

INTELLIGENT CAR DETECTING SYSTEM (ICDS)

MAZITA BINTI MOHAMAD

A thesis submitted in fulfillment of the
requirements for the award of the degree of
Master of Engineering in Electrical – Electronics & Telecommunications

Faculty of Electrical Engineering
Universiti Teknologi Malaysia

MAY 2006

DEDICATION

To my dearest,
My mother, Hajjah Samsiyah binti Haji Ismail,
Gee, Lina, Epi, Linda, Imi, Isyam, Liza, Piji & Lutfi
Thank you for your support and understanding
I love all of you very much

To my mother, thank you for always being there whenever I need you

In loving memory of my father, Haji Mohamad bin Abd. Rahman, who passed away
on December 1st, 2005, I will remember and follow all that you had taught me.
May your soul rest in peace and being bless always.

ACKNOWLEDGEMENT

I would like to express my utmost gratitude to my supervisor, Prof. Dr. Ruzairi bin Abd. Rahim for his continued guidance, supports, advice and understanding in finishing up this project.

I also would like to thank to my sponsor, JPA for sponsoring my Masters programme and to KUiTTHO and UTM for giving me the opportunity to further my studies.

Thank you to K. Siti and K. Fiza for their help in letting me to use and borrow the laboratory equipments. I really appreciate it a lot.

Last but not least, I also would like to thank to all my family members and friends who help me in giving the moral supports and by being on my side whenever I was feeling down.

ABSTRACT

In this modern life, with the prosperous economy we are experiencing, most people own at least one car. Cars have been used widely as a mean of our daily transportation to help us commute from one place to another. As people are becoming so involved with their hectic schedule, sometimes they could not remember where they have parked their cars. Thus, this project is done to help the car owner to locate the distance of the car from his current location. The project uses the half-duplex communication between two units of transceivers, MOBILE unit and FIXED unit to provide the location of the car. The principle of RFID is applied in this project by assigning each unit with unique ID number. The FIXED unit is placed inside the car while the MOBILE unit is kept by the owner. The latter unit does the computation of the location estimation based on the signal it received from the FIXED unit. The estimation of location is done based on the received signal strength formulation. The free space path loss has been assumed. From this received signal strength which is also equivalent to V^2/R , the inverse proportionality of voltage level and distance is used in the calculation. The accuracy of the system is found to be in the range of 0.0m to 50.0m. The accuracy is found to degrade with the further the distance is. The large number is due to the limitation of the formulation used. The system is able to detect the location of the car within 250m radius.

ABSTRAK

Dengan kepesatan ekonomi pada masa kini, kebanyakan orang memiliki sekurang-kurangnya sebuah kereta. Kereta digunakan untuk tujuan pengangkutan dalam memudahkan urusan harian kita. Namun begitu, disebabkan kesibukan dalam menyelesaikan urusan harian, sebahagian daripada kita terlupa tempat di mana kita meletakkan kenderaan tersebut. Oleh itu, projek ini diusulkan bagi menyelesaikan masalah tersebut dengan menolong pemilik kereta mencari lokasi kenderaan tersebut berdasarkan kepada jaraknya daripada kenderaan berkenaan. Projek ini menggunakan komunikasi secara *'half-duplex'* di antara dua unit *'transceiver'*, unit MOBILE dan unit FIXED untuk memberi lokasi kenderaan. Prinsip RFID digunakan di dalam projek ini dengan setiap unit diberikan nombor ID yang berbeza. Unit FIXED diletakkan di dalam kenderaan sementara unit MOBILE dipegang oleh pemilik kenderaan. Pengiraan jarak dilakukan oleh unit MOBILE berdasarkan kepada isyarat yang diterima daripada unit FIXED. Pengiraan ini adalah berdasarkan kepada kekuatan isyarat yang diterima (*'the received signal strength formulation'*). Anggaran *'free space path loss'* telah digunakan. Berdasarkan kepada kekuatan isyarat yang diterima yang juga bersamaan dengan V^2/R , perkadaran songsang di antara voltan dan jarak telah digunakan di dalam pengiraan yang dilakukan oleh PIC18F448. Kejituan sistem ini didapati berada di dalam lingkungan 0.0m dan 50.0m. Kejituan sistem ini didapati semakin berkurangan dengan peningkatan jarak. Perbezaan yang ketara ini berlaku disebabkan oleh kekangan formula yang digunakan. Sistem ini mampu mengesan lokasi kenderaan di dalam lingkungan jarak 250m.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	PENGESAHAN STATUS TESIS	
	SUPERVISOR'S DECLARATION	
	TITLE PAGE	
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
	LIST OF SYMBOLS	xiii
	LIST OF ABBREVIATIONS	xiv
	LIST OF APPENDICES	xv
1	INTRODUCTION	1
	1.1 Problem Statement	1
	1.2 Research Objective	2
	1.3 Scope of Work	2
	1.4 Background of Study	3
	1.4.1 What is RFID?	4
	1.4.2 Half-Duplex Communication	5

	1.4.3 An Overview of Embedded Systems	5
	1.5 Thesis Layout	6
2	LITERATURE REVIEW	9
	2.1 Why RF is used in Many Systems?	9
	2.2 Why Embedded System?	10
	2.3 Existing Tracking Systems	11
	2.4 Estimation of Location	13
	2.4.1 Time of Flight	14
	2.4.2 Base Station Location	16
	2.4.3 Signal Strength	16
	2.5 Why Monopole Antenna?	17
	2.6 Data Modulation Process	19
	2.6.1 Amplitude Shift Keying	20
	2.6.2 Frequency Shift Keying	21
	2.6.3 Phase Shift Keying	22
	2.6.4 Comparison of Binary Modulation System	23
3	RESEARCH METHODOLOGY	24
	3.1 Microprocessor-based Digital Subsystem	24
	3.2 Development Process of Microprocessor Digital Subsystem	25
	3.3 How the ICDS functions?	27
	3.4 Computation of Distance	30
4	HARDWARE DESIGN AND IMPLEMENTATION	32
	4.1 Components Used in ICDS	32
	4.1.1 PIC18F448 Microcontroller	33
	4.1.2 Transceiver Unit, FM-RXQ1-433	33
	4.1.3 Monopole Antenna	34
	4.1.4 LCD Module, TRIMODS 1531	34
	4.2 Components Used in the FIXED Unit	35
	4.3 Components Used in the MOBILE Unit	36

5	SOFTWARE DESIGN AND IMPLEMENTATION	40
5.1	Software Setting	40
5.1.1	Control Setting for LCD Module	41
5.1.2	Control Setting for Transceiver Module	42
5.1.3	SPI Setting of PIC18F448 Microcontroller	43
5.1.4	ADC Setting of PIC18F448 Microcontroller	44
5.2	Software Design	46
5.2.1	Software Design for FIXED unit	46
5.2.2	Software Design for MOBILE unit	47
6	RESULTS AND ANALYSIS	52
6.1	Results from Testing on Each Unit	52
6.1.1	Results from Testing on FIXED Unit	53
6.1.2	Results from Testing on MOBILE Unit	54
6.1.2.1	Transceiver module	54
6.1.2.2	LCD Module	55
6.2	Results from Testing on the Whole System	58
6.2.1	Analysis and Discussion	59
7	CONCLUSION AND RECOMMENDATION	60
7.1	Conclusion	60
7.2	Recommendation	61
	REFERENCES	63
	APPENDICES	66

LIST OF TABLES

TABLE	TITLE	PAGE
3.1	The connection between voltage and distance together with its equivalent ADC value	31
5.1	The function of the interface pins in response to the voltage level	41
5.2	Operation modes of transceiver with corresponding levels of TX SELECT and RX SELECT	42
6.1	The comparison between the actual distance and the value displayed on LCD module	58

LIST OF FIGURES

FIGURE	TITLE	PAGE
1.1	Electromagnetic spectrum	3
2.1	In this graphical representation of the closed-form least squares position estimation method developed, the range measurements from multiple transmitters are combined using Pythagorean Theorem for an estimate of position	14
2.2	The principle of trilateration, where the circles represent the possible location of the receiver from the satellites	15
2.3	Radiation pattern of monopole antenna	19
2.4	Amplitude Shift Keying	20
2.5	FSK Waveform	21
2.6	Block diagram of the transponder	22
2.7	Oscillating wave of FSK modulator	22
2.8	PSK waveform	23
3.1	Development procedures for a microprocessor system	26
3.2	Flow Chart of the Operation of the Mobile Unit and Fixed Unit	29
4.1	Monopole antenna	34
4.2	Power supply for LCD module	35
4.3	FIXED unit circuitry	38
4.4	MOBILE unit circuitry	39
5.1	The setting of SPCON1 and SSPSTAT registers for SPI	44
5.2	The setting of ADCON0 and ADCON1 registers for ADC	45

5.3	The initialisation process with 8-bit interface mode	48
5.4	Flow chart of display_number subroutine	51
5.5	An example of position display	51
6.1	The signal levels of RX SELECT (Ch1) and TX SELECT (Ch2)	53
6.2	The signal received through RX DATA pin	53
6.3	The signal levels of TX SELECT (Ch1) and RX SELECT (Ch2)	54
6.4	The signal transmitted through TX DATA pin	55
6.5	The signal of E pin	55
6.6	The signal of RW pin	56
6.7	The signal of RS pin	56
6.8	The signal of DB0, DB1, DB2, DB3, DB4, DB5, DB6 and DB7	57

LIST OF SYMBOLS

P_R	the received signal strength
P_T	the transmitted signal strength
G_T	the antenna gain of a transmitter
G_R	the antenna gain of a receiver
λ	the wavelength of the operating frequency
d	distance between transmitter and receiver
A	amplitude of the signal
ω_c	carrier frequency
V	voltage
R	resistor value
N	ADC value
l	length of the monopole antenna
c	speed of light, 3×10^8 m/s
f	frequency of the signal

LIST OF ABBREVIATIONS

LCD	Liquid Crystal Display
RFID	Radio Frequency Identification
RF	Radio Frequency
LOS	Line of Sight
ID	Identification
GPS	Global Positioning System
GSM	Groupe Spéciale Mobile
SMS	Short Message Service
ASK	Amplitude Shift Keying
FSK	Frequency Shift Keying
PSK	Phase Shift Keying
DSB	Double sideband
ADC	Analogue Digital Converter
SPI	Serial Peripheral Interface

LIST OF APPENDICES

APPENDIX		PAGE
A	SOURCE CODES FOR FIXED UNIT AND MOBILE UNIT	66
B	DATA SHEETS OF LCD AND TRANSCEIVER MODULES	76
C	INSTRUCTION SETS OF PIC18F448	84

CHAPTER 1

INTRODUCTION

With the prosperous economy, nowadays, most of people own and use car for their everyday convenience. In 1981, 75 out of 1000 people around the world own the car. They use car to help them commute from one place to another. And, sometimes, people do forget where they have parked their vehicles. It may result in people making police reports thinking that their cars were stolen as they were not able to locate them. This has been mentioned in Info912 Programme aired on TraxxFM during one of its slots.

1.1 Problem Statement

The problem with this forgetfulness (and ignorance) could be solved with the help of the advancement in today's technology especially in terms of digital electronics, embedded systems and wireless communication.

- How to find where the car is at the parking lot compartment?

1.2 Research Objective

Thus, the objective of this project is to design a system that is able to locate the position of car (or other type of vehicle) when it is at halt. It is hope that this project would be able to provide the solution to the car owners in locating their car at the car park. It could also ease the worry of the owner as he knows that his car is still in the car park. Last but not least, it is hope that there will be no more false police report so as to fully utilise the police workforce in solving the real crime instead.

1.3 Scope of Work

The scope of this project involves in designing two units of embedded system, i.e. the MOBILE unit and the FIXED unit. Both of these units comprised of the hardware part and the software part. The hardware part includes the integration of the transceiver modules, one for the FIXED unit (to be placed in the car) and another one for mobile unit (to be kept by the car owner). Other than the transceiver modules, both units also include the control unit, i.e. the PIC18F448 microcontroller. While for user interface of the MOBILE unit, an LCD module is also included. The software part involves with the programming of the microcontrollers, i.e. the brains of both units. These microcontrollers control the communication between these two units. The computation of the car location is also done by the microcontroller of the MOBILE unit. The MOBILE unit's microcontroller also provides an interface link for the user, i.e. the control part of the LCD module.

The principle of Radio Frequency Identification (RFID) is applied in this system. It has been in which each unit is being assigned with a unique identification number.

A half-duplex system communication system is applied in this system so as to reduce the complexity of the system and at the same time cost is reduced as less hardware is required.

1.4 Background of Study

Radio frequency (RF) signal is the electromagnetic wave of which the frequency range is from 3 kHz to 300 MHz as shown in Figure 1.1 below, while the microwave frequency range is from 300 MHz to 300 GHz. RF is used in ICDS as it provides more advantages to the user compared to others. These advantages are due to the property of the RF signal itself. With the usage of RF, the system is able to function independent of the cable (as the system is non-wired) for easy handling. This is due to the fact that RF could transmit the signal through the air medium. Because of this property too, it enables RF the ability to pass through the walls/obstacles. Thus, it makes this system to function beyond walls/obstacles. Compared to Infra Red, although Infra Red also offers a wireless communication, it requires the Line Of Sight (LOS) communication in order for it to function. Thus, the system's communication will stop if the signal is blocked by the walls, making it an unsuitable choice for ICDS. The radio frequency of 433.92MHz is used in communicating between the two units.

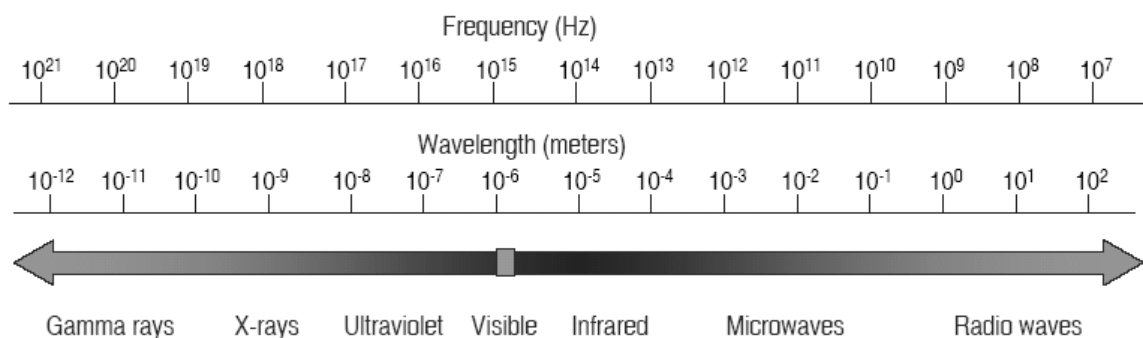


Figure 1.1: Electromagnetic spectrum

1.4.1 What is RFID?

Radio Frequency Identification (RFID) [1, 2] is a system used to replace the conventional barcode that we are using now. It has been applied in some application system such as by Mark & Spencer supermarket. The tag provides each item with individual ID number. In conventional barcode system, Infra Red has been used to read the barcode thus requiring the LOS between the barcode and the reader. Whereas in RFID, the tag itself will transmit the RF signal (its modulated ID code) during the reading process. First, the RFID reader transmits the RF signal. Then, RFID tag with the correct ID code will respond to the RFID reader by transmitting back the ID code. By using the RFID, the RFID reader is able to interrogate the RFID tag from far as it uses RF as a mean of communication.

RFID consists of 3 main components, namely:

1. Tags, which the identification data is embedded. They are known as transponder
2. Reader to communicate wirelessly to the tags
3. Software application that reads/writes data to/from tags through reader

Both, the reader and the tags are equipped with antennas in order for them to receive and emit the electromagnetic waves. There are endless benefits of RFID compared to conventional barcode in various fields from transportation, business, manufacturing and warehouse management. For example, the inventory process in a warehouse could be done automatically with the electronics labelling and wireless identification of objects using this RFID system, thus reducing the manpower needed in manual inventory process.

However, there is also a pressing issue of privacy invasion with regards to its application as experienced by Gillette and Tesco forcing them to terminate the RFID application. However, it is not relevant in this project as we do not pose any treat to this issue.

1.4.2 Half-Duplex Communication

One of the terms that could be used in characterising the wireless system is by looking at the directionality of the communication. This project will basically use a half-duplex system in which there will be two-way communication, but it does not occur simultaneously. It means that the channel could act as a transmitter at one time and as a receiver at another time. Therefore one antenna for each unit is sufficient (hence the low cost). Not only that, the interruption during data transmission is not necessary thus reducing the complexity of the control unit.

1.4.3 An Overview of Embedded Systems

An embedded system is a design making use of the power of a small microcontroller, like the Microchip PICmicro® MCU or dsPIC® Digital Signal Controller (DSCs). These microcontrollers combine a microprocessor unit (like the CPU in a desktop PC) with some additional circuits called “peripherals”, plus some additional circuits on the same chip to make a small control module requiring few other external devices. This single device can then be embedded into other electronic and mechanical devices for low-cost digital control.

The main difference between an embedded controller and a PC is that the embedded controller is dedicated to one specific task or set of tasks. A PC is designed to run many different types of programs and to connect to many different external devices. An embedded controller has a single program and, as a result, can be made cheaply to include just enough computing power and hardware to perform that dedicated task. A PC has a relatively expensive generalized central processing unit (CPU) at its heart with many other external devices (memory, disk drives, video controllers, network interface circuits, etc.). An embedded system has a low-cost

microcontroller unit (MCU) for its intelligence, with many peripheral circuits on the same chip, and with relatively few external devices. Often, an embedded system is an invisible part, or sub-module of another product, such as a cordless drill, refrigerator or garage door opener. The controller in these products does a tiny portion of the function of the whole device. The controller adds low-cost intelligence to some of the critical sub-systems in these devices.

An example of an embedded system is a smoke detector. Its function is to evaluate signals from a sensor and sound an alarm if the signals indicate the presence of smoke. A small program in the smoke detector either runs in an infinite loop, sampling the signal from the smoke sensor, or lies dormant in a low-power “sleep” mode, being awakened by a signal from the sensor. The program then sounds the alarm. The program would possibly have a few other functions, such as a user test function, and a low battery alert. While a PC with a sensor and audio output could be programmed to do the same function, it would not be a cost-effective solution (nor would it run on a nine-volt battery, unattended for years!). Embedded designs use inexpensive microcontrollers to put intelligence into the everyday things in our environment, such as smoke detectors, cameras, cell phones, appliances, automobiles, smart cards and security systems.

1.5 Thesis Layout

The layout of this thesis is divided into seven chapters. These chapters are as stated below:

Chapter 1 – Introduction

Chapter 2 – Literature Review

Chapter 3 – Research Methodology

Chapter 4 – Hardware Design and Implementation

Chapter 5 – Software Design and Implementation

Chapter 6 – Results and Analysis

Chapter 7 – Conclusion and Recommendations

In Chapter 1, the brief description of the project is given. It includes the objective of this project, the scope of this project and the background of this project. It also includes the existing tracking systems available.

In Chapter 2, the important properties of the RF signal, the necessity of using the half-duplex communication system and the existing techniques in estimating the location are explained.

Chapter 3 explains the research methodology used in the project. As the methodology involved both the hardware and the software, the chapter provides the overall methodology involved.

Chapter 4 provides the explanations of the hardware development and its implementation in details. The hardware construction of both the MOBILE unit and the FIXED unit are shown here.

In Chapter 5, the software design and implementation are explained. They include the control setting of the hardware modules used in this project and the flow of the operation of each unit.

Chapter 6 focuses on the results of this project. These results are also analysed and discussed here to give an in-depth view of the accuracies of this system in calculating the position of the car.

Finally, in Chapter 7, a conclusion of the project is made together with the suggestions for future works that could be proceed from this project.

REFERENCES

1. Unknown, “Radio Frequency Identification (RFID) – White Paper”, Accenture, 2001
2. Klaus Finkenzeller, *RFID Handbook: Radio Frequency Identification Fundamentals and Applications*, John Wiley, 1999
3. Miguel Angel Garcia and Agusti Solanas, “Automatic Distance Measurement and Material Characterisation with Infrared Sensors”, IEEE, 2005
4. Henry L. Bertoni, *Radio Propagation for Modern Wireless Systems*, Prentice-Hall, 2000
5. Baby monitor products at website <http://www.fisher-price.com>
6. Toddler monitor products at <http://www.ebay.ie>
7. Unknown, “Aviation Theory – Instrument Landing System (ILS)”, at website <http://www.flightsimaviation.com>
8. John B. Peatman, *Design With PIC Microcontrollers*, Prentice-Hall, 1998
9. John B. Peatman, *Embedded Design With the PIC18F452 Microcontroller*, Prentice-Hall, 2003
10. Garmin Corporation, “GPS Guide for Beginners - Manual”, December 2000

11. Garmin Corporation, "Using a Garmin GPS with Land Map", February 2003
12. Unknown, "How GPS Receiver Works" at website <http://electronics.howstuffworks.com/satellite.htm>
13. Unknown, "Save the Elephants GSM Animal Tracking Project Supported by Safaricom Foundation" at website <http://www.safaricom.co.ke>
14. Lionel M. Ni, Yunhao Liu, Yiu Cho Lau and Abhishek P. Patil, "LANDMARC: Indoor Location Sensing Using Active RFID", IEEE, 2003
15. David Lynch Jr., *Introduction to RF Stealth*, SciTech Publishing, 2004
16. Claudia A. Kent and Farid U. Dowla, "Position Estimation of Transceivers in Communication Networks", IEEE, 2002
17. K. V. S. Rao, "Overview of Back-Scattered Radio Frequency Identification System (RFID)", IEEE, 1999
18. David M. Pozar, *Microwave and RF Wireless Systems*, John Wiley, 2001
19. Joseph J. Carr, *Practical Antenna Handbook*, 2nd edition, McGraw-Hill, 1994
20. David R. Smith, *Digital Transmission Systems*, 3rd edition, Kluwer Academic, 2004
21. Sau-Mou Wu, Jeng-Rern Yang and Tzen-Yi Liu, "A transponder IC for Wireless Identification Systems", IEEE, 1996
22. Herman Lam and John O'Malley, *Fundamentals of Computer Engineering: Logic Design and Microprocessors*, John Wiley, 1988
23. Multiplication and Division subroutine modules at <http://www.picbook.com>

24. Richard C. Dorf and James A. Svoboda, *Introduction to Electric Circuits*, 3rd edition, John Wiley, 1996
25. PIC18F488 Manual and its development tools at <http://www.microchip.com>
26. Myke Predko, *Programming and Customizing PICmicro Microcontrollers*, McGraw-Hill, 2002
27. John Iovine, "PIC Microcontroller Project Book: For PICBasic and PICBasic Pro Compilers", 2nd edition, McGraw-Hill, 2004
28. Data sheets at <http://www.digchip.com>