

NON-LINEAR TEST OF PRECAST SUBFRAME SUBJECTED TO CYCLIC
LATERAL LOADINGS

Ahad Javanmardi

A project report submitted in partial fulfillment of the
requirements for the award of the degree of
Master of Engineering (Civil-Structure)

Faculty of Civil Engineering
Universiti Teknologi Malaysia

JANUARY 2014

Specially dedicated to my beloved family and friends

ACKNOWLEDGEMENTS

First and foremost, I would like to express my sincerest gratitude and appreciation to my supervisor, Assoc. Prof. Dr. Abdul Kadir Bin Marsono for his worthwhile guidance throughout this project. His wide knowledge and his expert advice during the period I have been carrying out this research, has been of great value for me. His invaluable comments, kind consideration, encouragement and support have provided a good basis to present this project report.

And then I would like to thanks who support me morally to finish my report. Their precious opinion is useful for me to have an idea in completing this report.

ABSTRACT

The demand for new building has been increased significantly, which can sustain loads whether lateral loads as well as gravity load. So far concrete has proven its reliability on most of structural system but it has a big drawback which is the slow construction rate. To eliminate this issue precast concrete has been introduced to the construction since it is prefabricated in the factory and then transferred to the construction site for assembly. The use of precast concrete systems offers several advantages such as speedy assembly, higher quality, lower project cost, better sustain, and enhanced occupational health and safety. The major concern in the precast concrete system is the rigidity of connections or joints. In this research a laboratory test was carried out on a precast concrete frame with post-tension joints (scaled prototype 1:5) which have been subjected to lateral cyclic loading. The beam-to-column connected to each other by threaded rod and nuts. The investigation is to find out the natural frequency of the frame before the testing and after each cyclic loading, maximum sway of the frame to check the lateral stability and ductility. The precast system was found to be more ductile than the conventional subframe and the test yield all the characteristic of system failure at ultimate limit state of cyclic loadings.

ABSTRAK

Permintaan untuk bangunan baru telah meningkat dengan ketara terutama, yang boleh menampung beban sisi dan juga beban graviti. Jadi konkrit ini telah membuktikan keupayaannya pada kebanyakan sistem struktur tetapi ia mempunyai kelemahan yang besar ia itu kadar pembinaan yang perlahan. Sebagai penyelesaian, konkrit pratuang isu telah diperkenalkan ke dalam pembinaan dengan ia dibuat di kilang dan kemudian dipindahkan ke tapak pembinaan untuk pemasangan. Penggunaan sistem konkrit pratuang menawarkan beberapa kelebihan seperti pemasangan cepat, kualiti yang lebih tinggi, kos projek yang lebih rendah, dan dipertingkatkan keselamatan dan kesihatan pekerjaan. Kebimbangan utama dalam sistem konkrit pratuang adalah ketegaran sambungan atau sendi. Dalam kajian ini ujian makmal telah dijalankan pada rangka konkrit pratuang sendi (prototaip berskala 1:5) pada beban sisi muatan berulang. Rasuk disanag dengan sekeru dan nat. kajian itu adalah untuk mengetahui frekuensi semula jadi bingkai sebelum ujian dan selepas setiap beban beralang, untuk mencari kestabilan sisi dan kemuluran. Hasil kajian mendapati bahawa ketangka adalah lebih mulur dari struktur kerangkr biasa dan ciri-ciri kegagalan jage telah diperolehi dari beban berulang di makmal.

TABLE OF CONTENT

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
1	INTRODUCTION	1
	1.1 Introduction	1
	1.1.1 Background	2
	1.1.2 Application of precast construction	2
	1.1.3 Advantages of the precast construction	3
	1.1.4 Disadvantages of the precast concrete	3
	1.2 Statement of problem	4
	1.3 Objective	4
	1.4 Scope of Study	5
	1.5 Importance of Study	6
2	LITERATURE REVIEW	7
	2.1 Introduction	7
	2.2 Moment frames	9

2.3	Concrete Moment Frames	11
2.4	Connections in precast constructions	12
2.4.1	Rigid Beam-To-Column Connections	14
2.4.2	Semi-Rigid Beam-To-Column Connections	15
2.4.3	Simple Beam-To-Column Connections	15
2.4.3.1	Beam on Top of a Column	16
2.4.3.2	Beam-To-Column with Haunched Column	17
2.4.3.3	Beam-To-Column with Corbel and Cast-In Dowel	18
2.4.3.4	Welded Beam-To-Column Connection	19
2.4.3.5	Beam-To-Column with steel Corbels	20
2.5	Post Tensioned Method	21
2.5.1	Profile of Post-tensioned Tendons	22
2.6	Eurocode Design of Practice	22
2.7	Summary	23
3	RESEARCH METHODOLOGY	24
3.1	Introduction	24
3.2	Design of specimens	24
3.3	Preparation of the specimens	26
3.3.1	Moulding	26
3.3.2	Detailing of the specimens	28
3.3.2.1	Beam detailing	28
3.3.2.2	Column detailing	29
3.3.2.3	Stump detailing	30
3.3.3	Fixing and fitting of gauges	30
3.3.4	Mix design of the concrete	31
3.3.5	Curing and painting	34
3.4	Assembling of IBS subframe	36
3.5	Fixing of the gauges	37
3.6	Testing	39

3.6.1	A sample compressive strength test	40
3.6.2	Natural frequency test	41
3.6.2.1	SeismoSignal	43
3.4.2.2	Fourier and Power Spectra	46
3.6.3	Cyclic lateral loading test	46
4	RESULT AND DISCUSSION	48
4.1	General	48
4.2	Concrete Cube Compressive strength	48
4.3	Modulus of Elasticity	49
4.4	Natural Frequency	50
4.5	Cyclic lateral loading	54
4.5.1	Frame behaviour during test	54
4.5.2	Test results of cyclic lateral loading	58
4.5.3	Deformation shape	64
5	CONCLUSION	66
5.1	Introduction	66
5.2	Conclusion	66
5.3	Recommendations	69
	REFERENCES	70
	APPENDIX	73

LIST OF TABLES

TABLE NO.	TITLE	PAGE
3.1	The concrete admixture design for the first casting	32
3.2	The concrete admixture design for the second casting	33
3.3	The target displacements	47
4.1	Compressive strength of plain concrete	49
4.2	Compressive strength of plain concrete with corresponding value of Modulus of Elasticity	50
4.3	Natural Frequency test values of the frame at all stages	54
A.1	Natural Frequency test values of the frame at all stages	83

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Post-tensioned connected of the precast frame	5
2.1	Plastic Hinge Formation	11
2.2	Moment distribution in various type of connections (Taranath, 2012)	13
2.3	Beam on the top of column (Elliot 1996)	16
2.4	Beam-to Column with corbel and cast in dowel (Bruggeling and Huyghe,1991)	18
2.5	Welded Beam-to-Column connection (Bruggeling and Huyghe, 1991)	19
2.6	Beam-to-column with Mushroom like corbels (Bruggeling and Huyghe, 1991)	20
2.7	Beam-to-column with Steel corbels (Elliot, 1996)	21
3.1	The detailing of the Column and Stump	25
3.2	The detailing of the Beam	25
3.3	The formwork of the columns and stumps	26
3.4	The formwork of the beams	27
3.5	The plywood formwork parts after painting	27
3.6	The formwork assembly of the moulding columns and stumps	28
3.7	The formwork of the beam	28
3.8	Ready formwork of the beam for casting	29
3.9	Procedure involved in Tiding up the column reinforcement	29

3.10	Strain gauge fixing on the bars	30
3.11	Formwork of the columns and stumps ready for casting	31
3.12	The concrete mixer of volume of $0.045 m^3$	33
3.13	Moulding poured with concrete	34
3.14	Curing of the specimens with wetted gunnysacks	35
3.15	Specimens painted with two coats of thin white emulison	36
3.16	Post-tension assembly in push over rig	37
3.17	Detailing of the gauges	38
3.18	The precast frame with all gauges assembled	39
3.19	Compressive Strength Test Machine	41
3.20	Accelerometer and vibrating hammer	42
3.21	Vibrating the test frame	42
3.22	Typical view of the SeismoSignal software	44
3.23	Seismosignal Input File Parameters	44
3.24	Seismosignal units setting	45
3.25	Fourier and Power Spectra	45
4.1	Pseudo Dynamic Loading	51
4.2	Natural frequency of the frame in X direction in Power Spectra	51
4.3	Natural frequency after first cycle of lateral loading	52
4.4	Natural frequency after second cycle of lateral loading	52
4.5	Natural frequency after third cycle of lateral loading	53
4.6	Natural frequency of the frame at collapse	53
4.7	Initial cracks on the columns and beams	55
4.8	Spalls and Cracks of the beam and column	56
4.9	Cash of the beam at 5KN	56
4.10	Minor cracks on the stumps	57
4.11	Failure of the beam and column	58
4.12	Detailing of LVDT`s and gauges	59
4.13	Load-Displacement relationship of the frame from LVDT2	60

4.14	Load-Displacement relationship of the frame from LVDT7	60
4.15	Non-Linear Load-Strain relationship of the right column bar	61
4.16	Non-Linear Load-Strain relationship of the left column bar	61
4.17	Load-Strain relationship of the bolt	62
4.18	Linear Stress-Strain relationship of the right column bar	62
4.19	Linear Stress-Strain relationship of the left column bar	63
4.20	Linear Stress-Strain relationship of the bolt	63
4.21	Deformed shape of the precast frame	64
4.22	The rotation and lifting of beam to column connections	65
5.1	Load-Displacement relationship of the frame	67
5.2	Deformation shape of the frame from the experiment	68
5.3	Deformation shape of the frame from the Finite Element Analysis	69
A.1	Post-tension connected of the precast frame	75
A.2	Detailing of beam and column	79
A.3	Vibrating hammer and accelerometer	81
A.4	Post-tension connected of precast frame	82
A.5	Load-Displacement relationship of the frame	82
A.6	Load-Displacement relationship of the frame	84

CHAPTER 1

INTRODUCTION

1. Introduction

It has been proven that the concrete is strong in compression but weak in tension. In order to improve its strength, steel reinforcement has been introduced to the concrete and called reinforced concrete.

Prefab which is also known as prefabricated concrete is a concrete which is cast in the mould inside the manufacturing plant that located away from the construction site. Concrete is cured in a controlled environment and then transport to the construction site for assembly.

This controlled environment will give the manufacturing precision and proper curing monitored by the plant employee. This is one of the advantages of precast concrete over the cast in-situ concrete.

1.1.1 Background

Precast concrete has been used since Ancient Roman civilization to build buildings. They used it to build their complex network of buildings, canals, drains and tunnels. After Second World War especially in Europe there was a huge demand for new buildings for reconstruction purposes. Economic and social development caused the demand and a large number of buildings in the 80`s. During this reconstruction and development period, an important portion of industrial building was invented by using the precast system due to the advantage of its fabrication and speed of assembly.

Precast panelled building were developed in Liverpool England in 1905. The method was designed by city engineer John Alexandra Brodie. Later on the idea was adopted all over the world especially Eastern Europe and Scandinavia.

1.1.2 Application of precast concrete construction

Precast concrete has a wide range of application in civil engineering where is not limited to building industries only. It is also used in agricultural industry, transportation and traffic and railway industry, sanitary and water treatment plant.

Precast concrete can be used in most of industries as it can withstand in most extreme weather conditions and still durable after decade of use for structural members like foundations, beams, column, floors, shear walls, retaining walls or non-structural members like fireplace mantels, curtain walls, barriers, accropode, manhole and pedestrian furniture.

1.1.3 Advantages of the precast construction

The advantages of the precast concrete are

- It has good quality control since it is manufactured in the controlled manufacturing plant.
- Curing can be accelerated by heating the precast part in a steam room and it increases strength significantly and also reduce the time between casting of the components.
- Precast will be extremely durable as the control process start from materials selection to curing of concrete.
- Pre-stressed precast concrete reduces the size and number of structural members due its strength.
- In construction site, the construction process is rapid since it can be installed immediately assembly upon arrival of component in bulk.
- It can be assembled on any weather condition.

1.1.4 Disadvantages of the precast construction

The disadvantages of precast concrete are:

- The weight of precast members as the lifting cranes are required consistently on assembly area.
- The connection between the members of precast may be difficult assemble and fabricated.
- Precast has limitation in architectural layout and dimension as it have the fixed shape and size.
- The margin of errors is very small since incorrect dimension of precast may result into the change of entire layout not as designed.

- Precast panel cannot be used for two-way structural system as the size of the panel is limited.
- Skilled workers are required for manufacturing and assembly.

1.2 Statement of problem

There are several questions that need to be solved in order to complete the verification of the system and they are:

- The propose shape and design of precast beam and column is relatively new on precast system. It must have a sufficient strength vertically and laterally to subside the earthquakes.
- The post-tensioning effect the discontinuity in the whole system strength.
- The strength and ductility need to be sufficient to implement the system in constructions for long service life.

1.3 Objective

The objectives of this study are listed as below:

- To conduct a laboratory test to find out the real behavior and performance of the column to beam connection of the post-tension precast connected concrete subframe.
- To find the natural frequency of the frame before and after the damage of the model at several cycles of lateral loads.
- To obtain the ductility of the frame due to lateral cyclic load.

1.4 Scope of Study

The scopes of this study are listed as follows:

- The laboratory test on the precast beam-to-column frame model of reduce scale 1:5 are carried out in the laboratory with reference to BS8110:1985.
- The main span size of beam of this frame is 1600mm \times 60mm \times 120mm with two sides cantilever size of 400mm \times 60mm \times 80mm, the size of the column is 80mm \times 80mm \times 600mm and stump is 80mm \times 80mm \times 250mm (Figure 1.1).
- The frame is subjected to lateral cyclic lateral loads to find the load-displacement relationship, moment-rotation relationship and shape of the deformation.
- The grade of steel is S275 ($p_y = 275$) and grade of concrete is 50 ($f_{cu} = 50$)
- The analysis of ductility and natural frequency only.

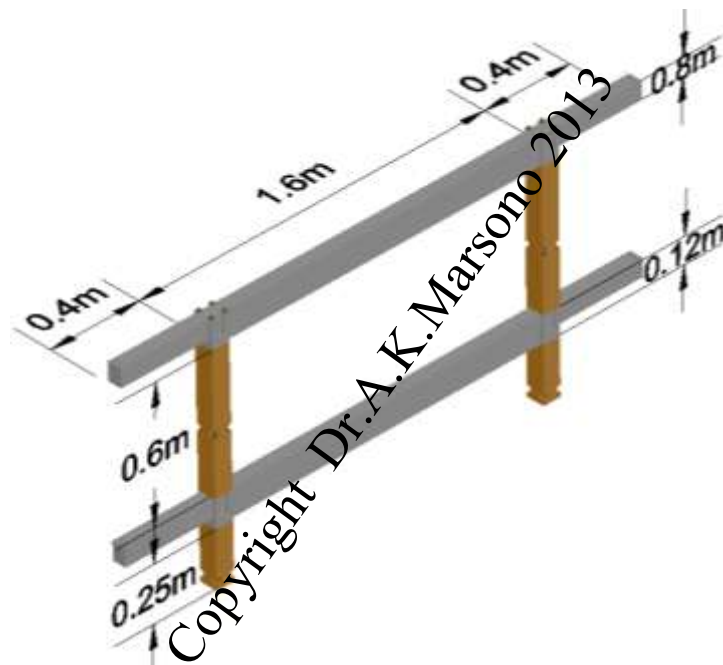


Figure 1.1 Post-tension connected of the precast frame

1.5 Importance of Study

This study gives a clear understanding of the behavior and failure mechanisms of the new post-tensioned precast concrete connection. The behavior of the connection includes load-displacement relationship, moment-rotation relationship, stress distribution and shape of the deformation. The proposed beam-to-column connection should withstand the lateral load in order to get the stability, strength and ductility of the frame. The result of this test will be beneficial in the development of precast structures. It enables frame to resist from lateral load in other words to gain stability, increase the rate of construction significantly. The scaled model test saves the time and cost of the investigation.

REFERENCES

- Andrew W. Taylor, Cynthia Kuo, Kevin Wellenius, Duke Chung. (1997) "A Summary of Cyclic Lateral Load Tests on Rectangular Reinforced Concrete Columns".
- April, Auckland New Zealand, pp. 1-11. Bull, D.K. and Park, R (1986), 'Seismic Resistance of Frames Incorporating Precast Prestressed Concrete Beam Shells', PCI Journal, 31(4) pp. 54-93.
- Brooke, N.J. and Ingham, J.M (2011). 'The Effect of Reinforcement Strength on the Overstrength Factor for Reinforced Concrete Beams', Proceedings of the Ninth Pacific Conference on Earthquake Engineering Building an Earthquake – Resilient Society, Paper Number 069, 14-16.
- BS 8110-1:1985. Structural use of concrete Code of practice for design and construction
- Bull, D.K. and Park, R (1986), 'Seismic Resistance of Frames Incorporating Precast Prestressed Concrete Beam Shells', PCI Journal, 31(4) pp. 54-93.
- Bungale S. Taranath, 'Structural Analysis and Design of Tall Buildings' 2012.
- Carydis PG, Psycharis IN, Mouzakis HP (2007) PRECAST EC8: Seismic Behaviour of precast concrete structures with respect to Eurocode 8. Final Report of the contribution of LEE/NTUA, FP5 Project No. G6RD-CT-2002-00857.
- Chopra, A. K. and Goel, R. K., 2000, Evaluation of a NSP to estimate seismic deformation: SDF systems, Journal of Structural Engineering, ASCE, Vol. 126, No. 4, pp. 482-490.
- Clough R.W., Penzien J. [1994] Dynamics of Structures, 2nd Edition, McGraw Hill.
- Concr. Inst. 61 (2) (1964) 195-210.
- Eastern Pretech Pte. Ltd. (2004). "Leading the Way in Innovative Building Technologies." Malaysia: Trade brochure.

Handbook for the Seismic Evaluation of Buildings, 1998.

Ioannis N. Psycharis , Harris P. Mouzakis. (2012). Assessment of the seismic design of precast frames with pinned connections from shaking table tests.

IS: 13920-1993, Code of practice for Ductile Detailing of reinforced concrete structures subjected to seismic forces, Bureau of Indian Standards, New Delhi.

IS: 1893-2002, Code of practice for Criteria for earthquake resistant design of structures Part 1 General provisions and buildings, Bureau of Indian Standards, New Delhi.

IS: 456-2000, Indian Standard code of practice for plain and reinforced concrete, Bureau of Indian Standards, New Delhi.

IS: 800-1984, Code of Practice For General Construction in steel, Bureau of Indian Standards, New Delhi.

Khaloo, A. and Paratesh, H (2003), 'Cyclic Loading of Ductile Precast Concrete Beam-Column Connection', ACI Structural Journal, 100 (3), pp. 291-296.

Kim s.Elliot. (2002). "Precast concrete structures" London, UK: Blackwall seince Ltd.

Loo, Y.C. and Yao, B.Z (1995), 'Static and Repeated Load Tests on Precast Concrete Beam-to-Column Connections', PCI Journal, 40 (2) pp. 106-115.

Negro P, Mola E, Ferrara L, Zhao B, Magonette G, Molina J (2007) PRECAST EC8: seismic behaviour of precast concrete structures with respect to Eurocode 8. Final Report of the experimental activity of the Italo-Slovenian Group, Parts 1, 2, 3, FP6 Project No. G6RD-CT-2002-00857.

Sinha, B. P., Gerstle, K. H. and Tulin, L. G., 'Stress-strain relations for concrete under cyclic loading', J. Amer.

Vanmarcke E.H. [1976] "Structural response to earthquakes," Chapter 8 in Seismic Risk and Engineering Decisions (eds. C. Lomnitz and E. Rosenblueth), Elsevier, Amsterdam, pp. 287-338.

Xue, W. and Yang, X (2010). 'Seismic Tests of Precast Concrete, Moment Resisting Frames and Connections', PCI Journal, 55(3), pp. 102-121.

Yang C.Y. [1986] Random Vibration of Structures, John Wiley and Sons.