

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/362539185>

Simulation Analyses Related to Human Bone Scaffold: Utilisation of Solidworks® Software in 3D Modelling and Mechanical Simulation Analyses

Article in *Journal of Human Centered Technology* · August 2022

DOI: 10.11113/humentech.v1n2.28

CITATIONS

0

READS

136

3 authors:



Abdullah Sharaf Saleh Al-Hammadi
Furtwangen University

2 PUBLICATIONS 12 CITATIONS

[SEE PROFILE](#)



Syafiqah Saidin
Universiti Teknologi Malaysia

74 PUBLICATIONS 861 CITATIONS

[SEE PROFILE](#)



Muhammad Hanif Ramlee
Universiti Teknologi Malaysia

82 PUBLICATIONS 539 CITATIONS

[SEE PROFILE](#)



Simulation Analyses Related to Bone Scaffold: Utilisation of Solidworks® Software

Abdullah Sharaf Saleh Alhammad^{1*}, Syafiqah Saidin^{2,3}, Muhammad Hanif Ramlee²

¹Medical Engineering Department, Faculty of Mechanical and Medical Engineering, Hochschule Furtwangen University, Jakob-Kienzle-Straße 17, 78054 Villingen-Schwenningen, Germany

²School of Biomedical Engineering & Health Sciences, Faculty of Engineering, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

³IJN-UTM Cardiovascular Engineering Centre, Institute of Human Centered Engineering, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

*Corresponding Author

Received xx June 2022; Accepted xx Aug 2022; Available online 06 August 2022
<https://doi.org/10.11113/humentech.xx>

Abstract:

Bone loss is risen due to fractures, surgeries and traumatic injuries. Scientists and engineers work over the years to find solutions to heal and accelerate bone regeneration. Bone grafting technique has been utilised which projects significant improvement in bone regeneration area. An extensive study is essential on the relation between the mechanical properties of bone scaffolds and the design of bone scaffolds in forecasting permeability access to promote bone growth and nutrient distribution. In reducing cost and time, a mechanical simulation analysis is beneficial to simulate the relation. There are various computational softwares have been combined and used to perform several types of simulation analyses on bone scaffolds including Solidwork, Ansys, Abaqus, COMSOL Multiphysics, MATLAB etc. Among the simulation analyses, two main tests that can be simulated are mechanical test and fluid modelling. Solidwork as one of the computer-aided design softwares has been extensively used to design two and three-dimensional models. The advancement of this software on the performance of simulation analyses has also extended its application towards variety of applications including on bone scaffold evaluation. There are several parameters which are necessary to be set prior to the conduction of mechanical simulation analysis such as applied forces, material properties, mesh properties and boundary condition. There, this review study is intended to expose the utilisation of computer simulation analysis, specifically Solidworks® software in analysing bone scaffold structure.

Keywords: Simulation analysis; Bone implantation; Assistive scaffold; Solidwork

1. Introduction

Grafting is a surgical technique that is used to replace and substitute missing bones to avoid highly complicated bone fractures that could present a severe risk to the patient's health [1]. Bone grafts are commonly used to treat various conditions, including delayed fracture union, non-congenital pseudoarthrosis, trauma, cancer and osseous tumour defects [1]. Bone grafts usage is the norm for treating skeletal fractures or restoring and regenerating missing bone, as demonstrated by the vast number of bone grafting procedures carried out around the world [2]. There are three primary methods to produce bone grafts: autographs, allografts and xenografts [2]. Autogenous, also known as autograft, is a

grafting technique where the replacement bones are extracted from the patient's body and sometimes extracted from the iliac bone. While allograft is a grafting technique where the replacement bones are obtained from a bone bank or provided by a donor, on the other hand, xenograft is a grafting technique where bones are harvested from an animal or synthetic material such as hydroxyapatite (HA) or other biocompatible and naturally occurring substances with identical properties to the human bone [1]. Bone graft's design is often varied according to their form of structure which correspond to intended applications.

The rigidity and strength of scaffolds are crucial in managing maladjusted stress concentration and reducing stress shielding. Simultaneously, sufficient porosity and permeability are essential to promote bone growth and nutrient distribution based on biological activities [3]. The geometry architecture of scaffold to replace human trabecular bone needs to withstand static and dynamic loads, up to 20 MPa [4]. It should also compose of macro and micropores to promote cell growth and mineral precipitation, while nutrient and oxygen diffusion should interconnect all pores [4]. Arjunan *et al.* [3] have proposed various cellular and structural properties of scaffolds in an anatomically form [3]. The mechanical output of the scaffold was within reasonable range for the porous architecture. Therefore, it has therefore been understood that at a design stage, the permeability of scaffolds must be considered in conjunction with stiffness and strength to complement both the host bone's mechanical and biological healing capabilities [3].

Computational biomaterial simulations have recently gained considerable attention with the ability to deliver immediate results as an alternative and economical approach compared with experimental analysis. Numerous computational fluid dynamics (CFD) analyses have been conducted to evaluate the permeability and wall shear stress (WSS) of different types of scaffolds [5]. Through a combination of simulation and experiment, Arjunan *et al.* [3] compared the mechanical outputs of several design models. In their analysis, multiple mathematical models with significant determination coefficients have estimated the length, porosity and elastic modulus of the alpha-beta titanium alloy (Ti6Al4V)-based cellular structures. Finite element analysis (FEA) also has been used to model stress-strain data through simulated compression analysis [6]. The analysis can be carried out on all structures, to obtain efficient numerical simulations with precise results of finite elements to avoid singularities on the numerical models and to avoid additional computational time [6]. Thus, computerised simulation becomes a common engineering practice for model evaluation.

Solidworks® is a computer-aided software (CAD) that can be used to create new designs, models and structures. It provides scratch architecture, where both three-dimensional (3D) and two-dimensional (2D) architectures can be constructed [7]. The combination of modelling and FEA allows the simulated investigation of mechanical and biological behaviours on patient-specific implants at a reduced cost. The first step in simulation has been set to determine the physical problem of design models. The limiting conditions, components materials and the characteristics of each substance are the critical criteria that should be defined [8]. Those information, provided in this review study is aimed to expose the utilisation of computer simulation analysis, specifically Solidworks® software in analysing bone scaffold structure. The review starts with the overview of bone tissue engineering, followed by the common performed simulation analyses in bone implantation area. Then, specific simulation softwares for bone scaffold evaluation are discussed by highlighting the utilisation of Solidworks® software.

2. Bone Tissue Engineering

Bone grafts and metallic prosthetic implants are the recent approaches used to increase and stimulate new bone formation to replace and regenerate bone deficiencies [9]. However, the transplantation of extensively used biomaterials in dentistry needs diagnosis under specific clinical presentations [10]. According to Hung [1], the first bone implant recorded was implemented in 1668, and by the year 2001, bone grafting procedures have reached 500,000 in the United States of America (USA) and 2 million worldwide. Bone grafting materials should be ideal and meet precise specification such as being bioresorbable, osteoconductive, biocompatible, osteoinductive, porous, structurally similar to bone, mechanically resistant, easy to use, safe and cost-effective [11, 12].

The actual structure of bone tissues is a kind of complex porous construction with irregular pore structure and uneven distribution of pores and porosity. The scaffold should be porous, as the supporting structure for cell growth. Smooth surface structure without distortion or sharp edges, is preferred to facilitate the attachment and proliferation of scaffolding cells. Furthermore, bone tissue porous scaffolds also play an important role in the transport of nutrients and in the removal of waste during cell growth [12]. The concept of using scaffolds in bone tissue engineering is a key factor in the regeneration of bone defects of critical size [12]. Cells should attach on the embedded scaffolds and expand on the porous surfaces. The structural morphology and mechanical resistance are provided by the scaffold surface, on which the adhering cells can grow [13].

According to Arjunan *et al.* [3], critically engineered rigidity and strength of a scaffold are important for handling maladjusted stress accumulation and reducing stress shielding. At the same time, sufficient porosity and permeability are essential to promote biological processes associated with bone growth and nutrient distribution. To produce an efficient bone scaffold, a rigorous combination of all these parameters is important. A porosity and pore size of 70 – 90% and 450 - 700 μm respectively, are typically suggested as appropriate parameters for approaching human bone properties [3]. Models of different shapes, different porosities and different pore sizes can be obtained by changing function parameters, which offers a great possibility in fitting the human bone tissue structure [12].

3. Simulation Analyses in Bone Implantation

The simulation for modelling of food, pharmaceutical, biochemical and other chemical sectors established in the early nineties because these processes are complex, and it was not easy to be simulated [14]. They mentioned that the Monte Carlo simulation which is an excellent method to assess the impact on the operation spread of economic performance was used to quantify the risk of development process where they also used this method in their study to perform the manufacturing process of techno-economic analysis for nanotubes made of chitosan–titanium dioxide (TiO_2) [14]. In bone implantation, there are three main area that have been explored with the conduction of simulation analyses including bone implant, bone scaffold and bone cement.

3.1 Bone implant

In the area of implant reconstruction, there are researchers who investigated the effects of micro thread on stress distribution during bone pre-implantation using FEA. Different types of bones were constructed using several computational models of the human mandible with the simulation of bone resorption [15]. A healthy male mandibular bone was scanned using a cone-beam computed tomography where the acquired images were imported to Materialise-Mimics v17 software for further image processing and modelling. Finally, the model was tested with Abaqus 2016, Dassault Systems. On a parallel study, other researchers evaluated the influence of bone types in terms of bone density on generated stress distribution [16]. They used numerical simulation techniques using Abaqus statistical package software.

3.2 Bone scaffold

The strength and the stiffness of bone scaffolds are essential for stress management. In bone scaffolds, the balance between porosity, permeability and mechanical properties are the keys to facilitate biological activities that associated with bone growth and nutrient delivery [3]. The investigation on the relationship between strength, stiffness, permeability and stress along with porosity was done using Darcy's law through a permeability test using Ansys Fluent CFD solver. Another experimental test using Ashby's criterion and finite element method (FEM) were also conducted for the determination of mechanical properties using Ansys non-linear mechanical solver. In the study of gyroid structures with different volumes fraction which was conducted by Ma *et al.* [17], the parts were modelled and tested using different software's where PTC Creo 3.0 was used to create 3D models, Mimics 17.0 software was used to rebuild the 3D models obtained from CT scans and ImageJ software was used to analyse the surface appearance and the section thickness at different heights.

3.3 Bone cement

Herrera *et al.* [18] found that during five years experimental analysis, a periprosthetic bone remodelling, associated with ABG-II (Stryker) and Versys (Zimmer) cemented stem models were implanted in old patients, randomly. This study was conducted as a clinical study using finite element simulation to investigate biomedical changes due to hip arthroplasty. The cancellous bone geometry was determined using CT scans of the patient's femur and the obtained images were meshed using I-Deas software. The calculations of the analysis were conducted using Abaqus 6.10 software.

According to Giner *et al.* [19], the estimation of cement line's critical energy in cortical bone tissues was proposed. The analysis method was conducted using correlating experimental tests and finite element simulation due to the difficulty in using experimental method. Three points bending test of ovine bone and both initial and growth of microcracks simulated using finite element in damage models were simulated based on a maximum principal strain criterion. Plot Digitizer was used to define the micro samples' outer boundaries and the contours of the osteons. The Abaqus software was then used to generate the Spline and transferred into Python as a script for simulation.

4. Simulation Software for Bone Scaffold Evaluation

Lots of software are being used for the simulation of biomedical applications, especially for bone application design and validation. The computational methods and software simulation have been extensively used as the mechanical testing on scaffolds in forecasting cell proliferation, oxygen consumption and scaffold degradation [20]. Abaqus software, created by Dassault Systems, is used as a software for analysis based on FEM technique. As an example, the modulation and the simulation of referenced lattice were conducted using Abaqus software [21]. The hollow cube and the truncated hexahedron cell have been tested to predict the behaviour of those unit cells under compression test using Abaqus 6.14 FEA package [21]. COMSOL Multiphysics is a metaphysical simulation software that is used for modelling devices, designs and processes in various engineering disciplines. This software can understand, optimise and even predict physics-based processes through numerical solutions (COMSOL website). In the study conducted by Arjunan *et al.* [3], the numerical analysis on biomaterial Ti6Al4V-based scaffolds was done by using COMSOL Multiphysics through the simulation of compression stress-strain tests.

According to Yusop *et al.* [22], the degradation behaviour of Cur-Fe and 80C-20P-Fe scaffolds was evaluated and compared using COMSOL Multiphysics software and MATLAB. Another software that is used for research is K3DSurf, a program that is used to visualise mathematical models in three to six dimensions using parametric equations. Based on the study by Ali *et al.* [5], the evaluation on eight different bone scaffolds models was done by investigating the flow of fluids within the scaffolds using CFD which is a software that simulates the motion of fluids while K3DSurf was used for visualising the exported parametric equations.

5. SOLIDWORKS

Solidworks® is a parametric modeler that uses dimensions, parameters and relationships to define 3D shapes [23]. It was first introduced in 1995 and becomes one of the leading softwares in 3D modelling and analysis [23]. The improvements and the expansion of this software application has expanded its applications to various industries and research institutes which use this software in designing, modelling and simulating stable structures [24]. The software allows engineers and designers to create mathematically solid models and by assigning the desired material properties, it allows them to simulate and evaluate the behaviour of the designed part using FEM [24]. This software has a wide range of applications such as simulation, motion, flow simulation and many others [25]. Figure 1 shows the utilisation of Solidworks® in designing bone scaffold.

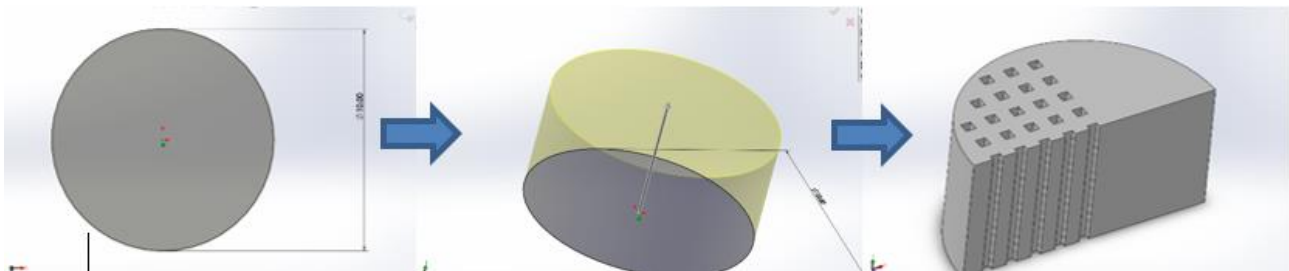


Figure 1. Bone scaffold design using Solidworks®

5.1 Types of analyses

Zhao *et al.* [26] conducted a study on different design of bone scaffolds in which the scaffolds were designed using Solidworks® and fabricated by selected laser melting machine. In that study, the mechanical properties of these bone scaffolds were tested using FEM by utilising similar software. The FEM can be used to accurately predict the behaviour of whole bone by setting the applied forces, its magnitude and the applied direction.

A study of heat transfer in hip replacements made of bone cement was performed by Ikekwem *et al.* [27], which used Solidworks® simulation software to perform steady-state thermal analysis on 3D structures. The authors found that poly(methyl methacrylate) (PMMA) resulted in a heat raise for the whole assembly hip replacement system and also created a heat flux [27].

Solidworks® has also been used to create closed-cell honeycomb Nitinol stent to evaluate the sealing stress, crimping strain and contact forces [28]. Dacron was designed to cover or coat the Nitinol stent, followed by the simulation analyses using FEM method [28]. Besides, Solidworks® that is integrated with other software such as MATLAB is capable to conduct various studies to enhance performance outputs [29]. Both softwares have been used to develop a framework for automatic optimisation, aiming to reduce the stress transcatheter aortic valve (TAV) leaflets through the projection of Von Mises stresses contours [29].

5.2 Analysis parameters

There are several parameters which are necessary to be declared for the conduction of simulation analysis using Solidworks® including the applied forces, material properties, mesh properties and boundary condition [30]. The applied loading is critically set to imitate the forces acting on the design model which will produce and generate stress distribution [28, 29]. In bone implantation, it is crucial to simulate whether the design model could remain in place following the implantation as biological forces will act in all directions [30]. The material properties should be set to the design models to provide data to the software, in resisting the applied forces or loading once the simulation is run [31]. The material properties inclusion will affect the simulated outputs on mechanical strength, Young's modulus, elongation and deformation [31].

FEM 's theory breaks the solid body into several thin, easily shaped cells that will model the body's structure as precisely as possible [32]. Such small cells are referred as elements and the junction points between elements are known as nodes. The method of turning a robust body model into a FE model is called meshing that allows much simpler bonded solutions to replace a complicated engineering problem [32]. In order to find the most suitable number of meshes for the conduction of simulation and computational analyses, a convergence study of meshes is required [33]. Based on Kuang and Chang [34], the default median mesh should be used in the simulation mechanical analysis using Solidworks® to increase the homogeneity of stress distribution and to prevent wrong data interpretation. Some models are modelled with triangular elements and another form of tetrahedral elements could also be used to construct 3D scaffold geometries [5]. The unit size of element is very important to control the sensitivity of applied pressure [3, 5]. The smaller the unit size will produce more precise structure of 3D model and better stress homogeneity [5]. However, lowering the unit size will impact in greater element and nodes that will consume longer time for the accomplishment of simulation analysis depending on the workstation capability [3].

Boundary condition is required in the setting of FEM to provide constraint surfaces for the simulation analysis. In the study by Saidin *et al.* [31], three boundary conditions were set to the assembled of dental implant, teeth and two types of bone. On the other study by Jayendiran *et al.* [30], the boundary condition was applied at the interface between the outer surface of the blood and the stent inner surface for the transfer of continuous normal stress and continuous displacement. Figure 2 displays the placement of applied loading or loading force on the surface of 3D model bone scaffold and the setting of boundary condition on the opposite surface of bone scaffold. For the simulation in physiological environment, the surface or points of boundary condition must be properly selected based on the constraint surface or constraint point of the rigid organs and tissues.

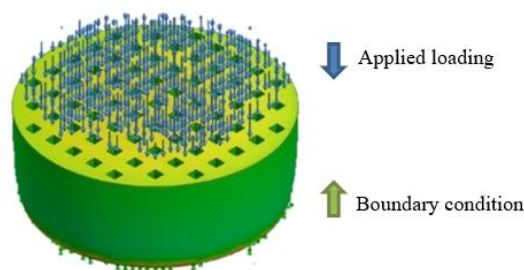


Figure 2. Placement of applied loading and boundary condition on 3D model bone scaffold using Solidworks®

6. Conclusion

The FEA methodology has provided reliable values which brings its application to the area of biomedical engineering. Simulation analysis is a new and cost-effective methodology to be applied in bone tissue engineering as an alternative to the conventional experimental methodologies. This review study is focused on the simulation analyses on bone scaffolds, specifically on the utilisation of Solidworks®.

References

- [1] Hung, Nguyen, Basic Knowledge of Bone Grafting, Bone Grafting, edited by Alessandro Zorzi, Joao de Miranda, IntechOpen, 2012. <https://doi.org/10.5772/30442>.

- [2] L. Polo-Corrales, M. Latorre-Esteves and J.E. Ramirez-Vick, Scaffold design for bone regeneration, *Journal of Nanosciences and Nanotechnology*, 2014, 14(1):15–56. <https://doi.org/10.1166/jnn.2014.9127>.
- [3] Arjunan, A., Demetriou, M., Baroutaji, A., & Wang, C, Mechanical performance of highly permeable laser melted Ti6Al4V bone scaffolds, *Journal of the mechanical behavior of biomedical materials*, 2020, 102. <https://doi.org/10.1016/j.jmbbm.2019.103517>.
- [4] Baptista, Ricardo, and M. Guedes, Fatigue behavior of different geometry scaffolds for bone replacement, *Procedia Structural Integrity*, 2019, 17: 539-546. <https://doi.org/10.1016/j.jmbbm.2019.103517>.
- [5] Ali, Davar, Mehmet Ozalp, Sebastien BG Blanquer, and Selis Onel, Permeability and fluid flow-induced wall shear stress in bone scaffolds with TPMS and lattice architectures: A CFD analysis, *European Journal of Mechanics-B/Fluids*, 2020, 79: 3376-385. <https://doi.org/10.1016/j.euromechflu.2019.09.015>.
- [6] Manolis, George D., Petia S. Dineva, Tsviatko Rangelov, and Dimitris Sfyris, Mechanical models and numerical simulations in nanomechanics: A review across the scales, *Engineering Analysis with Boundary Elements*, 2021, 128: 149-170. <https://doi.org/10.1021/nl901448z>.
- [7] Bhagwat, Rohan Vinayak, Computer Aided Tissue Engineering for The Generation Of Unit Library Structure Of Scaffold For Human Bone (In-Vitro), PhD diss, 2015.
- [8] Bellos, E., D. Korres, C. Tzivanidis, and K. A. Antonopoulos. "Design, simulation and optimization of a compound parabolic collector." *Sustainable Energy Technologies and Assessments*, 2016, 16. 53-63. <https://doi.org/10.1016/j.seta.2016.04.005>.
- [9] Fernandez de Grado, Gabriel, Laetitia Keller, Ysia Idoux-Gillet, Quentin Wagner, Anne-Marie Musset, Nadia Benkirane-Jessel, Fabien Bornert, and Damien Offner, Bone substitutes: a review of their characteristics, clinical use, and perspectives for large bone defects management. *Journal of tissue engineering*, 2018, 9. <https://doi.org/10.1177/2041731418776819>.
- [10] Rinaldi, Marco, Scott D. Ganz, and Angelo Mottola, *Computer-Guided Dental Implants and Reconstructive Surgery: Clinical Applications*, Elsevier Health Sciences, 2015, ISBN: 9780323278041.
- [11] Tang, Guoke, Zhiqin Liu, Yi Liu, Jiangming Yu, Xing Wang, Zhihong Tan, and Xiaojian Ye. "Recent trends in the development of bone regenerative biomaterials." *Frontiers in Cell and Developmental Biology*, 2021, 9, <https://doi.org/10.3389/fcell.2021.665813>.
- [12] Wang, Su, Linlin Liu, Xin Zhou, Luchuang Zhu, and Yongqiang Hao. "The design of Ti6Al4V Primitive surface structure with symmetrical gradient of pore size in biomimetic bone scaffold." *Materials & Design*, 2020, 193. <https://doi.org/10.1016/j.matdes.2020.108830>.
- [13] Prasad, Somasundaram, and Raymond Chung Wen Wong, Unraveling the mechanical strength of biomaterials used as a bone scaffold in oral and maxillofacial defects, *Oral Science International*, 2018, 15, no. 2: 48-55. [https://doi.org/10.1016/S1348-8643\(18\)30005-3](https://doi.org/10.1016/S1348-8643(18)30005-3).
- [14] Lim, Siew Shee, and Dominic CY Foo, Simulation and scale-up study for a chitosan–TiO2 nanotubes scaffold production, *Food and bioproducts processing*, 2017, 106: 108-116. <https://doi.org/10.1016/j.fbp.2017.09.002>.
- [15] Jin, Zhi-Heng, Meng-Dong Peng, and Qing Li, The effect of implant neck microthread design on stress distribution of peri-implant bone with different level: A finite element analysis, *Journal of Dental Sciences*, 2020, 15, no. 4: 466-471. <https://doi.org/10.1016/j.jds.2019.12.003>.
- [16] Azcarate-Velázquez, Francisco, Raquel Castillo-Oyagüe, Luis-Guillermo Oliveros-López, Daniel Torres-Lagares, Álvaro-José Martínez-González, Andrea Pérez-Velasco, Christopher D. Lynch, José-Luis Gutiérrez-Pérez, and María-Ángeles Serrera-Figallo. "Influence of bone quality on the mechanical interaction between implant and bone: A finite element analysis." *Journal of Dentistry*, 2019, 88: 103161. <https://doi.org/10.1016/j.jdent.2019.06.008>.
- [17] Ma, Shuai, Qian Tang, Qixiang Feng, Jun Song, Xiaoxiao Han, and Fuyu Guo, Mechanical behaviours and mass transport properties of bone-mimicking scaffolds consisted of gyroid structures manufactured using selective laser melting, *Journal of the mechanical behavior of biomedical materials*, 2019, 93: 158-169. <https://doi.org/10.1016/j.jmbbm.2019.01.023>.
- [18] Herrera, Antonio, Sarai Rebollo, Elena Ibarz, Jesús Mateo, Sergio Gabarre, and Luis Gracia, Mid-term study of bone remodeling after femoral cemented stem implantation: comparison between DXA and finite element simulation, *The Journal of Arthroplasty*, 2014, 29, no. 1: 90-100. <https://doi.org/10.1016/j.arth.2013.03.028>.
- [19] Maghami, Ebrahim, Jason P. Moore, Timothy O. Josephson, and Ahmad R. Najafi, Damage analysis of human cortical bone under compressive and tensile loadings, *Computer Methods in Biomechanics and Biomedical Engineering*, 2022, 25, no. 3: 342-357. <https://doi.org/10.1080/10255842.2021.2023135>.
- [20] Mustafa, Nur Syahirah, Nor Hasrul Akhmal, Sudin Izman, Mat Hussin Ab Talib, Ashrul Ishak Mohamad Shaiful, Mohd Nazri Bin Omar, Nor Zaiazmin Yahaya, and Suhaimi Illias, Application of Computational Method in Designing a Unit Cell of Bone Tissue Engineering Scaffold: A Review, *Polymers*, 2021, 13, no. 10: 1584. <https://doi.org/10.3390/polym13101584>.

- [21] Bhardwaj, Tarun, Surya Pratap Singh, and Mukul Shukla, Finite element modeling and analysis of implant scaffolds, In 2017 International Conference on Advances in Mechanical, Industrial, Automation and Management Systems (AMIAMS), IEEE, 2017, pp. 358-362. <https://doi.org/10.1063/5.0080312>.
- [22] Yusop, Abdul Hakim, Murni Nazira Sarian, Fatihhi Szali Januddi, Qamar Uddin Ahmed, Mohammed Rafiq Kadir, Djoko Hartanto, Hendra Hermawan, and Hadi Nur, Structure, degradation, drug release and mechanical properties relationships of iron-based drug eluting scaffolds: The effects of PLGA, Materials & design, 2018, 160: 203-217. <https://doi.org/10.1016/j.matdes.2018.09.019>.
- [23] Bethune, J. D., Engineering Design and Graphics with Solidworks®, Edited by T. Laura Norman, Croom. New York: Pearson Education, Inc, 2017. ISBN 13: 978-0-13-450769-9
- [24] Parashar, Sandeep Kumar, and Jai Kumar Sharma. "A review on application of finite element modelling in bone biomechanics." Perspectives in Science, 2016, 8: 696-698. <https://doi.org/10.1016/j.pisc.2016.06.062>.
- [25] Planchard, D. C, SOLIDWORKS 2018 Tutorial with Video Instruction. SDC Publications, 2018. ISBN: 978-1-63057-156-6.
- [26] Zhao, Li, Xuan Pei, Lihua Jiang, Cheng Hu, Jianxun Sun, Fei Xing, Changchun Zhou, Yujiang Fan, and Xingdong Zhang, Bionic design and 3D printing of porous titanium alloy scaffolds for bone tissue repair, Composites Part B: Engineering, 2019, 162: 154-161. <https://doi.org/10.1016/j.compositesb.2018.10.094>.
- [27] Ikekwem, J. U., J. J. Chukwunke, and S. N. Omenyi, Thermal behavior of bone cement in hip replacement, Physical Science International Journal, 2018, 17, no. 4: 1-14. <https://doi.org/10.9734/PSIJ/2018/39318>.
- [28] Jayendiran, Raja, Bakr Nour, and Annie Ruimi, Performance of a Nitinol Honeycomb Stent for the Management of Atherosclerotic Aortic Plaque: Crimping, Sealing, and Fluid–Structure Interaction Analysis, Journal of Applied Mechanics, 2021, 88, no. 3. <https://doi.org/10.1115/1.4049139>.
- [29] Abbasi, Mostafa, and Ali N. Azadani, A geometry optimization framework for transcatheter heart valve leaflet design, Journal of the Mechanical Behavior of Biomedical Materials, 2020,102. <https://doi.org/10.1016/j.jmbbm.2019.103491>.
- [30] Madfa, A. A., MR Abdul Kadir, J. Kashani, S. Saidin, E. Sulaiman, J. Marhazlinda, R. Rahbari, B. J. J. Abdullah, H. Abdullah, and NH Abu Kasim, Stress distributions in maxillary central incisors restored with various types of post materials and designs, Medical Engineering & Physics, 2014, 36, no. 7: 962-967. <https://doi.org/10.1016/j.medengphy.2014.03.018>.
- [31] Saidin, Syafiqah, Mohammed Rafiq Abdul Kadir, Eshamsul Sulaiman, and Noor Hayaty Abu Kasim. "Effects of different implant–abutment connections on micromotion and stress distribution: Prediction of microgap formation." Journal of Dentistry, 2012, 40, no. 6: 467-474. <https://doi.org/10.1016/j.jdent.2012.02.009>.
- [32] Petrova, Radostina V, Introduction to static analysis using SolidWorks simulation. CRC Press, 2014. ISBN: 978-7738076866.
- [33] Hong, C. C., Cheng-Long Chang, and Chien-Yu Lin. "Static structural analysis of great five-axis turning–milling complex CNC machine." Engineering Science and Technology, an International Journal, 2016,19, no. 4: 1971-1984. <https://doi.org/10.1016/j.jestch.2016.07.013>.
- [34] Kuang and Chang, H., Design optimization in Computer-Aided Engineering Design, Academic Press, 2015, pp. 907–1000. ISBN: 9780128097366.