

LOAD MODELLING AND SIMULATION OF INDUSTRIAL AND
RESIDENTIAL LOAD FOR HARMONIC ANALYSIS

MOHAMAD NAIM BIN MOHAMAD

A project report submitted in partial fulfilment of the
requirements for the award of the degree of
Master of Engineering (Electrical Power)

Faculty of Electrical Engineering
Universiti Teknologi Malaysia

DECEMBER 2016

To my beloved mother, wife, daughters and son

ACKNOWLEDGEMENT

First of all, I would like to express my gratitude to ALLAH S.W.T the almighty, without God blessing this project cannot be realized and finished successfully.

Special thanks belong to my supervisor Dr.Dalila Binti Mat Said, who provides and guides me with a variety of information, references and ideas to complete this project. Working with him is the most valuable experience for me. A lot of knowledge and skill I had gained from him in producing the quality project.

My appreciation also goes to my family who has been so tolerant and supports me all these years. Thanks for their encouragement, love and emotional supports that they had given to me.

Nevertheless, my great appreciation is dedicated to my friends and those who involved directly or indirectly in this project. Thanks.

ABSTRACT

Power Quality (PQ) is a phrase normally uses to describe all aspects of events in electrical system that deviates from normal system operations. Issues regarding PQ are growing concern especially towards power utilities. The increasing numbers of sophisticated electronics equipment like high efficiency variable speed drive (VSD) and power electronic appliances in the market producing harmonics current to the network system. Harmonics current can be transmitted from one facility through the others utilities equipment to neighbouring businesses through shared networks system. Harmonics current can cause harmful effects at the main equipment on network system and will cause problems such as overheated transformers, conductors, neutral wires, nuisance breaker trips, and voltage distortion all leading to equipment malfunction or fail which translates to loss of money to power utilities and consumers. The objective of this thesis model the nonlinear based on actual load to determine the level of harmonics produce by nonlinear loads. Other than that, objective of this thesis to investigate the current harmonics produce by residential and industrial load. The loads are connected to network system based on IEEE-13 bus distribution and small scale system to determine the current harmonics characteristic in network system for residential and industrial building. The main objective of this thesis to apply the mitigation technique to reduce current harmonics by using active and passive filter. Active filter will be using STATCOM as mitigation technique. The data will be tabulate for comparison and analysis. The results current harmonic level in network system will be reduce due to mitigation techniques apply in the system.

ABSTRAK

Kualiti Kuasa (PQ) adalah frasa yang biasanya digunakan untuk menggambarkan semua aspek peristiwa dalam system elektrik yang menyimpang daripada operasi sistem normal. Isu-isu mengenai PQ semakin membimbangkan terutamanya terhadap pihak pembekal kuasa. Peningkatan mendadak peralatan elektronik canggih seperti kecekapan tinggi memandu laju boleh ubah (VSD) dan peralatan elektronik kuasa dalam pasaran menghasilkan harmonik arus kepada system rangkaian elektrik. Harmonik arus boleh dihantar dari satu tempat melalui peralatan lain utility dan perniagaan yang lain melalui system rangkaian yang dikongsi. Harmonik arus boleh menyebabkan kesan berbahaya pada peralatan utama pada system rangkaian pengagihan elektrik dan boleh menyebabkan masalah seperti alat pengubah menjadi terlalu panas, konduktor, wayar neutral, perjalanan pemutus kacau ganggu, dan gangguan voltan, ini semua akan membawa kepada kerosakan peralatan atau gagal yang diterjemahkan kepada kehilangan kerugian kepada pihak pembekal tenaga dan pengguna. Beban akan direka bentuk berdasarkan kepada beban sebenar untuk menentukan tahap harmonik yang dihasilkan oleh peralatan. Beban disambungkan kepada system rangkaian berdasarkan IEEE-13 sistem pengagihan dan system skala kecil. Harmonik arus akan diukur didalam system rangkaian yang menentukan dengan menggunakan perisian PSCAD / EMTDC dan akan mengurangkan dengan menggunakan penapis aktif dan pasif. Data ini akan menjadi menjadualkan untuk perbandingan dan analisis.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xvi
	LIST OF SYMBOLS	xvii
	LIST OF APPENDICES	xviii
1	INTRODUCTION	1
	1.1 Background of the Study	1
	1.2 Problem Statement	3
	1.3 Objectives of the Study	3
	1.4 Scopes of the Study	4
	1.5 Project Report Outline	5
2.	LITERATURE REVIEW	7
	2.1 Introduction	7
	2.2 Harmonic Indices and Limits	9
	2.3 Load Modelling	13
	2.3.1 Fluorescent Lamps	14
	2.4 Harmonic Mitigation Technique	15

2.4.1	Passive Filter	16
2.4.2	Active Filtering	18
2.4.3	Phase Shifting Transformers	20
2.4.4	K- Factor	21
2.5	Related Work	22
2.6	Summary	23
3.	METHODOLOGY	24
3.1	Introduction	24
3.1.1	Load Modelling	24
3.1.2	Small Scale Network (Residential)	25
3.1.3	IEEE- 13 Buses Distribution System.	26
3.2	Simulation of Current Harmonic.	27
3.2.1	Construct Test System	27
3.2.2	Simulate Test System	29
3.3	Total Harmonic Distortion	29
3.4	Create and Pre-processing Input and Output Data	30
3.5	Project Flowchart	31
3.6	Summary	32

4.	RESULTS AND DISCUSSION	33
	4.1 Introduction	33
	4.2 Load Modelling Simulation.	33
	4.2.1 Lift Motor	34
	4.1.2 Fluorescent Light	37
	4.1.3 Television and CPU	40
	4.3 Results of Small Scale Network (Residential)	43
	4.3.1 Harmonic Current Simulation Small Scale Network (Residential).	43
	4.3.2 Harmonic Current Mitigation Small Scale Network (Residential)	48
	4.4 Results of IEEE- 13 Bus Distribution Network (Industrial)	53
	4.4.1 Harmonic Current Simulation IEEE- 13 Bus Distribution System	53
	4.4.2 Harmonic Current Mitigation Simulation IEEE- 13 Bus Distribution System	62
5.	CONCLUSION	80
	5.1 Conclusion	80
	5.2 Future Work	81
	REFERENCES	82
	AppendicesA –F	85

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Harmonic Voltage Distortion Limit (V_h) in % at PCC	11
2.2	Harmonic Current Distortion Limit (I_h) in % of Load Current (I_L)	12
2.3	Maximum and Minimum Harmonic Contents of a Typical Fluorescent Lighting	14
3.4	Rating of Domestic and Industrial Load Modelled by PSCAD	25
4.5	Current Harmonic Spectrum for Lift Motor.	35
4.6	Current Harmonic Spectrum Produced by. Fluorescent Light	38
4.7	Current Harmonic Spectrum Produced by Television.	41
4.8	Current Harmonic Spectrum for Small Scale Network	44
4.9	Current Harmonic Spectrum for Small Scale Network Compensate with Passive Filter	49
4.10	Comparison Total Harmonic Distortion Current (THDi)	52
4.11	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 8	54
4.12	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 6- 8	56

4.13	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 10	58
4.14	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 9-10	61
4.15	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 10	64
4.16	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 6-8	66
4.17	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 10	69
4.18	Current Harmonic Spectrum for IEEE 13-Bus Distribution Network at Bus 9-10	71
4.19	Comparison Total Harmonic Distortion Current (THDi)	73

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Comparison Between Linear and nonlinear load In Time Domain.	2
2.1	Harmonics Integer	9
2.2	Passive Filter Element	16
2.3	Schematic Representation of STATCOM	18
2.4	Schematic Representation of STATCOM	19
2.5	Cancellation of The Triplen Harmonic By Achieving a 60° Phase Shift Between The Two Wave Shapes, and then Combining	20
2.6	Cancellation of the 5 th , 7 th , 17 th , and 19 th Harmonics by (“A”) + (“A”+ 60°) Combination to Obtain the “B” Wave Shape	21
2.7	Cancellation of the 5 th , 7 th , 17 th , and 19 th harmonics by (“A + 30° ”) + (“B”) combination.	21
3.1	Small Scale Distribution System for Residential	25
3.2	IEEE 13-Bus Distribution Network Diagram	26
3.3	Small Scale distribution network carry out simulation by using PSCAD	27
3.4	IEEE 13-Bus Distribution Network Carry Out Simulation by using PSCAD	28
3.5	Flowchart of Load Modelling and Mitigation Techniques	31
4.1	Lift Motor Circuit Diagram	34

4.2	Current Harmonic SpectrumLift Motor	35
4.3	Voltage Waveform Lift Motor	36
4.4	Current Waveform Lift Motor	36
4.5	Fluorescent Light Circuit	37
4.6	Current Harmonic SpectrumFluorescent Light	38
4.7	Voltage WaveformFluorescent Light	39
4.8	Current Waveform Fluorescent Light	39
4.9	Television and CPU Circuit	40
4.10	Current Harmonic SpectrumTelevision and CPU	41
4.11	Voltage WaveformTelevision and CPU	42
4.12	Current Waveform Television and CPU	42
4.13(a), (b), (c)	Current Harmonic Spectrum(Ia)	44
4.14(a), (b), (c)	Voltage Waveform(Va)	46
4.15(a), (b), (c)	Current Waveform (Ia)	47
4.16(a), (b), (c)	Current Harmonic Spectrum(Ia)	51
4.17	Total Harmonic Distortion (THDi) without Filter	52
4.18	Total Harmonic Distortion (THDi) with Passive Filter	52
4.19(a),(b),(c)	Current Harmonic Spectrum at Bus 8	54
4.20(a),(b),(c)	Current Harmonic Spectrum at Bus 6- 8	56
4.21(a),(b),(c)	Current Harmonic Spectrum at Bus 10	59
4.22(a),(b),(c)	Current Harmonic Spectrum at bus 9 – 10	61
4.23(a),(b),(c)	Current Harmonic Spectrum at bus 8 with Statcom	64
4.24(a),(b),(c)	Current Harmonic Spectrum at bus 6-8 with Statcom	67

4.25(a),(b),(c)	Current Harmonic Spectrum at bus 10 with Passive Filter	69
4.26(a),(b),(c)	Current Harmonic Spectrum at bus 9- 10 with Passive Filter	71
4.27(a),(b),(c) Filter	Current Harmonic Spectrum at bus 6-8 without	73
4.28(a),(b),(c)	Current Harmonic Spectrum at bus 6-8 with Passive Filter	75
4.29(a),(b),(c)	Total Harmonic Distortion (%) at bus 9-10 Without Filter	76
4.30(a),(b),(c)	Total Harmonic Distortion (%) at bus 9-10 with STATCOM	78

LIST OF ABBREVIATIONS

PQ	-	Power Quality
VSD	-	Variable Speed Drive
IEEE	-	Institute of Electrical and Electronics Engineers
kV	-	kilovolt
PCC	-	Point Common Coupling
APF	-	Active Filter
PF	-	Passive Filter
MW	-	mega watt
MVA	-	mega volt ampere
MVar	-	mega volt ampere reactive
DC	-	Direct Current
p.u	-	per unit
THD	-	Total Harmonic Distortion
rms	-	root mean square
TDD	-	Total Demand Distortion
Xc	-	Capacitance Reactance
VSC	-	Voltage Source Converter
PFCC	-	Power Factor Capacitor Correction

LIST OF SYMBOLS

C	-	Capacitance
f	-	Frequency
F	-	Farad
Ω	-	Ohms
R	-	Resistance
R^2	-	coefficient of determination
S	-	Siemens
X	-	Reactance
L	-	Inductance

APPENDIX	TITLE	PAGE
A.	IEEE 13-Bus Industrial Distribution System Transformer Data	82
B.	Network Data for 5 Bus Test System	83
C.	The Simple Radial Test and DSTATCOM Implemented in PSCAD	84
D.	The Simple Radial Test and DVR Implemented in PSCAD	85
E.	The 5 Bus Test System and DSTATCOM Implemented in PSCAD	86
F.	The 5 Bus Test System and DVR Implemented in PSCAD	86

CHAPTER 1

INTRODUCTION

1.1 Background of the Study

Electronics equipment or machine became the most important equipment to reduce or expedite the work. This current phenomenon was increasing the numbers of sophisticated electronics equipment's through the innovation by design engineer. The most important of innovation has been discovered like high efficiency variable speed drive (VSD) and power electronic controller which is has been used widely in electronics equipment's. However, this innovation was create the electromagnetic interference has heightened interest in power quality (PQ). PQ a phrase normally uses to describe all aspects of events in electrical system that deviates from normal system operations. PQ is the most important characteristic explain for many types of power system disturbances such as harmonic distortion, transient voltage variations, voltage flicker and etc. Nowadays, PQ relate to harmonics has been getting more and more get attention from many researches. Many researcher focus the investigation the effect of network system performance of industrial equipment. PQ problems occur when the 50 or 60 Hertz sine wave alternating-voltage power sources is distorted. Industrial or residential have using power electronics circuit in the equipments will produce the harmonics and will affect the network system. This will cause the malfunction or overheated on the equipment.

Modern distribution system, harmonic produced by the modern home appliance such as compact fluorescent light, LCD TVs, personal computers and others electronics equipment. Nonlinear loads became to be prime sources of harmonics distortions in networks system. Harmonics current produced by non-linear loads are injected back into power distribution system through the points of common coupling (PCC) [1]. Consequently, the harmonic problems were identified and treated by installing passive harmonic filters at the Point of Common Coupling (PCC) of the major distorting loads so that the filter effectiveness was easily accessed and verified [29],[30][31]. Although each of the devices is not individually a large source of harmonics, the collective effect is so noticeable that the excessive waveform distortions in urban distribution systems are becoming increasingly dominated by the harmonics of residential loads [26][27]. Figures 1.1 describes the load connected to a sinusoidal voltage the devices create non-sinusoidal current [4]. Current also carry the higher frequencies and distorted the sinusoidal waveform.

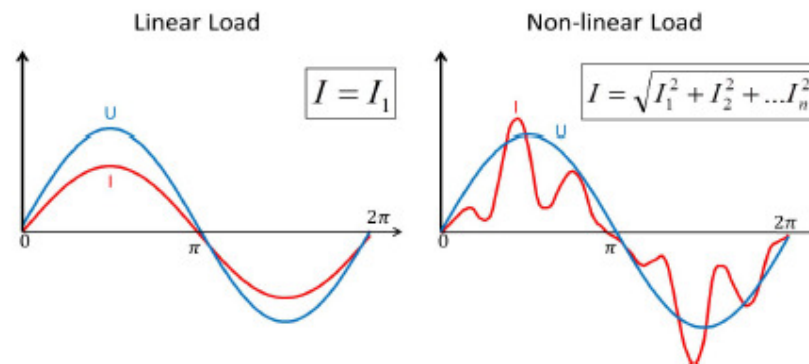


Figure 1.1 comparison between linear and a nonlinear load in time domain

Harmonics filter has been designed to reduce or eliminate the harmonics in the system. Harmonics distortions in power distribution system can be eliminate be suppressed using two approached namely passive and active filter [1]. Passive

filtering (PF) is the simplest conventional solution to mitigate the harmonic distortion [2]. Although simple, the use passive elements do not always respond correctly to dynamics of the power distribution systems [3]. Active filters (APF) is newest technology for mitigation harmonic in distribution system. APF performances are independent on the power distribution system properties [3]. Some of these solutions offer guaranteed results and have no adverse effect on the power system, while the performance of others is largely dependent on system conditions.[20] Operation analysis and technical appraisal of these solutions are studied [21].

1.2 Problem Statement

Current harmonics can causes transformers, motor and others equipment became malfunction and power electrical network to became unstable which translate to losses of money. Current harmonics is creating by electronics equipment, variable speed drive (VSD) and power electronics controller. These types of electronic equipment will cause distorted waveforms that contains harmonic, thus affecting the power quality in electrical system. The filter is essential to be installed to filter current harmonic occurs in the network system.

This proposed method will able to reduce or eliminate of current harmonic at low voltage for residential and industry building.

1.3 Objectives of the Study

The objectives of this study are:

- To model and simulate the harmonic produced by nonlinear load for residential and industrial building.
- To investigate the harmonic impact from residential and industrial load.
- To mitigate the harmonic current in distribution system by using passive and active filter method.

1.4 Scopes of the Study

The scopes of this study are:

- Analysis will focus on residential and industrial building.
- Load modelling will be focus on television, CPU and desktop, lift, CFL Lamp and Adjustable Variable Speed (ASD).
- Mitigation method will be focus on passive and active filter and simulate by using PSCAD software.
- Current harmonics characteristic will be monitor on the low voltage system for residential and industrial building.

1.5 Project Report Outline

This project report consists of five main chapters which are introduction, literature review, methodology, results and discussion and conclusion.

Chapter 1 of this project report will be focused on the general briefing about harmonics, load modelling methods, total harmonics distortion and mitigation techniques. This chapter also explains the objectives, scopes of the project, problem statements and project report outline.

Chapter 2 will be more on the discussion about literature review on the harmonics, load modelling methods, total harmonics distortion and mitigation techniques. This chapter also discusses on the related works on current harmonics mitigations technique.

Chapter 3 is the methodology for this project. In this chapter, the method proposed will be explained in further details on how to model and simulate the test systems using software. This chapter also discusses on the development of load modelling using software.

Chapter 4 will be focussing on the results obtained in the chapter 3. The results will be analysed using appropriate tools. The analysis comprises of load modelling, current harmonics spectrum, total harmonics distortion (THDi), performances of mitigation techniques.

REFERENCES

1. Zainal Salam*, Tan Perng Cheng and AwangJusoh “Harmonics Mitigation Using Active Power Filter:A Technological Review”. *UniversitiTeknology Malaysia*, 2006.
2. A. Ludbrook, “Harmonic Filter for Notch Reduction,”*IEEETrans.on Industry Application*,Vol.24,pp.947-954,1988
3. J.C.Das, “Passive Filters – Potentialities and Limitation,”*IEEE Trans. On Industry Application*, Vol.40, no.1, pp.232-241, 2004.
4. Lukas Motta and Nicolas Faundes, “Active/Passive Harmonic Filters: Applications,Challengesand Trends,” IEEE,2016.
5. RaneruNageswara Rao, “ Harmonic Analysis of Small Scale Industrial Load and Harmonic Mitigation Technique in Industrial Distribution System,”*International Journal of Engineering Research and Application (IJERA)*, Vol 3,no 4,pp.1511-1540,2013.
6. W.M. Grady and S.Santoso, “ *Understanding Power System Harmonics*,” IEEE Power Engineering Review, Vol.21,no.11,pp.8-11,2001
7. R.C. Dugan,M.F.McGranaghan, S.Santoso and H.W.Beaty. “*Electrical Power System Quality*” 2nd.ed.McGraw-Hill,2002,USA
8. W.E.Kazibwe and M.H.Sendaula. “*Electric Power Quality Control Technique*” Van Nostrand Reinhold 1993, New York, USA
9. Gonzalo Sandoval and John Houdek, “ *A Review Of Harmonic Mitigation Techniques*” 2005

10. D.A.Gonzalez and J.C.McCall, “ Design of Filters to Reduce Harmonic Distortion In Industrial Power System,” IEEE Trans. On Industry Application, Vol.LA-23,pp.504-512,1987
11. J.K. Phipps, “A Tranners Function Approach to Harmonic Filter Design” IEEE Trans. On Industry Application Magazine , Vol.3 no.2.pp.68-82,1997
12. Daniel W. Hart “*Power Electronics*”. McGraw-Hill,2011 ,USA
13. IEEE Recommended Practice and Requirement for Harmonic Control in Electric Power System, 2014
14. Mohan “Electronic Drive”. 2005 by CRC Press LLC
15. M. Davudi, S. Torabzad, B. Ojaghi (2011)“*Analysis of Harmonics and Harmonic Mitigation Methods in Distribution Systems*” Australian Journal of Basic and Applied Sciences, 5(11): 996-1005, 2011 ISSN 1991-8178
16. Kiran Deshpande, Prof.RajeshHolmukhe and Prof. Yogesh “*K-Factor Transformers and Non-linear Loads*” Dept.of Electrical Engineering, College of Engineering, BharatiVidyapeeth University, Pune
17. Olimpo Anaya-Lara and E. Acha. Modelling and Analysis of Custom Power System by PSCAD/EMTDC. *IEEE Transaction on Power Delivery*, 2002. 17(1): 266-272
18. C. Venkatesh, D. Srikanth Kumar, Student Members, IEEE, D.V.S.S. Siva Sarma, Senior Member, IEEE and M. Sydulu, Member, IEEE“Modelling of Nonlinear Loads and Estimation of Harmonics in Industrial Distribution System” IEEE,2008

19. R. Kameswara Rao, G. Ravi Kumar, S. S. Tulasiram, "*Effective Harmonic Mitigation Techniques Using Wavelets Based Analysis*" International Journal of Engineering Science and Technology-Vol 3, pp6571-6581 ,2011
20. Hussein A. Attia¹, M. El-Metwally¹ and Osama M. Fahmy² "*Harmonic Distortion Effects and Mitigation in Distribution Systems*" Journal of American Science 2010.
21. T. S. Key, J-S. Lai, "Costs and benefits of Harmonic Current Reduction for Switch Mode Power Supplies in a Commercial Office Buena Vista, FL, October, 8-12, 1995.
22. T.K Abdel-Galil, E.F. EI-Saadany and M.M.A Salama "*Implementation of Different Mitigation Techniques for Reducing Harmonics Distortion in Medium Voltage Industrial Distribution System*" IEEE, 2001
23. R.A. Kantaria¹, Student Member, IEEE, S.K. Joshi², K. R. Siddhapura. "*A Novel Hysteresis Control Technique of VSI Based STATCOM*" IEEE, 2011.
24. Amit Jain, Ned Mohan, Karan Joshi and Aman Behal "*Voltage Regulation with STATCOMS: Modeling, Control and Results.*" IEEE Transactions on Power Delivery, Vol 21, NO. 2, April 2006 PP 726-734.
25. Yashomani Y. Kolhatkar, and Shyama P. Das, "*Experimental Investigation of a Single-Phase UPQC With Minimum VA Loading*" IEEE Transactions on Power Delivery, Vol. 22, NO. 1, January 2007 PP 373-380
26. D. J. Pileggi, E. M. Gulachenski, C. E. Root, T. J. Gentile, A. E. Emanuel, "The Effect of Modern Compact Fluorescent Lights on Voltage Distortion", IEEE Transactions on Power Delivery, vol. 8, no. 3, July 1993, pp. 1451-1459
27. C. Jiang, D. Salles, W. Xu and W. Freitas, "*Assessing the Collective Harmonic Impact of Modern Residential Loads – Part II: Applications*" , Accepted to publish in IEEE Transactions on Power Delivery

28. IEC Standard 1000-3-6, "*Assessment of Emission Limits for Distorting loads in MV and HV Power Systems – Basic EMC Publication*", 1996
29. "IEEE Guide for Application and Specification of Harmonic Filters," IEEE Std 1531-2003, vol., no., pp. 0_1-60, 2003
30. Nassif, A.B.; Wilsun Xu; Freitas, W.; , "*An Investigation on the Selection of Filter Topologies for Passive Filter Applications*," IEEE Transactions on Power Delivery, vol. 24, no. 3, pp. 1710-1718, July 2009
31. C. J. Chou, C. W. Liu, J. Y. Lee, "*Optimal Planning of Large Passive-Harmonic-Filters Set at High Voltage Level*", IEEE Transactions on Power Systems, vol. 15, no. 1, pp. 433-441, Feb. 2000