

# Effects of radio-frequency power on structural properties and morphology of AlGa<sub>N</sub> thin film prepared by co-sputtering technique

Nur Afiqah Othman<sup>1</sup>, Nafarizal Nayan<sup>2\*</sup>, Mohd Kamarulzaki Mustafa<sup>1</sup>, Zulkifli Azman<sup>3</sup>, Megat Muhammad Ikhsan Megat Hasnan<sup>2</sup>, Siti Noryasmin Jaafar<sup>3</sup>, Anis Suhaili Bakri<sup>3</sup>, Mohd Hafiz Mamat<sup>4</sup>, Mohd Zamri Mohd Yusop<sup>5</sup>, Ahmad Shuhaimi Abu Bakar<sup>6</sup> and Mohd Yazid Ahmad<sup>7</sup>

<sup>1</sup>Faculty of Applied Science and Technology, Universiti Tun Hussein Onn Malaysia (UTHM) Kampus Pagoh, Hab Pendidikan Tinggi Pagoh, KM 1, Jalan Panchor, 86400 Panchor, Johor, Malaysia.

<sup>2</sup>Microelectronics & Nanotechnology-Shamsuddin Research Centre (MiNT SRC), Institute for Integrated Engineering (I<sup>2</sup>E), Universiti Tun Hussein Onn Malaysia (UTHM), 86400 Batu Pahat, Johor, Malaysia.

<sup>3</sup>Faculty of Electrical and Electronic Engineering, Universiti Tun Hussein Onn Malaysia (UTHM), 86400 Batu Pahat, Johor, Malaysia.

<sup>4</sup>Faculty of Electrical Engineering, UiTM, 40450 Shah Alam, Selangor, Malaysia.

<sup>5</sup>Faculty of Mechanical Engineering, Universiti Teknologi Malaysia (UTM). 81310 Skudai, Johor, Malaysia.

<sup>6</sup>Faculty of Science, University Malaya, 50630 Kuala Lumpur, Malaysia.

<sup>7</sup>Nanorian Technologies Sdn Bhd, 40 & 41-1, Jalan Kajang Perdana 3/2, Taman Kajang Perdana, 43000 Kajang, Selangor, Malaysia.

\*Corresponding author: nafa@uthm.edu.my

**Abstract:** To date, the deposition of AlGa<sub>N</sub> thin film using the co-sputtering technique at room temperature has not been reported yet. The use of AlGa<sub>N</sub> for electronic devices has been widely known because of its ultra-wide bandgap. However, to deposit the AlGa<sub>N</sub> thin film and achieved high quality of AlGa<sub>N</sub> films, higher temperature or extra time deposition are needed, which is not compatible with industrial fabrication process. Here, a co-sputtering technique between two power supplies of magnetron sputtering (which are RF and HiPIMS) is introduced to deposit the AlGa<sub>N</sub> thin films. The AlGa<sub>N</sub> thin films were deposited at various RF power to study their effect on structural properties and morphology of the thin films. AlGa<sub>N</sub> films were sputtered simultaneously on silicon (111) substrate for short time and at room temperature using GaN and Al target. Then, the films were characterized by X-ray diffraction (XRD), atomic force microscopy (AFM), and surface profiler to study their properties. XRD shows the GaN (101) and (013) plane for the AlGa<sub>N</sub> deposited at RF power of 30 W. Also there only GaN (101) for the AlGa<sub>N</sub> with 50 W RF power. Yet, the 70 W RF power shows the amorphous structure of AlGa<sub>N</sub>. The roughness and the grain size of AlGa<sub>N</sub> film from AFM analysis showed the trend of decreasing and increasing respectively. The roughness of the AlGa<sub>N</sub> films with 30 W power was 0.82 nm, 0.85 nm for 50 W, and 0.46 nm for 70 W RF power. The grain size of the AlGa<sub>N</sub> films was 30.06 nm, 32.10 nm, and 37.65 nm for RF power of 30 W, 50 W, and 70 W respectively. The profilometer found that the thickness of the AlGa<sub>N</sub> films was decreasing with increasing of RF power. This paper can demonstrate a successful co-sputtering technique of AlGa<sub>N</sub>. Despite AlGa<sub>N</sub> crystal structure was not able to found out in the XRD analysis, the effect of RF power has been studied to give significant effects on AlGa<sub>N</sub> thin film deposition.

**Keywords:** AlGa<sub>N</sub> thin film, co-sputtering technique, RF power, thin film deposition

© 2021 Penerbit UTM Press. All rights reserved

Article History: received 25 May 2021; accepted 12 June 2021; published 28 August 2021.

## 1. INTRODUCTION

AlGa<sub>N</sub> alloys were the ternary alloy of GaN and AlN. AlGa<sub>N</sub>, also known as ultra-wide bandgap materials, has a bandgap greater than GaN ( $E_G = 3.4$  eV), allowing for the next step in power electronics output [1]. AlGa<sub>N</sub> alloys are extremely appealing for the manufacture of ultraviolet UV and deep UV emitters, detectors, and other optoelectronic equipment due to their ability to control the direct bandgap in the broad energy range 3.4–6.1 eV. Aside from that, AlGa<sub>N</sub> has a high mechanical hardness, thermal conductivity, dielectric constant, and resistance to harsh

environments [2]. Furthermore, the majority of alloy research to date has focused on epitaxial films deposited by metal-organic chemical vapor deposition (MOCVD) and molecular beam epitaxy (MBE) which applied substrate temperature more than 900 °C to produce high quality of III-nitride materials [3]–[5]. The growth of Al-rich AlGa<sub>N</sub> using solely thermal atomic layer deposition was recently completed successfully at 342°C [6]. Therefore, we introduce two techniques of sputtering to deposit AlGa<sub>N</sub> simultaneously at room temperature.

RF magnetron sputtering (RFMS) has been used widely to fabricate thin films such as AlN and GaN [7]–[10].

RFMS deposition methods have several benefits for fabrication systems, including the ability to deposit thin films at lower substrate temperatures and the ability to manufacture uniform thin films over wide areas [11]. Simanullang et al. [8] used the RFMS technique to successfully obtain a high crystal structure of GaN thin film at a low temperature ( $\leq 200$  °C). High power impulse magnetron sputtering (HiPIMS) also a part of the magnetron sputtering power supply that has been used to fabricate thin films [12]–[14]. HiPIMS have a significant fraction of ionized sputtered to create a high-performance thick coating, which has improved the thin film consistency even further [15]. HiPIMS deposition generates a substantial number of metal ions (up to 40–80%), HiPIMS films are generally thick and smooth, and plasma density is more than  $10^{13}$  cm<sup>3</sup>. As a result, its stoichiometry and structural strength can be easily measured at lower deposition temperatures as compared to other approaches [16]. In this paper, we want to study morphology and structural properties of AlGa<sub>N</sub> thin film deposited by the both technique of RFMS and HiPIMS simultaneously at room temperature. As we know that, there is not much paper reported regarding the fabrication of AlGa<sub>N</sub> and its properties. The wide bandgap of AlGa<sub>N</sub> increases the interest to study further the behavior of AlGa<sub>N</sub> for semiconductor devices.

## 2. EXPERIMENTAL DETAILS

### 2.1 Substrates preparation

Before the silicon wafer (111) acts as substrate enters the sputtering chamber, the substrate was cleaned to remove the native oxide layer that exists on the surface of the silicon wafer. Silicon was cleaned by dipping the Si into the diluted hydrofluoric acid (HF) for 1 minute. After that, deionized water was used to rinse the Si wafer and nitrogen gas was used to dry the Si wafer after the cleaning process. Once the cleaning process was done, the Si wafer was immediately put into the sputtering chamber.

### 2.2 Deposition process

The deposition process takes place in the chamber of magnetron sputtering. A 3-inch diameter of GaN and Al target (purity 99.999%) was used and connected directly to the RF and HiPIMS power supply, respectively. By using a turbo molecular pump, the base pressure of the sputtering chamber was achieved at  $8.0 \times 10^{-6}$  Torr and the sputtering pressure was set at 10 mTorr. RF power with 13.65 MHz (Advance Energy, Cesar RF Power), meanwhile the HiPIMS power consisted of DC power supply (PsPlasma, SDC 1024) and impulse power supply (Starfire Industries, SF-Impulse-SH) was used to supply the power to the magnetron sputtering. The Ar/N<sub>2</sub> flow rate was maintained at 100/25 sccm using the mass flow controller for 1 hour at room temperature. The distance between target and substrate was 10 cm and the substrate rotation was set at 5 rpm. The HiPIMS power was maintained at 10 W, in the meantime, the RF power was varied at 30 W, 50 W, and 70 W. The experimental setup is shown in Figure 1 and the sputtering parameter details is shown in Table 1.

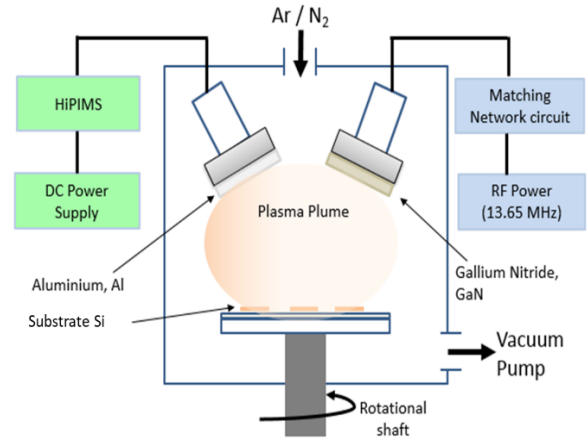


Figure 1. Experimental setup of AlGa<sub>N</sub> using the co-sputtering technique

Table 1. Parameter of the AlGa<sub>N</sub> deposition

Power Supply	HiPIMS	RF
Frequency	1500 Hz	13.65 MHz
Pulse Width	300	-
Working pressure	$10 \times 10^{-3}$ Torr	
Base Pressure	$8 \times 10^{-4}$ Torr	
Ar/N <sub>2</sub> flow rate	100/25 sccm	
Power (W)	10	30,50,70
Distance target to the substrate (cm)	10	

### 2.3 Characterization of AlGa<sub>N</sub> thin films

The structural properties of the AlGa<sub>N</sub> thin films were investigated by analyzing the result from the x-ray diffraction (XRD) PANalytical X-Pert Powder scan at 2 thetas of 20° - 80° with ½ divergence slit and the incident angle “omega” at 0.5 degrees. The surface morphology of the AlGa<sub>N</sub> film was observed using atomic force microscopy (AFM5100N-DFM) from Hitachi using contact mode AFM. The scan size was taken at  $1 \times 1$  μm. In addition, the thickness of the AlGa<sub>N</sub> films was identified using the surface profilometer (DektakXT) from Bruker.

## 3. RESULTS AND DISCUSSIONS

The XRD pattern of AlGa<sub>N</sub> films in Figure 2 shows the (101) and (013) plane of hexagonal GaN with PDF code: ICSD 98-018-1358 was exist at a degree of 36.5° and 62.7° respectively for RF power at 30 W. However the peak of GaN (013) disappeared when the RF power increase to 50 W and both of the GaN peak missing which show amorphous structure up to 70 W of RF power. According to Hwang et al. [17], the films deposited at higher RF power have a higher deposition rate resulting in better crystallinity than lower RF power. However, the crystallinity can become worse when the RF power increases further. Therefore, for our AlGa<sub>N</sub> thin film when the RF power increases up to 70 W, the films show low crystallinity. Nonetheless, based on Mantarci et and Kundakci [18] the RF power under 50 W was the best crystallizing of GaN films on Si substrate. Figure 3 shows

the thickness of the AlGaIn depends on the RF power from the profilometer. The trend shows that the thickness of the AlGaIn film decreasing with increasing RF power.

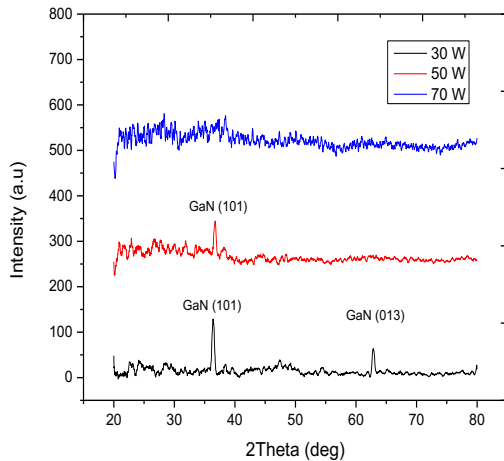


Figure 2. XRD pattern of prepared thin film at differences RF powers

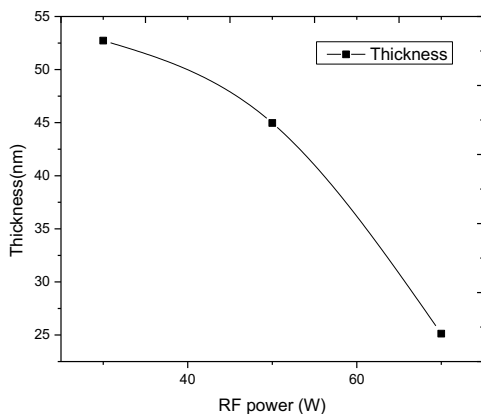


Figure 3. The thickness of AlGaIn thin films depends on RF power

An increase in RF power from 30 to 50 W resulted in a 0.03 nm rougher surface. However, increasing the RF power from 50 to 70 W resulted in a 0.39 nm smoother surface. The roughness of the AlGaIn thin films ranged from 0.46 to 0.85 nm on average. Based on Figure 4, the highest roughness was 0.85 corresponding to the 50 W RF power growth condition, whereas the lowest roughness was 0.46 nm corresponding to the 70 W RF power growth condition. Increasing the RF power from 50 to 70 W resulted in a considerable reduction in the average roughness of the thin film, resulting in a small improvement in the surface morphology of the thin film. However, raising the RF power from 30 to 50 W increased the average roughness of the thin film, resulting in deterioration of the thin film's surface morphology. Thin

films with minimal roughness are frequently sought for optoelectronic device applications because it impacts another layer or ohmic contact that is produced over the roughened surface. As we know, increasing the RF power may lead to higher surface roughness due to an increased rate of deposition [19]. Nevertheless, in our cases, the results show vice versa with the literature, which may be due to both techniques RF and HiPIMS was sputtered simultaneously that to contribute to the smoother surface of the thin film. Meanwhile, Figure 5 shows the grain sizes of AlGaIn thin films increase proportionally with RF power. The grain sizes give an effect to the strength of the AlGaIn material. AlGaIn with 30 W RF power has a smaller grain size of 30.06 nm, while AlGaIn with 50 W and 70 W RF power has grain sizes of 32.10 nm and 37.65 nm, respectively. A fine grain size would undoubtedly increase the finished product's yield strength and stress relief tolerance. Smaller grains can also increase a material's formability in general [20].

#### 4. CONCLUSION

The effect of RF power on the structural properties and morphology of AlGaIn has been investigated systematically. The AlGaIn film was co-sputtered on clean silicon (111) substrates with varied RF power from 30 to 70 W under pure Ar and N<sub>2</sub> plasma. The film thickness was found to decrease with the increase of RF power. The XRD shows only the GaN structure (101) and (013) plane for AlGaIn deposited with 30 W RF power and only GaN (101) for AlGaIn with 50 W RF power. The XRD pattern found the amorphous structure of AlGaIn when deposited with 70 W of RF power. It was found that the grain size grew up with the increase of RF power. Vice versa, the surface roughness of the AlGaIn decreases with the increase of the RF power. However, in the future, the deposition of the AlGaIn can be carried out with varied other parameters that can affect the properties of the AlGaIn and enhance the quality of the films.

#### ACKNOWLEDGMENT

This research was funded by CREST Malaysia through P28C1-17 & A154. The authors also acknowledge Nanorian Technology Sdn Bhd for their contribution to this work. All the analyses were carried out in the lab of Microelectronic and Nanotechnology Shamsuddin Research Centre by the staff was appreciated. This study is partially supported by the Ministry of Higher Education.



Figure 4. Surface roughness of AlGaIn thin films at differences RF power from AFM analysis



Figure 5. Grain sizes of AlGaIn thin films at differences RF power from AFM analysis

## REFERENCES

- [1] R. J. Kaplar, A.A. Allerman, A. M. Armstrong, M. H. Crawford, J. R. Dickerson, A. J. Fisher and A. G. Baca, "Review—Ultra-Wide-Bandgap AlGaIn Power Electronic Devices," *ECS J. Solid State Sci. Technol.*, vol. 6, no. 2, pp. Q3061–Q3066, 2017.
- [2] N. Nepal, J. Li, M. L. Nakarmi, J. Y. Lin and H. X. Jiang, "Temperature and compositional dependence of the energy band gap of AlGaIn alloys," *Appl. Phys. Lett.*, vol. 87, no. 24, pp. 1–3, 2005.
- [3] M. R. Laskar, T. Ganguli, A. A. Rahman, A. P. Shah, M. R. Gokhale and A. Bhattacharya, "MOVPE growth and characterization of a-plane AlGaIn over the entire composition range," *Phys. Status Solidi - Rapid Res. Lett.*, vol. 4, no. 7, pp. 163–165, 2010.
- [4] L. Zhao, S. Zhang, Y. Zhang, J. Yan, L. Zhang, Y. Ai, Y. Guo, R. Ni, J. Wang and J. Li, "AlGaIn-based ultraviolet light-emitting diodes on sputter-deposited AlN templates with epitaxial AlN/AlGaIn superlattices," *Superlattices Microstruct.*, vol. 113, pp. 713–719, 2018.
- [5] M. Stutzmann, O. Ambacher, A. Cros, M.S. Brandt, H. Angerer, R. Dimitrov, N. Reinacher, T. Metzger, R. Höppler, D. Brunner, F. Freudenberg, R. Handschuh and Ch. Deger, "Properties and applications of MBE grown AlGaIn," *Mater. Sci. Eng. B*, vol. 50, no. 1–3, pp. 212–218, 1997.
- [6] S. Choi, A. S. Ansari, H. J. Yun, H. Kim, B. Shong, and B. J. Choi, "Growth of Al-rich AlGaIn thin films by purely thermal atomic layer deposition," *J. Alloys Compd.*, vol. 854, p. 157186, 2021.
- [7] A. S. Bakri, N. Nayan, A. S. Abu Bakar, Z. Azman, N. A. Raship, M. Tahan and R. A. Mohamed Ali, "Structural properties and surface roughness of heterostructure GaN/AlN on Si (100) substrate," *2020 IEEE Student Conf. Res. Dev. SCORED 2020*, pp. 128–131, 2020.
- [8] M. Simanullang, Z. Wang, N. Kawakami, R. Ogata, T. Yoshida and M. Sugiyama, "Non-polar GaIn thin films deposition on glass substrate at low temperatures by conventional RF sputtering," *Thin Solid Films*, vol. 675, pp. 1–4, 2019.
- [9] A. Ullah, Q. Wang, I. Ahmad, and M. Usman, "Irradiation effects on Nd and W doped Aluminum Nitride thin films," *Phys. B Condens. Matter*, vol. 586, p. 412086, 2020.
- [10] X. Jiao, Y. Shi, H. Zhong, R. Zhang, and J. Yang, "AlN thin films deposited on different Si-based substrates through RF magnetron sputtering," *J.*

- Mater. Sci. Mater. Electron.*, vol. 26, no. 2, pp. 801–808, 2014.
- [11] E. C. Knox-Davies, J. M. Shannon, and S. R. P. Silva, “The properties and deposition process of GaN films grown by reactive sputtering at low temperatures,” *J. Appl. Phys.*, vol. 99, no. 7, 2006.
- [12] F. Schmaljohann, D. Hagedorn, and F. Löffler, “Electrical insulation performance of aluminum oxide layers on metallic substrates – HiPIMS compared to RF-MS,” *Surf. Coatings Technol.*, vol. 361, pp. 119–122, 2019.
- [13] T. Shimizu, H. Komiya, T. Watanabe, Y. Teranishi, H. Nagasaka, K. Morikawa and M. Yang, “HIPIMS deposition of TiAlN films on inner wall of microdies and its applicability in micro-sheet metal forming,” *Surf. Coatings Technol.*, vol. 250, pp. 44–51, 2014.
- [14] F. J. Jing, T. L. Yin, K. Yukimura, H. Sun, Y. X. Leng, and N. Huang, “Titanium film deposition by high-power impulse magnetron sputtering: Influence of pulse duration,” *Vacuum*, vol. 86, no. 12, pp. 2114–2119, 2012.
- [15] Y. C. Yang, C. Te Chang, Y. C. Hsiao, J. W. Lee, and B. S. Lou, “Influence of high power impulse magnetron sputtering pulse parameters on the properties of aluminum nitride coatings,” *Surf. Coatings Technol.*, vol. 259, pp. 219–231, 2014.
- [16] K. A. Aissa, N. Semmar, A. Achour, Q. Simon, A. Petit, J. Camus, C. Boulmer-Leborgne and M. A. Djouadi, “Achieving high thermal conductivity from AlN films deposited by high-power impulse magnetron sputtering,” *J. Phys. D: Appl. Phys.*, vol. 47, no. 35, 2014.
- [17] D. K. Hwang, K. H. Bang, M. C. Jeong, and J. M. Myoung, “Effects of RF power variation on properties of ZnO thin films and electrical properties of p-n homojunction,” *J. Cryst. Growth*, vol. 254, no. 3–4, pp. 449–455, 2003.
- [18] A. Mantarci and M. Kundakçi, “Power-dependent physical properties of GaN thin films deposited on sapphire substrates by RF magnetron sputtering,” *Bull. Mater. Sci.*, vol. 42, no. 5, 2019.
- [19] N. Srinatha Y. S. No, V. B. Kamble, S. Chakravarty, N. Suriyamurthy, B. Angadi, A. M. Umarji and W. K. Choi, “Effect of RF power on the structural, optical and gas sensing properties of RF-sputtered Al doped ZnO thin films,” *RSC Adv.*, vol. 6, no. 12, pp. 9779–9788, 2016.
- [20] B. Wellman, “Grain Size and Material Strength,” *Tech. TidBits*, no. 15, pp. 488–489, 2010.