

MODELING AND EXPERIMENTAL ANALYSIS OF EXHAUST GAS  
TEMPERATURE AND MISFIRE IN A CONVERTED-DIESEL HOMOGENEOUS  
CHARGE COMPRESSION IGNITION ENGINE FUELLED WITH ETHANOL

BAHRAM BAHRI

A thesis submitted in fulfilment of the  
requirements for the award of the degree of  
Doctor of Philosophy (Mechanical Engineering)

Faculty of Mechanical Engineering  
Universiti Teknologi Malaysia

SEPTEMBER 2013

*To my lovely wife for her sincere help and accompany,  
to my kind parents for their priceless support and motivation  
and to all my teachers and lecturers who educated me during my studies.*

## ACKNOWLEDGEMENT

Firstly, I would like to express my appreciation to my supervisor Prof. Dr. Azhar Abdul Aziz for his valuable suggestions, guidance and continuous support throughout this research.

I would also like to thank my co-supervisors Dr. Shahbakhti, Dr. Mohd Farid Muhamad Said and other nice friends who helped me during my studies. I also would like to thank all staff of Automotive Development Centre (ADC) members for their valuable cooperation and interest. My thanks are also extended to senior technician Mr. Hishamudin for his valuable assistant.

Last but not least, I would like to thank my wife for her encouragement in which this thesis would not have existed without her patience, understanding and support.

## ABSTRACT

Homogeneous charge compression ignition (HCCI) and the exploitation of ethanol as an alternative fuel is one way to explore new frontiers of internal combustion engines with an objective towards maintaining its sustainability. Here, a 0.3 liter single-cylinder direct-injection diesel engine was converted to operate on the alternative mode with the inclusion of ethanol fuelling and intake air preheating systems. The main HCCI engines parameters such as indicated mean effective pressure, maximum in-cylinder pressure, heat release, in-cylinder temperature and combustion parameters, start of combustion, 50% of mass fuel burnt ( $CA_{50}$ ) and burn duration were acquired for 100 operating conditions. They were used to study the effect of varying input parameters such as equivalence ratio and intake air temperature on exhaust gas emission, temperature and ethanol combustion, experimentally and numerically. The study primarily focused on HCCI exhaust gas temperature and understanding and detecting misfire in an ethanol fuelled HCCI engine, thus highlighting the advantages and drawbacks of using ethanol fuelled HCCI. The analysis of experimental data was used to understand how misfire affects HCCI engine operation. A model-based misfire detection technique was developed for HCCI engines and the validity of the obtained model was then verified with experimental data for a wide range of misfire and normal operating conditions. The misfire detection is computationally efficient and it can be readily used to detect misfire in HCCI engine. The results of the misfire detection model are very promising from the viewpoints of further controlling and improving combustion in HCCI engines.

## ABSTRAK

Nyalaan Mampatan Caj Homogen (HCCI) dan penggunaan etanol sebagai bahan api alternatif adalah salah satu kaedah untuk mempelbagaikan penggunaan enjin pembakaran dalam, dalam usaha melestarikan penggunaannya di masa hadapan. Dalam, kajian ini sebuah enjin diesel satu silinder jenis semburan terus dengan isipadu 0.3 liter, telah diubahsuai untuk beroperasi menggunakan bahan api etanol. Enjin telah melalui pengubahsuaian sistem bahan api dan pemasangan sistem prapemanasan udara masuk di samping pengubahsuaian kecil yang lain. Parameter utama seperti tekanan berkesan purata tertunjuk, haba keluaran, suhu kebuk pembakaran, tekanan pembakaran maksimum, permulaan pembakaran, 50% jisim bahan api yg terbakar ( $CA_{50}$ ) dan masa pembakaran telah diperolehi bagi 100 keadaan operasi enjin. Parameter ini digunakan untuk mengkaji kesan perubahan parameter masukan seperti nisbah persamaan dan suhu masukan udara ke atas keluaran ekzos, suhu dan pembakaran secara ujikaji dan juga analisis berangka. Secara amnya, kajian tertumpu kepada ramalan suhu ekzos enjin serta pemahaman dan pengesanan fenomena salah-nyalaan apabila menggunakan bahan api etanol. Usaha ini memperlihatkan beberapa kebaikan serta kekurangan penggunaan etanol dalam enjin HCCI. Analisis data yang diperolehi telah membantu penyelidik memahami bagaimana salah-nyalaan mempengaruhi operasi enjin HCCI. Satu teknik berunsurkan model simulasi untuk mengesan salah-nyalaan telah dibangunkan dan telah terbukti keberkesanannya setelah dibuat pelbagai perbandingan dengan hasil ujian yang dilaksanakan di makmal. Teknik ini telah terbukti efisien dalam meramalkan salah-nyalaan di dalam enjin HCCI ini. Keputusan yang dihasilkan oleh model ini amat berpotensi untuk membantu mengawal dan meningkat kecekapan pembakaran di dalam enjin HCCI.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>ACKNOWLEDGEMENT</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	xi
	<b>LIST OF FIGURES</b>	xii
	<b>LIST OF SYMBOLS</b>	xvii
	<b>LIST OF ABBREVIATIONS</b>	xix
	<b>LIST OF APPENDICES</b>	xxii
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Background	1
	1.1.1 Spark ignition engine	3
	1.1.2 Compression ignition engine	3
	1.1.3 Homogeneously charge compression ignition engine	4
	1.2 Problem Statement	6
	1.3 Objectives of Research	7
	1.4 Scope of Research	8
	1.5 Research Methodology	10
	1.6 Significance of Research	10

<b>2</b>	<b>LITERATURE REVIEW</b>	<b>12</b>
	2.1 Introduction	12
	2.2 HCCI Engine Brief History	12
	2.3 Ethanol Fuelled HCCI Engine	17
	2.4 Overview of HCCI Engine Exhaust Gas Temperature	26
	2.5 Overview of Misfire in ICEs	28
	2.5.1 Recent works on misfire detection techniques in ICEs	30
	2.6 Artificial Neural Network Modelling	34
	2.6.1 Artificial neural network	34
	2.6.2 Creation of the ANN structure	40
	2.6.3 Type of hidden neuron	41
	2.6.4 Number of hidden neurons	41
	2.6.5 Training ANN structure	41
	2.6.6 Applications of artificial neural network model in ICEs	42
	2.7 Summary	43
<b>3</b>	<b>EXPERIMENTAL SETUP AND PROCEDURES</b>	<b>44</b>
	3.1 Introduction	44
	3.2 Test Engine	45
	3.3 Engine Motoring	47
	3.4 Engine Modification	47
	3.4.1 Develop of a new intake manifold and air preheating system	49
	3.4.2 Installation of ethanol fuel system	52
	3.4.3 Fitting of encoder and rotor plate TDC detector to the engine flywheel	54
	3.4.4 CI/HCCI engine fuel system	55
	3.5 Test Cell Instrumentation	59
	3.5.1 In-cylinder pressure measurement	60
	3.5.2 Data acquisition system	61

3.5.3	Temperatures measurement	62
3.5.4	Crank angle encoder (engine speed sensor)	63
3.5.5	Dynamometer	64
3.5.6	Emissions measurements	64
3.5.7	Air flow measurement	65
3.5.8	Fuel flow measurement	66
3.6	Equivalence Ratio	67
3.7	Research Fuels	67
3.8	Experimental Procedures	68
3.8.1	Preliminary inspection	69
3.8.2	CI/HCCI Engine Starting	70
3.8.3	Data acquisition with DeweCA	70
3.8.4	Exhaust emissions	71
3.9	Experimental Error Analysis	71
3.9.1	Mean Value	71
3.9.2	Estimation of errors	72
3.10	Experimental Limitation	72
3.11	Summary	72
<b>4</b>	<b>ANALYSIS AND MODELING OF EXHAUST GAS TEMPERATURE</b>	<b>74</b>
4.1	Introduction	74
4.2	Cylinder Pressure Analysis	75
4.2.1	Heat release rate	76
	4.2.1.1 Cylinder volume	76
4.2.2	Indicated mean effective pressure	79
4.2.3	In-cylinder temperature	79
4.2.4	Pressure rise rate	80
4.2.5	Third derivative of in-cylinder pressure	81
4.2.6	Mass Fraction Burned	82
4.3	Adiabatic Flame Temperature	83
4.4	Operating Conditions of Experiments	84
4.5	Relation Between $T_{\text{exh}}$ , Engine Emissions and	



	Operating Parameters	85
	4.6 Ethanol Combustion	91
	4.6.1 Effect of ethanol combustion on $T_{\text{exh}}$ and emissions	98
	4.7 ANN Model for Predicting $T_{\text{exh}}$	101
	4.8 Summary	104
<b>5</b>	<b>ANALYSIS AND MISFIRE DETECTION IN THE COVERTED HCCI ENGINE FULLED WITH ETHANOL</b>	<b>106</b>
	5.1 Introduction	106
	5.2 Misfire in HCCI Engine	107
	5.3 Misfire Effect on HCCI Engine Exhaust Emissions and Operation	108
	5.3.1 Effect of misfire on exhaust emissions	109
	5.3.2 Effect of Misfire on HCCI engine operation	111
	5.4 ANN Misfire Detection Model	118
	5.5 Statistical analysis for misfire detection for test engine	124
	5.5.1 Misfiring detection	124
	5.5.2 Misfire detection based on in-cylinder pressure	124
	5.5.3 Misfire detection based on crank angle rotational speed	126
	5.6 Summary	128
<b>6</b>	<b>CONCLUSIONS AND RECOMMENDATIONS FOR FUTURE WORK</b>	<b>130</b>
	6.1 Conclusions	130
	6.2 Recommendations for Future Work	132
	<b>REFERENCES</b>	<b>134</b>
	Appendices A-I	147-176

## LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Literature summary of using different fuels in HCCI engine	16
2.2	List of the factors that affect engine efficiency	16
2.3	Summary of important study on ethanol fuelled HCCI engine	25
3.1	Yanmar L70AE engine specifications	45
3.2	HCCI manifold specifications	51
3.3	Injector specifications	56
3.4	Five-gas portable EMS emission analyzer specifications	65
3.5	Fuels Properties	68
4.1	The correlation between $T_{exh}$ and main combustion parameters	91
4.2	Characteristics of advanced and retard combustion phasing for ethanol combustion.	96
5.1	The correlation between MHRR and main combustion parameters	114
5.2	The correlation between MHRR and of in-cylinder pressures at different crank angles	116
5.3	Evaluation of the ANN model using various training function	120

## LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	SI engine fundamental	2
1.2	CI engine	4
1.3	HCCI combustion	5
1.4	Research procedure flowchart	11
2.1	Major benefits (solid circles) and disadvantages (dashed circles) pertinent to using ethanol in ICEs	18
2.2	Literature on HCCI engine fuelled with ethanol	26
2.3	Using exhaust gas temperature in ICEs research flowchart	27
2.4	Disadvantages of misfire in ICEs flowchart	29
2.5	Various misfire detection techniques developed in automotive industry	31
2.6	Schematic view of the brain	35
2.7	Comparison of the brain and ANN	36
2.8	General representation of an artificial neuron	37
2.9	Exemplification of a 3 layer input-output ANN model	38
2.10	ANN model creation procedure	39
3.1	The modified Yanmar HCCI engine connects to the dynamometer	46
3.2	Schematic view of the HCCI engine and measuring equipment	46
3.3	The modified Yanmar HCCI engine connects to the electric motor	48

3.4	Schematic views of HCCI engine, electro motor and speed controller	48
3.5	Schematic view of HCCI intake manifold	50
3.6	HCCI intake manifold	50
3.7	Installation of fuel rail and injector to the engine	53
3.8	Schematic view of fuel rail and injector position	53
3.9	Joining encoder and TDC detector to the flywheel	54
3.10	Schematic view of TDC detector and encoder installation	54
3.11	CI/HCCI engine fuel system	55
3.12	Schematic view of CI/HCCI engine fuel system	55
3.13	LED, photodiode and rotor plate	57
3.14	Circuit of injector controller	58
3.15	Pulse generator	59
3.16	In-cylinder pressure sensor with water cooling system	60
3.17	Schematic view showing the connection between sensors and DAQ system	61
3.18	Exhaust gas temperature sensor	62
3.19	Encoder (engine speed sensor).	63
3.20	EMS exhaust gas emission analyzer and its accessories	64
3.21	Connecting the airbox to the ram pipe of intake manifold	65
3.22	Air consumption measurement system	66
3.23	Fuel consumption detector	66
4.1	Variation of the in-cylinder pressure versus crank angle showing $P_{\max}$ , $P_{TDC}$ and $\theta_{p\max}$ ( $N=1350$ RPM, $\Phi=0.34$ and $T_{in}=153^{\circ}\text{C}$ )	75
4.2	Engine geometric parameters	77
4.3	Cylinder volume model output ( $N= 1550$ RPM)	78
4.4	Rate of net heat release and in-cylinder pressure versus crank angle degree. Ignition timing definition of ethanol combustion using in-cylinder pressure trace and net heat release rate ( $N=1550$ RPM, $\Phi=0.38$ and $T_{in}=140^{\circ}\text{C}$ )	78

4.5	In-cylinder gas temperature versus crank angle (N=1550 RPM, $T_{in}=153^{\circ}\text{C}$ and $\Phi=0.31$ )	80
4.6	In-cylinder pressure rise rate versus crank angle (N=1550 RPM, $\Phi=0.31$ and $T_{in}=153^{\circ}\text{C}$ )	80
4.7	Positive to negative in concavity of the in-cylinder pressure (N=1550 RPM, $T_{in}=153^{\circ}\text{C}$ and $\Phi=0.31$ )	81
4.8	Ignition timing definition of ethanol combustion using in-cylinder pressure trace and fuel mass fraction burnt (N=1550 RPM, $\Phi=0.31$ and $T_{in}=153^{\circ}\text{C}$ )	82
4.9	Operating conditions of the 100 experimental data points used in the study	84
4.10	Variation in HCCI emissions versus $T_{exh}$ for 100 HCCI operating points	86
4.11	Variation in the IMEP, $P_{max}$ and $T_{ad}$ versus $T_{exh}$ for 100 HCCI operating points. The solid lines show the regression lines fit on the data	88
4.12	Variations of $T_{exh}$ as a function of SOC, $CA_{50}$ and BD for 100 HCCI operating points	89
4.13	Variations of $T_{exh}$ as a function of $T_{in}$ and $\Phi$ for 100 HCCI operating points. The solid lines show the regression lines fit on the data	90
4.14	Variation of mass fraction burned versus crank angle (N=1550 RPM, $\Phi=0.31$ and 0.38 for (a) and (b) respectively)	93
4.15	Variation of in-cylinder pressure rise rate versus crank angle (N=1550 RPM, $\Phi=0.31$ and 0.38 for (a) and (b) respectively)	94
4.16	Variation of third derivative of in-cylinder pressure versus crank angle (N=1550 RPM, $\Phi=0.31$ and 0.38 for (a) and (b) respectively)	95
4.17	Variation of in-cylinder pressure, net heat release rate and in-cylinder gas temperature versus crank angle degree for different intake temperatures (N=1550 RPM	

	and $\Phi=0.34$ )	97
4.18	Variation of combustion metric and $T_{\text{exh}}$ as a function of intake temperature (the same conditions as in Figure 5.9)	99
4.19	Variation in exhaust gas temperature, IMEP and emissions with changing $\Phi$ ( $N=1550$ RPM and $T_{\text{in}}=145^{\circ}\text{C}$ )	100
4.20	Variation of $T_{\text{exh}}$ versus engine speed at different $\Phi$ and $T_{\text{in}}$	101
4.21	Structure of $T_{\text{exh}}$ ANN model for an HCCI engine.	102
4.22	Comparison between simulated (Sim.) and experimental (Exp.) $T_{\text{exh}}$ for 35 training and 65 validating data points at a range of HCCI operating conditions. (The vertical dashed lines show engine speed regions, Region-I: 1350 RPM, Region-II: 1550 RPM and Region-III: 1750 RPM)	103
5.1	Heat release percentage versus IMEP for 120 consecutive cycles including artificial misfire cycles ( $N=1400$ RPM, $\Phi=0.25$ and $T_{\text{in}}=145^{\circ}\text{C}$ )	108
5.2	Variation of intake temperature versus SOC and $CA_{50}$ at $N=1550$ RPM.	110
5.3	Variation of HC and CO emissions versus $CA_{50}$ at $N=1550$ RPM	111
5.4	Variation of IMEP, maximum in-cylinder pressure and net heat release rate during 120 consecutive cycles with periodic misfire (Misfire types I and II, $N=1400$ RPM, $\Phi=0.25 \rightarrow 0 \rightarrow 0.25$ and $T_{\text{in}}=145^{\circ}\text{C}$ )	112
5.5	Variation of IMEP, maximum in-cylinder pressure and net heat release rate during 120 consecutive cycles with periodic misfire (Misfire types I and II, $N=1400$ RPM, $\Phi=0.25 \rightarrow 0 \rightarrow 0.25$ and $T_{\text{in}}=145^{\circ}\text{C}$ )	113
5.6	Combustion pressure trace, net heat release rate and $P_0$ , $P_5$ , $P_{10}$ , $P_{15}$ and $P_{20}$ in sample motoring, misfiring and	

	firing cycles (Test conditions at N=1400 RPM: motoring cycle: $\Phi=0$ , IMEP= -0.9 bar; misfire cycle: $\Phi=0.25$ , $T_{in}=145^{\circ}\text{C}$ and IMEP= -0.25 bar (misfire type I); firing cycle: $\Phi=0.25$ , $T_{in}=145^{\circ}\text{C}$ and IMEP= 1.4 bar)	115
5.7	$P_0$ , $P_5$ , $P_{10}$ , $P_{15}$ and $P_{20}$ versus MHRR for 120 consecutive cycles the solid line shows the regression line (N=1400 RPM, $\Phi=0.25 \rightarrow 0 \rightarrow 25$ and $T_{in}=145^{\circ}\text{C}$ )	117
5.8	Structure of the misfire detection ANN model	119
5.9	Operating conditions of the 65 experimental data points used for training and validation of AMD model.	120
5.10	Performance of the AMD model to identify misfire among random normal/misfire cycles	122
5.11	Performance of the AMD model to identify artificially generated misfires	122
5.12	Performance of the AMD model to identify the onset of misfire when moving from a normal operating region to a misfire region (N=1350 RPM and $\Phi=0.34$ )	123
5.13	The correlation between max heat release rate and skewness of in-cylinder pressure with regression line for 100 misfire cycle test	125
5.14	The correlation between max heat release rate and Kurtosis of in-cylinder pressure with regression line for 100 misfire cycle test	125
5.15	Comparison between engine rotational speed versus crank angle degree at two normal and misfire with engine speed noise (N=1400 RPM, $\Phi=0.25$ , $T_{in}=145^{\circ}\text{C}$ )	126
5.16	Comparison between engine rotational speed versus crank angle degree at two normal and misfire with engine speed	127
5.17	Variation of skew value during misfire test with showing misfire cycles (N=1400 RPM, $\Phi=0.25$ , $T_{in}=145^{\circ}$ )	128

## LIST OF SYMBOLS

$a$	-	Crank ratio
$a_i$	-	Output of a neuron
$a_j$	-	Input function of a neuron
$A_o$	-	Orifice area
$B$	-	Bore of cylinder
$C_D$	-	Orifice discharge coefficient
$C_v$	-	Specific heat at constant volume
$C_p$	-	Specific heat at constant pressure
$d_o$	-	Orifice plate diameter (airbox)
$dU$	-	Change of internal energy of the mass in the system
$dQ$	-	Heat release rate from combustion;
$dW$	-	work performed on piston;
$dQ_{ht}$	-	Heat transfer to the cylinder walls
$dQ_{cr}$	-	Energy loss and leakage due to mass flow crevice in the regions between the piston and the cylinder wall
$e$	-	Error
$g$	-	Acceleration due to gravity
$h$	-	Height
$L$	-	Stroke length
$l$	-	Connecting rod length
$m$	-	Charge mass in cylinder
$\dot{m}_a$	-	Air mass flow rate
$\dot{m}_f$	-	Fuel mass flow rate
$n$	-	Total number of repeated measurements made
$n_1$	-	Polytropic index
$N$	-	Engine speed



$O_{ip}$	-	The desired output vectors
$P$	-	In-cylinder pressure
$P_f$	-	Pressure at EOC
$P_{IVC}$	-	Pressure at IVC
$P_{man}$	-	Density of manometer
$P_k$	-	Pressure at k crank angle degree
$P_s$	-	Pressure at SOC
$R$	-	Universal gas constant
$s$	-	Distance between the crank shaft axis and the piston pin axis
$S$	-	Stroke
$S_1$	-	Mean error
$S_m$	-	Standard error of the mean
$t_{ip}$	-	The network output (target),
$T$	-	Temperature
$T_{IVC}$	-	Temperature at IVC
$V$	-	Cylinder volume
$V_c$	-	Clearance volume or compression volume
$V_d$	-	Engine displacement volume
$V_{IVC}$	-	Volume at IVC
$\Delta V_k$	-	Difference engine volume at k crank angle degree
$V_f$	-	Volume at EOC
$V_s$	-	Volume at SOC
$X_{mean}$	-	Mean value
$U$	-	Internal energy per mass unit
$\theta$	-	Crank angle
$\theta_{pmax}$	-	Crank angle of maximum in-cylinder pressure
$\Phi$	-	Equivalence ratio
$\gamma$	-	Specific heat ratio, ( $C_p/C_v$ )
$\Delta P$	-	Pressure drop across the orifice plate
$\rho$	-	Density
$\Delta t$	-	Time change

## LIST OF ABBREVIATIONS

aBDC	-	After Bottom Dead Center
aTDC	-	After Top Dead Center
AC	-	Actual
AFR	-	Air Fuel Ratio
AI	-	Artificial Intelligence
AMD	-	Ann Misfire Detection
ANN	-	Artificial Neural Network
ATAC	-	Active Thermo-Atmosphere Combustion
BD	-	Burn Duration
BP	-	Back Propagation
bTDC	-	Before Top Dead Center.
CAD	-	Crank Angle Degree
CA <sub>x</sub>	-	Crank Angle For x% of Mass Fraction Burnt Fuel
CA <sub>max,dp/dh</sub>	-	Crank Angle at Maximum Pressure Rise Rate (dp/dh)
CA <sub>MHRR</sub>	-	Crank Angle at MHRR
CA <sub>Pmax</sub>	-	Crank Angle at P <sub>max</sub>
CFD	-	Computational Fluid Dynamics
CI	-	Compression Ignition.
CIHC	-	Compression-Ignited Homogeneous Charge
CR	-	Compression Ratio
CPS	-	Combustion Pressure Sensor
CVF	-	Crankshaft Velocity Fluctuation
CO	-	Carbon Monoxide
CO <sub>2</sub>	-	Carbon Dioxide
DAQ	-	Data Acquisition System

DEE	-	Diethyl Ether
E85	-	85% Ethanol and 15% Water
ECU	-	Electronic Control Unit
EER	-	Exhaust Energy Recovery
EGR	-	Exhaust Gas Recirculation.
EOC	-	End of Combustion.
EtOH	-	Ethanol
EVC	-	Exhaust Valve Closing
EVO	-	Exhaust Valve Opening
FFV	-	Flexible Fuel Vehicle
HC	-	Hydrocarbons
HCCI	-	Homogeneous Charge Compression Ignition
HRR	-	Heat Release Rate
ICE	-	Internal Combustion Engine
IMEP	-	Indicated Mean Effective Pressure.
IVC	-	Intake Valve Closing
IVO	-	Intake Valve Opening
LED	-	Light Emitting Diode
LTHR	-	Low Temperature Heat Release
MFB	-	Mass Fraction Burned
MHRR	-	Maximum Heat Release Rate
MPRR	-	Maximum Pressure Rise Rate
NO <sub>x</sub>	-	Oxides of Nitrogen
NVO	-	Negative Valve Overlap
O <sub>2</sub>	-	Oxygen
OBD	-	On-board Diagnostic
ON	-	Octane Number
P <sub>in</sub>	-	Intake Pressure
P <sub>max</sub>	-	Maximum In-cylinder Pressure
P <sub>TDC</sub>	-	In-cylinder pressure at top dead center
P <sub>x</sub>	-	In-cylinder pressure at x crank angle degree
PCCI	-	Premixed Charge Compression Ignition
PFI	-	Port Fuel Injection

PM	-	Particulate Matter
PPM	-	Parts Per Million
PRR	-	Pressure Rise Rate
RMS	-	Root Mean Square
RPM	-	Revolution Per Minute
SI	-	Spark Ignition
SOC	-	Start of Combustion.
ST	-	Stoichiometric
STD	-	Standard Deviation.
$T_{ad}$	-	Adiabatic Flame Temperature
$T_{in}$	-	Intake Temperature
$T_{exh}$	-	Exhaust Gas Temperature
TDC	-	Top Dead Center
TS	-	Toyota-Soken
VVA	-	Variable Valve Actuation
VCR	-	Variable Compression Ratio
VVT	-	Variable Valve Timing

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	Heat Release Rate Analysis	147
B	Skewness and Kurtosis Analysis	151
C	Wavelet Transform	152
D	Constant Volume Adiabatic Flame Temperature	154
E	Fuel Flow Measurement	156
F	Summary of HCCI experimental data from Yanmar engine	157
G	ANN Model Implementation with Matlab	163
H	AMD Model Experimental Data	166
I	Publications	175

## CHAPTER 1

### INTRODUCTION

#### 1.1 Background

Internal combustion engines (ICEs) are devices in which the combustion of fuel, specifically fossil fuel, with an oxidizer (air) takes place inside the engine's combustion chamber. The result of detonation of the mixture, heat energy will be created which the detonation force will be applied onto the piston surface areas resulting in the production of mechanical energy.

There are three types of reciprocating ICEs i.e: i) spark ignition (SI), ii) compression ignition (CI) and iii) homogeneous charge compression ignition (HCCI) engines respectively. The differences are based on several factors but namely on fuel preparation and ignition. However the principle of operating is the same (Basshuysen and Schäfer, 2004). Figure 1.1 shows the four-stroke cycle SI engine where the piston and valve movements during the intake, compression, expansion, and exhaust strokes are shown.


The first engine operating process is the intake stroke as the piston is pulled downward towards its lower position, the bottom dead center (BDC). At this lower

position, air and fuel will be induced into the combustion chamber through intake manifold and opened intake valve.

The second process is the compression stroke in which both intake and exhaust valves are closed and as piston is pushed towards its upper position, top dead center (TDC), the volume is reduced, thus the air-fuel mixture is compressed. Highly depends on engine type, the charge is ignited near to TDC.

The third process is the power stroke which takes place after compression stroke and continues sometime into the expansion stroke and followed by a rapid combustion. During combustion the fuel releases heat in a totally enclosed (nearly constant volume) vessel which produces burned or unburned exhaust gases in combustion chamber and work is generated.

The last process is the exhaust stroke in which the engine's exhaust valve will be activated by the cam pushing on the rocker arm and the exhaust and the burned are pushed by the piston to goes out and exit from the cylinder through the opened exhaust valve. These four strokes are repeated continuously to make engine running.

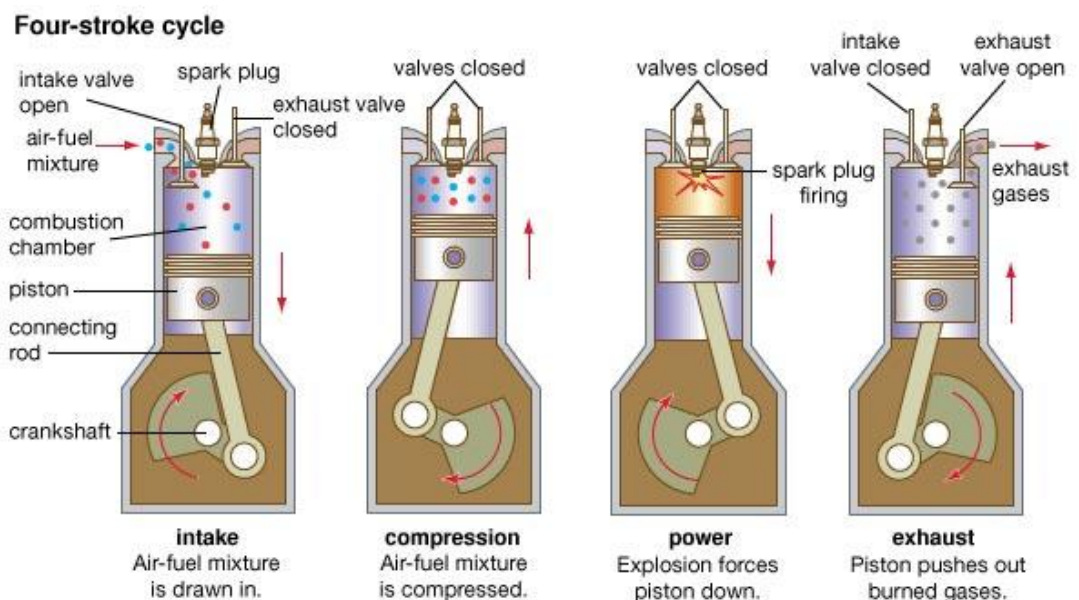

**Figure 1.1** SI engine fundamental (James, 2013).

### **1.1.1 Spark ignition engine**

In a spark ignition (SI) engine premixed air-fuel mixture is induced into the cylinder from intake manifold. In port fuel injected (PFI) system, fuel is atomized and vaporized by using injector and mixed with the air behind the intake valve. Before arriving piston to the TDC, charge is ignited with using spark plug (Figure 1.1), thus a turbulent flame is produced through the combustion chamber. The important characteristics of a SI engine are listed as follows (Stone, 1992):

- SI engine operates close to stoichiometric air-fuel ratio (AFR).
- In SI engine flow rate of air is controlled by throttling.
- Fuel consumption is influenced by efficiency directly, which results in higher carbon dioxide (CO<sub>2</sub>) emissions.
- With using 3-way catalysts in SI engine, carbon monoxide (CO), nitrogen oxides (NO<sub>x</sub>) and unburned hydrocarbons (uHC) emissions decrease.


### **1.1.2 Compression ignition engine**

In a compression ignition (CI) engine or better known as diesel engine, fuel is directly injected during intake stroke where air is induced into the cylinder (Figure 1.2). During the compression stroke due to the high compression ratio, the air temperature will become high and near to TDC, fuel is atomized and injected to the hot air and creates combustion with a diffusive flame. The important characteristics of a CI engine are listed as follows (Vressner, 2007):

- High compression ratio and low fuel consumption.
- CI engines operate unthrottled which results in less pumping losses.
- The load is controlled by the amount of injected fuel.



- $\text{NO}_x$  emissions and particulate matter is highly generated due to diffusive combustion. New after-treatment systems are designed to reduce  $\text{NO}_x$ .
- Increasingly popular for using in passenger car due to lower fuel consumption and higher power output.

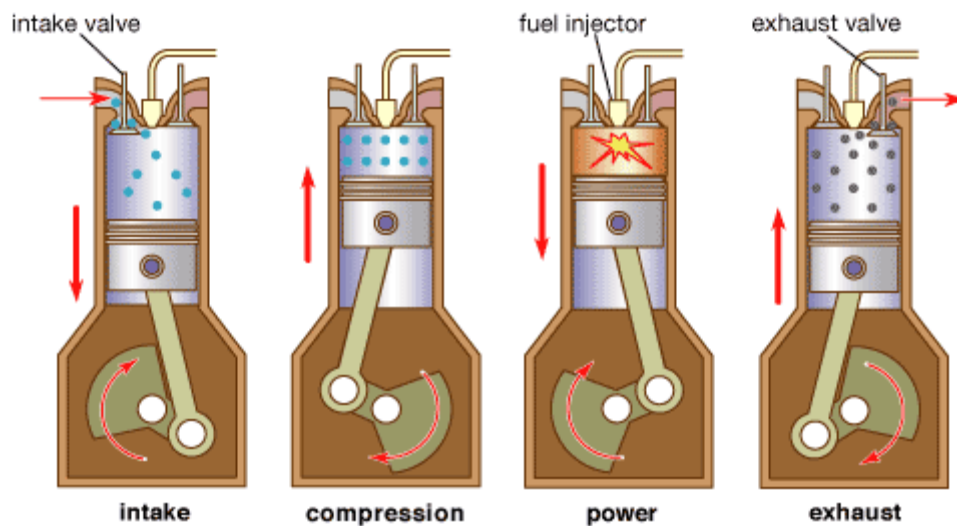


**Figure 1.2** CI engine (James, 2013).

### 1.1.3 Homogeneous charge compression ignition engine

The homogeneous charge compression ignition (HCCI) engine is relatively a new concept recently being developed by researchers as the ‘next-generation’ of ICEs. It synergizes the best features of diesel and gasoline engines. It is stated to be compatible with wide variety of bio-fuels. HCCI engines are said to be of higher thermal efficiency than diesel and gasoline engines of similar displacement, with promising low ultra  $\text{NO}_x$  and PM (Particulate matter) emission indexes. Fuel autoignition takes place through the compression due to increased pressure and temperature history. Diluted mixtures are needed in HCCI engine to keep the pressure rise rates at acceptable levels due to high combustion rate (Zhao, 2007).

HCCI characterized by the merging of the best elements of diesel and gasoline behaviors respectively. The characteristic of HCCI engine is similar to CI for high compression ignition feature and SI counterpart for its mixture homogeneity. As shown in Figure 1.3, autoignition takes places simultaneously at several locations in combustion chamber with no external ignition source (spark in SI and fuel injection in CI engines). The HCCI engine runs unthrottled similar to the CI engine and with comparing to the SI engine, the pumping losses are reduced. HCCI engine like CI have high compression ratio (CR) to create fast combustion near TDC to improve efficiency. If above take into account, these limitations make HCCI to be a combustion concept instead of an engine type (Stanglmaier and Roberts, 1999).

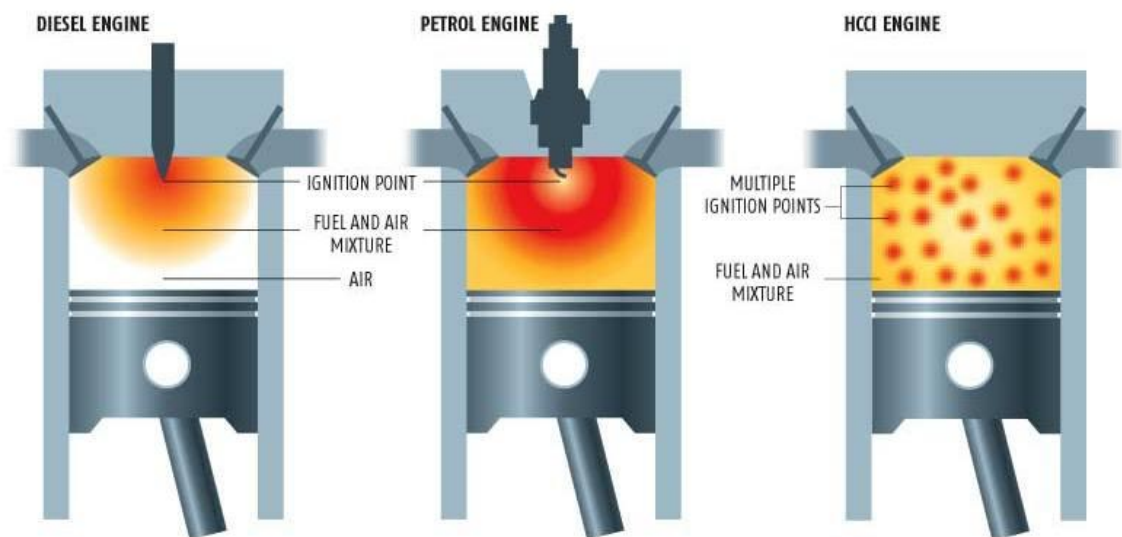

**Figure 1.3** HCCI combustion versus tradition CI and SI combustion (Marshall, 2006).

In general the merits of HCCI engine are:

1. Using very lean mixture (high diluted) in HCCI engine makes it as low fuel consumption engine (Sankaran *et al.*, 2007).
2. Using the diluted mixture in HCCI engine makes it having low combustion chamber's temperature and keep temperature combustion down which results in decreasing the amount of NO<sub>x</sub> and PM during HCCI engine running (Aceves *et al.*, 2001).

3. Higher thermal efficiency and as most of the combustion energy is released during the combustion and expansion stroke, HCCI has less waste exhaust energy compared to SI and typical CI engines (Shahbakhti *et al.*, 2010)
4. The results from other research showed that HCCI engines can be capable to operate with several fuels such as gasoline, diesel fuel and most alternative and renewable fuels (Epping *et al.*, 2008).

On the other hand the demerits of HCCI combustion:

1. Achieving high load for this kind of engine is difficult due to an increase in pressure. Using this engine should be common with a CI or SI switching to HCCI (Santoso *et al.*, 2005).
2. Controlling ignition timing (start of combustion (SOC)) is a major problem because it governed by the temperature, pressure history and needs a new electronic control unit (Blom *et al.*, 2008).
3. HC and CO emissions are typically higher in HCCI than that of diesel engines due to low temperature combustion (Aceves *et al.*, 2004) but CO and HC emissions can be decreased by using an oxidation catalytic converter in HCCI engine.
4. Cold start is the main problem for HCCI engine and this problem is recently weakened by using a dual mode SI-HCCI (Santoso *et al.*, 2005, Koopmans *et al.*, 2003) or CI-HCCI (Canova *et al.*, 2007) technique where the engine starts in the SI/CI mode for engine warm up.

## 1.2 Problem Statement

Globalization and the rise in mobility, price variation of the fuels based on crude oil, more stringent environmental regulations for engine makers and the exhaust emission problem have urged and have motivated internal combustion

engine (ICEs) designers to overcome these challenges. This is merely to confirm that future ICEs will be more sustainable and adaptable for economical and robust operations.

Some of the ways of overcoming these are through the adoption of new engine. HCCI engine is a new technology that is adaptable for use with wide range of fuels. The other factor that is suitable for air pollution is using of ethanol as an alternative fuel.

Despite lower  $\text{NO}_x$  and PM, the level of HC and CO emissions are high due to lean burn and low temperature combustion (Shudo *et al.*, 2007). Exhaust after-treatment system is needed to help an HCCI engine to mitigate high amount of HC and CO. Taking the catalyst converter to the light off temperature (250-300 °C) (Jean *et al.*, 2007) plays an important role for realizing HCCI engines as a practical solution. As the catalyst temperature drops below the light-off, the converter becomes ineffective in reducing exhaust emissions (Tanikawa *et al.*, 2008). Therefore, it is essential to understand and analyzing exhaust temperature ( $T_{\text{exh}}$ ) for an ethanol fuelled HCCI engines.

Also, delayed combustion phasing and unstable combustion can cause HCCI misfire resulting in high HC and CO emissions (Ghazimirsaid and Koch, 2012). The unburned fuel from engine misfire will enter into the catalytic converter, and this can have a cooling effect on the catalyst (Baghi Abadi *et al.*, 2011). Misfire can be generated in several ways in HCCI engines, which makes analyzing of misfire essential for engine developers.

Thus, it is necessary to investigate the effect of input variable such as intake temperature and air-fuel ratio, on the  $T_{\text{exh}}$  and understanding and detecting misfire in an ethanol fuelled HCCI due to lack of accurate study on misfire in HCCI engine.

### 1.3 Objectives of Research

This research focuses on the effect of operating parameters on HCCI engine exhaust gas temperature and the effect of misfire on HCCI engine operation. Hence, three main objectives of this investigation are as follows:

- To convert a CI engine to operate on HCCI mode.
  
- To study the effect of varying operating parameters on HCCI engine performance,  $T_{\text{exh}}$  and emissions and also the ethanol combustion characteristic.
  
- Understanding and analyzing misfire in an ethanol fuelled HCCI engine and to develop a model for fast detection of misfiring in HCCI engine.

### 1.4 Scope of Research

The scope of this research comprises of the following aspects:

- a) To convert a single-cylinder diesel engine to operate in HCCI mode and to undertake modifications such as:
  - To develop new intake manifold for HCCI engine for containing preheating and fuelling system.


- To develop heating system.
  - To develop new fuel system for ethanol port fuel injection.
  - To develop electrical circuit for controlling fuelling and fuel injection system.
- b) To perform numerical analysis for defining heat release, ethanol combustion characteristics and find combustion timing characteristic such as start of combustion (SOC), 50% of mass fraction burnt ( $CA_{50}$ ) and burn duration (BD).
- c) Experimental investigation on the HCCI engine fuelled ethanol operation such as:
- Effect of input parameters on HCCI performance, operation and engine out emissions.
  - Study on  $T_{exh}$  of HCCI engine.
  - Develop model for fast prediction  $T_{exh}$  in HCCI engine.
- d) Experimental investigation on the effect of misfire on HCCI engine, such as:
- Investigate into the engine characteristics for misfire detection.
  - Statistical analysis for misfire detection in HCCI engine.
  - Develop model for fast detection of misfire in HCCI engine.

## 1.5 Research Methodology

The flowchart presented in Figure 1.4 describes the research methodology considered in this thesis. First, an introduction as well as a literature study is presented. Then, an attempt to prepare laboratory setup and the engine modifications such as electrical circuit for fuel injecting, intake manifold for containing heater, fuel system for ethanol injection as port fuel injector and chassis for joining engine and encoder. Next, do the experimental work and get desire data. A comparative study among the proposed scheme should be carried out to highlight the effect of initial condition on HCCI performance, exhaust gas temperature and emission. Develop model for determining ethanol combustion characteristics and ignition timing. Study on the effect of misfire in HCCI engine operation and develop model to present an appropriate computational for fast detecting misfire in HCCI engine.

## 1.6 Significance of Research

Low exhaust temperature in HCCI significantly limits efficiency of an exhaust after-treatment system to mitigate high HC and CO emissions in HCCI engines. Thus, an efficient investigation should be done for  $T_{\text{exh}}$  of HCCI to develop method to improve exhaust after-treatment systems. Also, delayed combustion phasing leads to autoignition which occurred with the downward movement of the piston and makes HCCI engine operates near misfire region which result in producing partial-burn and misfire cycles with too much CO and HC emission. Furthermore, understanding the HCCI operation change during misfire is very essential. However, new methods to detect HCCI misfire help researcher and factories to overcome this problem. Consequently, a specific attention for designing effective misfire detection systems is required. To the best of the authors' knowledge, this study is the first study undertaken to develop a misfire detection technique for HCCI engines.

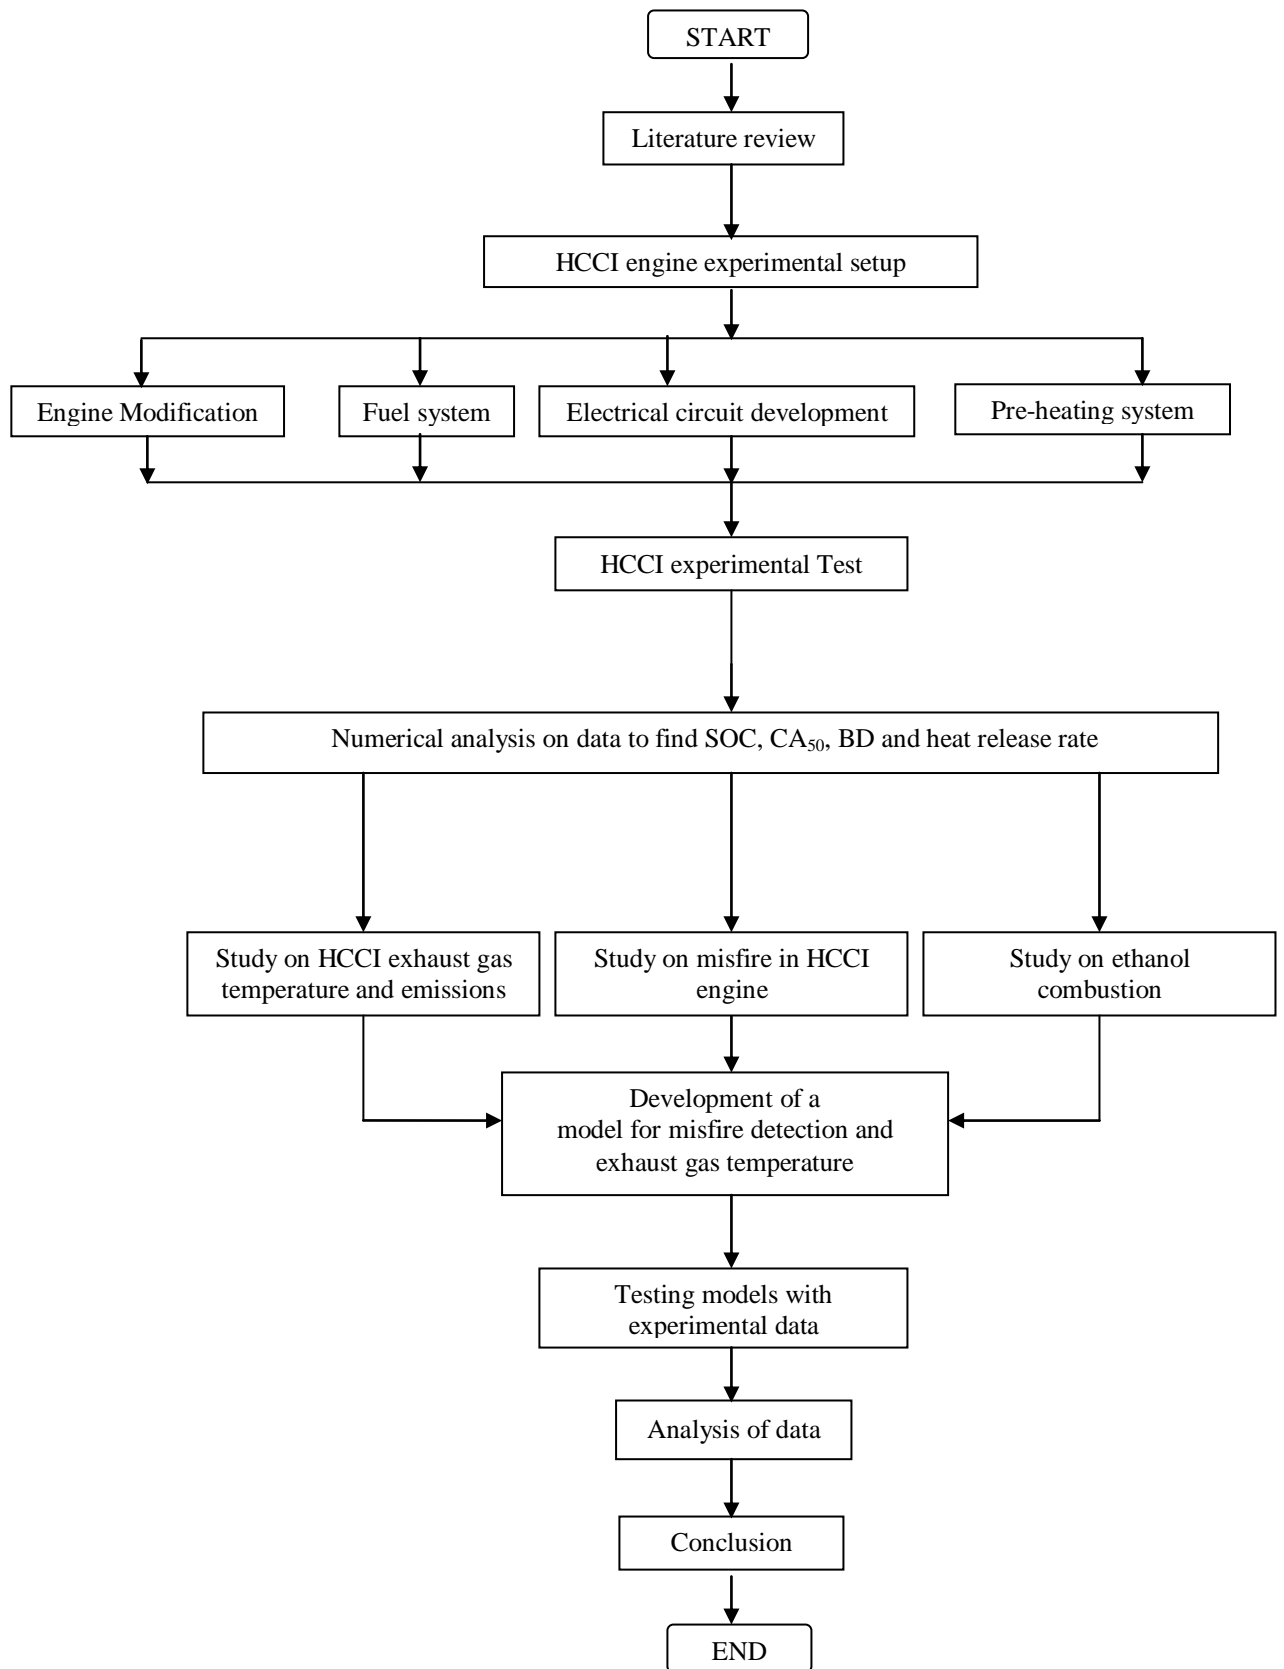

**Figure 1.4** Research procedure flowchart.



## REFERENCES

- Abu-Qudais, M. (1996). Exhaust gas temperature for knock detection and control in spark ignition engine. *Energy Conversion and Management*, 37(9): 1383-1392.
- Aceves, S. M., Smith, J. R., Westbrook, C. K. and Pitz, W. J. (1999). Compression ratio effect on methane hcci combustion. *Journal of Engineering for Gas Turbines and Power*, 121(3): 569-574.
- Aceves, S. M., Flowers, D. L., Martinez-Frias, J., Smith, J. R., Dibble, R., Au, M. and Girard, J. (2001). HCCI combustion: analysis and experiments, SAE Paper: 2001-01-2077.
- Aceves, S. M., Flowers, D. L., Espinosa-Loza, F., Martinez-Frias, J., Dec, J. E., Sjöberg, M., Dibble, R. W. and Hessel, R. P. (2004). Spatial Analysis of Emissions Sources for HCCI Combustion at Low Loads Using a Multi-Zone Model, SAE Paper: 2004-01-1910.
- Aceves, S. M., Flowers, D. L., Chen, J. Y. and Babajimopoulos, A. (2006). Fast prediction of HCCI combustion with an artificial neural network linked to a fluid mechanics code, SAE Paper: 2006-01-3298.
- Agrell, F., Ångström, H.-E., Eriksson, B., Wikander, J. and Linderyd, J. (2003). Integrated simulation and engine test of closed loop hcci control by aid of variable valve timings, SAE Paper: 2003-01-0748.
- Antunes, J. M. G., Mikalsen, R. and Roskilly, A. P. (2008). An investigation of hydrogen-fuelled HCCI engine performance and operation. *International Journal of Hydrogen Energy*, 33(20): 5823-5828.
- Aoyama, T., Hattori, Y., Mizuta, J. i. and Sato, Y. (1996). An Experimental study on premixed-charge compression ignition gasoline engine, SAE Paper: 1996-01-960081.

- Assaf, T., Mathews, D. and Naik, S. (2010). Signal processing for rough road detection. *SAE Int. J. Passeng. Cars - Electron. Electr. Syst.*, 3(1): 81-87.
- Azzoni, P. M., Moro, D., Porceddu-Cilione, C. M. and Rizzoni, G. (1996). Misfire detection in a high-performance engine by the principal component analysis approach, SAE Paper: 960622.
- Baghi Abadi, M. K., Hajnayeb, A., Hosseingholizadeh, A. and Ghasemloonia, A. (2011). Single and multiple misfire detection in internal combustion engines using vold-kalman filter order-tracking, SAE Paper: 2011-01-1536.
- Bahri, B., Aziz, A. A., Shahbakhti, M. and Muhamad Said, M. F. (2012). Misfire detection based on statistical analysis for an ethanol fuelled HCCI engine. *International Review of Mechanical Engineering (IREME)*, 6 (6): 1276-1282.
- Bahri, B., Aziz, A. A., Shahbakhti, M. and Muhamad Said, M. F. (2013). Understanding and detecting misfire in an HCCI engine fuelled with ethanol. *Applied Energy*, 108(0): 24-33.
- Basshuysen (Richard von) and Fred Schäfer. (2004). Internal combustion engine handbook – basics, components, systems and perspectives. ISBN 0-7680-1139-6, SAE International, Canada.
- Bedoya, I. D., Saxena, S., Cadavid, F. J., Dibble, R. W. and Wissink, M. (2012). Experimental study of biogas combustion in an HCCI engine for power generation with high indicated efficiency and ultra-low NOx emissions. *Energy Conversion and Management*, 53(1): 154-162.
- Blom, D., Karlsson, M., Ekholm, K., Tunestål, P. and Johansson, R. (2008). HCCI engine modeling and control using conservation principles, SAE Paper: 2008-01-0789.
- Boguś, P. and Merkisz, J. (2005). Misfire detection of locomotive diesel engine by non-linear analysis. *Mechanical Systems and Signal Processing*, 19(4): 881-899.
- Burrus, C. Introduction to Wavelets and Wavelet Transforms: A Primer (Englewood Cliffs, NJ: Prentice-Hall, 1998).
- Cai, W. and Collings, N. (1992). A catalytic oxidation sensor for the on board detection of misfire and catalyst efficiency, SAE Paper: 922248.
- Canova, M., Chiara, F., Cowgill, J., Midlam-Mohler, S., Guezennec, Y. and Rizzoni, G. (2007). Experimental characterization of mixed-mode HCCI/DI combustion on a common rail diesel engine, SAE Paper: 2007-24-0085.

- Cavina, N., Cipolla, G., Marcigliano, F., Moro, D. and Poggio, L. (2006). A methodology for increasing the signal to noise ratio for the misfire detection at high speed in a high performance engine. *Control Engineering Practice*, 14(3): 243-250.
- Chang, J., Kim, M. and Min, K. (2002). Detection of misfire and knock in spark ignition engines by wavelet transform of engine block vibration signals. *Measurement Science and Technology*, 13: 1108–1114.
- Charles, P., Sinha, J. K., Gu, F., Lidstone, L. and Ball, A. D. (2009). Detecting the crankshaft torsional vibration of diesel engines for combustion related diagnosis. *Journal of Sound and Vibration*, 321(3–5): 1171-1185.
- Chauvin, J., Corde, G., Petit, N. and Rouchon, P. (2007). Airpath strategy for experimental transient control of a diesel HCCI engine. *Oil & Gas Science and Technology-Revue De L Institut Francais Du Petrole*, 62(4): 483-491.
- Chauvin, J., Moulin, P., Youssef, B. and Grondin, O. (2008). Global airpath control for a turbocharged Diesel HCCI engine. *Oil & Gas Science and Technology-Revue De L Institut Francais Du Petrole*, 63(4): 553-561.
- Checkel, M. D. and Dale, J. D. (1986). Computerized knock detection from engine pressure records, SAE Paper: 860028.
- Choi, Y. and Chen, J. Y. (2005). Fast prediction of start-of-combustion in HCCI with combined artificial neural networks and ignition delay model. *Proceedings of the Combustion Institute*, 30(2): 2711-2718.
- Christensen, M., Johansson, B. and Einewall, P. (1997). Homogeneous charge compression ignition (HCCI) using iso-octane, ethanol and natural gas- a comparison with spark ignition operation, SAE Paper: 972874.
- Christensen, M. and Johansson, B. (1999). Homogeneous charge compression ignition with water injection, SAE Paper: 1999-01-0182.
- Christie, M. J., Fortino, N. and Yilmaz, H. (2009). Parameter optimization of a turbo charged direct injection flex fuel si engine, *SAE Int. J. Engines*, 2(1): 123-133.
- Chung, Y., Bae, C., Choi, S. and Yoon, K. (1999). Application of a wide range oxygen sensor for the misfire detection, SAE Paper: 1999-01-1485.
- Dahl, D. and Denbratt, I. (2011). HCCI/SCCI load limits and stoichiometric operation in a multicylinder naturally aspirated spark ignition engine operated on gasoline and E85. *International Journal of Engine Research*, 12(1): 58-68.

- Dai, D., Hu, Z., Pu, G., Li, H. and Wang, C. (2006). Energy efficiency and potentials of cassava fuel ethanol in Guangxi region of China. *Energy Conversion and Management*, 47(13–14): 1686-1699.
- Dean, A. M., Swan, J. W. and Kirkham, C. A. (1924). Fundamental improvements in manifold design, SAE Paper: 240004.
- Devasenapati, S. B., Sugumaran, V. and Ramachandran, K. I. (2010). Misfire identification in a four-stroke four-cylinder petrol engine using decision tree. *Expert Systems with Applications*, 37(3): 2150-2160.
- Docquier, N. and Candel, S. (2002). Combustion control and sensors: a review. *Progress in Energy and Combustion Science*, 28(2): 107-150.
- Elghawi, U. M., Mayouf, A., Tsolakis, A. and Wyszynski, M. L. (2010). Vapour-phase and particulate-bound PAHs profile generated by a (SI/HCCI) engine from a winter grade commercial gasoline fuel. *Fuel*, 89(8): 2019-2025.
- Epping, K., Aceves, S., Bechtold, R. and Dec, J. (2002). The potential of hcci combustion for high efficiency and low emissions, SAE Paper: 2002-01-1923.
- Fathi, M., Saray, R. K. and Checkel, M. D. (2011). The influence of Exhaust Gas Recirculation (EGR) on combustion and emissions of n-heptane/natural gas fueled Homogeneous Charge Compression Ignition (HCCI) engines. *Applied Energy*, 88(12): 4719-4724.
- Ferrari, V. (2007). Achieving EURO III and EURO IV with ultra-low precious metal loadings, SAE Paper: 2007-01-2565.
- Fiveland, S. B. and Assanis, D. N. (2001). Development of a two-zone HCCI combustion model accounting for boundary layer effects, SAE Paper: 2001-01-1028
- Flowers, D. L., Aceves, S. M., Martinez-Frias, J. and Dibble, R. W. (2002). Prediction of carbon monoxide and hydrocarbon emissions in iso-octane HCCI engine combustion using multizone simulations. *Proceedings of the Combustion Institute*, 29(1): 687-694.
- Flowers, D. L., Aceves, S. M. and Frias, J. M. (2007). Improving Ethanol Life Cycle Energy Efficiency by Direct Utilization of Wet Ethanol in HCCI Engines, SAE Paper: 2007-01-1867.
- Förster, J., Lohmann, A., Mezger, M. and Ries-Müller, K. (1997). Advanced engine misfire detection for SI-engines, SAE Paper: 970855.

- Gao, P., Zhang, L., Cheng, K. and Zhang, H. (2007). A new approach to performance analysis of a seawater desalination system by an artificial neural network. *Desalination*, 205(1–3): 147-155.
- Ghazimirsaied, A. and Koch, C. R. (2012). Controlling cyclic combustion timing variations using a symbol-statistics predictive approach in an HCCI engine. *Applied Energy*, 92(0): 133-146.
- Gnanam, G., Sobiesiak, A., Reader, G. and Zhang, C. (2006). An HCCI engine fuelled with iso-octane and ethanol, SAE Paper: 2006-01-3246.
- Goh, C. S., Tan, K. T., Lee, K. T. and Bhatia, S. (2010). Bio-ethanol from lignocellulose: Status, perspectives and challenges in Malaysia. *Bioresource Technology*, 101(13): 4834-4841.
- Goryntsev, D., Sadiki, A. and Janicka, J. (2013). Analysis of misfire processes in realistic Direct Injection Spark Ignition engine using multi-cycle Large Eddy Simulation. *Proceedings of the Combustion Institute*, 34(2): 2969-2976.
- Haraldsson, G., Tunestål, P., Johansson, B. and Hyvönen, J. (2002). HCCI Combustion Phasing in a Multi Cylinder Engine Using Variable Compression Ratio, SAE Paper: 2002-01-2858.
- Haraldsson, G., Tunestål, P., Johansson, B. and Hyvönen, J. (2003). HCCI Combustion Phasing with Closed-Loop Combustion Control Using Variable Compression Ratio in a Multi Cylinder Engine, SAE Paper: 2003-01-1830.
- Haraldsson, G., Tunestål, P., Johansson, B. and Hyvönen, J. (2004). HCCI closed-loop combustion control using fast thermal management, SAE Paper: 2004-01-0943.
- Hyvönen, J., Haraldsson, G. and Johansson, B. (2003). Supercharging HCCI to extend the operating range in a multi-cylinder VCR-HCCI engine, SAE Paper 2003-01-3214.
- Heywood J. Internal combustion engine fundamentals. New York: Mc-Graw Hill; 1988.
- Iida, N. (1994). Combustion Analysis of methanol-fueled active thermo-atmosphere combustion (ATAC) engine using a spectroscopic observation, SAE Paper: 940684.
- James, E, Encyclopedia Britannica at <http://kids.britannica.com/comptons/art-89315>, 2013-07-31.

- Jean, E., Leroy, V., Montenegro, G., Onorati, A. and Laurell, M. (2007). Impact of ultra low thermal inertia manifolds on emission performance, SAE Paper: 2007-01-0935.
- Jianmin, L., Xiaolei, L., Xiaoming, Z., Shiyong, X. and Lijun, D. (2011). Misfire diagnosis of diesel engine based on rough set and neural network. *Procedia Engineering*, 16(0): 224-229.
- Joelsson, T., Yu, R., Bai, X. S., Vressner, A. and Johansson, B. (2008). Large eddy simulation and experiments of the auto-ignition process of lean ethanol/air mixture in HCCI engines, *SAE Int. J. Fuels Lubr.*, 1(1): 1110-1119.
- Jung, D., Kwon, O. and Lim, O. (2011). Comparison of DME HCCI operating ranges for the thermal stratification and fuel stratification based on a multi-zone model. *Journal of Mechanical Science and Technology*, 25(6): 1383-1390.
- Kim, H., Ryu, J. and Lee, K. (2007). A study on the characteristics of spray and combustion in a HCCI engine according to various injection angles and timings. *Journal of Mechanical Science and Technology*, 21(1): 133-140.
- Kirchen P. Thermo-kinetic modeling of the HCCI cycle: predicting the ignition timing. M.Sc. Thesis, University of Alberta, 2004.
- Kirkham, C. and Cambio, R. (2006). Misfire Detection Including Confidence Indicators Using a Hardware Neural Network. SAE Paper: 2006-01-1349.
- Kiwitz, P., Onder, C. and Guzzella, L. (2012). Control-oriented modeling of a three-way catalytic converter with observation of the relative oxygen level profile. *Journal of Process Control*, 22(6): 984-994.
- Komachiya, M., Kurihara, N., Kodama, A., Sakaguchi, T., Fumino, T. and Watanabe, S. (1998). A method of misfire detection by superposing outputs of combustion pressure sensors, SAE Paper: 982588.
- Kong, S. C. and Reitz, R. D. (2002). Application of detailed chemistry and CFD for predicting direct injection HCCI engine combustion and emissions. *Proceedings of the Combustion Institute*, 29: 663-669.
- Koopmans, L., Ström, H., Lundgren, S., Backlund, O. and Denbratt, I. (2003). Demonstrating a SI-HCCI-SI mode change on a volvo 5-cylinder electronic valve control engine, SAE Paper: 2003-01-0753.
- Kwon, O. S. and Lim, O. T. (2010). Effect of boost pressure on thermal stratification in HCCI engine using the multi-zone model. *Journal of Mechanical Science and Technology*, 24(1): 399-406.

- Lu, X., Han, D. and Huang, Z. (2011). Fuel design and management for the control of advanced compression-ignition combustion modes. *Progress in Energy and Combustion Science*, 37(6): 741-783.
- Machrafi, H., Cavadias, S. and Gilbert, P. (2008). An experimental and numerical analysis of the HCCI auto-ignition process of primary reference fuels, toluene reference fuels and diesel fuel in an engine, varying the engine parameters. *Fuel Processing Technology*, 89(11): 1007-1016.
- Mack, J. H., Dibble, R. W., Buchholz, B. A. and Flowers, D. L. (2005a). The Effect of the Di-tertiary butyl peroxide (DTBP) additive on hcci combustion of fuel blends of ethanol and diethyl ether. SAE Paper: 2005-01-2135.
- Mack, J. H., Flowers, D. L., Buchholz, B. A. and Dibble, R. W. (2005b). Investigation of HCCI combustion of diethyl ether and ethanol mixtures using carbon 14 tracing and numerical simulations. *Proceedings of the Combustion Institute*, 30(2): 2693-2700.
- Mack, J. H., Aceves, S. M. and Dibble, R. W. (2009). Demonstrating direct use of wet ethanol in a homogeneous charge compression ignition (HCCI) engine. *Energy*, 34(6): 782-787.
- Kalogirou, S. A. (2009). Artificial Neural Networks and Genetic Algorithms in Energy Applications in Buildings. *Advances in Building Energy Research*, 3(1): 83-119.
- Kalogirou, S. A., Florides, G. A., Pouloupatis, P. D., Panayides, I., Joseph-Stylianou, J. and Zomeni, Z. (2012). Artificial neural networks for the generation of geothermal maps of ground temperature at various depths by considering land configuration. *Energy*, 48(1): 233-240.
- Marshall J, Clean-burn Engine Dodges Ever Tighter Regulations. In New Scientist magazine. January 2006.
- Maurya, R. K. and Agarwal, A. K. (2011). Experimental study of combustion and emission characteristics of ethanol fuelled port injected homogeneous charge compression ignition (HCCI) combustion engine. *Applied Energy*, 88(4): 1169-1180.
- Maurya, R. K. and Agarwal, A. K. (2012). Statistical analysis of the cyclic variations of heat release parameters in HCCI combustion of methanol and gasoline. *Applied Energy*, 89(1): 228-236.

- Megaritis, A., Yap, D. and Wyszynski, M. L. (2007). Effect of water blending on bioethanol HCCI combustion with forced induction and residual gas trapping. *Energy*, 32(12): 2396-2400.
- Megaritis, A., Yap, D. and Wyszynski, M. L. (2008). Effect of inlet valve timing and water blending on bioethanol HCCI combustion using forced induction and residual gas trapping. *Fuel*, 87(6): 732-739.
- Morey, F. and Seers, P. (2010). Comparison of cycle-by-cycle variation of measured exhaust-gas temperature and in-cylinder pressure measurements. *Applied Thermal Engineering*, 30(5): 487-491.
- Moro, D., Azzoni, P. and Minelli, G. (1998). misfire pattern recognition in high performance si 12-cylinder engine, SAE Paper: 980521.
- Mosbach, S., Aldawood, A. M. and Kraft, M. (2008). Real-time evaluation of a detailed chemistry HCCI engine model using a tabulation technique. *Combustion Science and Technology*, 180(7): 1263-1277.
- Najafi, G., Ghobadian, B., Tavakoli, T., Buttsworth, D. R., Yusaf, T. F. and Faizollahnejad, M. (2009). Performance and exhaust emissions of a gasoline engine with ethanol blended gasoline fuels using artificial neural network. *Applied Energy*, 86(5): 630-639.
- Najt, P. M. and Foster, D. E. (1983). Compression-ignited homogeneous charge combustion, SAE Paper: 830264.
- Nareid, H. and Lightowler, N. (2004). Detection of engine misfire events using an artificial neural network, SAE Paper: 2004-01-1363.
- Ng, C. K. W. and Thomson, M. J. (2004). Modelling of the effect of fuel reforming and EGR on the acceptable operating range of an ethanol HCCI engine. *International Journal of Vehicle Design*, 44(1-2): 107-123.
- Noguchi, M., Tanaka, Y., Tanaka, T. and Takeuchi, Y. (1979). A study on gasoline engine combustion by observation of intermediate reactive products during combustion, SAE Paper: 790840.
- Olsson, J.-O., Tunestål, P. and Johansson, B. (2001). Closed-loop control of an HCCI engine, SAE Paper: 2001-01-1896.
- Onishi, S., Jo, S. H., Shoda, K., Jo, P. D. and Kato, S. (1979). Active thermo-atmosphere combustion (ATAC) - a new combustion process for internal combustion engines, SAE Paper: 790501.



- Osburn, A. W., Kostek, T. M. and Francheck, M. A. (2006). Residual generation and statistical pattern recognition for engine misfire diagnostics. *Mechanical Systems and Signal Processing*, 20(8): 2232-2258.
- O'Sullivan, R. D. and Will, N. S. (1994). The Effect of Intermittent Engine Misfire and Air to Fuel Ratio Excursions on Exhaust Catalyst Temperature, SAE Paper: 940927.
- Peng, Z., Wang, T., He, Y., Yang, X. and Lu, L. (2013). Analysis of environmental and economic benefits of integrated Exhaust Energy Recovery (EER) for vehicles. *Applied Energy*, 105(0): 238-243.
- Peterson, B., Reuss, D. L. and Sick, V. (2011). High-speed imaging analysis of misfires in a spray-guided direct injection engine. *Proceedings of the Combustion Institute*, 33(2): 3089-3096.
- Ponti, F. (2008). Instantaneous engine speed time-frequency analysis for onboard misfire detection and cylinder isolation in a V12 high-performance engine. *Journal of Engineering for Gas Turbines and Power-Transactions of the ASME*, 130(1).
- Ponti, F. (2008). Development of a Torsional Behavior Powertrain Model for Multiple Misfire Detection. *Journal of Engineering for Gas Turbines and Power*, 130(2): 022803-022813.
- Rassweiler, G. M. and Withrow, L. (1938). Motion Pictures of Engine Flames Correlated with Pressure Cards. SAE Paper: 380139.
- Ribbens, W. B. and Park, J. (1994). road tests of a misfire detection system. SAE Paper: 940975.
- Rizzoni, G. (1987). fast transforms for rapid isolation of misfiring cylinders. SAE Paper: 871915.
- Ryan, T. W., Mehta, D. and Callahan, T. J. (2004). HCCI: Fuel and engine interaction. Which Fuels for Low CO<sub>2</sub> Engines: 59-67.
- Sankaran, R., Im, H. G. and Hewson, J. C. (2007). analytical model for auto-ignition in a thermally stratified hcci engine. *Combustion Science and Technology*, 179(9): 1963-1989.
- Santoso, H., Matthews, J. and Cheng, W. (2005). Characteristics of HCCI engine operating in the negative-valve-overlap mode. SAE Paper: 2005-01-2133.

- Saxena, S., Schneider, S., Aceves, S. and Dibble, R. (2012). Wet ethanol in HCCI engines with exhaust heat recovery to improve the energy balance of ethanol fuels. *Applied Energy*, 98(0): 448-457.
- Shahbakhti, M. and Koch, C. R. (2008). Characterizing the cyclic variability of ignition timing in a homogeneous charge compression ignition engine fuelled with n-heptane/iso-octane blend fuels. *International Journal of Engine Research*, 9 (5): 361-397.
- Shahbakhti, M., Ghazimirsaeid, A. and Koch, C. R. (2010). Experimental study of exhaust temperature variation in a homogeneous charge compression ignition engine. *Proceedings of the Institution of Mechanical Engineers, Part D: Journal of Automobile Engineering*, 224: 1177-97.
- Shaver, G. M., Roelle, M. J. and Christian Gerdes, J. (2006). Modeling cycle-to-cycle dynamics and mode transition in HCCI engines with variable valve actuation. *Control Engineering Practice*, 14(3): 213-222.
- Shaver, G. M. Physics-based modeling and control of residual-affected hcci engines using variable valve actuation. PhD. Thesis, University of stanford, 2004.
- Shiao, Y. and Moskwa, J. J. (1994). Misfire Detection and cylinder pressure reconstruction for si engines, SAE Paper: 949144.
- Shivakumar, Srinivasa Pai, P. and Shrinivasa Rao, B. R. (2011). Artificial neural network based prediction of performance and emission characteristics of a variable compression ratio CI engine using WCO as a biodiesel at different injection timings. *Applied Energy*, 88(7): 2344-2354.
- Shudo, T. and Yamada, H. (2007). Hydrogen as an ignition-controlling agent for HCCI combustion engine by suppressing the low-temperature oxidation. *International Journal of Hydrogen Energy*, 32(14): 3066-3072.
- Silveira, A. M. d., Ramos, D., Domahovski, S. C. and Castro, A. (2009). Misfire diagnostic for flex vehicles - a case study, SAE Paper: 2009-36-0247.
- Sjöberg, M. and Dec, J. E. (2007). Comparing late-cycle autoignition stability for single- and two-stage ignition fuels in HCCI engines. *Proceedings of the Combustion Institute*, 31(2): 2895-2902.
- Sjöberg, M. and Dec, J. E. (2010). Ethanol autoignition characteristics and HCCI performance for wide ranges of engine speed, load and boost. *SAE Int. J. of Engine*, 119(3): 84-106.

- Sjöberg, M. and Dec, J. E. (2011). Effects of EGR and its constituents on HCCI autoignition of ethanol. *Proceedings of the Combustion Institute*, 33(2): 3031-3038.
- Soylu, S. (2005). Examination of combustion characteristics and phasing strategies of a natural gas HCCI engine. *Energy Conversion and Management*, 46(1): 101-119.
- Stanglmaier, R. H. and Roberts, C. E. (1999). Homogeneous charge compression ignition (HCCI): benefits, compromises, and future engine applications, SAE Paper: 1999-01-3682.
- Stone, R. Introduction to Internal Combustion Engines, Second Edition. Macmillan, 1992.
- Stockinger, V., Schapertons, H., and Kuhlmann, U. (1992). Investigations on a gasoline engine working with self-ignition by compression. *MTZ* vol. 53, pp 80–85, 1992.
- Szybist, J. P. (2008). Fuel-Specific Effect of Exhaust Gas Residuals on HCCI Combustion: A Modeling Study, SAE Paper: 2008-01-2402.
- Tamura, M., Saito, H., Murata, Y., Kokubu, K. and Morimoto, S. (2011). Misfire detection on internal combustion engines using exhaust gas temperature with low sampling rate. *Applied Thermal Engineering*, 31(17–18): 4125-4131.
- Tanikawa, K., Hirota, T., Yamada, T., Komori, M., Zhang, G. and Muraki, H. (2008). Development of advanced three-way catalyst technology, SAE Paper: 2008-01-1645.
- Thring, R. H. (1989). Homogeneous-charge compression-ignition (HCCI) engines, SAE Paper: 892068.
- Tyree, C. D. (1992). Emission levels and catalyst temperatures as a function of ignition-induced misfire, SAE Paper: 920298.
- Viggiano, A. and Magi, V. (2009). Multidimensional simulation of ethanol HCCI engines, SAE Paper: 2009-24-0031.
- Viggiano, A. and Magi, V. (2012). A comprehensive investigation on the emissions of ethanol HCCI engines. *Applied Energy*, 93(0): 277-287.
- Vressner, A., Egnell, R. and Johansson, B. (2008). Combustion Chamber Geometry Effects on the Performance of an Ethanol Fueled HCCI Engine. SAE Paper: 2008-01-1656.

- Vressner, A. (2007). Studies on the load range of an HCCI engine using in-cylinder pressure, ion current and optical diagnostics. Lund university, PhD thesis.
- Williams, S., Hu, L., Nakazono, T., Ohtsubo, H. and Uchida, M. (2008). Oxidation catalysts for natural gas engine operating under HCCI or SI conditions. *SAE Int. J. Fuels Lubr.*, 1(1): 326-337.
- Wu, Z. J. and Lee, A. (1998). Misfire detection using a dynamic neural network with output feedback, SAE Paper: 980515.
- Xie, H., Wei, Z., He, B. and Zhao, H. (2006). Comparison of HCCI combustion respectively fueled with gasoline, ethanol and methanol through the trapped residual gas strategy, SAE Paper: 2006-01-0635.
- Yang, J., Culp, T. and Kenney, T. (2002). Development of a gasoline engine system using HCCI technology - the concept and the test results, SAE Paper: 2002-01-2832.
- Yao, M., Zheng, Z. and Liu, H. (2009). Progress and recent trends in homogeneous charge compression ignition (HCCI) engines. *Progress in Energy and Combustion Science*, 35(5): 398-437.
- Yao, M. F., Huang, C. and Zheng, Z. L. (2007). Multidimensional numerical simulation on dimethyl ether/methanol dual-fuel homogeneous charge compression ignition (HCCI) engine combustion and emission processes. *Energy & Fuels*, 21(2): 812-821.
- Yap, D., Megaritis, A. and Wyszynski, M. L. (2004). An investigation into bioethanol homogeneous charge compression ignition (HCCI) engine operation with residual gas trapping. *Energy & Fuels*, 18(5): 1315-1323.
- Yap, D., Karlovsky, J., Megaritis, A., Wyszynski, M. L. and Xu, H. (2005). An investigation into propane homogeneous charge compression ignition (HCCI) engine operation with residual gas trapping. *Fuel*, 84(18): 2372-2379.
- Yap, D., Peucheret, S. M., Megaritis, A., Wyszynski, M. L. and Xu, H. (2006). Natural gas HCCI engine operation with exhaust gas fuel reforming. *International Journal of Hydrogen Energy*, 31(5): 587-595.
- Ying, W., Li, H., Jie, Z. and Longbao, Z. (2009). Study of HCCI-DI combustion and emissions in a DME engine. *Fuel*, 88(11): 2255-2261.
- Yoshimura, K., Tokunaga, Y., Hashimoto, D. and Sakurai, H. (2007). Knock and misfire detection using ion current measurement for ultra lean burn medium speed gas engine. SAE Paper: 2007-01-2078.

- Zhang, Y., He, B.-Q., Xie, H. and Zhao, H. (2006). The combustion and emission characteristics of ethanol on a port fuel injection HCCI engine, SAE Paper: 2006-01-0631.
- Zhao, H., Peng, Z. & Ladommatos, N. (2001). Understanding of controlled autoignition combustion in a four-stroke gasoline engine. *Proceedings of the Institution of Mechanical Engineers Part D Journal of Automobile Engineering*, 215(D12), 1297-1310.
- Zhao, F., T. W. Asmus, D. N. Assanis, J. E. Dec, J. A. Eng, and P. M. Najt. Homogeneous Charge Compression Ignition (HCCI) Engines. SAE Publication PT-94, 2003.
- Zhao, H.. Homogeneous Charge Compression Ignition (HCCI) and Con-trolled Auto Ignition (CAI) Engines for the Automotive Industry. Wood- head Publishing Ltd., Brunel University UK, 2007.