

## ANALYSIS OF PEDESTRIAN-LEVEL WIND VELOCITY IN FOUR NEIGHBOURHOODS IN KLANG VALLEY

Azli Abd Razak<sup>a,b\*</sup>, Mohd Azhari Mohd Rodzi<sup>a</sup>, Amirul Hakim Jumali<sup>a</sup>, Sheikh Ahmad Zaki<sup>c</sup>

<sup>a</sup>Faculty of Mechanical Engineering, Universiti Teknologi MARA, Shah Alam, Malaysia

<sup>b</sup>Tropical Building Performance Research Group, Green Technology and Sustainable Development, Community of Research, Universiti Teknologi MARA, Shah Alam, Malaysia

<sup>c</sup>Malaysia-Japan International Institute of Technology, Universiti Teknologi Malaysia, Kuala Lumpur, Malaysia

### Article history

Received

13 February 2015

Received in revised form

30 April 2015


Accepted

31 May 2015

\*Corresponding author

azlirazak@salam.uitm.edu.my

### Graphical abstract

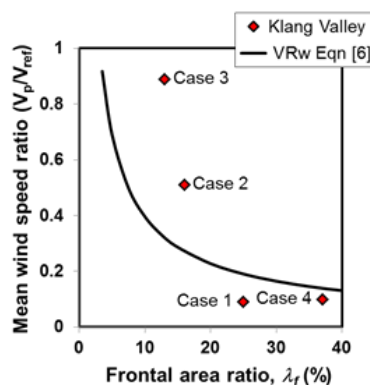

### Abstract

Urban ventilation is important for the purpose of pollution dispersion, indoor ventilation for free running buildings and urban thermal comfort. In comparison to suburban cities, high-density cities have very low wind speeds at pedestrian level due to the densely built buildings blocking the wind and creating stagnant zones locally. Under this circumstance, field measurements were performed to investigate the performance of pedestrian wind at four major cities in Klang Valley. Mean wind speed was measured using anemometers at 1 minute data interval for 3 hours and the data collection for each case were obtained at pedestrian level. The mean wind speed ratio was plotted against the frontal area ratio and plan area ratio. The result indicates that: (1) the mean wind speed dramatically decreases with the increase of plan area ratio and (2) the mean wind speed exponentially decreases with the increase of frontal area ratio and qualitatively agrees with the power law relationship which is proposed by previous researcher. In addition, the frontal area ratio is considered as a better parameter to evaluate the performance of urban ventilation.

**Keywords:** Pedestrian wind velocity, plan area ratio, frontal area ratio, wind direction, urban ventilation

© 2015 Penerbit UTM Press. All rights reserved

## 1.0 INTRODUCTION

The urban population in Peninsular Malaysia has been rapidly developing whereby the rate of population increased from 54.3% to 67% between the years 1999 to 2009 [1]. This trend is expected to continue as the nation develops and it has been estimate that, within 2010 to 2020 approximately 6 million additional population will live in the urban areas of Peninsular Malaysia [2]. This high rate of increase in population contributes to the increase in density of cities and urban conurbations. Due to the dense urban structure, the pedestrian comfort in the urban area is reduced especially in the locations where the wind flows are

obstructed by buildings. A study in the heritage city of Melaka shows that a direct relationship exists between the air temperature and the built-up ratio [3]. Therefore, it is important for city planners and urban designers to design cities for wind especially in hot and humid country like Malaysia.

The objective of this study is to investigate the pedestrian wind environment at four major areas in Klang Valley towards the attainment of a well-ventilated city. Many factors were used to determine the pedestrian wind environment in relevant literature [4-7]. Studies have shown that the relationship between the frontal area ratio (ratio of building frontal area to ground surface area, *hereafter*  $\lambda_f$ ) and mean

wind speed ratio is more suitable to investigate the pedestrian wind performance compare to the building coverage ratio or plan area ratio (ratio of building roof area to ground surface area, hereafter  $\lambda_p$ ) [5, 6, 8].

Most of those studies were based on Computational Fluid Dynamics (CFD), thus it is important to notice that there are relatively few studies on mean wind speed ratio through wind tunnel or field study. Hence, Kubota and Ahmad [9] had performed a wind tunnel experiment and proposed a relationship between housing pattern ( $\lambda_p$ ) and mean wind speed ratio for selected low-rise terraced house areas in Johor Bahru Metropolitan City. The study revealed that the mean wind speed ratio decreases linearly with  $\lambda_p$  and the mean wind speed ratio of this study was found to be slightly higher than Japanese apartment houses which used the same methodology (see Figure 3). Recently, Arkon and Özkol [10] selected Izmir Bay area for their field measurement and they found that the uniformity of building heights has negative effect on enhancing pedestrian-level wind speed. In addition, the upwind direction has important effect on the lower wind speed at pedestrian level when it is perpendicular to the canyon and the result is similar with Kubota and Ahmad [11].

The present study is based on field measurement of four locations in Klang Valley namely Kampung Baru (Case 1), Taman Keramat (Case 2), Pantai Dalam (Case 3) and Mont Kiara (Case 4). The idea is to apply the exponential equation developed by Abd Razak et al. [6] based on the idealized building to the real urban structure.


## 2.0 DESCRIPTION OF FIELD MEASUREMENT

The mean wind speed at pedestrian level, wind direction and mean wind speed above the canopy layer were measured by using anemometers (WatchDog 2550 Weather Station) and the wind measurement was fixed to one minute interval to ensure the accuracy and it was placed on the sites for the duration of 3 hours to collect data each case. To determine the wind direction and mean velocity, the reference anemometer was placed 2m above the rooftop of the taller building in each case. Next, the data for pedestrian mean wind speed was measured at 1.5m height from the ground level.

The selection of the field study consists of high rise buildings and they are surrounded by the low rise building or residential buildings. An area of 745m x 745m was chosen as case area because of wide coverage of buildings has satisfied the required characteristics (see Figure 1). Case 1 (Kampung Baru) is located in the city center of Kuala Lumpur and consists of low-rise residential building, shop lot and high-rise commercial building. Case 2 (Taman Keramat), Case 3 (Pantai Dalam) and Case 4 (Mont Kiara) are located approximately 9km from city center. High-rise and low-rise building for Case 2, 3 and 4 are composed of apartment and terraced house. The details of urban building layout, wind direction and frequency of mean wind speed are shown in Figure 2.



(a)

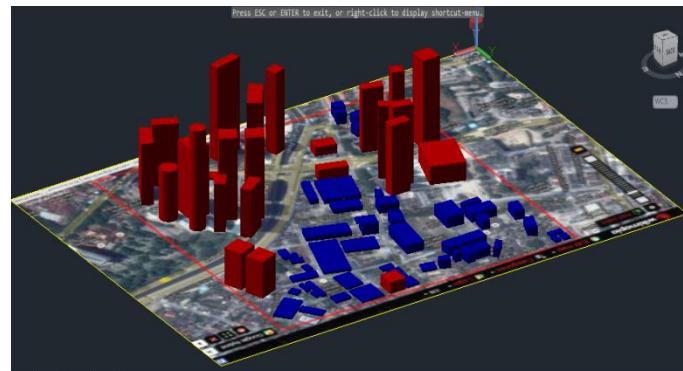

(b)

**Figure 1** (a) Image of Kampung Baru capture using WikiMapia viewer and (b) 3D image of building in Kampung baru

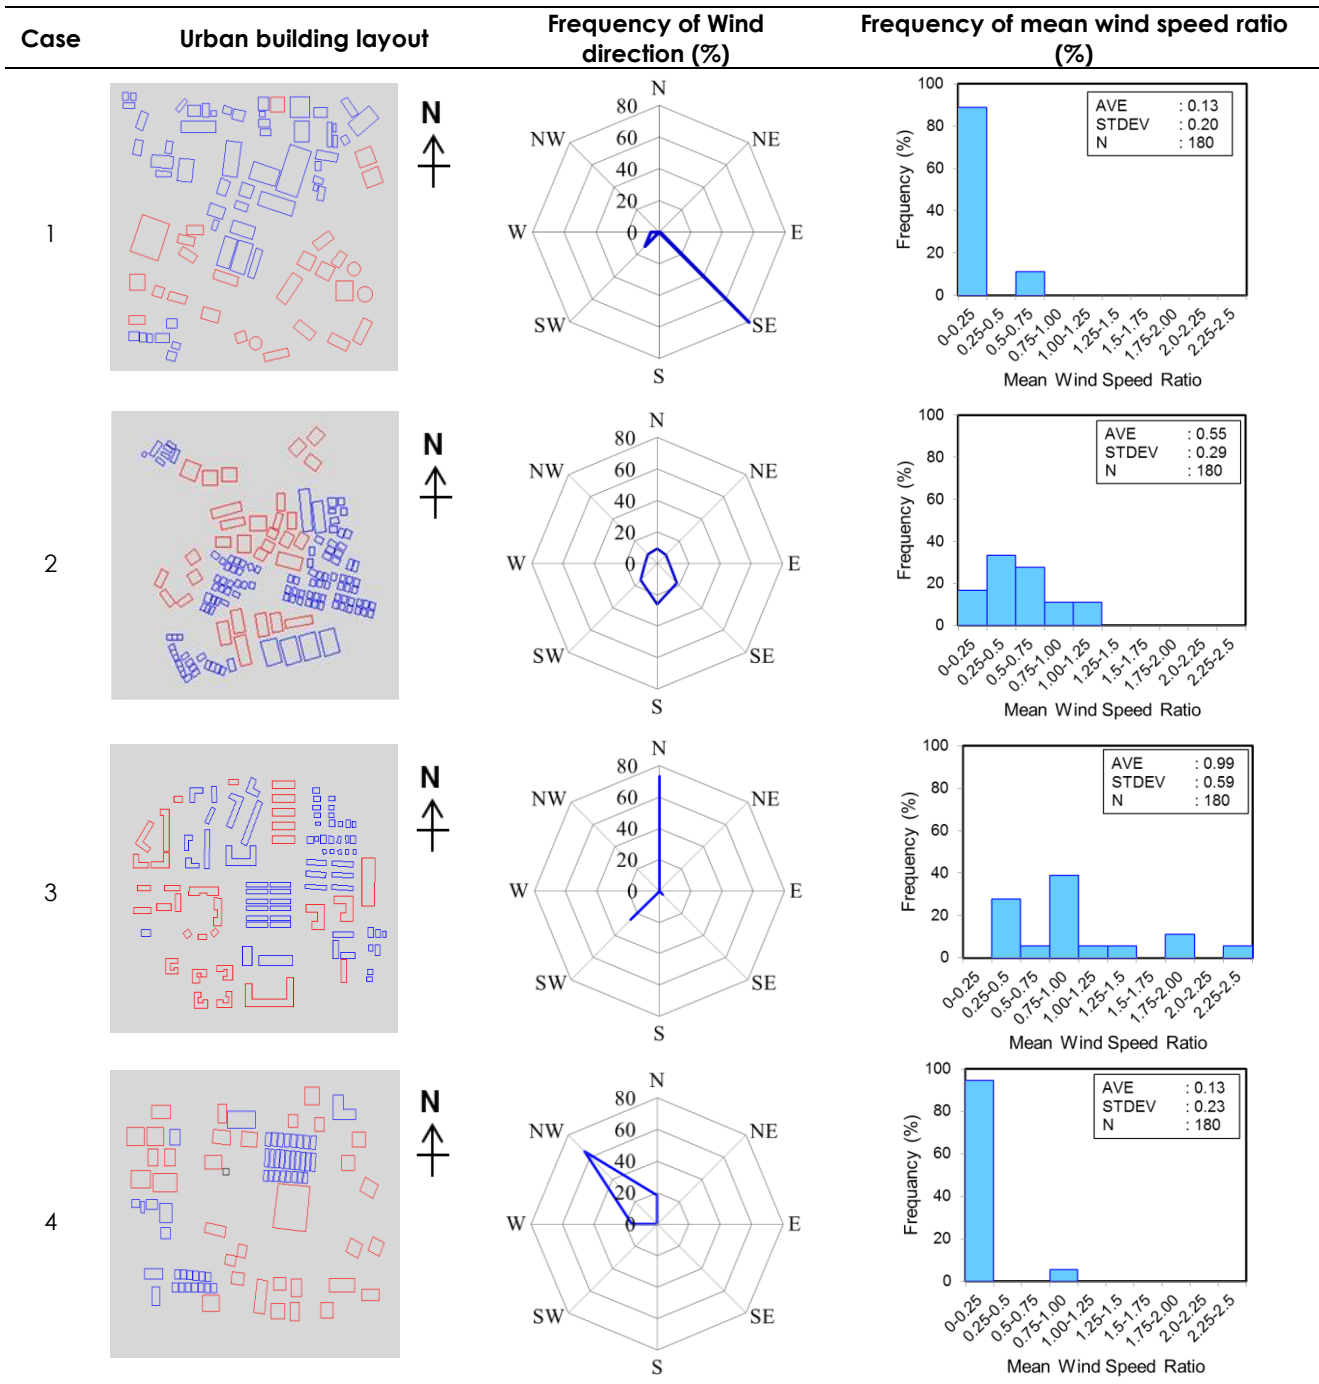


Figure 2 Frequency of mean wind speed ratio and wind direction at selected area

Table 1 Brief outline of field study

Case	Location	Plan area ratio, $\lambda_p$ (%)	Frontal area ratio, $\lambda_f$ (%)
1	Kampung Baru	21	25
2	Taman Keramat	18	16
3	Pantai Dalam	13	13
4	Mont Kiara	19	37

Table 1 shows a brief outline of the field study in terms of  $\lambda_p$  and  $\lambda_f$  and the values of those ratio were calculated based on 3-D image that was extruded from the WikiMapia viewer image. The values of  $\lambda_p$  were calculated based on the ratio of projected building roof area to the ground surface area, and the values of  $\lambda_f$  which is defined as the ratio of building surface area normal to the upwind to the ground surface area were also calculated using the same approach.

### 3.0 RESULTS AND DISCUSSION

Figure 3 shows a firm correlation between the  $\lambda_p$  and the mean wind speed ratio of the heterogeneous building in Klang Valley. Interestingly, the mean wind speed ratio for Klang Valley dramatically decreases as the  $\lambda_p$  increases. However, this trend line is slightly differ as compare to the trend line that was produced by Kubota and Ahmad [9]. This shows that the mean wind speed at pedestrian level is significantly influenced by the building morphology

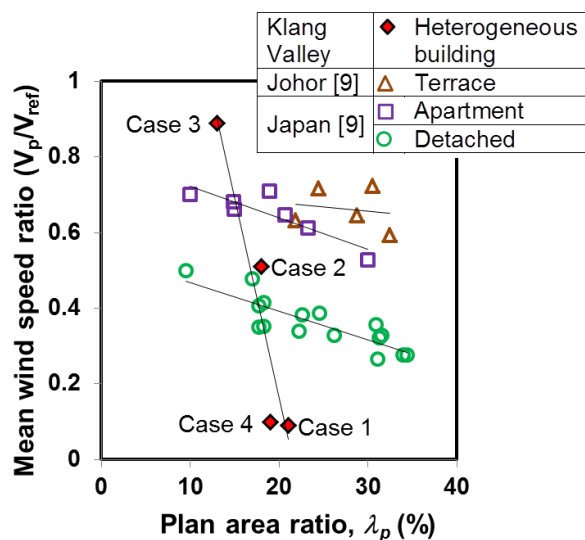


Figure 3 Relationship between  $\lambda_p$  and  $V_p/V_{ref}$

### 4.0 CONCLUSION

The conclusion of this paper can be summarized as follows:

i. The air velocity at pedestrian level is greatly affected by the urban morphology. High density cities produce low mean wind speed and this situation contributes to the higher pollutant concentration at pedestrian level [7]. This becomes a serious issue for compact cities with higher building coverage ratio (or  $\lambda_p$ ) like Hong Kong or Tokyo with  $\lambda_p$  which generally ranges from 25% to 40% [13].

ii. The relationship between the mean wind speed ratio and the  $\lambda_f$  is more suitable to explain the ventilation rate of the urban area as compare to the

such heterogeneous building height, building orientation, building arrays and building aspect ratio and not only dependent on  $\lambda_p$ .

The frontal area ratio,  $\lambda_f$ , is another important parameter for evaluating urban ventilation indices [6] and Figure 4 shows the relationship between the mean wind speed ratio and the  $\lambda_f$ . It is clearly recognized that the mean wind speed ratio exponentially decreases as the value of  $\lambda_f$  increased regardless of any type of urban morphology. This result qualitatively agrees with simple power law equation introduced by Abd Razak et al. [6] especially the high value of  $c$ . According to the Ng [12], the nature of urban morphology of higher density cities have tall buildings and bulky which lead to a high frontal area ratio. For the case of low  $\lambda_f$ , the mean wind speed ratio slightly over estimates as compare to the power law equation. This is due to the effect of channel which is required to have further investigation by collecting more spatially average data.

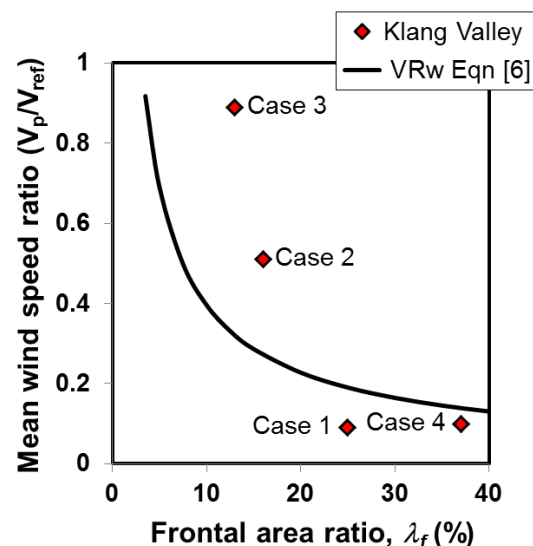


Figure 4 Relationship between  $\lambda_f$  and  $V_p/V_{ref}$

$\lambda_p$ . Wong et al. [14] explains the  $\lambda_f$  as a good indicator for investigating the corridor ventilation, despite the randomness building geometry such as various aspect ratios, heterogeneity in building height and various building orientation.

iii. Information on overall pedestrian wind environment cannot be attained by classifying the urban built form into cluster of dwelling or height variability such as detached housing and apartment housing [9]. The entire urban morphology consists of mixed buildings geometry and characterized as heterogeneous and complex.

## Acknowledgement

The authors of this work would like to express their sincere gratitude to Faculty of Mechanical Engineering, Universiti Teknologi MARA (UiTM) with the support of grant-in aid (600-RMI/FRGS 5/3 (73/2013)) from the Ministry of Education. The authors would also like to thank i-Kohza Wind Engineering for (Urban, Artificial, Man-made) Environment, Malaysia-Japan International Institute of Technology (MJIT), as the Research Institutes facilitating this research.

## References

- [1] Tenth Malaysia Plan 2011–2015. 2010. In, The Economic Planning Unit, Prime Minister's Department, Putrajaya. 429.
- [2] National Physical Plan-2. 2010. In, Federal Department of Town and Country Planning. 281.
- [3] Jamei, E., Jamei, Y., Rajagopalan, P., Ossen, D. R., and Roushenas, S. 2015. Effect of Built-up Ratio on the Variation of Air Temperature in a Heritage City. *Sustainable Cities and Society*. 14: 280-292.
- [4] Abd Razak, A., Hagishima, A., Ikegaya, N., Mohamad, M. F., and Zaki, S. A. 2013. Mean Wind Flow Field around Idealized Block Arrays with Various Aspect Ratios. *Applied Mechanics and Materials*. 393: 767-773.
- [5] Ikeda, Y., Ikegaya, N., Hagishima, A., Tanimoto, J., and Abd Razak, A. 2014. Characteristics of Spatio-temporal Fluctuation of Urban Pedestrian Wind Derived from Large-Eddy Simulation. *6th International Symposium on Computational Wind Engineering -CWE2014*. Humberg, Germany.
- [6] Abd Razak, A., Hagishima, A., Ikegaya, N., and Tanimoto, J. 2013. Analysis of Airflow Over Building Arrays for Assessment of Urban Wind Environment. *Building and Environment*. 59: 56-65.
- [7] Hu, T., and Yoshie, R. 2013. Indices to Evaluate Ventilation Efficiency in Newly-built Urban Area at Pedestrian Level. *Journal of Wind Engineering and Industrial Aerodynamics*. 112: 39-51.
- [8] Abd Razak, A., Ikegaya, N., Hagishima, A., and Tanimoto, J. 2012. Numerical Investigation of Urban Geometry Impact on Pedestrian Wind Environment. *The Seventh International Colloquium on Bluff Body Aerodynamics and Applications*. Shanghai, China.
- [9] Kubota, T., and Ahmad, S. 2005. Analysis of Wind Flow in Residential Areas of Johor Bahru City. *Journal of Asian Architecture and Building Engineering*. 4: 209-216.
- [10] Arkon, C. A., and Özkol, Ü. 2014. Effect of Urban Geometry on Pedestrian-level Wind Velocity. *Architectural Science Review*. 57: 4-19.
- [11] Kubota, T., and Ahmad, S. 2006. Wind Environment Evaluation of Neighborhood Areas in Major Towns of Malaysia. *Journal of Asian Architecture and Building Engineering*. 5: 199-206.
- [12] Ng, E. 2012. Towards Planning And Practical Understanding of the Need for Meteorological and Climatic Information in the Design of High-density Cities: A Case-based Study of Hong Kong. *International Journal of Climatology*. 32: 582-598.
- [13] Hang, J., and Li, Y. 2010. Ventilation Strategy and Air Change Rates in Idealized High-rise Compact Urban Areas. *Building and Environment*. 45: 2754-2767.
- [14] Wong, M. S., Nichol, J. E., To, P. H., and Wang, J. 2010. A Simple Method for Designation of Urban Ventilation Corridors and Its Application to Urban Heat Island Analysis. *Building and Environment*. 45: 1880-1889.