

OPTIMIZATION OF THERMOLUMINESCENCE RESPONSE OF COPPER DOPED ZINC LITHIUM BORATE GLASS CO-DOPED WITH Na₂O

^{12*}A. Saidu, ¹H. Wagiran, ¹M. A. Saeed, ¹³Y. S. M. Alajeram, ¹H. K. Obayes, ⁴A.B.A. Kadir

¹Department of Physics, Faculty of Science Universiti Teknologi Malaysia,

81310 UTM Johor Bahru, Johor, Malaysia

²Department of Physics, Faculty of Science Usmanu Danfodiyo University Sokoto, Nigeria

³Department of Medical Radiology, Al-Azhar University, Gaza Strip Palestine

⁴Secondary Standard Dosimetry Laboratory (SSDL) Nuclear Agency Malaysia

¹²amsakoko@gmail.com, ²husin@utm.my, ²moalsd@gmail.com, ³yasser_ajr@hotmail.com,

²hayder_iraq_88@yahoo.com, ⁴bazlie@nuclearmalaysia.gov.my

*Corresponding author

Abstract. Establishing the basic procedures that will influence the enhancement of the TL yield of a phosphor is paramount in the issue of dosimetry. Melt quenching method was adopted in synthesizing lithium borate glass modified with ZnO, doped with CuO and co-doped with Na₂O. The structural and optical properties of zinc lithium borate and some TL properties of copper doped zinc lithium borate were reported in our previous works. The amorphous nature of the prepared glasses was confirmed by x-ray diffraction analysis (XRD). Physical properties of the glass were obtained via Archimedes principle. The copper doped zinc lithium borate was co-doped with different concentration of Na₂O (0.025 mol % to 0.1 mol %). The glasses were irradiated with 4 Gy dose of gamma rays using ⁶⁰Co gamma cell. The highest TL response was recorded against 0.05 mol% concentration of Na₂O. The best settings for TLD reading of the proposed TLD were determined. The optimal annealing temperature and time for this composition was found to be 300 °C and 50 min respectively. The best heating rate at which the new TLD can be readout was 3 °C S⁻¹.

Keywords: thermoluminescence dosimetry, annealing time, annealing temperature, heating rate, sodium oxide

1.0 INTRODUCTION

Precise and accurate determination of radiation dose is necessary for radiation physics applications like radiotherapy, personal and environmental radiation monitoring. High sensitivity, low fading, dose linearity, relative good effective atomic number, etc are among the basic properties necessary for accurate and precised dosimeter [1, 2]. Hygroscopic nature of borate and its relative instability has set back on its performance as TL dosimeter. However among the advantages of dosimeters made of borate glass over other types of dosimeters include: easy preparation; cheap; availability; effective atomic number close to that of human tissue and easy accommodation of various types of dopant such as transition, alkali, alkali earth, and rare earth metals among others [3-5].

Many studies on thermoluminescence characteristics of borate concentrated on modifying it with alkali and alkaline metals such as magnesium, sodium potassium, etc. or doping it with rare earth and transition metals like copper [6-10]. The relative high electronegativity, good energy transfer of copper, usually, enhance the concentration of electron traps in the host of borate compound, potassium lithium borate for instance[6]. Alkali and alkaline metals hard also been tried as co-dopant by different researchers to overcome the quenching effect of copper dopant, with the aim of improving the sensitivity of the dosimeter. Despite the numerous efforts of researchers in enhancing the thermoluminescence performance of borate by host modification, doping and co-doping. Na has never been used to sensitize copper in borate host. Sodium is known for its good co-doping effect of enhancing TL intensity without changing or displacing the position of the TL peak. It is also known for a significant reduction of thermal bleaching effect [11]. In this work, we aimed at introducing Na₂O to ZLB:Cu so as to investigate the co-doping effect of Na₂O in this new host.

2.0 MATERIALS AND METHOD

High purity raw materials from Sigma Aldrich Company with purity 99.9%. were used for the synthesis of the glass samples. The materials involved are H₃BO₃ Li₂CO₃, ZnO, CuO and Na₂O. Agate motor and pestle was used to crush and mix the stoichiometric raw materials. The mixture was mixed more in milling machine for about 40 min to obtain a homogeneous mixture. The nominal composition of the prepared samples is
(70-x-y) H₃BO₃ – 10ZnO – 20Li₂CO₃: x-CuO, y-Na₂O,
x = 0.025, 0.025 ≤ y ≤ 0.1

Moreover, the breakdown of the composition is shown in table 1. The glass samples of were prepared using melt quenching method at high temperature of 1300°C in the alumina crucible. After obtaining a homogeneous liquid, the melting process was quenched on a stainless plate mold at 400 °C. The obtained glass was annealed for 3 hrs and then set to cool down to room temperature at a cooling rate of 10 °C min⁻¹.

XRD machine with CuK α radiation was employed to check the amorphous nature of the glass samples. The samples were powdered for better result. The analysis was carried out at 40KV and 30mA. The sample holder spun at 15 rpm with step time of 5s per step and a resolution of 0.01°. The scanning was between 2 θ values of 10° to 90°.

The density of the prepared glass sample was measured by Archimedes's principle Eq 1 using buoyant liquid of toluene (99.99 % purity).

$$\rho = \left[\frac{w_a}{w_a - w_l} \times (\rho_z - d) \right] + d \quad (1)$$

Where ρ is the density of glass, ρ_z is the density of the liquid (0.8696 gcm⁻³), W_a and W_l are the weight of glass in the air and liquid respectively. While d is the density of air (0.001 gcm⁻³). The obtained density values were used to calculate the molar volumes of the samples using Eq 2.

$$V_m = \frac{M}{\rho} \quad (2)$$

Where V_m is the molar volume in cm³ mol⁻¹, ρ is the density of glass and M is the molecular weight. Concentration of the doping ions, the polar radius, as well as the inter nucleus radius, were determined by Eq 3, Eq 4 and Eq 5 respectively.

$$N = \frac{\text{mol\% of doped} \times \text{glass density} \times \text{NA}}{\text{Average molecular weight of glass}} \quad (3)$$

$$r_p (\text{\AA}) = \frac{1}{2} \left(\frac{\pi}{6N} \right)^{\frac{1}{3}} \quad (4)$$

$$r_i (\text{\AA}) = \left(\frac{1}{N} \right)^{\frac{1}{3}} \quad (5)$$

The structural and optical properties of zinc lithium borate and some TL properties of copper doped zinc lithium borate were reported in our previous works [12].

The prepared chips were irradiated using ⁶⁰Co gamma cell at Universiti Kebangsaan Malaysia (UKM). The cell has the dose rate of 5.232 mGy min⁻¹ as at the time of irradiation. The exposed TLD chips were kept in an opaque container at room temperature (25 °C- 30 °C) to avoid the effect of light and temperature. To avoid TL peaks at low temperature due to unwanted shallow traps, reading of the TL response was taken 24 hours after irradiation. TLD reader model of Harshaw 4500 obtainable at the Secondary Standard Dosimetry Laboratory (SSDL) of the Nuclear Agency Malaysia was used for the determination of TL properties of the new dosimeters. Infrared filter was incorporated in the TLD reader to minimize the possible thermal noise. The reader was provided with a continuous flow of nitrogen gas during readout to minimize chemiluminescence effect and avoid spurious TL signals. The TLD reader was calibrated, and quality assurance tests were made in order to obtain precise and concise results. Each experiment data was repeatedly taken for about five times from which average and standard deviation was calculated. .

3.0 RESULTS AND DISCUSSION

The vitreous nature of the prepared glass was checked by X-ray diffraction analysis (XRD). The patterns of the XRD spectrum is shown in figure 1. The spectrum is free of any sharp Bragg peaks. This indicated that the glass sample is still in an amorphous state despite the introduction of Na₂O in the matrices of 0.025% copper doped zinc lithium borate.

Physical parameters of the prepared glass (ZLB: 0,025Cu, x-Na, $0.025 \leq x \leq 0.1$) were shown in table 2. Density of the glass was observed to have increased with the increase of concentration of Na₂O. The increase in density can be ascribed to the increase of the molecular weight due high atomic weight of Na₂O and increase of the boron-oxygen ratio with the increase of Na₂O concentration as well as the change of BO₃ triangular group to BO₄ tetrahedral groups. Molar volume was observed to have decreased with increase in density of the glass. This is a good sign of concise and compacted structure of the glass. As size and weight of dopant became the main factors that influence density of glass, ionic concentration N, was, therefore, seen to have increased with the increase of glass density. However, the polar radius (r_p) and inter nucleus distance (r_i) decreases with an increase of dopant concentration [13-16]. With the nature of these physical parameters, the obtained glass is expected to have good conductivity behavior.

Every thermoluminescence material is produced with the aim of its being highly sensitive TL phosphor. Also reliable re-usability of a TL phosphor strongly depends on a tentative thermal treatment procedures. The main aim of pre and post irradiation annealing is to re-establish the existing thermal defect equilibrium and remove the residual signal before irradiation. A very virgin TL phosphor must have a particular recipe for pre and post irradiation annealing treatment [17]. Best annealing temperature and time were determined with the ambition of extracting the highest sensitivity of the new proposed TLD. Temperatures from 100 °C to 400 °C were tried at a constant time of one hr. The obtained best temperature was fixed, and time varied from 10 min to 60 min. Variation of TL response at difference temperatures and time were illustrated in figure 2 and 3 respectively. The percentage of the STD at each data point was shown in the two figures. The optimal annealing temperature and time of the new proposed phosphor was considered as the temperature and time points at which highest TL emission and relatively lowest percentage of STD is obtained. 300 °C and 50 min are thus referred to as the best temperature and time for annealing procedure of the new TLD [11, 18]. The subsequent TL parameters will, therefore, be investigated base on this annealing procedure.

Heating rate at which TLD chip is readout has its peculiar effects to the glow intensity as well as to the peak position of the glow curve. These effects were, therefore, investigated. The chips were exposed to 4 Gy using ⁶⁰Co gamma cell and influence of different heating rate values from 1 °C to 10 °C was determined. The shapes of the glow curves remain the same for all the heating rate values tested as depicted in figure 4. There was a shift of the peak temperature from left to the right, hence to the higher temperatures as the rate of heating increases from low to higher values. This behavior can be explained in terms of the amount of electrons released per thermal stimulation and time required to released the electrons. At low heating rates ($\leq 3 \text{ }^\circ\text{C s}^{-1}$) the time taken to prescribe a shape of the glow curve is high and thus enough time to evacuate all electrons in the traps. While at relatively high heating rates ($> 3 \text{ }^\circ\text{C s}^{-1}$), the higher the heating rate the less the time it will take to complete glow curve shape and the less the time for the electrons to be released from all traps. Shifting of glow curves will, therefore, occur at higher heating rate values as a compensation to the reduction of the released electrons [19, 20]. The TL intensity increases from 1 °C to 3 °C and drastically decreases from 7 °C to 10 °C as shown in figure 5. Figure 6 portrays the variation of heating rate with a maximum temperature of the glow curves. Heating rate of $3 \text{ }^\circ\text{C s}^{-1}$ was, therefore,

adopted for the determination of the subsequent TL parameters of the new proposed phosphor.

The glow curve of copper doped zinc lithium borate glass co-doped with different concentrations of Na₂O is shown in figure 7. The obtained glow curves are symmetrical with single peak temperature for all concentrations. It is remarkably observed that the TL intensity increased with an increase in concentration of Na₂O from 0.025 mol % to 0.05 mol % and dropped at 0.1 mol %. 0.05 mol % concentration of Na₂O is, therefore the 0.05 mol % concentration of Na₂O gives the best glow curve with highest intensity and peak temperature around 211 °C. It is will thus be the optimal concentration upon which the subsequent TL parameters will be the base.

Table 1: The raw materials and composition of prepared glasses.

Sample	Batch composition (mol %)				
	ZnO	Li ₂ CO ₃	H ₃ BO ₃	CuO	Na ₂ O
S1	10%	20%	69.990%	0.010	-
S2	10%	20%	69.975%	0.025	-
S3	10%	20%	69.950%	0.050	-
S4	10%	20%	69.900%	0.100	-
S5	10%	20%	69.950%	0.025	0.025
S6	10%	20%	69.925%	0.025	0.050
S7	10%	20%	69.875%	0.025	0.100

Table 2: The physical parameters for different concentration of Na⁺ ions doped ZLB:Cu glass.

Sample No	ρ (g cm ⁻³)	M _w	V _m	N*10 ²⁰ (ion cm ⁻³)	r _p (Å)	r _i (Å)
S5	2.4899	54.8095	22.0127	6.8392	5.3871	13.3411
S6	2.4942	54.7909	21.9673	13.6617	4.2783	10.5929
S7	2.4972	54.7600	21.9286	27.4619	3.4171	8.4607

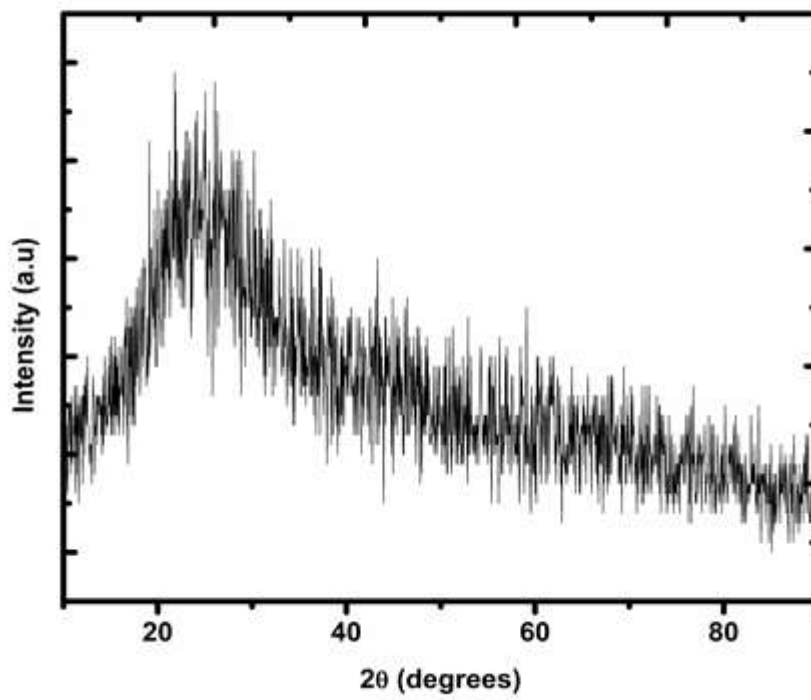


Figure 1: XRD pattern at room temperature of ZLB:0.025 mol% co-doped with 0.05 mol% of Na₂O glass.

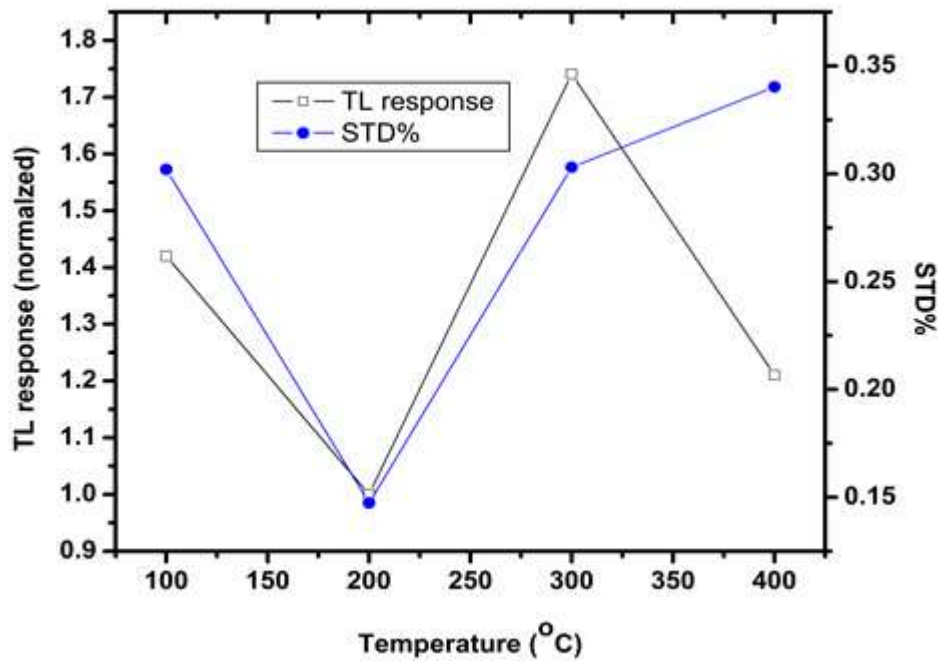


Figure 2: Variation of TL intensity with different annealing temperature

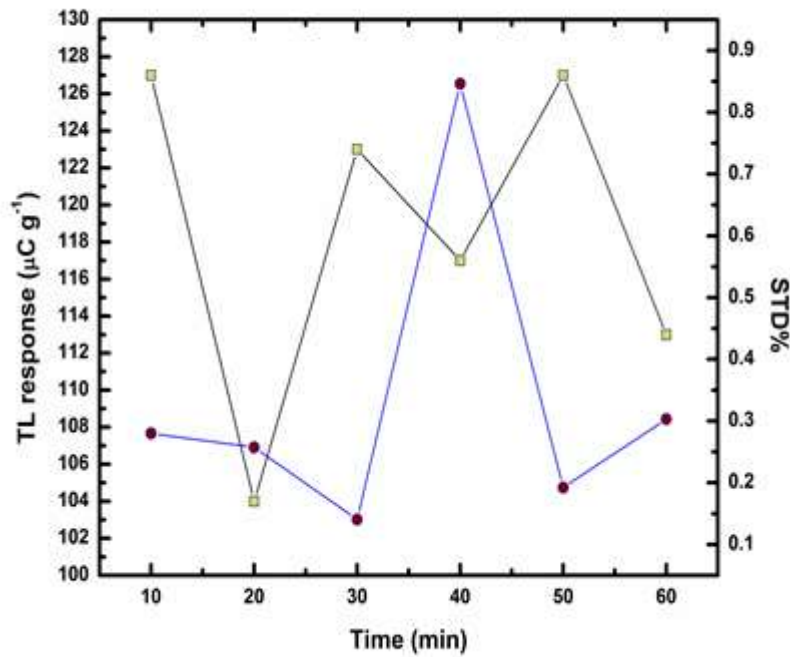


Figure 3: Variation of TL intensity with different annealing time

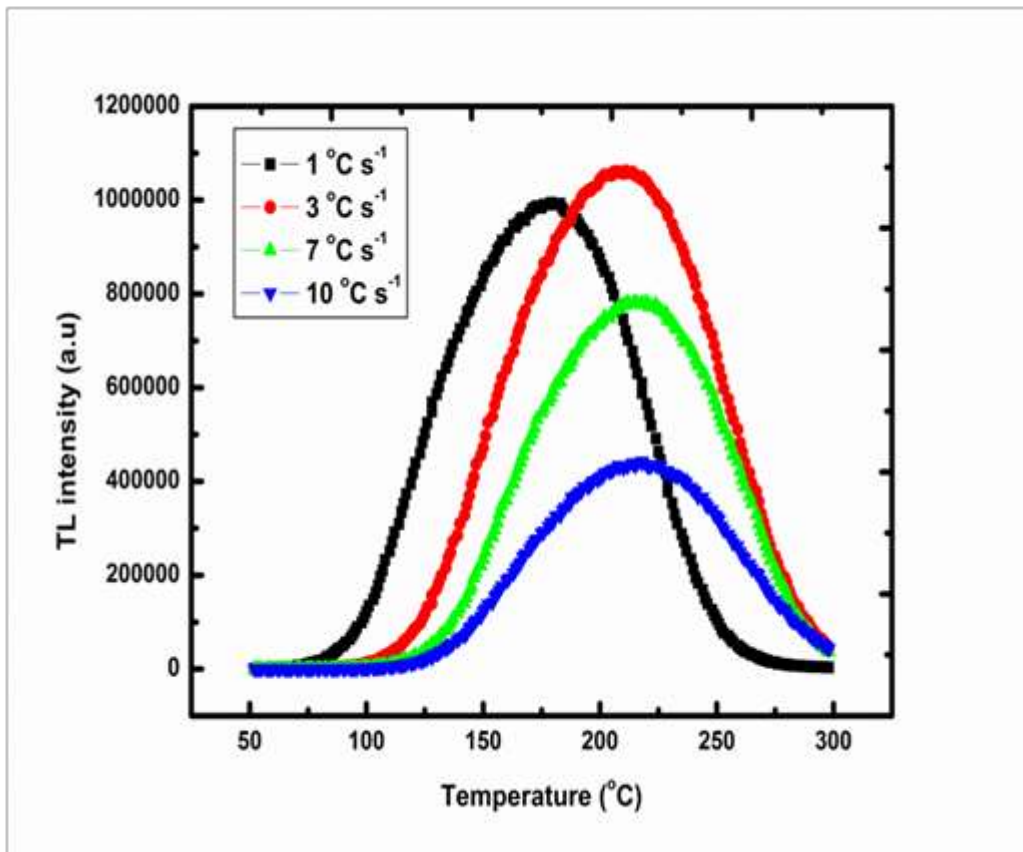


Figure 4: Glow curve profile as a function of heating rate for ZLB: 0.025 mol% Cu co-doped with 0.05 mol% Na glass.

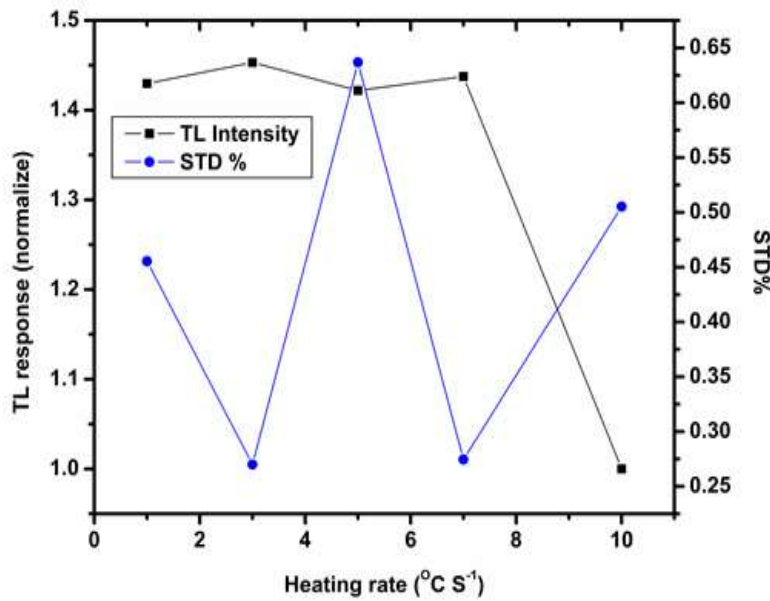


Figure 5: Variation of TL intensity with different heating rate

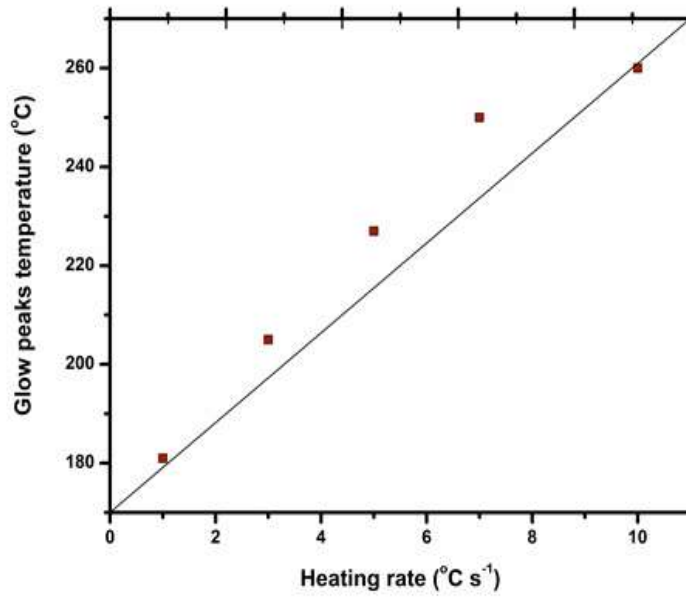


Figure 6: Variation of glow peak temperature with different heating rate

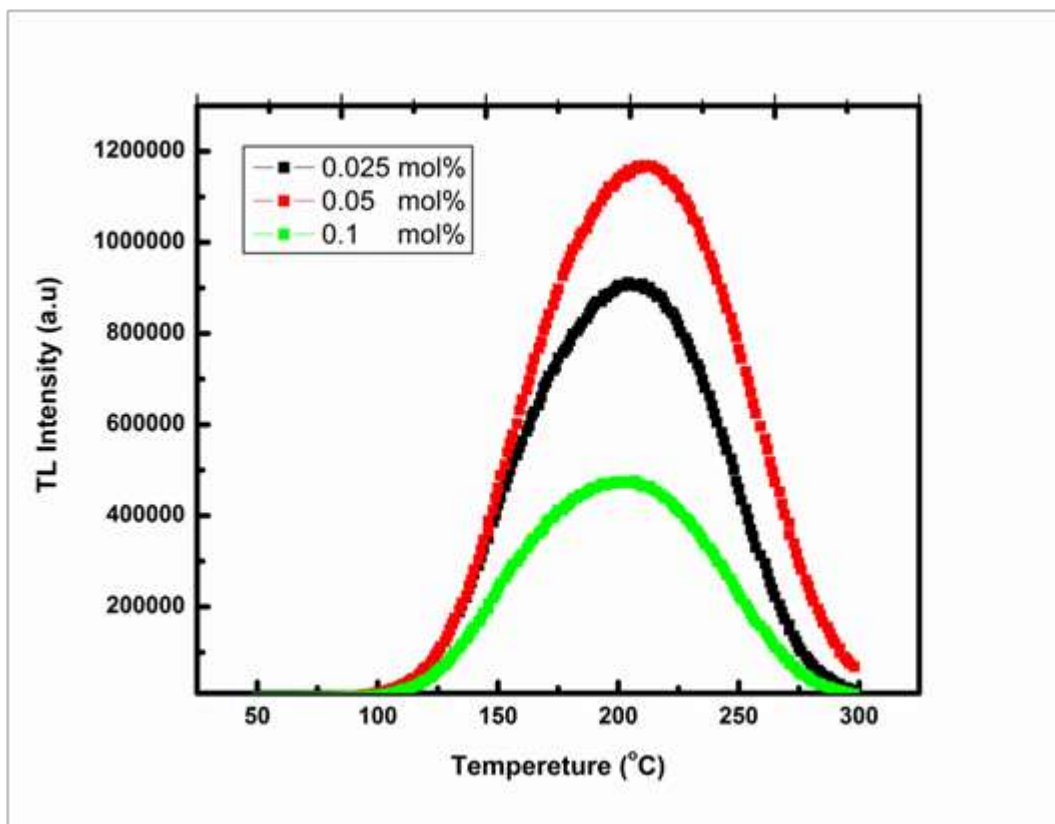


Figure 7: Glow curves of ZLB:Cu doped with different concentration of Na⁺ ions

4.0 CONCLUSIONS

The proposed TL material ZnO-Li₂CO₃-H₃B₂O₃:Cu⁺ was improved by co-doping it with Na₂O. The TL intensity of ZnO-Li₂CO₃-H₃B₂O₃:Cu⁺ was enhanced by 100% with addition of sodium in this new phosphor. The best concentration of Na in copper doped zinc lithium borate glass was found to be 0.05 mol %. The best annealing procedure and heating rate of the co-doped TL material was found to be 300 °C at 50 minutes and 3 °C s⁻¹ respectively. Dosimetric TL properties of this improve phosphor should be further determined.

Acknowledgment

The authors are grateful to Universiti Teknologi Malaysia for the university research grant. The work was also supported by Tertiary Institution Education Fund (TETFUND) through Usmanu Danfodiyo University Sokoto Nigeria.

REFERENCES

- [1] Bos, A. (2006) Theory of thermoluminescence. Radiation measurements, **41**: p. S45-S56.
- [2] Furetta, C. (2003) Handbook of thermoluminescence. World Scientific.
- [3] Chandra, B., et al. (1982) Annealing and re-usability characteristics of LiF (Mg, Cu, P) TLD phosphor. Radiation Protection Dosimetry, **3**(3): p. 161-167.
- [4] Del Nery, S.M., et al. (1994) Luminescence quenching by iron in barium aluminoborate glasses. Physical Review B, **49**(6): p. 3760.
- [5] Elkholy, M., (2010) Thermoluminescence of B₂O₃-Li₂O glass system doped with MgO. Journal of Luminescence, **130**(10): p. 1880-1892.
- [6] Aboud, H., et al. (2014) Thermoluminescence properties of the Cu-doped lithium potassium borate glass. Applied Radiation and Isotopes, **90**: p. 35-39.
- [7] Anishia, S.R., et al. (2011) Thermoluminescence properties of rare earth doped lithium magnesium borate phosphors. Journal of Luminescence, **131**(12): p. 2492-2498.
- [8] Jiang, L., et al. (2007) Thermoluminescence properties of Ce³⁺-doped LiSr₄(BO₃)₃ phosphor. Materials Letters, **61**(29): p. 5107-5109.
- [9] Santiago, M., et al. (1998) Thermoluminescence of sodium borate compounds containing copper. Journal of materials science letters, **17**(15): p. 1293-1296.
- [10] Tengku Kamarul Bahri, T., et al. (2014) Thermoluminescence properties of CaO-B₂O₃ glass system doped with GeO₂. Radiation Physics and Chemistry, **102**: p. 103-107.
- [11] Furetta, C., et al. (2000) Dosimetric characterisation of a new production of MgB₄O₇:Dy,Na thermoluminescent material. Applied Radiation and Isotopes, **52**(2): p. 243-250.

- [12] Saidu, A., et al. (2014) Structural properties of Zinc Lithium borate glass. *Optics and Spectroscopy*, **117**(3): p. 396-400.
- [13] Alajerami, Y.S.M., et al. (2013) Luminescence characteristics of Li₂CO₃–K₂CO₃–H₃BO₃ glasses co-doped with TiO₂/MgO. *Applied Radiation and Isotopes*, **82**(0): p. 12-19.
- [14] Reddy, R., et al. (2003) Absorption and emission spectral studies of Sm³⁺ and Dy³⁺ doped alkali fluoroborate glasses. *Journal of Quantitative Spectroscopy and Radiative Transfer*, **77**(2): p. 149-163.
- [15] Harrison, W.A. (2012) *Electronic structure and the properties of solids: the physics of the chemical bond*. Courier Dover Publications.
- [16] Reshak, A.H., et al. (2008) Band structure features of nonlinear optical yttrium aluminium borate crystal. *Solid State Sciences*, **10**(10): p. 1445-1448.
- [17] Tugay, H., et al. (2009) The thermoluminescent properties of natural calcium fluoride for radiation dosimetry. *Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms*, **267**(23): p. 3640-3651.
- [18] Pal, P.P. and J. Manam, (2013) effect of li⁺ co-doping on the luminescence properties of zno: tb 3 nanophosphors.
- [19] Alajerami, Y., et al. (2013) The Effect of TiO₂ and MgO on the Thermoluminescence Properties of a Lithium Potassium Borate Glass System. *Journal of Physics and Chemistry of Solids*, **74**(12): p. 1816-1822.
- [20] Lee, J., et al (2008) Role of dopants in LiF TLD materials. *Radiation Measurements*, **43**(2): p. 303-308.