

DYNAMIC ANALYSIS OF FRICTION STIR WELDING JOINTS IN DISSIMILAR MATERIAL PLATE STRUCTURE

Siti Norazila Zahari^a, Mohd Shahrir Mohd Sani^{a*}, Nurulakmar Abu Husain^b, Mahadzir Ishak^c, Izzuddin Zaman^d

^aAdvanced Structural Integrity of Vibration Research (ASIVR), Faculty of Mechanical Engineering, University Malaysia Pahang, 26600 Pekan, Pahang, Malaysia

^bAutomotive Department, Faculty of Mechanical Engineering, Universiti Teknologi Malaysia (UTM), 81310 UTM Johor Bahru, Johor, Malaysia

^cFaculty of Mechanical Engineering, University Malaysia Pahang, 26600 Pekan, Pahang, Malaysia

^dDepartment of Engineering Mechanics, Faculty of Mechanical and Manufacturing Engineering, Universiti Tun Hussein Onn Malaysia, 86400 Parit Raja, Batu Pahat, Johor, Malaysia

Article history

Received

18 December 2015

Received in revised form


10 March 2016

Accepted

25 April 2016

*Corresponding author
mshahrir@ump.edu.my

Graphical abstract



Abstract

Friction stir welding (FSW) is a welding process that widely used as a solid state joining process for producing welded structure of similar and dissimilar materials such as aluminum alloy, magnesium etc. FSW process has expanded rapidly in industries including aerospace, automotive and maritime due to several advantages compared to other fusion welding. In this paper, experimental modal analysis (EMA) and normal mode finite element analysis (FEA) of the FSW welded joint structure of materials AA6061 and AA7075 will be carried out to identify dynamic properties. Rigid Body Element (RBE2) in MSC NASTRAN/PATRAN is used to model the welds and their compatibility for representing FSW welded structure also being identified. Model updating is performed to minimize the discrepancy between EMA and FEA. Model updating will be acted as an optimization method and is being presented using the structural optimization capability. Finite model updating could be done in individual components and welded structure. RBE2 connecting element can be used to represent friction stir welding with good accuracy.

Keywords: Model updating; friction stir welding; finite element analysis; experimental modal analysis

Abstrak

Kimpalan putaran geseran (FSW) ialah sejenis kimpalan yang digunakan secara meluas sebagai salah satu proses penggabungan dalam keadaan pepejal bagi menghasilkan struktur kimpalan yang terhasil daripada percantuman bahan yang sama dan berbeza seperti *aloi aluminum*, *magnesium* dan lain-lain. Proses kimpalan putaran geseran telah berkembang secara mendadak dalam industri termasuklah aeroangkasa, automotif dan maritim disebabkan beberapa kelebihan yang ada pada FSW berbanding proses kimpalan yang lain. Dalam kertas kajian ini, analisis modal secara eksperimen (EMA) dan analisis mod normal unsur terhingga (FEA) dijalankan ke atas struktur (AA6061 dan AA7075) yang dikimpal untuk mengenal pasti sifat dinamik. Unsur jasad tegar (RBE2) dalam perisian MSC NASTRAN/PATRAN digunakan untuk merangka kimpalan dan kesesuaian unsur ini mewakili struktur kimpalan FSW juga dikenalpasti. Pengemaskinian model

dijalankan untuk meminimumkan perbezaan nilai yang diperolehi di antara EMA dan FEA. Pengemaskinian model akan berfungsi sebagai langkah pengoptimuman dan diuraikan menggunakan keupayaan pengoptimuman struktur. Pengemaskinian model terhitung dapat diaplikasikan kepada komponen secara individu atau yang telah bercantum. Unsur penggabungan RBE2 boleh digunakan untuk mewakili kimpalan putaran geseran dengan tepat.

Kata kunci: Pengemaskinian model; kimpalan putaran geseran; analisis unsur terhingga; analisis modal secara eksperimen

© 2016 Penerbit UTM Press. All rights reserved

1.0 INTRODUCTION

Friction Stir Welding (FSW) is a solid state joining technique, invented at The Welding Institute (TWI) in early 1990's. FSW has expand rapidly since its first development and being used widely in automotive, aerospace and maritime industries. FSW managed to catch public attention with the welding of the latest iMac by joining the front and backed of computer's ultra-thin (5mm at the edge) enclosure and being remark as a joining technology that enabled the creation of the "most advanced, most brilliant desktop" in Apple Inc.'s history.

The basic working principle of FSW is easy to implement and the detailed terminology to discuss FSW process was outlined in a paper by Threadgill [1]. A non-consumable rotating tool consisting of pin and shoulder plunges into adjoining edge of the workpiece and traversed along the joint line which resulting in heat generated through both friction and plastic deformation (Figure 1).

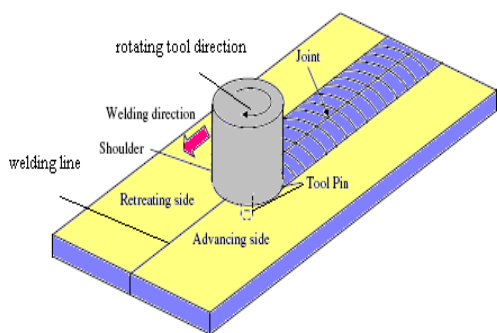


Figure 1 FSW process [2]

FSW shows many advantages when compared to fusion welding. The most remarkable function of FSW is that this process enable alloys, that difficult or impossible to join using other conventional welding, to be welded. FSW also do not require filler material and shielding gas. This characteristics enable FSW to be considered as a "green" technology due to its energy

efficiency and environmental friendly behavior. FSW can be applied to numerous types of joint such as square butt joint and lap joint as frequently used joint structure. FSW is the most compatible method for welding light metal alloys, aluminum (Al) based metal.

FSW welded structure do not only provide connection between the two materials but also crucially contribute to stiffness and dynamics properties of the structure. Due to these notable function, it is important to have required physical understanding on the behavior of the welds which can be achieved by numerical and experimental method.

Predictive work such as design, analysis and evaluation of welded structure are usually accomplished by computational method [3]. For a complex structure, it is always not practical to model the weld joints in detail. Only a simple but reliable finite element (FE) representation is needed in order to predict the behavior of welds. There are many previous research focused on modelling the weld joints [3-10]. However, to the author's best knowledge there is no published paper on modelling the dynamic properties of a structure with FSW. Experimental modal analysis (also referred as modal testing) has become a widely known and efficient technique to analyze dynamic behavior of structure. The data that been obtained from modal testing not only can be used to predict dynamic properties but also used as a validation of analytical models before they can be utilized for further detailed analysis.

In automotive, rail transportation and aerospace industries, AA7075 and AA6061 are the two most largely utilized structural material. Therefore for this present study, AA7075 and AA6061 Al alloys will be used as dissimilar materials to investigate dynamic properties of FSW welded structure. Finite element analysis and experimental modal analysis will be explained in the following section. Correlation of two different result will be discussed in next section. Then model updating will be performed to reduce the error between the two results.

2.0 DESCRIPTION OF STRUCTURES

2.1 Materials

The materials used in the study are AA6061 and AA7075 Al alloy flat plate with thickness 2mm. The physical and geometrical properties of these two flat plates are listed in Table 1.

Table 1 Material and geometrical properties

No.	Properties	Materials	
		AA7075	AA6061
1	Length, l [mm]	200	200
2	Width, b [mm]	100	100
3	Density, ρ [kg/m ³]	2820	2700
4	Young's Modulus, E [GPa]	72	69
5	Thickness, t [mm]	2	2

2.2 Friction Stir Welding Process

AISI H13 tool steel with cylindrical pin profile was used as a welding tool. The tool consists of shoulder and pin with diameter 17.7mm and 5.80mm respectively. Backing plate and parallel bar were made of mild steel used to support and hold the specimen during welding process. FSW process was carried out using vertical milling machine. All the tools and machine involved in welding process are shown in Figure 2. For this study, plate AA6061 was placed on its advancing side due to its higher mechanical strength and tool pin was positioned at the center of joint line. Process

parameters that being used in this study are rotational speed $\omega=1100$ rpm, traverse speed $v=50$ mm/min and tilt angle = 2°.

2.3 Finite Element Analysis (FEA)

Figure 3 shows the complete FE model of FSW welded structure which is modelled in MSC/NASTRAN using four noded shell elements (CQUAD4). The flat plane consists of 16 elements and 25 nodes. Nominal values for both flat plates are stated in Table 1 above. Neither constraints nor load were assigned to create free-free boundary state. Minimum frequency of 1Hz was set to avoid the solver from calculating the six rigid body motions that having frequency less than 1 Hz. Rigid Body Element (RBE2) was used to represent the weld joint in the FE model. Five RBE2 elements was inserted with the middle nodes of each plate attached to another in a straight line.

Normal mode analysis (SOL 103) in MSC NASTRAN was performed to compute the modal data of the FSW welded structure. For this analysis, LANCZOS algorithm was used to analyze the plate because element size of the plate is fine and contains many degrees of freedom (DOF). Figure 4 shows five first natural frequencies and mode shapes. The first mode is shown at 146.84Hz, 220.49 Hz for the second mode, and 252.52 Hz for the third mode, and 335.84 Hz for the fourth mode and 500.39 Hz for the fifth mode. Validation of the FE models are carried out by comparing modal parameters obtained from analytical models with the experimental counterparts that will be explained in the following section.



Figure 2 FSW tool and machining

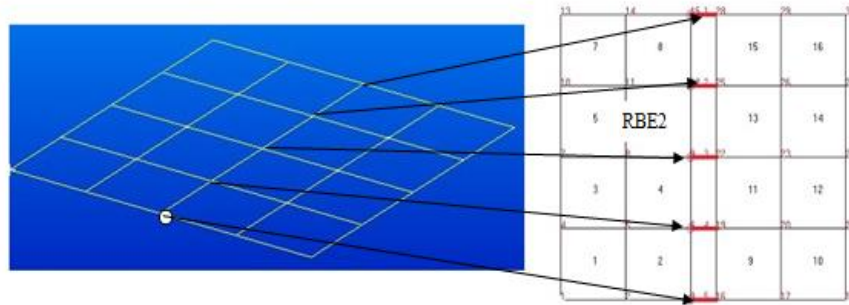


Figure 3 FE modeling with RBE2 element

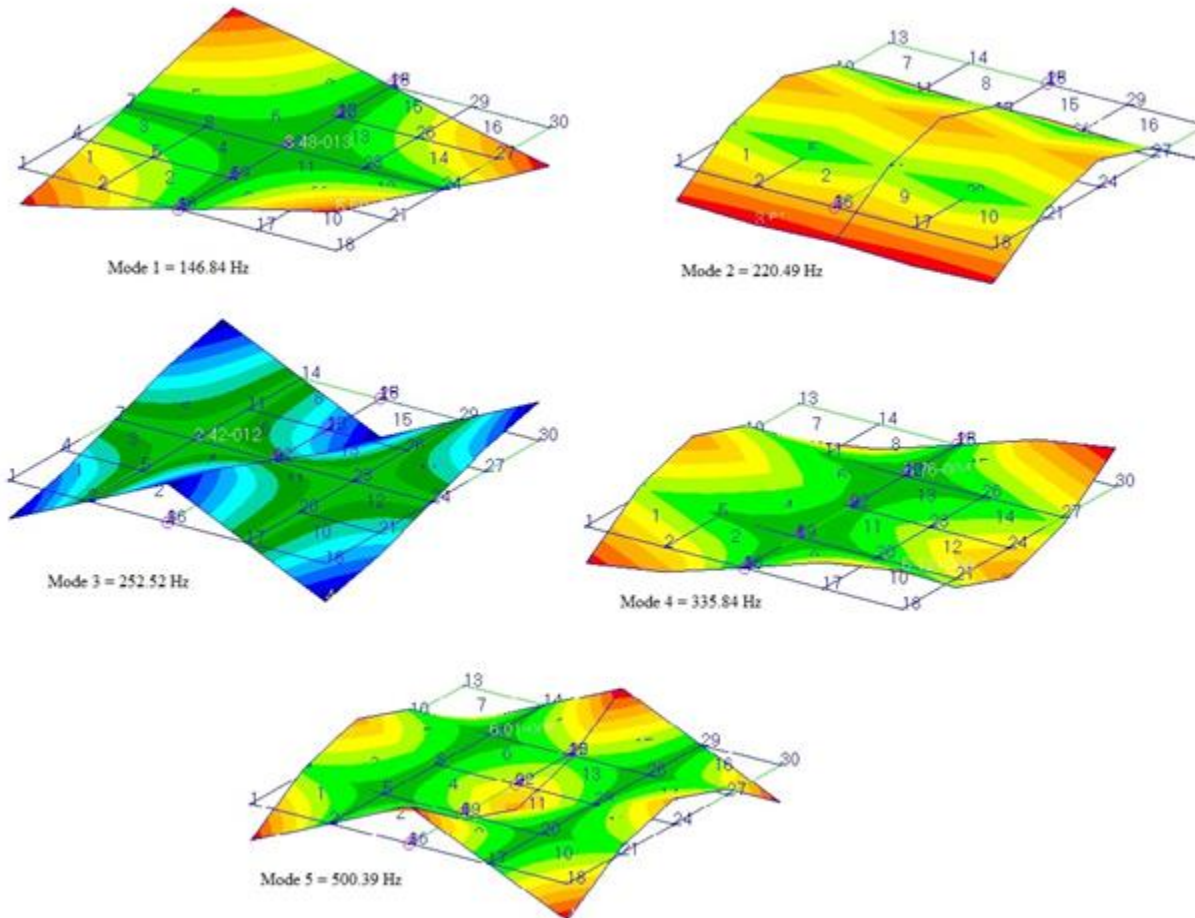


Figure 4 Five mode shapes of FSW flat plate

2.3 Experimental Modal Analysis (EMA)

Modal testing or EMA is used to extract modal parameters such as natural frequency, mode shapes and damping ratio experimentally. For this study, impact hammer had been used as an excitation

method. Due to its simple geometry, all flat plate was divided into 25 small grids point that represent the flat plate shape where at this point FRF was measured. A Kistler type uniaxial with sensitivity of 100mV/g used in this experiment was fixated at point 13.

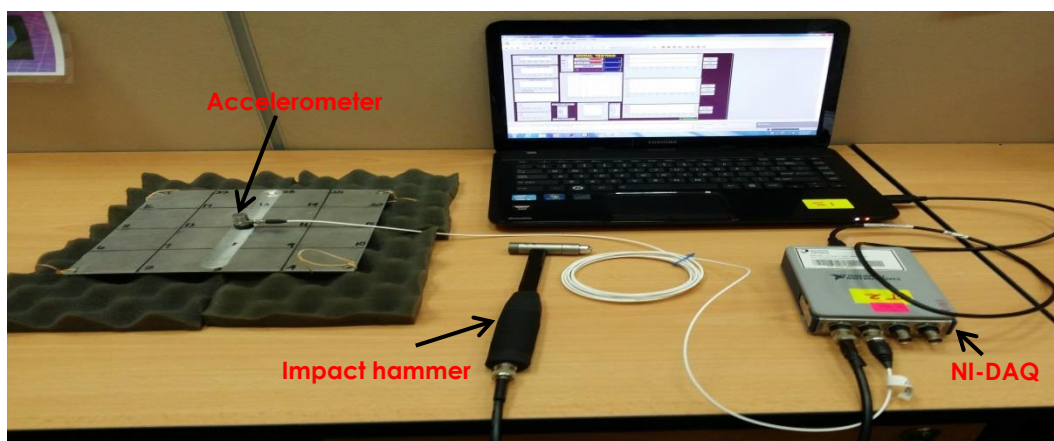


Figure 5 Impact hammer setup

The locations of impact point and measurement point were selected carefully to avoid any nodal points. All the equipments for modal testing illustrated in Figure 5 and the flat plate was supported by sponge in order to simulate free-free boundary condition.

The flat plate was tested using one point hammer and one measurement point with only first five modes measured from this set of test. The mass of flat plate and accelerometer were neglected because mass loading effect was very minimal [11]. DasyLab software was used to measure the signal from impact

hammer and accelerometer and convert it into FRF. Then, data block collected from DasyLab software will be transferred to MESScope software in order to extract modal parameters using curve fitting method. Natural frequency from the experiment is compared with the natural frequency of FEA and being listed in Table 2 together with the percentage error. In addition, Figure 6 shows the mode shapes extracted from experimental procedure.

Table 2 Natural frequencies of EMA & FEA

Mode	I (EMA) Natural Frequency (Hz)	II (FEA) Natural Frequency (Hz)	III Error (%) $= (II-I)/I $
1	149.00	146.84	1.45
2	210.00	220.49	4.50
3	255.00	252.52	0.97
4	345.00	335.84	2.66
5	508.00	500.39	1.50

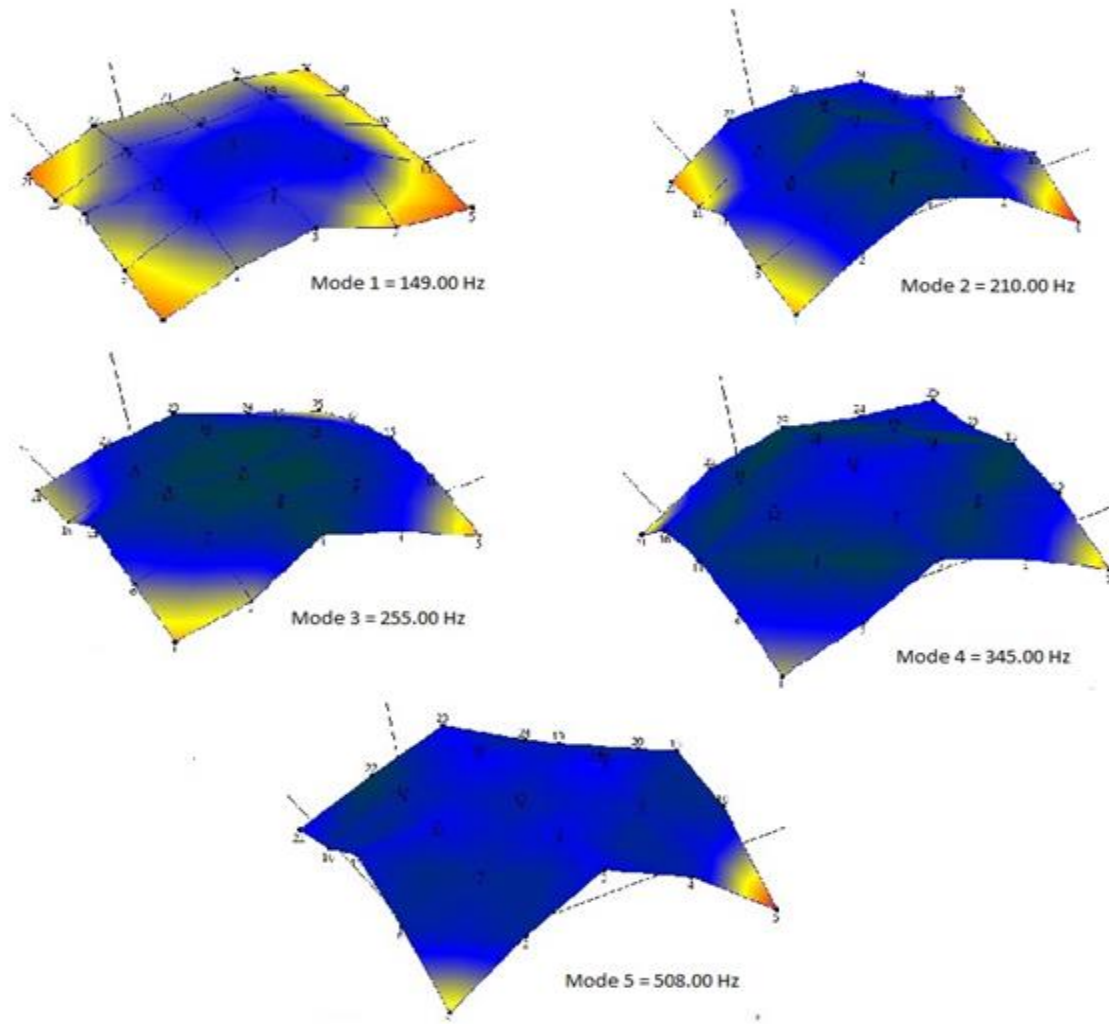


Figure 6 Five mode shapes of FSW flat plate (FEA)

From the table, it shows that the percentage error between predicted natural frequencies compared to measured data for less than 1 only occurred for mode 3 meanwhile for mode 1 and 5 are reasonably good with below 1.5 per cent error. Then for the rest of modes (mode 2 and 4), higher error are obtained which are larger than 2 per cent. This can conclude that the FE modelling is not accurate enough to represent the actual FSW structure. Therefore, model updating need to be carried out to reduce discrepancy between test results and prediction counterparts.

2.4 Model Updating Of The FSW Structure

Model updating is one of the methods used to improve correlation between finite element model and experimental results by changing the modeling parameters that have been assigned [12]. It is very crucial step in validation process by altering the values of parameter to make up a definite FE model for additional analysis. There are several methods for

model updating [13-16] and for this study, optimization algorithm (SOL200) in NASTRAN software was used to perform model updating.

2.4.1 Formulation Of Updating Procedure

For equation of motion for undamped free vibration of a structure can be expressed as

$$\omega^2[M] + [K]\hat{u} = 0 \quad (1)$$

Where M and K are mass and stiffness matrices of the structure and \hat{u} is the modal displacement vector. ω^2 is the eigenvalue and ω is the natural frequency of a structure. Simple first order Taylor series expansion that used in equation for NASTRAN can be expressed as

$$\omega_{n+1}^2 = \omega_n^2 + S_i(\partial\theta) \quad (2)$$

In above equation, S_i is sensitivity matrix (mxn) that denotes the rates of change of structural eigenvalues

ω^2 with respect to the changes in parameters $\delta\theta$ which can be defined as [17]

$$S_i = \delta\omega^2 / \delta\theta = u_i^T (\delta k / \delta\theta - \omega^2 \delta\theta / \delta\theta) u_i \quad (3)$$

Therefore from the equation, it shown that any alteration made to the system parameters also can affect the modal properties (natural frequency, damping etc.) of the system. So, the updating parameters and modal properties should be chosen properly for updating procedure.

An error function, J between experimental modal data and analytical modal data is determined for minimization in the updating process. The process will be iterative until convergence is achieved when the error function between the two data is small enough. The error function can be derived from below equation

$$J = \sum_{j=1}^n (\lambda_j / \lambda_{j\text{exp}} - 1)^2 \quad (4)$$

Where λ_j is the j th predicted eigenvalue from FE model and $\lambda_{j\text{exp}}$ is the j th experimental. It is noted that equation (4) only valid to be used if the experimental eigenvalue and analytical eigenvalues are paired correctly. If using more number of experimental modal properties, the updated value will be more predictive compare to using only a few modal data.

2.4.2 Selection Of Updating Parameters

Before move to model updating, sensitivity analysis was performed beforehand in order to find the parameters that having major influence on the modification of modal properties of FSW plate. After several iteration in sensitivity analysis, the parameters

that been selected as updating parameters are Young Modulus, E and thickness for both plate. The initial values of Young's modulus are set to 72 GPa and 69 GPa for each plate respectively. The Young's modulus is allowed to vary from 68 to 79 GPa, while the thickness of the plate only having small variation from 0.0019 to 0.0022. From the sensitivity analysis, it also stated that Poisson ratio and density less influential in modeling the FE model FSW.

2.4.3 Updating Results

Updating is complete when the error function minimized as explained in above subsection and being performed on the basis first five measured frequencies. Table 3 (column II) shows the updated results for the FSW flat plate. While Table 4 shows the changes of the updating parameters for the FE model.

From Table 3 below, it is found that all the natural frequencies are improved except for mode 2. The results also show that, the RBE2 that been used for modelling the joint did not have any parameters assigned to be modified. So, there are no parameters in this modelling involved in updating procedure. Attention is given to the Young's modulus of plate AA7075 and AA6061. Poisson ratio and density did less influencing the result of FEA for this study. From Table 4, it shows that convergence obtained quickly for the updating. From this study, FE modelling of FSW structure is now closer to experimental model by having only 6% error. It is also proved that not only material properties affected the result of modal data but also geometrical properties contribute to the difference between experimental and analytical data.

Table 3 Natural frequencies of EMA & FEA

Mode	I (EMA) Natural Frequency (Hz)	II (FEA) Updated Natural Frequency (Hz)	III Initial Error (%) = (II-I)/I	IV Updated Error (%) = (IV-I)/I
1	149.00	147.20	1.45	1.21
2	210.00	220.76	4.50	5.12
3	255.00	253.31	0.97	0.66
4	345.00	336.97	2.66	2.33
5	508.00	501.89	1.50	1.20
		TOTAL ERROR	11.08	10.53

Table 4 Changes of the updating parameters for FE model

Parameter	I Initial Value	II Updated Value	Changes (%) = (II-I)/I
Young's Modulus, E_{AA7075} [GPa]	72	67	6.94
Young's Modulus, E_{AA6061} [GPa]	69	71	2.90
Thickness of plate, t_{AA7075} [mm]	2.00	2.0030	0.15
Thickness of plate, t_{AA6061} [mm]	2.00	2.0026	1.30

4.0 CONCLUSION

This study show that the initial frequencies extracted from analytical method are having some error compare to experimental counterparts when RBE2 element is used to represent the modeling of FSW joint. More importantly in assigning the RBE2 connecting element, it is recommended to put a smaller displacement between the two plates. This is because it will influence the result of FEA. When modelling is settled, the discrepancy between this two results can be reduced using model updating. Before proceed to model updating, sensitivity analysis had been done first to select the right updating parameter. From the sensitivity analysis it shown that both material and geometrical properties play a vital role in model updating in minimizing the error of FE model. After model updating been executed, the error between numerical and test result become smaller. It can conclude that RBE2 can be used to represent FSW and model updating can be used to correct the value of parameter been assigned for FE modeling.

Acknowledgement

This research is fully supported by KTP grant, RDU141011. Special thanks to focus group of Advanced Structural Integrity of Vibration Research (ASIVR) and Universiti Malaysia Pahang for providing all the equipment used for this project. The author also wishes to acknowledge the financial support from Knowledge Transfer Programme (KTP) and Ministry Of Higher Education.

References

- [1] Threadgill, P. 2007. Terminology in friction stir welding. *Science and Technology of Welding & Joining*. 12(4): 357-360.
- [2] Nandan, R., T. DebRoy, and H. Bhadeshia. 2008. Recent advances in friction-stir welding—process, weldment structure and properties. *Progress in Materials Science*. 53(6): 980-1023.
- [3] Husain, N.A., Khodaparast, H.H., Snaylam, A., James, A., Dearden, G. and Ouyang H. 2010. Finite-Element Modelling And Updating Of Laser Spot Weld Joints In A Top-Hat Structure For Dynamic Analysis. *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*. 224(4): 851-861.
- [4] Salvini, P., F. Vivio, and V. Vullo. 2000. A Spot Weld Finite Element For Structural Modelling. *International Journal of Fatigue*. 22(8): 645-656.
- [5] Palmonella, M., Friswell, M.I., Mottershead, J.E. and Lees, A.W. 2004. Guidelines For The Implementation Of The CWELD And ACM2 Spot Weld Models In Structural Dynamics. *Finite Elements in Analysis and Design*. 41(2): 193-210.
- [6] Palmonella, M., Friswell, M.I., Mottershead, J.E. and Lees, A.W. 2005. Finite Element Models Of Spot Welds In Structural Dynamics: Review And Updating. *Computers & Structures*. 83(8): 648-661.
- [7] Husain, N.A., Khodaparast, H.H., Snaylam, A., James, S., Sharp, M., Dearden, G. and Ouyang, H. 2009. Modal Testing And Finite Element Model Updating Of Laser Spot Welds. *Journal of Physics: Conference Series*. 181(1): 012-024
- [8] Husain, N.A., Snaylam, A., Khodaparast, H.H., James, S., Dearden, G. and Ouyang, H.J. 2009. FE Model Updating for Damage Detection—Application to a Welded Structure. *Key Engineering Materials*. 413: 393-400.
- [9] Kuratani, F., Okuyama, M., Yamauchi, T. and Washior, S. 2010. Finite Element Modeling Of Spot Welds For Vibration Analysis. *Fifth Asian Conference on Multibody Dynamics*. Kyoto, Japan. 23-26 August 2010. 1-7.
- [10] Alvarez, R. D. A., N. Ferguson, and B. Mace. 2014. A Robust Spot Weld Model For Structural Vibration Analysis. *Finite Elements in Analysis and Design*. 89: 1-7.
- [11] Yunus, M. A. 2011. *Finite Element Modelling And Updating Of Structure Of Sheet Metal With Bolted And Welded Joints*. Phd Thesis. University of Liverpool.
- [12] Mottershead, J. and M. Friswell. 1993. Model Updating In Structural Dynamics: A Survey. *Journal of Sound and Vibration*. 167(2): 347-375.

- [13] Arora, V., S. Singh, and T. Kundra. 2009. Finite Element Model Updating With Damping Identification. *Journal of Sound and Vibration*. 324(3): 1111-1123
- [14] Mehrpouya, M., E. Graham, and S.S. Park. 2013. FRF Based Joint Dynamics Modeling And Identification. *Mechanical Systems and Signal Processing*. 39(1): 265-279.
- [15] Başağa, H.B., T. Türker, and A. Bayraktar. 2011. A Model Updating Approach Based On Design Points For Unknown Structural Parameters. *Applied Mathematical Modelling*. 35(12): 5872-5883.
- [16] Jensen, H., Millas, E., Kusanovic, D. and Papadimitriou, C. 2014. Model-Reduction Techniques For Bayesian Finite Element Model Updating Using Dynamic Response Data. *Computer Methods in Applied Mechanics and Engineering*. 279: 301-324.
- [17] Friswell, M. and J. E. Mottershead. 1995. *Finite Element Model Updating in Structural Dynamics*. Springer Science & Business Media. 38