

LOW DENSITY POLYETHYLENE TAPIOCA STARCH DEGRADABLE
BIOFILMS WITH PALM OIL BASED PROCESSING AID FOR
BLOWN FILM EXTRUSION

ROSHAFIMA RASIT ALI

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Polymer Engineering)

Faculty of Chemical Engineering
Universiti Teknologi Malaysia

MARCH 2015

This thesis is dedicated to my husband, Helmi Hj Haron, mama and abah, super cool siblings; Fina, Baby and Fiq and beloved children, Iman, Fathiyyah and Fayha

ACKNOWLEDGEMENTS

Alhamdulillah. This thesis represents not only my work on the keyboard; it is a milestone in more than a one decade of my journey in Universiti Teknologi Malaysia (UTM) starting as an undergraduate student back in 1996. Throughout these years I have learned and experienced a valuable living philosophy and principle that cannot be conducted and analyzed through experimental and data analysis. This thesis is also the result of many experiences and knowledge's I have encountered at UTM from dozens of remarkable individuals who I wish to acknowledge each one of them.

First and foremost I would like to thank my supervisor, Associate Professor Dr Wan Aizan for her guidance, patience, support a tireless and encouragement along the journey of my study. She has given me support including literally assisting my research task, academically and emotionally through the rough road to finish this thesis. One simply could not wish for a better or friendlier supervisor.

I am most grateful to Mr Suhee Tan, Mr Nordin Ahmad and Ms Zainab Salleh; the most awesome lab technicians of Polymer Engineering Department, Faculty of Chemical Engineering, UTM; for their dedicated help, guidance and experience sharing during my experimental works. I have been blessed with a friendly and cheerful group of my fellow postgraduate mates; Dayang, Nurnadia, Shahrul Nizam, Mohd Zaini and Dr Lai Jau Choi. I really appreciate their kindness, help and accompany through all this years. I would like to acknowledge the financial support and study leave opportunity granted by Ministry of Higher Education, Malaysia and Universiti Teknologi Malaysia, encouragement from all staffs in Polymer Engineering Department; especially to my current head of department, Assoc. Prof. Dr Aznizam and not to forget, Assoc. Prof. Dr Shahrir Hashim as former head of department. A special dedication goes to my fellow colleagues; Kama, Zana, Ana, Ina, Yun, Niza, Umi and Ina Muis for their encouragement, guidance and years of fun in many ways along my journey.

Above all, my deepest dedication goes to the most important source of my life; parents, husband, siblings and children. Their continuous support and unconditional love have been the strongest pillars that carry me through all this trying years. They have cherished with me every great moment and always there whenever I needed it.

ABSTRACT

In this study, tapioca starch-based polyethylene biofilms with various starch contents, ranging from 5 to 40 wt%, were prepared with added plasticizers and polyethylene-grafted-maleic anhydride (PE-g-MA) as compatibilizer by a one-step process. The pellets of tapioca starch-based low density polyethylene (LDPE/TS) were first produced using a twin-screw extrusion process, followed by film blowing extrusion process to produce biofilm samples. Two types of plasticizers, commercial glycerol and palm oil based olein, were added to produce the best formulation for the film blowing process. Palm oil based olein influenced the processing of biocomposites by inducing lower viscosity, better dispersion and flowability. The biocomposites with addition of fixed amount of palm oil based olein displayed excellent film blowing ability compared to glycerol. Scanning electron micrograph of this biofilm with incorporation of starch up to 30 wt% showed good dispersion of starch granular in the polymer matrix. Adding compatibilizer increased the compatibility of the blends, and thus the mechanical properties of tapioca starch-based biofilms were improved. Optical properties, such as haze and gloss of biofilms, decreased as the starch contents increased, coinciding with the starch particle size in the polymer matrix. The barrier properties of tapioca starch-based biofilms, such as water uptake, moisture content and water vapour transmission rate were higher than pure LDPE, due to the hydrophilic characteristics of starch. Biofilms exposed to outdoor weathering, fungi, enzyme and controlled soil burial test demonstrated significant changes on weight loss and surface structure due to photodegradation by sunlight and microorganism activities. Biofilms with starch contents 10 to 40 wt% were determined safe to be used as food plastics packaging for aqueous, non-acidic and acidic foods, oils and processed dry food containing fat and alcoholic ingredients.

ABSTRAK

Dalam kajian ini, biofilem polietilena berasaskan kanji ubi kayu dengan pelbagai kandungan kanji, daripada 5 hingga 40 wt% telah disediakan dengan tambahan pemplastik dan polietilena-tercangkuk-maleik anhidrida sebagai penserasi melalui proses satu-peringkat. Palet polietilena berketumpatan rendah berasaskan kanji ubi kayu (LDPE/TS) telah dihasilkan dengan menggunakan proses penyemperitan skru berkembar, dan kemudian diteruskan dengan proses penyemperitan tiupan filem untuk menghasilkan sampel biofilem. Dua jenis bahan pemplastik digunakan, iaitu gliserol dan minyak sawit berasaskan olein, telah ditambah untuk menghasilkan formulasi terbaik melalui proses penyemperitan tiupan filem. Minyak sawit berasaskan olein pengaruhi pemprosesan biokomposit dengan mendorong kepada kelikatan yang lebih rendah, serakan dan kebolehan aliran yang lebih baik. Biokomposit dengan tambahan minyak sawit berasaskan olein pada kadar tetap menunjukkan keupayaan yang baik untuk diproses melalui proses penyemperitan tiupan filem berbanding gliserol. Mikrograf imbasan elektron biofilem ini dengan kandungan kanji sebanyak 30 wt% menunjukkan penyebaran butiran kanji yang baik dalam matriks polimer. Tambahan penserasi dalam adunan telah meningkatkan keserasian adunan, dengan itu sifat-sifat mekanik biofilem berasaskan kanji bertambah baik. Ciri-ciri optik, seperti jerebu dan kekilatan biofilem menurun dengan peningkatan kandungan kanji, bertepatan dengan saiz partikel kanji dalam matriks polimer. Sifat rintangan biofilem berasaskan kanji ubi kayu mengandungi kandungan penyerapan air, kandungan kelembapan dan kadar penghantaran wap air yang lebih tinggi berbanding LDPE tulen, disebabkan oleh ciri-ciri hidrofilik kanji. Biofilem yang terdedah kepada luluhawa, kulat, enzim dan ujian tertanam di dalam tanah yang terkawal menunjukkan perubahan yang ketara kepada penurunan berat asal dan struktur permukaan yang disebabkan oleh aktiviti fotodegradasi oleh cahaya matahari dan aktiviti mikroorganisma. Biofilem dengan kandungan kanji sebanyak 10 hingga 40 wt% berat telah didapati selamat untuk digunakan sebagai pembungkusan plastik makanan bagi makanan jenis berair, makanan bukan berasid dan berasid, makanan berminyak dan makanan kering yang diproses yang mengandungi bahan lemak dan alkohol.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	Xiii
	LIST OF FIGURES	Xvi
	LIST OF SYMBOLS	Xxiv
	LIST OF ABBREVIATIONS	xxv
1	INTRODUCTION	1
	1.1 Introduction	1
	1.2 Problem Statement	6
	1.3 Objectives of the Study	9
	1.4 Scopes of the Study	9
	1.5 Significance of the Study	11
2	LITERATURE REVIEW	12
	2.1 Plastics and Environment	12
	2.2 Polymer Used in Packaging	16
	2.3 Development in Biodegradable Packaging Materials	22
	2.3.1 Starch Based Biodegradable Polymers	27
	2.3.2 Starch Based Low Density Polyethylene Biodegradable Polymers	32

2.3.3	Tapioca starch-based Degradable Polymers	33
2.3.4	Effect of Plasticizers and Compatibilizers on Starch-based Degradable Polymers	34
2.4	Processing of Biodegradable Packaging Materials	37
2.5	Properties of Biodegradable Packaging Materials	41
2.6	Modification of Biodegradable Packaging Materials	45
2.7	Others Starch Based Biodegradable Polymers	47
2.8	Degradation of Plastics	49
2.9	Biodegradation of Plastics	51
2.10	Factors Affecting Biodegradation	55
2.11	Mechanism of Biodegradation	58
2.11.1	Microbial Degradation	59
2.11.2	Thermal Degradation	61
2.11.3	Photodegradation	62
2.11.4	Chemical Degradation	64
2.12	Starch	67
2.13	Antimicrobial Food Packaging Biofilm	72
3	METHODOLOGY	76
3.1	Materials	76
3.1.1	Low Density Polyethylene	76
3.1.2	Tapioca Starch	77
3.1.3	Plasticizers	77
3.1.4	Compatibilizer	77
3.2	Preparation of Tapioca Starch-based Polyethylene Biocomposites	79
3.2.1	Pre-gelatinization of Tapioca During Mixing Process	79
3.2.2	Compounding Process of Tapioca Starch- based Polyethylene by Extrusion Process	79
3.2.3	Blown Film Extrusion Process of Tapioca Starch-based Biofilm	80
3.2.4	Formulation Development of Tapioca Starch-	

based Polyethylene Biocomposites	81
3.2.4.1 Effect of Various Content of Tapioca Starch	81
3.2.4.2 Effect of Plasticizers on Tapioca Starch-based Polyethylene Biocomposites	82
3.2.4.3 Effect of PE-g-MA as Compatibilizer to the Tapioca Starch-based Polyethylene Biocomposites	83
3.3 Preparation of Tapioca Starch-based Polyethylene Antimicrobial Film	83
3.4 Melt Flow Index Analysis	84
3.5 Tapioca Starch-based Polyethylene Biofilm Characterization	84
3.5.1 Density Measurement	84
3.5.2 Fourier-transform Infrared Spectroscopy	85
3.6 Morphological Analysis of Tapioca Starch-based Polyethylene Biofilms	85
3.6.1 Optical Microscopy	85
3.6.2 Scanning Electron Microscopy	86
3.7 Optical Properties of Tapioca Starch-based Polyethylene Biofilms	86
3.7.1 Transparency Analysis	86
3.7.2 Gloss and Haze Film Analysis	86
3.8 Barrier Properties of Tapioca Starch-based Polyethylene Biofilms	87
3.8.1 Water Absorption Test	87
3.8.2 Moisture Content Analysis	88
3.8.3 Water Vapour Transmission Rate	88
3.8.4 Food Compatibility Analysis	89
3.9 Thermal Analysis	89
3.9.1 Thermogravimetry Analysis	89
3.9.2 Differential Scanning Calorimetry	90

3.10	Mechanical Testing	90
3.10.1	Tensile Test	90
3.10.2	Tear Strength	90
3.11	Biodegradability Studies	92
3.11.1	Natural Weathering Test	92
3.11.2	Enzyme Test	92
3.11.3	Exposure to Fungi Environment	93
3.11.4	Soil Burial Test	94
3.12	Antimicrobial Analysis of Tapioca Starch-based Polyethylene Biofilms	94
4	FORMULATION DEVELOPMENT OF TAPIOCA STARCH-BASED POLYETHYLENE BIOFILMS	96
4.1	Preparation of Tapioca Starch-based Polyethylene Biocomposites	96
4.1.1	Pre-gelatinization of Tapioca Starch During Mixing Process	96
4.1.2	Gelatinization of Tapioca Starch During Extrusion Process	97
4.1.3	Effect of Plasticizers on Tapioca Starch-based Polyethylene Biocomposite	99
4.1.3.1	Effect of Glycerol as Plasticizers on Tapioca Starch-based Polyethylene Biocomposites	99
4.1.3.2	Effect of Palm Oil Based Olein as Plasticizers on Tapioca Starch-based Polyethylene Biocomposites.	103
4.1.4	Effect of Various Contents of Tapioca Starch in Biocomposites.	109
4.1.5	Effect of Compatibilizer in Tapioca Starch-based Polyethylene Biocomposite	119

5	TAPIOCA STARCH-BASED POLYETHYLENE BIOFILMS	120
5.1	Introduction	120
5.2	Tapioca Starch-based Polyethylene Biofilm Characterization	121
5.2.1	Density Measurement	121
5.2.2	Fourier-transform Infrared Spectroscopy	123
5.2.3	Melt Flow Index Analysis	123
5.3	Scanning Electron Microscopy Analysis of Tapioca Starch-based Polyethylene Biofilms	126
5.4	Biofilms Surface Morphology Analysis	133
5.5	Optical Properties of Tapioca Starch-based Polyethylene Biofilms	136
5.5.1	Transparency and Haze Analysis	136
5.5.2	Gloss Film Analysis	138
5.6	Barrier Properties of Tapioca Starch-based Polyethylene Biofilms	139
5.6.1	Water Absorption Test	139
5.6.2	Moisture Content Analysis	142
5.6.3	Water Vapour Transmission Rate	145
5.6.4	Food Compatibility Analysis	146
5.7	Thermal Properties of Tapioca Starch-based Polyethylene Biofilm	149
5.7.1	Differential Scanning Calorimetry Analysis	149
5.7.2	Thermogravimetry Analysis of Tapioca Starch-based Polyethylene Biofilms	155
5.8	Mechanical Properties	157
5.8.1	Tear Strength	157
5.8.2	Tensile Strength and Elongation at Break	159
5.9	Biodegradation Analysis of Tapioca Starch-based Polyethylene Biofilms	164
5.9.1	Exposure to Enzyme Activities	164
5.9.2	Exposure to Fungi Environment	166

5.9.3 Outdoor Weathering Test	172
5.9.4 Soil Burial Analysis	187
5.10 Antimicrobial Activity of Films against Food Spoilage Microorganisms	199
6 CONCLUSION	201
6.1 Conclusion	201
6.2 Recommendations for Future Study	203
REFERENCES	204

LIST OF TABLES

TABLE NO.	TITLE	PAGE
1.1	Main plastics and their applications (Zheng and Yanful, 2005)	3
2.1	Functions of primary packaging (Hopewell <i>et al.</i> , 2009)	20
2.2	Common synthetic biodegradable plastics (Garthe and Kowal, 1994)	25
2.3	Summarizes of various biodegradable polymers, along with their generic advantages, disadvantages and potential applications (Halley, 2005)	30
2.4	Various Polymer Degradation Routes (Pospisil and Nespurek, 1997)	50
2.5	Size, shape, and amylose content of some starch granules (Zhang <i>et al.</i> , 2005)	69
2.6	Antimicrobials incorporated directly into polymers (Appendini and Hotchkiss, 2002; Suppakul <i>et al.</i> , 2003)	74
3.1	Table 3.1: Representative properties of LDPE (Source: MSDS LDF 260GG, Titan Polyethylene (M) Sdn. Bhd.)	76
3.2	Properties of tapioca starch (Oladunmoye <i>et al.</i> , 2014)	77
3.3	Typical properties of glycerol (Source: MSDS Glycerol, Fisher Scientific)	78
3.4	Typical properties of palm oil based olein (Source: Malaysian Palm Oil Board)	78
3.5	Technical specifications of twin screw extruder	80

3.6	Technical specifications of blown film extrusion machine	81
3.7	Formulations of tapioca starch-based polyethylene biocomposites	82
3.8	Formulations for the effect of glycerol as a plasticizer	82
3.9	Formulations for the effect of palm oil based olein as a plasticizer	83
3.10	Formulations for the effect of PE-g-MA as a compatibilizer	83
3.11	Reference of gloss level measurement	87
4.1	Results of film blowing process and melt index of tapioca starch-based polyethylene	100
4.2	Blow ability of tapioca starch-based polyethylene processed by film blowing technique	103
4.3	Results of film blowing process and melt index of tapioca starch-based polyethylene	106
4.4	Results of film blowing ability and melt index of various contents of tapioca starch in biofilms	110
4.5	Film blowing ability of tapioca starch-based polyethylene	111
5.1	Tapioca starch based polyethylene biofilms formulation	121
5.2	Density values of tapioca starch based polyethylene blends	122
5.3	Major FTIR bands and assignments	123
5.4	Percentage transmittance and haze of tapioca starch based biofilms	137
5.5	Percentage transmittances of all biofilms in different wavelengths	138
5.6	Gloss level of tapioca starch based polyethylene biofilms	139
5.7	WVTR values for LDPE and tapioca starch based biofilms with various contents of starch	145

5.8	The determination of migration in simulants	147
5.9	Classification of foods and selection of simulant	148
5.10	The glass transition temperature (T_g), crystallization temperature (T_c) and melting temperature (T_m) of LDPE and tapioca starch based polyethylene blends	149
5.11	Tensile strength and percent elongation of LDPE and tapioca starch based biofilms with various starch contents	160
5.12	Tensile strength and elongation of starch based polymer with various content of PE-g-MA as compatibilizer	162
5.13	Climatological Information of Johor Bahru	172
5.14	Diameter of the clear zone	199

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	World plastic materials demand by resin types in 2010 (Plastics, 2011)	2
2.1	World Plastics Production 1950 - 2011 (Plastics, 2011)	13
2.2	World Plastics Materials Production 2011 (Plastics, 2011)	14
2.3	Plastics demand by segments 2011 (Plastics, 2011)	17
2.4	Plastics demand by segments and resin types 2011 (Plastics, 2011)	18
2.5	General properties required for food packaging materials (Hawkins, 2013)	18
2.6	Classifications of biodegradable polymers (Bordes <i>et al.</i> , 2009)	23
2.7	The carbon cycle, involving biopolymer degradation (Tharanathan, 2003)	26
2.8	Schematic representations of the phase transitions of starch during thermal processing and aging (Yu and Christie, 2005)	38
2.9	A schematic representation of starch processing by extrusion (Xie <i>et al.</i> , 2012)	39
2.10	Tentative model for the degradation mechanism of LDPE: (a) via oxidation of both main chains and end groups; (b) via oxidation of exclusively main chain ends (Psomiadou <i>et al.</i> , 1997)	44

2.11	Schematic diagram of polymer degradation under aerobic and anaerobic conditions (Gu, 2003)	53
2.12	General mechanisms of plastic biodegradation under aerobic conditions (Shah <i>et al.</i> , 2008)	54
2.13	General mechanism of enzyme-catalyzed polymer degradation (Artham and Doble, 2008)	55
2.14	Parameters that affect the biodegradation of polymers (Artham and Doble, 2008)	56
2.15	Schematic representation of biofilm formation on a polymer surface (Flemming, 1998)	57
2.16	An intermolecular chain transfer in the polymer chain (El-Hadi <i>et al.</i> , 2002)	63
2.17	PLA hydrolysis in alkaline conditions (De Jong <i>et al.</i> , 2001)	66
2.18	PLA hydrolysis in acidic conditions (De Jong <i>et al.</i> , 2001)	66
2.19	Chemical structures and physical schematic representation of (a) amylose starch (b) amylopectin starch (Moad, 2011)	68
2.20	An idealized structure for the starch granule (Gallant <i>et al.</i> , 1997)	71
3.1	Test sample type for propagation tear resistance of plastic film and thin sheeting by pendulum method	91
4.1	LDPE pellets covered with tapioca starch with additional of plasticizers before compounding process via twin crew extrusion	97
4.2	Tapioca starch based polyethylene extrudates	98
4.3	Tapioca starch based polyethylene biocomposite resins	99
4.4	Melt Index of tapioca starch based PE with various content of glycerol	101
4.5	Film blowing of tapioca starch based PE with addition of 5 wt% of glycerol	104

4.6	Film blowing of tapioca starch based PE with addition of 20 wt% of glycerol	105
4.7	Melt Index of tapioca starch based PE with various content of glycerol	106
4.8	Melt Index of tapioca starch based PE with addition of glycerol (GLY) and palm oil based olein (PCO)	111
4.9	Tapioca starch based polyethylene film blowing with addition of 5% wt palm oil based olein	113
4.10	SEM micrographs of tapioca starch based polyethylene biofilms with 5 wt% palm oil based olein, (a) LDPE, and (b) LDPE/TS:90/10	115
4.11	SEM micrographs of tapioca starch based polyethylene biofilms with 5 wt% palm oil based olein, (a) LDPE/TS:80/20, (b) LDPE/TS:70/30, (c) LDPE/TS:60/40	116
4.12	SEM micrographs of tapioca starch based polyethylene biofilms with 20 wt% glycerol, (a) LDPE/TS:90/10, (b) LDPE/TS:80/20	117
4.13	SEM micrographs of tapioca starch based polyethylene biofilms with 20 wt% glycerol, (a) LDPE/TS:70/30, (b) LDPE/TS:60/40	118
5.1	Density values of tapioca starch-based polyethylene with various contents of starch	122
5.2	FTIR spectra for LDPE, tapioca starch and tapioca starch based polyethylene biofilms	124
5.3	Melt index of tapioca starch-based polyethylene with various starch contents	126
5.4	The SEM micrographs of (a) tapioca starch granules and (b) LDPE film	128
5.5	The SEM micrographs of (a) LDPE/TS:90/10 and (b) LDPE/TS:80/20 biofilms	129
5.6	The SEM micrographs of (a) LDPE/TS:70/30 and (b) LDPE/TS:60/40 biofilms	130

5.7	Surface microscopy images of biofilm (a) LDPE and (b) LDPE/TS:90/10	134
5.8	Surface microscopy images of biofilms (a) LDPE/TS:80/20, (b) LDPE/TS:70/30 and (c) LDPE/TS:60/40	135
5.9	Percentage transmittance of tapioca starch-based biofilms with different wavelengths	137
5.10	Illustrative images of tapioca starch based polyethylene biofilms with 30 wt% starch content in the blends (a) blown film extrusion sheet and (b) biofilms as food packaging.	140
5.11	Water absorption of LDPE and all tapioca starch based polyethylene biofilms.	141
5.12	Water absorption of biofilm with 30 wt% starch content with addition of 5, 10, 15 and 20 wt% of PE-g-MA as compatibilizer	142
5.13	Moisture content of LDPE and tapioca starch-based polyethylene biofilms with various starch contents	143
5.14	Moisture content of tapioca starch based polyethylene biofilms with various contents of PE-g-MA as compatibilizers	144
5.15	Migration values for tapioca starch based biofilms with different food simulants	148
5.16	DSC thermograms of LDPE film	150
5.17	DSC thermograms of (a) LDPE/TS:90/10 and (b) LDPE/TS:80/20	151
5.18	DSC thermograms of (a) LDPE/TS:70/30 and (b) LDPE/TS:60/40	152
5.19	DSC thermograms of LDPE and tapioca starch based polyethylene with 30% starch contents in blends with addition of PE-g-MA as compatibilizers (a) 5 wt% and (b) 10 wt%	153
5.20	DSC thermograms of LDPE and tapioca starch based	

	polyethylene with 30% starch contents in blends with addition of PE-g-MA as compatibilizers (a) 15 wt% and (b) 20 wt%	154
5.21	The thermogravimetric (TGA) curves of LDPE, tapioca starch and tapioca starch based polyethylene blends	156
5.22	The DTG curves of LDPE, tapioca starch, and tapioca starch-based polyethylene blends	156
5.23	Tear strength of LDPE and tapioca starch based biofilms with various contents of tapioca starch both in machine direction (MD) and transverse direction (TD).	158
5.24	Tear strength of tapioca starch based biofilms with 30% wt of starch content with addition of various content of PE-g-MA both in machine direction (MD) and transverse direction (TD)	158
5.25	Tensile strength of LDPE and tapioca starch based biofilms	160
5.26	Elongation at break of LDPE and tapioca starch based biofilms	161
5.27	Tensile strength of tapioca starch based polyethylene blends with various content of PE-g-MA as compatibilizer	163
5.28	Elongation of tapioca starch based starch based polyethylene blends with various content of PE-g-MA as compatibilizer	163
5.29	Proposed reaction of MA group from PE-g-MA with starch hydroxyl; hydrogen bonding of PE-g-MA and starch	164
5.30	Effect of varying starch contents on the percentage of degradation	165
5.31	Fungal growth of (a) LDPE film and (b) LDPE/TS:90/10 biofilm	167

5.32	Fungal growth of (a) LDPE/TS:90/10 biofilm and (b) LDPE/TS:90/10 biofilm	168
5.33	Evidence of fungi growth on surface of biofilm under microscopy magnification of 200X (a) LDPE film and (b) tapioca starch based polyethylene biofilm	169
5.34	Percentage of weight loss of tapioca starch biofilm after 28 days of analysis.	171
5.35	(a) and (b) The LDPE film and tapioca starch based biofilms exposed on a stationary rack for outdoor weathering test	173
5.36	Visual observation on (a) LDPE film and (b) LDPE/TS:90/10 biofilm before exposure and after exposure to outdoor weathering for 90 days	175
5.37	Visual observation on (a) LDPE/TS:80/20 film and (b) LDPE/TS:70/30 biofilm before exposure and after exposure to outdoor weathering for 90 days	176
5.38	Visual observation on LDPE/TS:60/40 biofilm before exposure and after exposure to outdoor weathering for 90 days	177
5.39	Weight loss of tapioca starch based biofilm after 90 days exposure to outdoor weathering	178
5.40	Surface microscopy image of LDPE film (a) before and (b) after exposure to outdoor weathering at magnification of 200x.	179
5.41	Surface microscopy image of LDPE/TS:90/10 biofilm (a) before and (b) after exposure to outdoor weathering at magnification of 200x.	180
5.42	Surface microscopy image of LDPE/TS:80/20 biofilm (a) before and (b) after exposure to outdoor weathering at magnification of 200x.	181
5.43	Surface microscopy image of LDPE/TS:70/30 biofilm (a) before and (b) after exposure to outdoor weathering at magnification of 200x.	182

5.44	Surface microscopy image of LDPE/TS:60/40 biofilm (a) before and (b) after exposure to outdoor weathering at magnification of 200x.	183
5.45	The FT-IR spectra of tapioca starch based polyethylene biofilm before and after exposure to outdoor weathering	184
5.46	Tensile strength of tapioca starch-based polyethylene biofilms before and after exposure to natural weathering were recorded after 90 days of exposure	185
5.47	Elongation of tapioca starch-based polyethylene biofilms before and after exposure to natural weathering were recorded after 90 days of exposure	186
5.48	Visual observation of biofilms undergoing the soil burial analysis (a) LDPE, (b) LDPE/TS:90/10 and (c) LDPE/TS:80/20	188
5.49	Visual observation of LDPE/TS:60/40 biofilms undergoing the soil burial analysis	189
5.50	Schematic illustrations of surface erosion and bulk erosion	190
5.51	Weight losses of tapioca starch based biofilm during soil burial analysis with various starch content	191
5.52	Micrographs of LDPE/TS:90/10 biofilm (a) before and (b) after soil burial analysis	193
5.53	Micrographs of LDPE/TS:80/20 biofilm (a) before and (b) after soil burial analysis	194
5.54	Micrographs of LDPE/TS:70/30 biofilm (a) before and (b) after soil burial analysis	195
5.55	Micrographs of LDPE/TS:60/40 biofilm (a) before and (b) after soil burial analysis	196
5.56	Suggested microorganisms and general degradation of biopolymer (Peanasky <i>et al.</i> , 1991)	197
5.57	<i>E.coli</i> activities on LDPE/TS:70/30 biofilms (a) without antimicrobial agent and (b) with	

antimicrobial agent.

200

LIST OF SYMBOLS

μm	-	Micrometer
d	-	Diameter
w	-	Weight fraction
x	-	Average thickness
P_o	-	Partial pressure
α -Amylase	-	Alpha amylase
$^{\circ}\text{C}$	-	Celsius
$^{\circ}\text{F}$	-	Fahrenheit
T_g	-	Glass transition temperature
T_c	-	Crystallization temperature
T_m	-	Melting temperature
M	-	Mass of residue
A	-	Total surface area
g-force	-	Gram force
nm	-	Nanometer
mg	-	Milligram
cm	-	Centimeter
dm	-	Decimeter
H_2O	-	Water
NH_3	-	Ammonia
NaOH	-	Sodium hydroxide
CH_4	-	Methane

LIST OF ABBREVIATIONS

PE	-	Polyethylene
TPS	-	Thermoplastic starch
PHA	-	Polyhydroxylalkanoates
PHB	-	Polyhydroxybutyrate
PHBV	-	Polyhydroxybutyrate-co-hydroxyvalerate
PLA	-	Poly(lactic acid)
PCL	-	Polycaprolactones
PEA	-	Poly(esteramides)
PBSA	-	Aliphatic-co-polyesters
PBAT	-	Aromatic-co-polyesters
PGA	-	Polyglycolic acid
PVOH	-	Poly(vinyl alcohol)
PVAC	-	Poly(vinyl acetate)
PEK	-	Polyethylketone
EAA	-	Poly(ethylene-co-acrylic acid)
PE-g-MA	-	Polyethylene-grafted-Maleic anhydride
SEM	-	Scanning electron micrograph
DSC	-	Differential scanning calorimetry
MB	-	Manganese stearate
STAc	-	Starch acetate
EVA	-	Ethylene vinyl acetate
KBr	-	Potassium bromide
WVTR	-	Water vapour transmission rate
TGA	-	Thermogravimetry analysis
FTIR	-	Fourier transform infrared spectroscopy
MI	-	Melt index

BUR	-	Blown-up ratio
LDPE/TS	-	Tapioca starch-based polyethylene
MD	-	Machine direction
TD	-	Transverse direction
STMP	-	Sodium trimetaphosphate
RH	-	Relative humidity

CHAPTER 1

INTRODUCTION

1.1 Introduction

Plastics are man-made long chain polymeric molecules. Plastics have become an essential part of our everyday life. More than half a century ago, synthetic polymers began to be used as a substitute for natural materials in almost every application (Shah *et al.*, 2008). The plastics industry has developed remarkably since the invention of various methods of production for synthetic polymers from petrochemical sources, which produce plastics that are valuable and desirable due to special characteristics. Plastics have been approved for use in a range of types and forms, including natural polymers, modified natural polymers, thermosetting plastics, thermoplastics, and more recently, biodegradable plastics (Andrady and Neal, 2009). Plastics have a range of unique properties used at a wide range of temperatures, are chemical and light resistant and durable, and can be easily processed and moulded at a lower cost relative to other materials, such as steel, glass, and paper.

Today plastics are almost completely derived from petrochemicals produced from fossil oil and gas, referred to as synthetic plastics. Synthetic plastics are extensively used in packaging food products, pharmaceuticals, cosmetics, detergents, chemicals, and in agricultural mulching film. This projected growth is mainly associated with an increasing public demand for plastics in many applications. Although hundreds of plastic materials are commercially available, only a few of these qualify as commodity thermoplastics in terms of their high volume and

relatively low price. This group of plastics consists of high-density polyethylene (HDPE), low-density polyethylene (LDPE), poly(vinyl chloride) (PVC), polypropylene (PP), polyethylene terephthalate (PET), and polystyrene (PS) (Siracusa *et al.*, 2008). Their partial consumptions on a global basis are displayed in Figure 1.1.

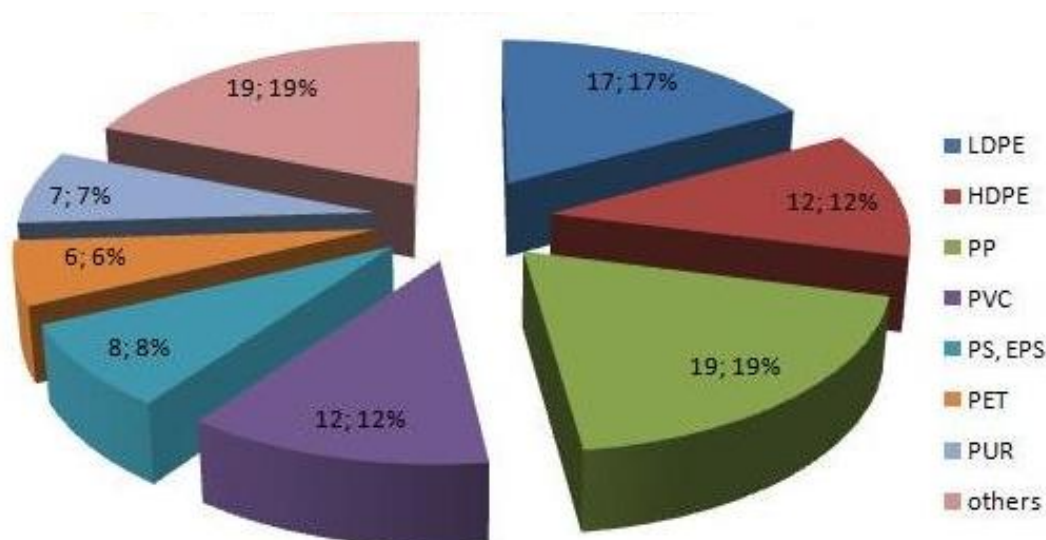


Figure 1.1 World plastic materials demand by resin types in 2010 (Plastics, 2011)

Table 1.1 shows that thermoplastics are extensively used in packaging and fabrication of bottles and films. There are approximately 49.5 million tons of synthetic plastics produced worldwide. Polyethylene represents 29% of the produced synthetic plastics. Half of that quantity, which is 25 million tons, will accumulate in nature and the majority is from the packaging sector. Synthetic plastics that are petrochemical-based, such as polyolefin, polyesters, and polyamides have been increasingly used as packaging materials. These types of plastics were overused in industries due to their availability in large quantities at a low cost and their favourable functionality characteristics, such as excellent tear and tensile strength, good heat-seal ability, and excellent barrier properties against oxygen and aroma compounds (Tharanathan, 2003).

However, these plastics are made of petroleum-based materials that are not easily and readily biodegradable. Synthetic plastics such as polypropylene (PP) and

polyethylene (PE) have a very low water vapour transmission rate rendering these materials completely non-biodegradable. Therefore, these materials contribute to environmental pollution, which causes severe ecological problems. Polyolefins are not degraded by microorganisms in the environment, which prolongs their lifetime to hundreds of years. In order to overcome these problems, there has been an increased enthusiasm among researchers in enhancing the biodegradability of synthetic plastics by blending them with low-cost natural biopolymers.

Table 1.1: Main plastics and their applications (Zheng and Yanful, 2005)

Plastics	Applications
Low density polyethylene (LDPE), linear low density polyethylene (LLDPE) Poly(vinyl chloride) (PVC)	Films, bags and packaging
Polyethylene terephthalate (PET), PVC, high density polyethylene (HDPE)	Bottles, tubes, pipes, insulation moulding
Polystyrene (PS) polypropylene (PP), PVC	Tanks, jugs, containers
Polyurethane (PUR)	Coating, insulation, paints, packing

Most lightweight synthetic plastic is used for a one-time utilization for packaging and is discontinued when its useful life is over, remaining in garbage deposits and landfills for decades (Volke-Sepulveda *et al.*, 1999). These materials are inactive and resistant to the existence of microorganisms, leading to a long duration of shelf life (Arvanitoyannis *et al.*, 1998). Even though there have been a lot of new technologies and methods for recycling and reducing plastics waste, the amount of accumulation of waste still increases every year. Replacing plastics with other packaging materials, such as paper, glass, and metals is a less attractive option due to economic factors and the material's deficiencies as compared to plastic materials. Recycling products also has its limitations, such as the high cost of operation; moreover, recycling technology is still in development. Many packaging materials

are not suitable for recycling because of contamination; the cleaning that is necessary prior to recycling can be very expensive.

Biodegradable plastics are plastics that can permit a degradation process. They are defined as plastics with comparable properties to synthetic plastics, but they can be decomposed after disposal in the environment through the activity of microorganisms (Tharanathan, 2003; Raghavan, 1995). Biodegradable plastics can be particularized as plastics wastes that can be processed using thermoplastic processing methods and machineries and can be decomposed when disposed in landfills through the activity of microbes and fungi to produce CO₂ and H₂O (Tharanathan, 2003), microbial cellular components, and miscellaneous microorganism by-products (Raghavan, 1995). Microorganisms break down the polymer chains, molecules and consume the material through several methods, such as microbial degradation, thermo-degradation, chemical degradation, and photo-degradation. Biodegradable plastics provide an alternative option for reducing municipal solid waste through biological recycling in the ecosystem. They can replace conventional synthetic plastic products (Raghavan, 1995). In addition, it is enticing that these biodegradable polymers originate primarily from agricultural or other renewable resources for a sustainable environment.

Polyethylene (PE) is one of the mass-produced non-degradable polymers. Various types of PE are used in many applications including agricultural and packaging films. Among the polyolefins, low-density polyethylene (LDPE) is more susceptible to the attack of microorganisms in certain conditions (Ohtake *et al.*, 1998). Biodegradable polymers are considerably more expensive than conventional non-biodegradable polymers. New mechanisms for production and processing of synthetic polymers and natural polymers from agriculture will be interesting alternatives to reduce the cost of biodegradable polymers in the market. Blending of low-density polyethylene with a low cost and abundant natural biopolymer such as starch will enhance the biodegradability of this material. Incorporating starch will expedite the attack of microorganisms on starch-based LDPE products. Starch is a good choice because it is an abundant and low cost material in the market, which will reduce the cost of production of a starch-based polyethylene biodegradable polymer.

Research on biodegradable plastics based on starch began in the 1970s and continues today at various laboratories all over the world. Starch satisfies the requirements of adequate thermal stability with minimum interference of melt properties and negligible disturbance of product quality; it has been considered a material candidate in certain thermoplastic applications (Shah *et al.*, 1995; Mani and Bhattacharya, 1998). The excellent physical properties of polyolefin make them suitable as packaging and agricultural film materials. Polyethylene (PE) blended with starch is already a potential candidate to replace non-degradable thermoplastics in the areas of packaging and agricultural mulching films. Starch is a hydrophilic polymer, mainly due to the hydroxyls contained in the molecules; in contrast, polyethylene is a hydrophobic material. The blends of starch and polyethylene are immiscible because of this opposite character of the two polymers.

Blending starch with synthetic polymer, such as polyethylene with the addition of glycerol as a plasticizer will improve its immiscibility and also enhance the biodegradability of the blends. Low molecular weight plastic additives like plasticizers and fillers are ordinarily susceptible to microbial attack. This leads to physical embrittlement and fragmentation of the polymer resulting in a porous and mechanically weakened polymer (Sastry *et al.*, 1998). The microbes release nonspecific oxidative enzymes that could attack starch-based polyethylene polymers. The addition of palm oil based olein can also function as a plasticizer to blend starch and LDPE, and it can reduce the cost of production. Films of starch-based polyethylene with and without vegetable oils as plasticizers were prepared using a blow film extrusion machine. The degradation of the films increased under thermo-oxidative treatment, ultraviolet light exposure, high temperature, high humidity, and natural ambience (soil burial). It can also be seen that vegetable oil as an additive has a dual role: as a plasticizer it improves the biofilm's quality, and as a pro-oxidant it accelerates degradation of the biofilms (Sastry *et al.*, 1998).

Starches are polymers that naturally occur in a variety of botanical sources and are a widely available renewable resource that can be obtained from residuals of harvesting and raw material industrialization. Tapioca starch is a promising starch that can be used in the development of biodegradable polymers. The incorporation of starch, as a naturally biodegradable polymer with synthetic polymers such as

polyethylene, will produce a biodegradable film with excellent mechanical properties that can be easily processed through conventional polymer processing techniques.

The addition of plasticizing agents, mainly glycols, will enhance the compatibility of starch-based polyethylene blend systems and will also typically increase their susceptibility to microbial attack (Mali *et al.*, 2005). Plasticizers also reduce the brittleness of the film by interfering with hydrogen bonding between the lipid and hydrocolloid molecules, and by improving film flexibility due to their ability to weaken internal hydrogen bonding between polymer molecule chains while increasing molecular volume (Tharanathan, 2003; Mali *et al.*, 2005).

1.2 Problem Statement

The use of plastic packaging is widespread and due to this there is a growing interest in the use of biodegradable polymers that can help minimize the environmental impacts of plastics. Lack of degradability of existing synthetic plastic materials and the shortage of landfill sites, as well as growing water and land pollution problems, have led to concerns about plastics (Shah *et al.*, 2008). Synthetic plastics are used in packaging products like food, pharmaceuticals, cosmetics, detergents, chemicals, and agricultural mulching film. Approximately 30% of plastics are used worldwide for packaging applications. Most are short-duration applications where the plastic packaging is used one time before being discarded and disposed to a landfill. Increasing public concern over dwindling landfill space and the accumulation of surface litter has promoted the development of degradable plastics. Biodegradable plastics offer one solution to managing packaging waste.

In the last 20 to 30 years there has been an increased interest in the production and use of fully biodegradable polymers with the main goal being replacement of non-biodegradable plastics commercially, especially those used in packaging materials. However, although these polymers possess the required properties and can be used for the production of blown film, they are not widely used due to their high cost. Commercially available biodegradable polymers are estimated

to be four to six times more expensive than polyethylene and polypropylene, which are the most widely used plastics for packaging applications. Consequently, many researchers have focused on studies of biodegradable polymers based on the utilization of natural and abundant polymers such as starch, cellulose, lignin, and chitin. These materials are very cheap, abundant, and produced from renewable and natural resources (Bikiaris and Panayiotou, 1998). However, due to their deficiency in mechanical and thermal properties, these materials are not suitable for most uses in the plastics industry. Blending natural polymer with synthetic polymer will improve the mechanical properties of this material.

The incorporation of starch in polyethylene blends will increase the biodegradability of the biofilm, and at the same time enhance the mechanical properties of this material making this material suitable for the packaging industry. Many researchers have concentrated on blending corn, wheat, rice, and whey starches with low-density polyethylene to produce biodegradable polymers. Tapioca starch has been seen as potential natural polymer for the development of biodegradable polymers because of its fully biodegradable properties and low cost of production. Tapioca starch has been widely studied by many researchers in edible films and coatings used to protect food products (Flores *et al.*, 2007; Fama *et al.*, 2005).

The addition of starch to polyethylene results in a drastic decrease of its tensile strength and elongation at break (Willet, 1994). For processing starch, it is necessary to destruct starch granules under the gelatinization process, which involves high temperature and extensive shear stress conditions or the addition of plasticizers (Rodriguez-Gonzalez *et al.*, 2004). This process results in a molten-like material called thermoplastic starch (TPS). TPS will behave like typical synthetic polymers that can be processed into various products by conventional polymer machinery processes such as extrusion, injection moulding, film blowing, compression moulding, and others.

To process starch, it is necessary to improve its process ability, which involves destroying the molecular order within the granules. The gelatinization process under shear stress will disrupt the granular structure of starch. The extrusion

process involves high shear and high-pressure conditions achieving gelatinization of the starch. During extrusion, starch granules will become progressively more mobile and eventually the crystalline region of the starch granule will melt. The starch would be expected to show the usual viscoelastic behaviour exhibited by thermoplastic melts (Liu *et al.*, 2009). Plasticizers also usually have a large influence on the shear viscous properties of starch polymer melts. The addition of plasticizers to the blend would not only influence the granular transformation and macromolecular degradation during processing, which affects the viscosity, but also assists the movements between starch inter- and intra-molecular chains, which also reduces the viscosity.

The process of blown film extrusion can be used to produce biodegradable starch biofilm in a mass quantity production. During the extrusion, the disruption of starch granules yields a homogenous and fluid material. This material, when expanded by blowing into a tubular matrix form, produces rigid films. The addition of suitable plasticizers increases the flexibility of the films because its presence among the starch chains reduces their intermolecular interaction by separating them, which increases their mobility (Mali *et al.*, 2005). Many other low molecular weight substances have been utilized as plasticizers for starch polyolefin blends. Palm oil based olein is a vegetable oil-based plasticizer. Adding palm oil based olein weakens the interaction of starch molecules and improves the plasticization of starch.

Palm oil based olein as plasticizer lead to more homogeneous biocomposites, which may lead to better properties than those produced with commercial glycerol. A plasticizer is a small molecule of volatility, that when added to polymeric materials, modifies the three-dimensional organization, decreases attractive intermolecular forces, and increases free volumes and chain mobility (Swain *et al.*, 2004). This plasticizer also contributed to a higher expandability during the blowing process. High melt tenacity would allow palm oil based plasticizer to produce thinner film and also lead to higher production rates of biofilms produced by film blowing process. In this study, tapioca starch-based polyethylene biofilms with various starch content, were prepared with added palm oil based olein plasticizer and compatibilizer by a one-step twin-screw extrusion process. The biocomposites undergo the film blowing process to produce biofilms with the addition of a compatibilizer to enhance

its mechanical properties and were incorporated with antimicrobial agent to establish its smart packaging characteristics.

1.3 Objectives of the Study

The main objective of this study is to develop biodegradable tapioca starch-based polyethylene biofilm with enhancing mechanical properties via the film blowing extrusion process. This objective is divided into multiple aims:

- To develop a tapioca starch-based polyethylene biofilm formulation with addition of glycerol and palm oil based olien as plasticizers and compatibilizer;
- To characterize and analyse the physico-mechanical and thermal properties of tapioca starch-based polyethylene biofilm,
- To analyse the barrier properties, morphology, and optical properties of tapioca starch-based biofilm,
- To investigate the biodegradability of tapioca starch-based biofilm,
- To enhance the properties of biofilm as an antimicrobial packaging material.

1.4 Scope of the Study

The scope of this study includes:

- Formulation development of tapioca starch-based polyethylene biocomposites with various starch contents ranging from 10 to 40 wt% using a one-step process. A gelatinization of tapioca starch under shear stress conditions and a compounding process using twin-screw extrusion process was used to produce biocomposites, followed by production of the biofilms via the film blowing extrusion process. The addition of glycerol and palm oil

based olein was used to study the effect of plasticizers on blends, ranged from 5 to 20 wt%. The effect of compatibilizers to enhance the blends' immiscibility was investigated by the incorporation of polyethylene-grafted-maleic anhydride at various contents, from 5 to 20 wt%.

- The characterization of tapioca starch biofilms was evaluated using Fourier transformed infrared spectroscopy and density measurement. Thermal properties and thermal degradation of biofilms were examined by differential scanning calorimetry and thermogravimetry analysis. The melt flow index of biofilms was determined to show their process ability. Mechanical properties of the biofilms, such as tensile and tearing strength, were investigated using tensile test and the Elmendorf tearing test, respectively.
- Barrier properties of tapioca starch-based polyethylene biofilms, such as the percentage of water absorption, moisture, water vapour, and food compatibility to acidic, alcoholic, and aqueous food types were analysed using water and moisture content analysis, water vapour transmission rate analysis, and food stimulants compatibility analysis, respectively. Morphology of tapioca starch-based polyethylene blends and the optical properties of the biofilms were examined by scanning electron microscopy and an optical microscope; and transparency, gloss, and haze meters respectively.
- The biodegradability of tapioca starch-based polyethylene biofilm was investigated by microbial degradation and photo-degradation. Biofilms were exposed to an enzyme-containing environment to study the effect of α -amylase enzymatic hydrolysis on the starch content in the film. Microbial degradation of biofilms was evaluated by exposure of biofilms to a fungal environment and soil burial analysis. Photo-degradation of tapioca starch-based biofilms was examined by exposure to natural weathering.

- The antimicrobial properties of tapioca starch-based polyethylene for packaging were investigated by the addition of an antimicrobial agent to the blends and antimicrobial analysis.

1.5 Significance of the Study

Plastics are used in our daily lives in a number of applications, from building and constructions, automotive, electrical and electronics, agricultural mulching to the packaging films, bags and containers. Majority of plastics used are discarded after one-short application especially the packaging materials and disposed to the landfills. Most plastic films used in packaging and agricultural mulching are not biodegradable; and in fact extremely durable and inert to the microorganisms. The significance of this study is to develop a formulation of biodegradable film suitable for plastics packaging and agricultural mulching films.

In this study, suitable plasticizer was added eased the process-ability and enhanced the immiscibility of starch and polyethylene. This study also focused on the production of tapioca starch-based biofilms via film blowing processing. A good formulation of tapioca starch-based blending improved the melt strength and bubble stability of the film blowing process. Hence, smooth and continuous biofilms with constant thickness along the bubble formation were produced. The tapioca starch-based polyethylene can be processed and produced using conventional plastic processing machineries.

The physic-mechanical and thermal properties of the tapioca starch-based biofilms were also important to established excellent materials for plastics packaging, as an alternative to the current non-biodegradable plastics. The properties of the biofilms must be acceptable or at comparable as the conventional synthetic polymers. Besides the excellent mechanical properties, the tapioca starch-based films prepared in this study proved to be biodegradable. Furthermore, addition of antimicrobial agent has prepared this biofilms to be a better material for food packaging.

REFERENCES

- Abd el- Rahim, H. A., El-Sayid, A. H., Ali, A. M. and Rabie, A. M. (2004). Synergistic Effect of Combining UV-sunlight-soil Burial Treatment on the Biodegradation Rate of LDPE/starch Blends. *Journal of Photochemistry and Photobiology A: Chemistry*. 163. 547-556.
- Abdul Majid, R., Ismail, H. and Taib, R. M. (2010). Effects of Polyethylene-g-Maleic Anhydride on Properties of Low Density Polyethylene/Thermoplastic Sago Starch Reinforced Kenaf Fibre Composites. *Iranian Polymer Journal*. 19. 501-519.
- Ahmad, I. and Fern, L. P. (2006). Effect of Pe-g-MA Compatibilizer on the Morphology and Mechanical Properties of 70/30 HDPE/ENR blends. *Polymer-Plastics Technology and Engineering*. 45. 735-739.
- Akaranta, O. and Oku, G. E. (1999). Erratum to; Some Properties of Cassava Mesocarp Carbohydrates-Low Density Polyethylene Blends. *Carbohydrate Polymers*. 34. 403-405.
- Alin, J. (2012). *Migration from Plastic Food Packaging During Microwave Heating*. Philosophy Doctor: KTH Chemical Science Engineering, Sweden.
- Al-Salem, S. M., Lettieri, P. and Baeyns, J. (2009). Recycling and Recovery Routes of Plastic Solid Waste (PSW): A Review. *Waste Management*. 29. 2625-2643.
- Altskär, A., Andersson, R., Boldizar, A., Koch, K., Stading, M., Righdal, M. and Thunwall, M. (2008). Some Effects of Processing on the Molecular Structure and Morphology of Thermoplastic Starch. *Carbohydrate Polymers*. 71. 591-597.
- Ammala, A., Bateman, S., Dean, K., Petinakis, E., Sangwan, P., Wong, S., Yuan, Q., Yu, L., Patrick, C. and Leong, K. H. (2011). An Overview of Degradable and Biodegradable Polyolefin. *Progress in Polymer Science*. 36. 1015-1049.
- Andrady, A. L. and Neal, M. A. (2009). Application and Societal Benefits of Plastics. *Philosophical Transactions of the Royal Society B*. 364. 1877-1984.

- Appendini, P and Hotchkiss, J. H. (2002). Review of Antimicrobial Food Packaging. *Innovative Food Science and Emerging Technologies*. 3. 113-126.
- Artham, T. and Doble, M. (2008). Biodegradation of Aliphatic and Aromatic Polycarbonates. *Macromolecular Bioscience*. 8. 14-24.
- Arvanitoyannis, I., Biliaderis, C. G., Ogawa, H. and Kawasaki, N. (1998). Biodegradable Films Made from Low-density Polyethylene (LDPE), Rice Starch and Potato Starch for Food Packaging Application: Part 1. *Carbohydrate Polymer*. 36. 89-104.
- Avella, M., De Vlieger, J. J., Errico, M. E., Fischer, S., Vacca, P. and Volpe, M. G. (2005). Biodegradable Starch/Clay Nanocomposites Films for Food Packaging Applications. *Food Chemistry*. 93. 467-474.
- Averous, L., Fauconnier, N., Moro, L. and Fringant, C. (2000). Blends of Thermoplastic Starch and Polyesteramide: Processing and Properties. *Journal of Applied Polymer Polymer Science*. 76. 1117-1128.
- Bajpai, A. K. and Shrivastava, J. (2007). Studies on α -amylase Induced Degradation of Binary Polymeric Blends of Crosslinked Starch and Pectin. *Journal Material Science*. 18. 765-777.
- Barlaz, M. A., Ham, R. K. Schaefer, D. M. (1989). Mass Balance Analysis of Anaerobically Decomposed Refuse. *Journal of Environmental Engineering*. 115. 1088-1102.
- Barlow, C. Y. and Morgan, D. C. (2013). Polymer Film Packaging for Food: An Environmental Assessment. *Resources, Conservation and Recycling*. 78. 74-80.
- Bever, M. B. (1986). *Encyclopedia of Material Science and Engineering*. (Vol:2). New York: Pergamon Press.
- Bhattacharya, M., Reis, R. L., Corrello, V and Boesel, L. (2005). *Materials Properties of Biodegradable Polymers*. In Smith, R. *Biodegradable Polymers for Industrial Applications*. (pp 67-85). England: Woodhead Publishing Limited.
- Bie, P., Liu, P., Yu, L., Li, X., Chen, L. and Xie, F. (2013). The Properties of Antimicrobial Films Derived from Poly(pactic acid)/starch/chitosan Blended matrix. *Carbohydrate Polymers*. 98. 959-966.
- Bikiaris, D. and Panayiotou, C. (1998). LDPE/starch Blends Compatibilized with PE-g-MA Copolymers. *Journal of Applied Polymer Science*. 70. 1503-1521.

- Bikiaris, D. N. and Karayannidis, G. P. (1999). Effect of Carboxylic End Groups on Thermooxidative Stability of PET and PBT. *Polymer Degradation and Stability*. 63. 213-218.
- Bikiaris, D. N., Papageorgiou, G. Z. and Achilias, D. S. (2006). Synthesis and Comparative Biodegradability Studies of the Poly(alkylene succinate)s. *Polymer Degradation and Stability*. 91. 31-43.
- Bikiaris, D., Prinios, J. and Panayiotou, C. (1997). Effect of EAA and Starch on the Thermooxidative Degradation of LDPE. *Polymer Degradation and Stability*. 56. 1-9.
- Bordes, P., Pollet, E. and Avérous, L. (2009). Nano-biocomposites: Biodegradable Polyester/Nanoclay Systems. *Progress in Polymer Science*. 34. 125-155.
- Brandelero, R. P.H., Gorsmann, M. V. E and Yamashita, F. (2011). Effect of the Method of Production of the Blends on Mechanical and Structural Properties of Biodegradable Starch Films Produced by Blown Extrusion. *Carbohydrate Polymers*. 86. 1344-1350.
- Brandelero, R. P.H., Gorsmann, M. V. E and Yamashita, F. (2012). Films of Starch and Poly(butylene adipate co-terephthalate) Added of Soybean Oil (SO) and Tween 80. *Carbohydrate Polymers*. 90. 1452-1460.
- Briassoulis, D. (2005). The Effects of Tensile Stress and the Agrochemical Vapam on the Ageing of Low Density Polyethylene (LDPE) Agrucultural Films. Part I. Mechanical Behaviour. *Polymer Degradation and Stability*. 88. 489-503.
- Burros, B. C., Young, L. A. and Carroad, P. A. (1987). Kinetics of Corn Meal Gelatinization at High Temperature and Low Moisture. *Journal of Food Science*. 52. 1372-1376.
- Carvalho, A. J. F. (2008). *Starch: Major Source, Properties and Applications as Thermoplastic Materials*. In. Belgacem, M. N. and Gandini, A. (Eds). *Monomers, Polymers and Composites from Renewable Resources*. (pp 321-342). The Netherlands: Elsevier.
- Carvalho, A. J. F., Zambon, M. D., Curvelo, A. A. S. and Gandini, A. (2003). Size Exclusion Chromatography Characterization of Thermoplastic Starch Composites. *Polymer Degradation and Stability*. 79. 133-138.
- Cerclé, C., Sarazin, P. and Daviz, B. C. (2013). High Performance Polyethylene/Thermoplastic Starch Blends Through Controlled Emulsification Phenomena. *Carbohydrate Polymers*. 92. 138-148.

- Chandra, R. and Rutsgi, R. (1997). Biodegradation of Maleated Linear Low Density Polyethylene and Starch Blends. *Polymer Degradation and Stabilization*. 56. 185-202.
- Chandra, R. and Rutsgi, R. (1998). Biodegradable Polymers. *Progress Polymer Science*. 23. 1273-1335.
- Charlesby, A. (1987). *Radiation Chemistry of Polymers*. In Farhataziz and Rodgers, M. A. J. *Irradiation of Polymers*. (pp 451-474). USA: VCH Publishers, Inc.
- Contat-Rodrigo, L. and Greus, A. R. (2002). Biodegradation Studies of LDPE Filled with Biodegradable Additives: Morphological Changes. I. *Journal of Applied Polymer Science*. 83. 1683-1691.
- Davis, G. (2003). Characterization and Characteristics of Degradable Polymer Sacks. *Materials Characterization*. 51. 147-157.
- Danjaji, I. D, Nawang, R, Ishiaku U. S, Ismail, H and Mohd Ishak Z, A. (2002). Degradation Studies and Moisture Uptake of Sago-Starch Filled Linear Low-Density Polyethylene Composites. *Polymer Test*. 21. 75-81.
- De Jong, S. J., Arias, E. R., Rijkers, D. T. S., Van Nostrum, C. F., Kettenes-van den Bosch, J. J. and Hennink, W. E. (2001). New Insights into the Hydrolytic Degradation of Poly(lactic acid): Participation of the Alcohol Terminus. *Polymer*. 42. 2795-2802.
- Drummond, K. M., Hopewell, J. L. and Shanks, R. A. (2000). Crystallization of Low-Density Polyethylene and Linear Low-Density Polyethylene-Rich Blends. *Journal Applied Polymer Science*. 78. 1009-1016.
- El-Hadi, A., Schanabel, R., Straube, E., Müller, G. and Henning, S. (2002). Correlation Between Degree of Crystallinity, Morphology, Glass Temperature, Mechanical Properties and Biodegradation of Poly (3-hydroxylalkanoate) PHAs and Their Blends. *Polymer Testing*. 21. 665-674.
- Erlandsson, B., Karlsson, S. and Albertsson, A. C. (1997). The Mode of Action of Corn Starch and a Prooxidant System in LDPE: Influence of Thermooxidation and UV Irradiation on the Molecular Weight Changes. *Polymer Degradation and Stabilization*. 55. 237-245.
- Fama, L., Rojas, A. M., Goyanes, S. and Gerschenson, L. (2005). Mechanical Properties of Tapioca-starch Edible Films Containing Sorbate. *LWT. Food Sciences and Technology*. 38. 631-630.

- Ferreira, W. H., Khalili, R. R., Mario, J. M., Junior, F. and Andrade, C. T. (2014). Effect of Organoclay on Blends of Individually Plasticized Thermoplastic Starch and Polypropylene. *Industrial Crops and Products*. 52. 38-45.
- Flemming, H. C. (1998). Relevance of Biofilms for the Biodeterioration of Surfaces of Polymeric Materials. *Polymer Degradation and Stability*. 59. 309-315.
- Flores, S., Fama, L., Rofas, A. M., Goyanes, S. and Gerschenson, L. (2007). Physical Properties of Tapioca-starch Edible Film: Influence of Filmmaking and Potassium Sorbate. *Food Research International*. 40. 257-265.
- Freile-Peigrín, Y., Madera-Santana, T., Robledo, D., Veleza, L., Quitanna, P. and Azamar, J. A. (2007). Degradation of Agar Films in a Humid Tropical Climate: Thermal, Mechanical, Morphological and Structural Changes. *Polymer Degradation and Stability*. 92. 244-252.
- Gallant, D. J., Bouchet, B. and Baldwin, P. M. (1997). Microscopy of Starch: Evidence of a New Level of Granule Organization. *Carbohydrate Polymers*. 32. 177-191.
- Garg, S. and Jana A. K. (2007). Studies on the Properties and Characteristics of Starch-LDPE Blend Films using Cross-linked, Glycerol Modified, Cross-linked and Glycerol Modified Starch. *European Polymer Journal*. 43. 3976-3987.
- Garthe, J. W. and Kowal, P. D. (1994). The Chemical Composition of Degradable Plastics. *Agricultural and Biological Engineering*. 6. 17-20.
- Gilmore, D. F., Antoun, S., Lenz, R. W. and Fuller, R. C. (1993). Degradation of Polyhydroxylalkanoates and Polyolefin Blends in a Municipal Wastewater Treatment Facility. *Journal of Environmental Polymer Degradation*. 4. 269-274.
- Goheen, S. M. and Wool, R. P. (1991). Degradation of Polyethylene-Starch Blends in Soil. *Journal of Applied Polymer Science*. 42. 2691-2701.
- Göpferich, A. (1996). Mechanisms of Polymer Degradation and Erosion. *Biomaterials*. 17. 103-114.
- Griffin, G. J. L. (1976). Degradation of Polyethylene in Compost Burial. *Journal Polymer Science: Polymer Symposium*. 57. 281-286.
- Griffin, G. J. L. (1980). Synthetic Polymers and the Living Environment. *Pure and Applied Chemistry*. 52. 399-407.
- Gu, J. D. (2003). Microbiological Deterioration and Degradation of Synthetic Polymeric Materials: Recent Research Advances. *International Biodeterioration and Biodegradation*. 52. 69-91.

- Gudmundsson, M. (1994). Retrogradation of Starch and the Role of its Components. *Thermomechanica Acta*. 246. 329-341.
- Guimarães, J. L., Wypych, F., Saul, C. K., Ramos, L. P. and Satyanarayana, K. G. (2010). Studies of the Processing and Characterization of Corn Starch and its Composites with Banana and Sugarcane Fibers from Brazil. *Carbohydrate Polymers*. 80. 130-138.
- Halley, P. J. (2005). *Thermoplastic Starch Biodegradable Polymers*. In Smith, R. *Biodegradable Polymers for Industrial Applications*. (pp 34-68). England: Woodhead Publishing Limited.
- Halley, P., Rutgers, R., Coombs, S., Kettles, J., Gralton, J., Christie, G., Jenkins, M., Beh, H., Griffin, K., Jayasekara, R. and Lonergan, G. (2001). Developing Biodegradable Mulch Films from Starch-Based Polymers. *Starch*. 53. 362-367.
- Hamilton, J. D., Reinert, K. H., Hagan, J. V. and Lord, W. V. (1995). Polymers as Solid Waste in Municipal Landfills. *Journal of Air and Waste Management Association*. 45. 247-251.
- Han, J. H. (2000). Antimicrobial Food Packaging. *Food Technology*. 54. 56-65.
- Hawkins, G. (2013). The Performativity of Food Packaging: Market Devices, Water Crisis and Recycling. *The Sociological Review*. 69. 66-83.
- Hooi, Y. G. (2005). *Mechanical, Water Absorption and Weathering Properties of Polylactic Acid/Rice Starch Composites*. Masters Thesis. Universiti Sains Malaysia.
- Hopewell, J., Dvorak, R. and Kosior, E. (2009). Plastics Recycling: Challenges and Opportunities. *Philosophical Transactions of the Royal Society B*. 364. 2115-2126.
- Huang, C. Y., Roan, M. L., Kou, M. C. and Lu, W. L. (2005). Effect of Compatibiliser on the Biodegradation and Mechanical Properties of High Content Starch/Low Density Polyethylene Blends. *Polymer Degradation and Stability*. 90. 95-105.
- Imam, S. H., Gordon, S. H., Mohamed, A., Harry-O'kuru, R., Chiou, B. S., Glenn, G. M. and Orts, W. J. (2006). Enzyme Catalysis of Insoluble Cornstarch Granules: Impact on Surface Morphology, Properties and Biodegradability. *Polymer Degradation and Stability*. 91. 2894-2900.

- Indian Standard. (1998). *IS 9845:1998*. Determination of Overall Migration of Constituents of Plastics Materials and Articles Intended to Come In Contact with Foodstuffs – Method of Analysis. *Bureau of Indian Standard*.
- Iovino, R., Zullo, R., Rao, M. A., Cassar, L. and Gianfreda. (2008). Biodegradation of a Poly(lactic acid)/starch/coir Biocomposites Under Controlled Composting Conditions. *Polymer Degradation and Stability*. 93. 147-157.
- Ishiaku, U. S., Pang, K. W., Lee, W. S. and Mohd Ishak, Z. A. (2002). Mechanical Properties and Enzymatic Degradation of Thermoplastic and Granular Sago Starch Filled Poly(ϵ -caprolactone). *European Polymer Journal*. 38.393-401.
- Jayasekara, R., Harding, I., Bowater, I. and Lonergan, G. (2005). Biodegradability of a Selected Range of Polymers and Polymer Blends and Standard Methods for Assessment of Biodegradation. *Journal of Polymers and the Environment*. 13. 231-251.
- Kaewtatip, K. and Tarantanakul, V. (2012). Structure and Properties of Pregelatinized Cassava Starch/Kaolin Composites. *Materials and Design*. 37. 423-428.
- Kalambur, S. and Rizvi, S. S. H., (2006). An Overview of Starch-based Plastic Blends from Reactive Extrusion. *Journal of Plastic Film and Sheeting*. 22. 39-58.
- Kale, G., Kijchavengkul, T., Auras, R., Rubino, M., Selke, S. E. and Singh, S. P. (2007). Compostability of Bioplastic Packaging Materials: An Overview. *Macromolecular Journals*. 7. 255-277.
- Kampeerapappun, P., Aht-ong, D., Pentrakoon, D. and Srikulkit, K. (2007). "Preparation of Cassava Starch/montmorillonite Composite Film." *Carbohydrate Polymers*. 67. 155-163.
- Kasirajan, S. And Ngouajio, M. (2012). Polyethylene and Biodegradable Mulches for Agricultural Applications: A Review. *Agronomy for Sustainable Development*. 32. 501-529.
- Kechichian, V., Ditchfield, C., Santos, P. V. and Tadini, C. C. (2010). Natural Antimicrobial Ingredients Incorporated in Biodegradable Films based on Cassava Starch. *LWT-Food Science and Technolog*. 43. 1088-1094.
- Khabbaz, F., Albertsson, A. C. and Karlsson, S. (1998). Trapping of Volatile Low Molecular Weight Photoproducts in Inert and Enhanced Degradable LDPE. *Polymer Degradation and Stability*. 61. 329-342.

- Kim, D., Ki, N. S. and Park, J. (2002). Preparation and Characterization of Modified Starch based Plastic Film Reinforced with Short Pulp Fiber II. Mechanical Properties. *Journal of Applied Polymer Science*. 88. 2108-2117.
- Kim, J., Kim, J. H., Shin, T. K., Choi, H. J. and Jhon, M. S. (2001). Miscibility and Rheological Characteristics of Biodegradable Aliphatic Polyester and Linear Low Density Polyethylene Blends. *European Polymer Journal*. 37. 2131-2139.
- Kim, M. (2003). Evaluation of Degradability of Hydroxypropylated Potato Starch/Polyethylene Film Blends. *Carbohydrate Polymer*. 54. 173-181.
- Kim, M. and Lee, S. J. (2002). Characteristics of Crosslinked Potato Starch and Starch Filled Linear Low Density Polyethylene Films. *Carbohydrate Polymers*. 50. 331-337.
- Koitaishi, M., Noguchi, M. T., Yamashita, Y. S., Hiradate, S., Suzuki, K., Yoshida, S., Watanabe, T., Shinozaki, Y., Tsushima, S. and Kitamoto, H. K. (2012). Degradation of Biodegradable Plastic Mulch Films in Soil Environment by Phylloplane Fungi Isolated from Gramineous Plants. *AMB Express*. 2. 1-10.
- Kyrikou, I. and Briassoulis, D. (2007). Biodegradation of Agricultural Plastic Films: A Critical Review. *Journal of Polymers and the Environment*. 15. 125-150.
- Lawton, J. W. (1996). Effect of Starch Type on the Properties of Starch Containing Films. *Carbohydrate Polymers*. 29. 203-208.
- Lee, S. Y., Eskridge, K. M., Koh, W. Y. and Hanna, M. A. (2009). Evaluation of Ingredients Effects on Extruded Starch-Based Foams Using a Supersaturated Split-Plot Design. *Industrial Crops and Products*. 29. 427-436.
- Lelievre, J. (1974). Starch Gelatinization. *Journal of Applied Polymer Science*. 18. 293-296.
- Li, C., Kucera, J. M., Lee, J., Corbin, A., Brodhagen, M., Miles, C. and Inglis, D. (2014). Effects of Biodegradable Mulch in Soil Quality. *Applied Soil Ecology*. 79. 59-69.
- Li, J. Y. and Yeh, A. I. (2001). Relationship between Thermal, Rheological Characteristics and Swelling Power for Various Starches. *Journal of Food Engineering*. 50.141-148.
- Li, M., Lee, J. K. and Cho, U. R. (2012). Synthesis, Characterization and Enzymatic Degradation of Starch-Grafted Poly(methyl methacrylate) Copolymer Films. *Journal of Applied Polymer Science*. 125. 405-414.

- Lim M. H., Wu, H. and Reid, D. S. (2000). The Effect of starch Gelatinization and Solute Concentrations on T_g of Starch Model System. *Journal Science Food Agriculture*. 80. 1757-1762.
- Liu, H., Xie, F., Yu, L., Chen, L. and Li, L. (2009). Thermal Processing of Starch-based Polymers. *Progress in Polymer Science*. 34. 1348-1368.
- Liu, W., Wang, Y. J. and Sun, Z. (2003). Effects of Polyethylene-grafted-Maleic Anhydride (PE-g-MA) on Thermal Properties, Morphology and Tensile Properties of Low Density Polyethylene (LDPE) and Corn Starch Blends. *Journal of Applied Polymer Science*. 88. 2904-2911.
- Liu, X., Yu, L., Liu, H., Chen, L. and Li, L. (2008). In Situ Thermal Decomposition of Starch with Constant Moisture in a Sealed System. *Polymer Degradation and Stability*. 93. 260-262.
- Lopez, O. V., Zaritzky, N. E., Grossmann, M. V. E. and García, M. A. (2013). Acetylated and Native Corn Starch Blend Films Produced By Blown Extrusion. *Journal of Food and Engineering*. 116. 286-297.
- Lucas, N., Bienaime, C., Belloy, C., Queneudec, M., Silvestre, F. and Nava-Saucedo, J. E. (2008). Polymer Biodegradation: Mechanisms and Estimation Technique. *Chemosphere*. 73. 429-442.
- Luijsterburg, B. and Goossens, H. (2014). Assessment of Plastics Packaging Waste: Material Origin, Methods, Properties. *Resources, Conservation and Recycling*. 85. 88-97.
- Luo, F., Ning, N., Chen, L., Su, R., Cao, J., Zhang, Q. and Fu, Q. (2009). Effects of Compatibilizers on the Mechanical Properties of Low Density Polyethylene/Lignin Blends. *Chinese Journal of Polymer Science*. 27. 833-842.
- Ma, X. and Yu, J. (2004). The Plasticizers Containing Amide Groups for Thermoplastic Starch. *Carbohydrate Polymers*. 57. 197-203.
- Mahalik, N. P. and Nambiar, A. N. (2010). Trends in Food Packaging and Manufacturing Systems and Technology. *Trends in Food Science & Technology*. 21. 117-128.
- Mahara, T. and Singh, B. C. (2006). Synthesis and Characterization of Biodegradable Polyethylene by Graft Copolymerization of Starch Using Glucose-Ce(IV) Redox System. *Journal of Applied Polymer Science*. 100. 3229-3239.
- Malešič, J., Kolar, J., Strlič, M. and Kočar, D. (2005). Photo-induced Degradation of Cellulose. *Polymer Degradation and Stability*. 89. 64-69.

- Mali, S., L. S., Sakanaka, F., Yamashita and Grossman, M. V. E. (2005). Water Sorption and Mechanical Properties of Cassava Starch Films and Their Relation to Plasticizing Effect. *Carbohydrate Polymer*. 60(3): 283-289.
- Mani, R. and Bhattacharya, M. (1998). Properties Injection Moulded Starch/Synthetic Polymer Blends-III. Effect of Amylopectin to Amylase Ratio in Starch. *European Polymer Journal*. 34. 1467-1475.
- Manzur, A., Limon-Gonzalez, M. and Favela-Torres, E. (2004). Biodegradation of Physicochemically Treated LDPE by a Consortium of Filamentous Fungi. *Journal of Applied Polymer Science*. 92. 265-271.
- Marsh, K. and Bugusu, B. (2007). Food Packaging-Roles, Materials and Environmental Issues. *Journal of Food Science*. 72. 39-55.
- Matsumura, S. (2005). *Mechanism of Biodegradation*. In Smith, R. (Ed). *Biodegradable Polymers for Industrial Applications*. (pp 112-145). London: Woodhead Publishing Limited.
- Matzinos, P., Bikiaris, D., Kokkou, S. and Panayiotou, C. (2001). Processing and Characterization of LDPE/Starch Products. *Journal of Applied Polymer Science*. 79. 2548-2557.
- Matzinos, P., Tserki, V., Gianikouris, C., Pavlidou, E. and Panayiotou, C. (2002). Processing and Characterization of LDPE/starch/PCL blends. *European Polymer Journal*. 38. 1713-1720.
- Moad, G. (2011). Chemical Modification of Starch by Reactive Extrusion. *Progress in Polymer Science*. 36. 218-237.
- Moore, G. F. and Saunders, S. M. (1997). Advance in Biodegradable Polymers. *Rapra Review Reports*. 9. 1-31.
- Müller, R. J., Kleeberg, I. and Deckwer, W. D. (2001). Biodegradation of Polyesters Containing Aromatic Constituents. *Journal of Biotechnology*. 86. 87-95.
- Müller, R. J., Witt, U., Rantze, E. and Deckwer, W. D. (1998). Architecture of Biodegradable Copolyesters Containing Aromatic Constituents. *Polymer Degradation and Stability*. 59. 203-208.
- Münstedt, H., Steffl, T and Malmberg, A. (2005). Correlation between Rheological Behaviour in Uniaxial Elongation and Film Blowing Properties of Various Polyethylene. *Rheological Acta*. 45. 14-22.

- Myllärinen, P., Partanen, R., Seppälä, J. and Forssell, P. (2002). Effect of Glycerol on Behaviour of Amylose and Amylopectin Films. *Carbohydrate Polymers*. 50. 355-361.
- Nabeshima, E. H. and Grossmann, M. V. E. (2001). Functional Properties of Pregelatinized and Cross-linked Cassava Starch Obtained by Extrusion with Sodium Trimetaphosphate. *Carbohydrate Polymer*. 45. 347-353.
- Nakamura, E. M., Cordi, L., Almeida, G. S. G., Duran, N. and Mei, L. H. I. (2005). Study and Development of LDPE/starch Partially Biodegradable Compounds. *Journal of Materials Processing Technology*. 162-163. 236-241.
- Ohtake, Y., Kobayashi, T., Asabe, H. and Murakami, N. and Nono, K. (1998). Oxidative Degradation and Molecular Weight Change of LDPE Buried under Bioactive Soil for 32-37 Years. *Journal of Applied Polymer Science*. 70. 1643-1659.
- Oladunmoye, O. O., Aworh, O. C., Maziya-Dixon, B., Erukaimure, O. L. and Elemo, G. N. (2014). Chemical and Functional Properties of Cassava Starch, Durum Wheat and Their Blends. *Food Science and Nutrition*. 2. 132-138.
- Olayan, H. B., Hamid, H. S. and Owen, E. D. (1996). Photochemical and Thermal Crosslinking of Polymers. *Journal of Macromolecular Science, Part C: Polymer Reviews*. 36. 671-719.
- Onteniente, J. P., Etiniente, F., Bureau, G. and Prudhomme, J. C. (1996). Fully Biodegradable Lubricated Thermoplastic Starches: Water desorption on Extruded Samples. *Starch*. 48. 10-16.
- Otey, F. H., Westhoff R. P. and Russell, C. R. (1976). Starch Graft Copolymers-Degradable Fillers for Poly(vinyl chloride) Plastics. *Industrial & Engineering Chemistry Product Research and Development*. 15. 139-142.
- Otey, F. H., Westhoff, R. P. and Russell, C. R. (1977). Biodegradable Films from Starch and Ethylene-Acrylic Acid Copolymer. *Industrial & Engineering Chemistry Product Research and Development*. 16. 305-308.
- Otey, F. H., Westhoff, R. P. and Doane, W. M. (1980). Starch-Based Blown Films. *Industrial & Engineering Chemistry Product Research and Development*. 19. 592-595.
- Pal, J., Ghosh, A. K. and Sing, H. (2008). Environmentally Degradable LLDPE/esterified Styrene-maleic Anhydride (ESMA) Blends. *European Polymer Journal*. 44. 1261-1274.

- Park, H., Lee, S., Chowdhury, S. R., Kang, T., Kim, H., Park, S. and Ha, C. (2002). Tensile Properties, Morphology and Biodegradability of Blends of Starch with various Thermoplastics. *Journal of Applied Polymer Science*. 86. 2907-2915.
- Peanasky, J. S., Long, J. M. and Wool, R. P. (1991). Percolation Effects in Degradable Polyethylene-Starch Blends. *Journal of Polymer Science Part B: Polymer Physics*. 29. 565-579.
- Pedrosa, A. G. and Rosa, D. S. (2005). Mechanical, Thermal and Morphological Characterization of Recycled LDPE/corn Starch Blends. *Carbohydrate Polymer*. 59. 1-9.
- Pedroso, A. G. and Rosa, D. S. (2005). Effect of the compatibilizer Pe-g-GMA on the mechanical, thermal and morphological properties of virgin and reprocessed LDPE/corn starch blends. *Polymers for Advanced Technologies*. 16. 310-317.
- Pěrez, S. and Berttoft, E. (2010). The Molecular Structures of Starch Components and Their Contribution to the Architecture of Starch Granules: A Comprehensive Review. *Starch*. 62. 389-420.
- Phua, Y. J., Lau, N. S., Sudesh, K., Chow, W. S and Mohd Ishak, A. A. (2012). Biodegradability Studies of Poly(butylene succinate)/organo-montmorillonite Nanocomposites Under Controlled Compost Soil Conditions: Effect of Clay Loading and Compatibilizer. *Polymer Degradation and Stability*. 97. 1345-1354.
- Polymer (2011). *Plastics-the Facts 2012: An Analysis of European Plastics Production, Demand and Waste Data for 2011*. Europe: Association of Plastics Manufacturers.
- Pongsawatmanit, R., Temsiripong, T. and Suwonsichaon, T. (2007). Thermal and Rheological Properties of Tapioca Starch and Xyloglucan Mixtures in the Presence of Sucrose. *Food Research International*. 40. 239-248.
- Pospisil, J. and Nespurek, S. (1997). Highlight in Chemistry and Physics of Polymer Stabilization. *Macromolecular Symposia*. 115. 143-163.
- Psomiadou, E., Arvanitoyannis, I., Biliaderis, C. G., Ogawa, H. and Kawasaki, N. (1997). Biodegradable Films Made from Low Density Polyethylene (LDPE), Wheat Starch and Soluble Starch for Food Packaging Applications. Part 2. *Carbohydrate Polymers*. 33. 227-242.
- Pushpadass, H. A., Bhandari, P. and Hanna, M. A. (2010). Effects of LDPE and Glycerol Contents and Compounding on the Microstructure and Properties of Starch Composite Film. *Carbohydrate Polymers*. 82. 1082-1089.

- Raghavan, D. (1995). Characterization of Biodegradable Plastics. *Polymer-Plastic Technology Engineering*. 34. 41-63.
- Rahman, W. A. W. A., Sin, L. T., Rahmat, A. R. and Samad, A. A. (2010). Thermal Behaviour and Interactions of Cassava Starch Filled with Glycerol Plasticized Polyvinyl Alcohol Blends. *Carbohydrate Polymers*. 81. 805-810.
- Rahmouni, M., Chouinard, F., Nekka, F., Lenaerts, V. and Leroux, J. C. (2001). "Enzymatic Degradation of Cross-linked High Amylose Starch Tablets and Its Effect on in Vitro Release of Sodium Diclofenac." *European Journal of Pharmaceutics and Biopharmaceutics*. 51. 191-198.
- Raj, B., Sankar, U. and Siddaramaiah. (2004). Low Density Polyethylene/Starch Blend Films for Food Packaging Applications. *Advances in Polymer Technology*. 23. 32-45.
- Rhim, J. W., Park, H. M. and Ha, C. S. (2013). Bio-nanocomposites for Food Packaging Applications. *Progress in Polymer Science*. 38. 1629-1652.
- Rivero, I. E., Balsamo, V. and Müller, A. J. (2009). Microwave-assisted Modification of Starch for Compatibilizing LLDPE/Starch Blends. *Carbohydrate Polymers*. 75. 343-350.
- Rodriguez-Gonzalez, F., Ramsy, B. and Favis, B. (2004). Rheological and Thermal Properties of thermoplastic Starch with High Glycerol Content. *Carbohydrate Polymers*. 58. 139-147.
- Rosa, D. S., Guedes, C. G. F. and Casarin, F. (2005). Mechanical Behavior and Biodegradation of Poly(ϵ -caprolactone)/starch Blends With and Without Expansor. *Polymer Bulletin*. 54. 321-333.
- Rosa, D. S., Guedes, C. G. F. and Cavalho, C. L. (2007). Processing and Thermal, Mechanical and Morphological Characterization of Post-consumer Polyolefins/thermoplastics Starch Blends. *Journal Material Science*. 42. 551-557.
- Rosa, D. S., Lotto, N. T., Lopes, D. R. and Guedes, C. G. S. (2004). The Use of Roughness for Evaluating the Biodegradation of Poly- β -(hydroxybutyrate) and poly- β -(hydroxybutyrate-co- β -valerate). *Polymer Testing*. 23. 3-8.
- Saias, Donatas ed., (1986). *Plastic Finishing and Deration*. New York: Van Nostrand Reinhold Company. 34-42.
- Sailaja, R. N. N. and Chandra, M. (2000). Use of Maleic Anhydride-grafted Polyethylene as Compatibilizer for Polyethylene-Starch Blends: Effect on Mechanical Properties. *Journal of Polymer Materials*. 17. 165-176.

- Sailaja, R. N. N., Reddy, A. P., Chandra, M. (2001). Effect of Epoxy Functionalized Compatibilizer on the Mechanical Properties of Low-Density Polyethylene/plasticized Tapioca Starch Blends. *Polymer International*. 50. 1352-1359.
- Sailaja, R. R. N. and Seetharamu, S. (2008). Itaconic Acid-grafted-LDPE as Compatibilizer for LDPE-Plasticized Tapioca Starch Blends. *Reactive and Functional Polymers*. 68. 831-841.
- Sastry, P. K., Satyanarayana, D., Rao, D. V. M. (1998). Accelerated and Environmental Weathering Studies on Polyethylene-Starch Blend Films. *Journal of Applied Polymer Science*. 70. 2251-2257.
- Schlemmer, D., Sales, M. J. A. and Resck, I. S. (2009). Degradation of Different Polystyrene/thermoplastic Starch Blends Buried in Soil. *Carbohydrate Polymers*. 75. 58-62.
- Shah, A. A., Hasan, F., Hameed, A. and Ahmed, S. (2008). Biological Degradation of Plastics: A Comprehensive Review. *Biotechnology Advances*. 26. 246-265.
- Shah, P. B., Bandopadhyay, S. & Bellare, J. R. (1995). Environmentally Degradable Starch Filled Low Density Polyethylene. *Polymer Degradation Stabilization*. 47. 165-173.
- Siracusa, V., Rocculi, P., Romani, S. and Rosa, M. D. (2008). Biodegradable Polymers for Food Packaging: A Review. *Trends in Food Science & Technology*. 19. 634-643.
- Sorrentino, A., Gorrasi, G. and Vittoria, V. (2007). Potentially Perspectives of Bio-nanocomposites for Food Packaging Applications. *Trends in Food Science & Technology*. 18. 84-95.
- Spathis, G and Niaounakis, M. (1996). Effect of Starch Type on the Properties of Starch Containing Films. *Carbohydrate Polymers*. 29. 203-208.
- Sung, S. Y., Sin, L. T., Tee, T. T., Bee, S. T., Rahmat, A. R., Rahman, W. A. W. A., Tan, A. C. and Vikhrman, M. (2013). Antimicrobial Agents for Food Packaging Applications. *Trends in Food Science & Technology*. 33. 110-123.
- Suppakul, P., Miltz, J., Sonneveld, K. and Bigger, S. W. (2003). Active Packaging Technologies with an Emphasis on Antimicrobial Packaging and its Applications. *Journal of Food Science*. 68. 408-420.

- Suppakul, P., Miltz, J., Sonneveld, K. and Bigger, S. W. (2006). Characterization of Antimicrobial Films Containing Basil Extracts. *Packaging Technology and Science*. 19. 259-268.
- Suppakul, P., Sonneveld, K., Bigger, S. W. and Miltz, J. (2011). Diffusion of linalool and methylchavicol from Polyethylene-based Antimicrobial Packaging Films. *LWT-Food Science and Technology*. 44. 1888-1893.
- Swain, S. N., Biswal, S. M., Nanda, P. K. and Nayak, P. L. (2004). Biodegradable Soy-Based Plastic: Opportunities and Challenges. *Journal of Polymer and the Environment*. 12. 35-41.
- Thakore, I. M., Desai, S., Sarawade, B. C. and Devi, S. (2001). Studies on Biodegradability, Morphology and Thermo-mechanical Properties of LDPE/modified Starch Blends. *European Polymer Journal*. 37. 151-160.
- Thakore, I. M., Iyer, S., Desai, A. and Lee, A. (1999). Morphology, Thermochemical Properties and Biodegradability of Low density Polyethylene/Starch Blends. *Journal of Applied Polymer Science*. 74. 2701-2802.
- Tharanathan, R.N. (2003). Biodegradable Films and Composite Coatings: Past, Present and Future. *Trends in Food Science & Technology*. 14: 71-78.
- Thiebaud, S., Aburto, J., Alric, I., Borredon, E., Bikiaris, D., Prinos, J. and Panayiotou, C. (1997). Properties of Fatty Acid Esters of Starch and their Blends with LDPE. *Journal of Applied Polymer Science*. 17. 705-721.
- Thunwall, M., Kuthanova, V., Boldizar, A. and Rigdahl, M. (2008). Film Blowing of Thermoplastic Starch. *Carbohydrate Polymers*. 71. 583-590.
- Tokiwa, Y., Ando, T., Suzuki, T. and Takeda, K. (1990). *Biodegradation of Synthetic Polymers Containing Ester Bonds*. in Glass, E. and Swift, G. (Eds.). *Agricultural and Synthetic Polymers*. (pp 136-148). USA: American chemical Society.
- Tserki, V., Matzinos, P., Kokkou, S. and Panayiotou, C. (2005). Novel Biodegradable Composites based on Treated Lignocellulosic Waste Flour as Filler. Part I. Surface Chemical Modification and Characterization of Waste Flour. *Composites: Part A*. 36. 965-974.
- Vieira, M. G. A., da Silva, M. A., dos Santos, L. O. and Beppu, M. M. (2011). Natural-based Plasticizers and Biopolymer Films: A Review. *European Polymer Journal*. 47. 254-263.

- Volke-Sepulveda, T., Favela-Torres, E., Manzur-Guzman, Limor-Gonzalez, M. and Trejo-Quitero, G. (1999). Microbial Degradation of Thermo-oxidized Low Density Polyethylene. *Journal of Applied Polymer Science*. 73. 1435-1440.
- Wahab, M. K. A., Ismail, H and Othman, N. (2012). Compatibilization Effects of PE-g-MA on Mechanical, Thermal and Swelling Properties of High Density Polyethylene/Natural Rubber/Thermoplastic Tapioca Starch Blends. *Polymer-Plastics Technology & Engineering*. 51. 298-303.
- Wang, Y. J., Liu, W. and Sun, Z. (2004). Effects of Glycerol and PE-g-MA on Morphology, Thermal and Tensile Properties of LDPE and Rice Starch Blends. *Journal of Applied Polymer Science*. 92. 344-350.
- Waryat, Romli, M., Suryani, A., Yuliasih, I. and Johan, S. (2013). Using of a Compatibilizer to Improve Morphological, Physical and Mechanical Properties of Biodegradable Plastic from Thermoplastic Starch/LLDPE Blends. *International Journal of Engineering & Technology*. 13. 115-122.
- Weiland, M., Daro, A. and David, C. (1995). Biodegradation of Thermally Oxidized Polyethylene. *Polymer Degradation and Stability*. 48. 275-289.
- Westhoff, R. P., Otey, H. F., Mehitretter, C. L. and Russel, C. R. (1974). Starch-filled Poly(vinyl chloride) Plastics-Preparation and Evaluation. *Industrial Engineering & Product Research Development*. 13. 123-125.
- Willett, J. L. (1994). Mechanical Properties of LDPE/Granular Starch Composites. *Journal of Applied Polymer Science*. 54. 1685-1695.
- Wool, R. P. and Cole, M. A. (2003). *Microbial Degradation*. in Lampman, S. (Ed). *Characterization and Failure Analysis of Plastics*. (pp 336-340). USA: ASM International.
- Wool, R. P., Raghavan, D., Wagner, G. C. and Billieux, S. (2000). Biodegradation Dynamics of Polymer-Starch Composites. *Journal of Applied Polymer Science*. 77. 1643-1657.
- Wu, C. S. (2003). Physical properties and Biodegradability of Maleated-polycaprolactone/starch Composite. *Polymer Degradation and Stability*. 80. 127-134.
- Wu, C. S. and Liao, H. T. (2002). Influence of a Compatibilizer on the Properties of Polyethylene-Octane Elastomer/Starch Blends. *Journal of Applied Polymer Science*. 86. 1792-1798.

- Xie, F., Halley, P. and Avérous, L. (2012). Rheology to Understand and Optimize Processability, Structures and Properties of Starch Polymeric Materials. *Progress Polymer Science*. 37. 595-623.
- Xiong, H. G., Tang, S. W., Tang, H. L. and Zou, P. (2008). The Structure and Properties of a Starch-Based Biodegradable Film. *Carbohydrate Polymers*. 71. 263-268.
- Yoon, S. D., Park, M. H. and Byun, H. S. (2012). Mechanical and Water Barrier Properties of Starch/PVA Composite Films by Adding Nano-sized Poly(methyl methacrylate-co-acrylamide) Particles. *Carbohydrate Polymers*. 87. 676-686.
- Yu, F., Prashantha, K., Soulestin, J., Lacrampe, M. F. and Krawczak, P. (2013). Plasticized-Starch/Poly(ethylene oxide) Blends Prepared by Extrusion. *Carbohydrate Polymers*. 91. 253-261.
- Yu, L. and Christie, G. (2005). Microstructure and Mechanical Properties of Orientated Thermoplastic Starches. *Journal of Materials Science*. 40. 111-116.
- Zhang, P., Whistler, R. L., BeMiller, J. N. and Hamaker, B. R. (2005). Banana Starch: Production, Physicochemical Properties and Digestibility-A Review. *Carbohydrate Polymers*. 59. 443-458.
- Zheng, Y. and Yanful, E. K. (2005). A Review of Plastic Waste Biodegradation. *Critical Review in Biotechnology*. 25. 243-250.
- Zullo, R. and Iannace, S. (2009). The Effects of Different Starch Sources and Plasticizers on Film Blowing of Thermoplastic Starch: Correlation among Process, Elongational Properties and Macromolecular Structure. *Carbohydrate Polymers*. 77. 376-383.