

METHODOLOGY FOR ASSESSING THE SUSTAINABILITY OF HOLLOW  
FIBER MEMBRANE SYSTEM FOR WASTEWATER TREATMENT

SALWA BINTI MAHMOOD

A thesis submitted in fulfilment of the  
requirements for the award of the degree of  
Doctor of Philosophy (Mechanical Engineering)

Faculty of Mechanical Engineering  
Universiti Teknologi Malaysia

FEBRUARY 2016

To my sweet little princess, Sofia.

## ACKNOWLEDGEMENT

Alhamdulillah, I am so grateful to Allah for giving me strength and guidance throughout my studies and to complete this thesis. This thesis would not have been completed without support and assistance from many people.

Foremost, I would like to express my sincere thanks and deep gratitude to my supervisor, Assoc. Prof. Dr. Muhamad Zameri bin Mat Saman and co-supervisor, Prof. Dr. Noordin bin Mohd Yusof for their supervision, support and encouragement throughout the research process and immense knowledge. Without their supervision, this thesis would not have been completed.

My gratitude also goes to Universiti Teknologi Malaysia (UTM) provides space and opportunities, and Kementerian Pendidikan Malaysia (KPM) for granting me the scholarship under MyBrain15 Scholarship Programme.

I would like to thanks my parents Mahmood bin Selamat and Zamilah binti Daman, families and friends for their prayers, support and well wishes. Lots of thanks to all my colleagues at Post Graduate room and AMTEC office, Abdul Rahman Hemdi, Mohd Fahrul Hassan, Nur Syamimi Jiran, Muhammad Azmi, Norirda Mohamed, Tengku Nur Azila and many others for their constant encouragement during some hard times and their valuable input in my research.

Finally, I would like to extend my deep gratitude to my husband, Mohammad Azwan bin Azit Kesumar for providing me with patience, continuous support and encouragement throughout this research.

## ABSTRACT

The world's supply of fresh water is finite and threatened by pollution such as the wastewater discharged from industries. Lately, the use of membrane system has received increasing attention for wastewater treatment. Though the membrane performance are usually determined, its performance from the sustainability perspective has received less attention. In line with the Malaysian government policy, the membrane system used for wastewater treatment needs to be scrutinized to ensure its sustainability according to the Triple Bottom Line aspects including environmental, social and economic. Previously, several tools or frameworks have been developed for assessing sustainability. However, most of the available tools assess membrane usage phase only without considering other phases of life cycle. This research aims to identify influencing parameters for assessing the sustainability of hollow fiber membrane system for wastewater treatment. In addition, a methodology for assessing the sustainability of membrane system was developed using fuzzy logic approach. It enables the assessment in the range between *sustainable* and *non-sustainable* membrane system. Life Cycle Assessment model was also developed to analyze the environmental burdens on the membrane system. GaBi software was employed to identify the parameters involved that cross the system boundary. The system boundary selected was from *cradle-to-grave* which consists of materials, fabrication process, transportation, usage and end of life phases. There were 29 parameters selected in the analysis. A Graphical User Interface was constructed using MATLAB platform, which was embedded with fuzzy linguistic calculation. A case study consists of a typical membrane system was successfully assessed by using the developed methodology. The results indicated that the sustainability level of the hollow fiber membrane module was high with an overall index value of 0.73. Fabrication process phase needs more attention in terms of sustainability as its index values were 0.27, 0.31, and 0.58 for environmental, social, and economic, respectively. For validation purposes, the results of the assessment were compared with the existing methodologies called ReCiPe and EcoIndicator99. However, the result from ReCiPe approach was limited to environmental aspect only. As for the social aspect, the findings were compared with the EcoIndicator99 approach. The results showed that the fuzzy evaluation method is able to assess the sustainability level of membrane system at par with the one obtained from EcoIndicator99.

## ABSTRAK

Bekalan air bersih adalah terhad dan kini terancam dengan pencemaran air sisa yang dihasilkan oleh industri. Sejak kebelakangan ini, sistem membran semakin mendapat perhatian yang tinggi bagi merawat air sisa. Walaupun prestasi membran biasanya diukur, namun prestasi dari perspektif kelestarian telah mendapat kurang perhatian. Selari dengan dasar kerajaan Malaysia, sistem membran yang digunakan untuk rawatan air sisa perlu diteliti bagi memastikan ianya lestari mengikut aspek *Triple Bottom Line* yang merangkumi aspek alam sekitar, sosial dan ekonomi. Sebelum ini, beberapa alat telah dibangunkan untuk menilai tahap kelestarian. Walau bagaimanapun, kebanyakan alat yang dibangunkan hanya menilai membran pada fasa kegunaan sahaja tanpa mengambil kira fasa-fasa lain dalam suatu kitar hayat. Tujuan kajian ini adalah untuk mengenalpasti parameter-parameter yang mempengaruhi penilaian tahap kelestarian sistem membran gentian berongga untuk merawat air sisa. Tambahan pula, kaedah untuk menilai kelestarian sistem membran dibangunkan dengan menggunakan pendekatan logika kabur. Ia membolehkan penilaian dibuat dalam julat diantara kelestarian dan ketidaklestarian sistem membran. Model Penilaian Kitar Hayat juga telah dibangunkan untuk menganalisis beban alam sekitar terhadap sistem membrane. Perisian GaBi puladigunakan untuk mengenal pasti parameter yang terlibat dalam melintasi sempadan sistem. Sempadan sistem yang dipilih adalah dari *cradle-to-grave* yang merangkumi fasa bahan, proses pembuatan, pengangkutan, penggunaan dan fasa hayat akhir. Terdapat 29 parameter yang dipilih di dalam kaedah ini. Sebuah paparan *Graphical User Interface* telah dibangunkan menggunakan platform MATLAB, yang mengandungi pengiraan logika kabur menggunakan bahasa kabur. Satu kajian kes melibatkan sistem membran biasa telah berjaya dinilai dengan menggunakan kaedah yang dibangunkan. Hasil kajian menunjukkan bahawa tahap kelestarian modul membran gentian berongga adalah tinggi dengan nilai indek keseluruhan adalah 0.73. Proses fabrikasi memerlukan lebih perhatian dari segi aspek kelestarian dengan nilai 0.27, 0.31, dan 0.58 masing-masing untuk aspek alam sekitar, sosial dan ekonomi. Untuk tujuan pengesahan, keputusan penilaian telah dibandingkan dengan kaedah yang setara iaitu ReCiPe dan EcoIndicator99. Namun, keputusan kaedah ReCiPe adalah terhad untuk aspek alam sekitar sahaja. Untuk aspek sosial, keputusan telah dibandingkan dengan kaedah EcoIndicator99. Hasil menunjukkan bahawa kaedah logika kabur mampu menilai prestasi kelestarian sistem membran yang setara dengan kaedah yang diperolehi dari EcoIndicator99.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>ACKNOWLEDGEMENT</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	xiii
	<b>LIST OF FIGURES</b>	xvii
	<b>LIST OF ABBREVIATION</b>	xxii
	<b>LIST OF SYMBOLS</b>	xxv
	<b>LIST OF APPENDICES</b>	xxvii
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Background of Research	1
	1.2 Statement of Problems	3
	1.3 Research Questions	4
	1.4 Research Objectives	5
	1.5 Research Scopes	5
	1.6 Summary of Research Methodology	6
	1.7 Significance of Research	6
	1.8 Thesis Structure	8

<b>2</b>	<b>LITERATURE REVIEW</b>	<b>10</b>
2.1	Introduction	10
2.2	Sustainability Concept	10
2.2.1	Sustainability of Product Life Cycle	14
2.3	Sustainability Assessment Concept	15
2.3.1	The Three Pillars	16
2.3.2	Sustainability Goals	17
2.4	Sustainability Assessment of Product Life Cycle	18
2.4.1	Qualitative Approach	18
2.4.2	Quantitative Approach	19
2.4.3	System Boundary	19
2.4.4	Current Sustainability Evaluation Method	21
2.5	ISO 14040:2006 LCA Framework	26
2.5.1	Strength of LCA	27
2.5.2	Limitation of LCA	29
2.5.3	Previous Research Work of LCA	29
2.6	Membrane Technology for Wastewater Treatment	33
2.7	Membrane System	36
2.7.1	Material Phase	39
2.7.2	Fabrication Process Phase	39
2.7.3	Transportation Phase	43
2.7.4	Usage Phase	43
2.7.5	End of Life Phase	45
2.8	Sustainability Parameters	47
2.8.1	Sustainability Parameters of Membrane System	47
2.8.1.1	Global Warming Potential	48
2.8.1.2	Acidification Potential	49
2.8.1.3	Eutrophication Potential	50
2.8.1.4	Waste Potential	51
2.8.1.5	Human Health Potential	52
2.8.1.6	Heavy Metal Potential	53
2.8.1.7	Carcinogen Potential	54
2.8.1.8	Risk Potential	55
2.8.1.9	Material Consumption	55

	2.8.1.10 Energy Consumption	56
	2.8.1.11 Price	57
	2.8.1.12 Fiber Maintenance	57
2.9	Legislation Regarding Sustainability	58
	2.9.1 Directive on Water Pollution by Discharge of Certain Dangerous Substances 2006/11/EC	59
	2.9.2 Directive on Industrial Emission 2010/75/EU	59
	2.9.3 Directive on Restriction of Hazardous Substances (RoHS) 2002/95/EC	60
	2.9.4 Malaysian Environmental Quality Act	60
2.10	Sustainability in Malaysia	61
	2.10.1 Green Technology Policy	61
	2.10.2 MyHijau Env-Label	62
	2.10.3 SIRIM Eco-Labeling Scheme	63
2.11	Life Cycle Database	64
	2.11.1 GaBi Database	64
	2.11.2 European Life Cycle Database (ELCD)	65
	2.11.3 EcoInvent Database	65
2.12	Artificial Intelligence System	66
	2.12.1 Fuzzy Logic Approach	66
	2.12.2 Artificial Neural Network	69
	2.12.3 Genetic Algorithm	71
	2.12.4 Comparison of Artificial Intelligence System	72
2.13	Summary	73
<b>3</b>	<b>RESEARCH METHODOLOGY</b>	<b>76</b>
	3.1 Introduction	76
	3.2 Constructing Preliminary Idea for Sustainability Assessment	77
	3.3 The Methodology	77
	3.3.1 Environmental Evaluation Methodology	78
	3.3.2 Social Evaluation Methodology	81
	3.3.3 Economic Evaluation Methodology	81



3.4	Application of ISO14040:2006	81
3.4.1	Development of LCA Model for Membrane System	85
3.5	Methodology for Developing the Sustainability Assessment	88
3.5.1	Goal and Scope Definition	89
3.5.2	Determination of Sustainability Parameters By LCI	89
3.5.2.1	System Boundary Selected	89
3.5.2.2	Elementary Inputs and Outputs Flow	90
3.5.2.3	Classification of Membrane Sustainability Parameters	91
3.5.2.4	Assigning Parameters for Middle-point And Final-point	92
3.5.3	Determination of Middle-point Indices	93
3.5.3.1	Setting Normalization Limit	95
3.5.3.2	Triangular Fuzzy Membership Function	95
3.5.3.3	Fuzzy Rules	102
3.5.3.4	Fuzzification	106
3.5.3.5	Fuzzy Inference System	107
3.5.3.6	Defuzzification	108
3.5.4	Determination of Sustainability Final-point Indices	110
3.5.5	Optional Weightage	110
3.5.6	Determination of Overall Sustainability Index	111
3.5.7	Determination of Membrane Performance	111
3.5.8	Interpretation and Improvement Actions	112
3.6	Graphical User Interface	112
3.6.1	GUI Main Page	114
3.6.2	Methodology Page	117
3.6.3	Legislation Page	118
3.6.4	User Guide Page	119

3.6.5	Environmental Sustainability Page	121
3.6.6	Social Sustainability Page	124
3.6.7	Economic Sustainability Page	127
3.6.8	Option Page	130
3.6.9	Overall Sustainability Page	131
3.6.10	Membrane Performance Page	132
3.7	Validation	133
3.8	Summary	134
<b>4</b>	<b>CASE STUDY AND RESULTS</b>	<b>136</b>
4.1	Overview	136
4.2	Membrane System Configuration	137
4.3	Life Cycle Assessment	140
4.3.1	Data Collection	140
4.3.2	Parameters Involved	141
4.3.3	Results of LCA model for Membrane System	141
	4.3.3.1 Global Warming Potential	142
	4.3.3.2 Acidification Potential	143
	4.3.3.3 Eutrophication Potential	144
4.4	Reference Value	144
4.4.1	Material Phase	145
	4.4.1.1 Sample of Calculation	148
4.4.2	Fabrication Process Phase	149
	4.4.2.1 Sample of Calculation	158
4.4.3	Transportation Phase	158
	4.4.3.1 Sample of Calculation	161
4.4.4	Usage Phase	162
	4.4.4.1 Sample of Calculation	166
4.4.5	End of Life Phase	167
	4.4.5.1 Sample of Calculation	170
4.4.6	Overall Reference Value	170
4.5	Sustainability Assessment Result	173
4.5.1	Environmental Assessment	173

4.5.1.1	GWP Index	176
4.5.1.2	AP Index	181
4.5.1.3	EP Index	184
4.5.1.4	WP Index	193
4.5.2	Social Assessment	198
4.5.2.1	Human Health Index	201
4.5.2.2	Heavy Metal Index	206
4.5.2.3	Carcinogen Index	213
4.5.2.4	Risk Index	218
4.5.3	Economic Assessment	220
4.5.3.1	Material Index	221
4.5.3.2	Energy Index	226
4.5.3.3	Price Index	230
4.5.3.4	Fiber Maintenance Index	232
4.5.4	Overall Sustainability Index	237
4.5.5	Membrane Performance Index	238
4.6	Validation	239
4.6.1	Environmental Validation	240
4.6.2	Social Validation	244
4.6.3	Economic Validation	249
4.7	Review of Achievement	249
4.8	Critical of Appraisal	255
4.9	Summary	257
<b>5</b>	<b>CONCLUSIONS AND RECOMMENDATIONS FOR FUTURE WORK</b>	<b>258</b>
5.1	Conclusion	258
5.2	Recommendation for Future Work	262
	<b>REFERENCES</b>	<b>264</b>
	Appendices A – I	276 – 308

## LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Summary of previous studies of LCA about general aspects	30
2.2	Summary of previous studies of LCA in membrane processes	31
2.3	Chemical cleaning agent used for hollow fiber membrane module	45
2.4	Strength and limitation of fuzzy logic approach	70
3.1	List of rules number for each potential impacts	103
3.2	Index range, value and description for 9 numbers of rules	104
3.3	Fuzzy rules in the evaluation of GWP Index	104
3.4	Fuzzy sustainability GUI evaluation defining diagram	113
4.1	Description of dope solution material with it is weight distribution	139
4.2	Description of hollow fiber membrane module parts with it is weight distribution	139
4.3	Parameters produced for producing 1kg of PVC, NMP and EG	146
4.4	Parameters produced for material phase	147
4.5	Ratio of dope solution, time and length of hollow fiber membrane module	150
4.6	Parameters produced for producing 1 MJ of electricity, 1kg of epoxy, 1kg of stainless steel, consumption of 1kg water and consumption of 1kg methanol	152
4.7	Parameters produced for fabrication phase	155

4.8	Quantity of parameters produced for utilization of 1 kg cargo diesel and 1kg for diesel production/refinery	159
4.9	Parameter produced for transportation phase	160
4.10	Quantity of parameters produced for filtration process, production of 1MJ electricity, 1kg of copper cathode and 1 kg of HCL	163
4.11	Parameter produced for usage phase	165
4.12	Quantity of parameters produced 1kg landfill of polymer waste and 1kg landfill of ferro metal waste	167
4.13	Parameter produced for EOL phase	168
4.14	Input data parameters with normalization limit value for environmental, social and economic aspects	171
4.15	Result of the environmental assessment of the hollow fiber membrane module	174
4.16	Parameters and reference value of GWP for fabrication process	176
4.17	Fuzzy rules for implication process of GWP for fabrication process	179
4.18	Parameters and reference value of AP for fabrication process	181
4.19	Fuzzy rules for implication process of AP for fabrication process	183
4.20	Parameters and references value of EP for fabrication process	184
4.21	Fuzzy rules for implication process of EP for fabrication process	188
4.22	Parameters and reference value of WP for fabrication process	193
4.23	Fuzzy rules for implication process of WP for fabrication process	195
4.24	Result of the social assessment of the hollow fiber membrane module	199
4.25	Parameters and reference value of human health potential for fabrication process	201

4.26	Fuzzy rules for implication process of human health for fabrication process	204
4.27	Parameters and reference value of heavy metal for fabrication process	206
4.28	Fuzzy rules for implication process of heavy metal for fabrication process	210
4.29	Parameters and reference value of carcinogen for fabrication process	214
4.30	Fuzzy rules for implication process of carcinogen for fabrication process	216
4.31	Risk parameters rank	218
4.32	Implication process for risk index for fabrication process	218
4.33	Result of the economic assessment of the hollow fiber membrane module	221
4.34	Parameters and reference value of material potential for fabrication process	221
4.35	Fuzzy rules for implication process of material potential for fabrication process	225
4.36	Parameters and reference value of energy potential for fabrication process	226
4.37	Fuzzy rules for implication process of energy for fabrication process	228
4.38	Parameters and reference value of price potential for fabrication process	230
4.39	Fuzzy rules for implication process of price for fabrication process	231
4.40	Parameters and reference value of fiber maintenance for fabrication process	233
4.41	Fuzzy rules for implication process of fiber maintenance for fabrication process	235
4.42	Comparison between fuzzy environmental assessment of GWP with ReCiPe approach	241
4.43	Comparison between fuzzy environmental assessment of AP with ReCiPe approach	242

4.44	Comparison between human health fuzzy social assessment of with Eco99 Respiratory	245
4.45	Comparison between heavy metal fuzzy social assessment with Eco99 Radiation	247
4.46	Comparison between fuzzy price index and direct cost	250

## LIST OF FIGURES

<b>FIGURE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
1.1	Product sustainability concepts	1
1.2	Summary of research methodology	7
2.1	Relationship between environmental, social and economic goals	12
2.2	A schematic presentation of sustainability concept	13
2.3	Manufacturing organization functions and environmental influences	14
2.4	Inputs and outputs crossing the system boundary	19
2.5	Description of system boundaries	20
2.6	UNCSD framework	23
2.7	GRI framework	23
2.8	LWSP framework	24
2.9	Wuppertal sustainable framework	25
2.10	Holistic LCA approach for simplified product life cycle	28
2.11	Market evolution of membrane treatment process in municipal and industrial end-user segment installed capacity by China from 2005 to 2010	35
2.12	Projected demand of membrane technology in Malaysia on 2015	36
2.13	Hollow fiber membranes	37
2.14	Cross section view of a hollow fiber membrane module	38
2.15	Position of hollow fiber membrane in the module	38
2.16	Process flow diagram of hollow fiber membrane module fabrication	40
2.17	Dry-wet spinning process	42



2.18	process flow diagram for overall life cycle phase of hollow fiber membrane module	46
2.19	The <i>MyHijau</i> label	62
2.20	SIRIM eco-labelling Scheme	64
2.21	FIS as an operator to mapping inputs to an output	67
2.22	The fuzzy logic control-analysis method	68
2.23	An example of simple model of ANN	69
2.24	An example of GA outline	71
3.1	Proposed framework for sustainability assessment of membrane system	79
3.2	Environmental Evaluation Methodology	80
3.3	Social Evaluation Methodology	82
3.4	Economic Evaluation Methodology	83
3.5	Life cycle stages included in the LCA model for membrane system	86
3.6	Schematic diagram of LCA model for hollow fiber membrane module by GaBi	87
3.7	Steps for developing sustainability assessment methodology	88
3.8	The <i>cradle-to-grave</i> system boundary selected	90
3.9	Membrane inputs and outputs flow	90
3.10	Classification of parameters	93
3.11	Parameters assigned for middle-point and final-point categories	94
3.12	Steps of fuzzy operation for determining sustainability middle-point indices	95
3.13	The plot of triangular membership function of $\mu(x)$	96
3.14	Input triangular membership function consists of low, medium and high	97
3.15	Output triangular membership function consist of low, low to medium, medium, medium to high and high	99
3.16	Triangular membership function for risk potential	102
3.17	An example of rule for GWP index	106
3.18	The implication aggregation and defuzzification processes of FIS	108

3.19	Example of FIS editor for GWP	109
3.20	General flow chart of fuzzy based sustainability assessment evaluation	115
3.21	Flowchart of the main page	116
3.22	GUI Main Page	117
3.23	Methodology Page	118
3.24	Legislation Page	119
3.25	User Guide Page	120
3.26	Flow chart of Environmental Assessment Page	122
3.27	Environmental Assessment Tool Page	123
3.28	Flowchart of Social Assessment Page	125
3.29	Social Assessment Tool Page	126
3.30	Flow chart of Economic Assessment Page	128
3.31	Economic Assessment Tool Page	129
3.32	Flowchart of Option Page	130
3.33	Option Page	130
3.34	Flowchart of Overall Assessment Page	131
3.35	Overall Assessment Page	132
3.36	Flowchart of Membrane Performance Page	133
3.37	Membrane Performance Page	134
4.1	Schematic diagram of membrane system	137
4.2	Bundles of hollow fiber membrane and membrane module	138
4.3	Product structure of the hollow fiber membrane module	138
4.4	Elementary input and output flow crossing the system boundary	142
4.5	GWP contributions of the hollow fiber membrane module life cycle	143
4.6	AP contribution of hollow fiber membrane module life cycle	144
4.7	EP contribution of hollow fiber membrane module life cycle	145
4.8	U-Length of hollow fiber membrane	150
4.9	Environmental assessment result	175
4.10	Input membership function of CO	177

4.11	Input membership function of CO <sub>2</sub>	178
4.12	Input membership function of CH <sub>4</sub>	178
4.13	Output membership function of GWP for fabrication process	180
4.14	Input membership function of SO <sub>2</sub>	182
4.15	Input membership function of NO <sub>x</sub>	182
4.16	Output membership function of AP for fabrication process	183
4.17	Input membership function of PO <sub>4</sub>	185
4.18	Input membership function of BOD	186
4.19	Input membership function of COD	186
4.20	Input membership function of NH <sub>3</sub>	187
4.21	Output membership function of EP for fabrication process	191
4.22	Input membership function of solid waste	194
4.23	Input membership function of chemical waste	195
4.24	Output membership function of WP for fabrication process	196
4.25	Social assessment result	200
4.26	Input membership function of CO	202
4.27	Input membership function of NMVOC	203
4.28	Input membership function of dust	203
4.29	Output membership function of human health potential for fabrication process	205
4.30	Input membership function of lead	207
4.31	Input membership function of mercury	208
4.32	Input membership function of chromium	208
4.33	Input membership function of copper	209
4.34	Output membership function of heavy metal for fabrication process	213
4.35	Input membership function of arsenic	215
4.36	Input membership function of benzene	216
4.37	Output membership function of carcinogen for fabrication process	217

4.38	Economic assessment result	223
4.39	Input membership function of renewable material	224
4.40	Input membership function of non-renewable material	224
4.41	Output membership function of material potential for fabrication process	225
4.42	Input membership function of renewable energy	227
4.43	Input membership function of non-renewable energy	227
4.44	Output membership function of energy potential for fabrication process	229
4.45	Input membership function of price	231
4.46	Output membership function of price potential for fabrication process	232
4.47	Input membership function of cleaning frequency	234
4.48	Input membership function of replacement frequency	234
4.49	Output membership function of AP for fabrication process	235
4.50	Overall sustainability index of hollow fiber membrane module	237
4.51	Membrane performance index of hollow fiber membrane module	239
4.52	GWP result of fuzzy environmental assessment	241
4.53	Climate change result of ReCiPe approach	242
4.54	AP result of fuzzy environmental assessment	243
4.55	Terrestrial acidification result of ReCiPe approach	244
4.56	Human health result of fuzzy social assessment	246
4.57	Eco99 Respiratory result of EcoIndicator99 approach	246
4.58	Heavy metal result of fuzzy social assessment	248
4.59	Eco99 Radiation result of EcoIndicator99 approach	248
4.60	Summarization of steps for developed methodology	251
4.61	Summarization for obtaining overall index	253

## LIST OF ABBREVIATIONS

1D	-	One Dimensional
2D	-	Two Dimensional
3D	-	Three Dimensional
AI	-	Artificial Intelligence
ANN	-	Artificial Neural Network
AP	-	Acidification Potential
BF	-	Bore Fluid
BOD	-	Biological Oxygen Demand
BOM	-	Bill of Material
CH <sub>4</sub>	-	Methane
cm	-	Centimeter
CO	-	Carbon Monoxide
CO <sub>2</sub>	-	Carbon Dioxide
COD	-	Chemical Oxygen Demand
Cr	-	Chromium
Cu	-	Copper
DALY	-	Disability Adjusted Life Year
DER	-	Dope Extrusion Rate
DfE	-	Design for Environment
EC	-	European Commission
EIA	-	Environmental Impact Assessment
ELCD	-	European Life Cycle Database
EOL	-	End of Life
EP	-	Eutrophication Potential
EQA	-	Environmental Quality Act
EU	-	European Union
FIS	-	Fuzzy Inference System

GA	-	Genetic Algorithm
Gpd	-	Gallon per day
GRI	-	Global Report Initiative
GT	-	Green Technology
GUI	-	Graphical User Interface
GWP	-	Global Warming Potential
H	-	High
HCL	-	Hydrochloric Acid
Hg	-	Mercury
IChemE	-	The Institution of Chemical Engineers
J	-	Joule
KeTTHA	-	Ministry of Green Technology and Water
Kg	-	Kilogram
L	-	Low
LCA	-	Life Cycle Assessment
LCC	-	Life Cycle Costing
LC-CO <sub>2</sub>	-	Life Cycle Carbon Dioxide
LC-E	-	Life Cycle Energy
LCI	-	Life Cycle Inventory
LCIA	-	Life Cycle Impact Assessment
LCSA	-	Life Cycle Sustainability Assessment
LinX	-	Life Cycle Index
LM	-	Low to Medium
LWSP	-	Lowell Centre for Sustainable Production
M	-	Medium
mf	-	Membership Function
MH	-	Medium to High
MJ	-	Mega Joule
ml	-	Milliliter
NH <sub>3</sub>	-	Ammonia
NMP	-	<i>N-methyl-2-pyrrolidone</i>
NMVOG	-	Non-methane Volatile Organic Compound
NO <sub>x</sub>	-	Mono-Nitrogen Oxide
Pb	-	Lead

PBB	-	<i>Polybrominated Biphenyls</i>
PBDE	-	<i>Polybrominated Diphenyl Ethers</i>
PO <sub>4</sub>	-	Phosphorus
PVC	-	<i>Poly Vinyl Chloride</i>
RM	-	Malaysian Ringgit
RoHS	-	Restriction of Hazardous Substances
s	-	second
SETAC	-	Society of Environmental Toxicology and Chemistry
SIRIM	-	Standard and Industrial Research Institute of Malaysia
SLCA	-	Social Life Cycle Assessment
SME	-	Small and Medium Enterprise
SO <sub>2</sub>	-	Sulphur Dioxide
SO <sub>x</sub>	-	Sulphur Oxide
TBL	-	Triple Bottom Line
TSS	-	Total Suspended Solid
UNCSD	-	United Nation Commission on Sustainable Development
W	-	Watt
WP	-	Waste Potential
WPI	-	Water Price Index
WRc	-	Water Research Centre

## LIST OF SYMBOLS

AND	-	Minimum fuzzy operator
OR	-	Maximum fuzzy operator
$\mu$	-	Degree of fuzzy membership function
$\mu_{\text{high}}$	-	Fuzzy membership function for high degree
$\mu_{\text{low to medium}}$	-	Fuzzy membership function for low to medium degree
$\mu_{\text{low}}$	-	Fuzzy membership function for low degree
$\mu_{\text{medium to high}}$	-	Fuzzy membership function for medium to high degree
$\mu_{\text{medium}}$	-	Fuzzy membership function for medium degree
$E_{\text{exp}}$	-	Membrane module expected efficiency
$I_{\text{AP}}$	-	Acidification index
$I_{\text{carcinogen}}$	-	Carcinogen index
$I_{\text{economic}}$	-	Economic index
$I_{\text{energy}}$	-	Energy index
$I_{\text{environmental}}$	-	Environmental index
$I_{\text{EP}}$	-	Eutrophication index
$I_{\text{GWP}}$	-	Global warming index
$I_{\text{heavy metal}}$	-	Heavy metal index
$I_{\text{human health}}$	-	Human health index
$I_{\text{maintenance}}$	-	Maintenance index
$I_{\text{material}}$	-	Material index
$I_{\text{price}}$	-	Price index
$I_{\text{risk}}$	-	Risk index
$I_{\text{social}}$	-	Social index
$I_{\text{sustainability}}$	-	Sustainability index
$I_{\text{WP}}$	-	Waste index
$L_{\text{exp}}$	-	Membrane module expected lifetime
$n$	-	Degree of input variables



$N_i(\chi)$	-	Aggregated membership function
$P$	-	Membrane price/cost
$R$	-	Number of fuzzy rule
$t$	-	Time
$v$	-	Number of input variables
$V_h$	-	Membrane module design flux
$w$	-	Optional weightage
$X^*$	-	Defuzzified output
$\chi$	-	Fuzzy inputs variable

**LIST OF APPENDICES**


<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	Range of output variables of fuzzy rules	276
B	Fuzzy rules in the evaluation of AP Index, EP Index, WP Index, Human Health Index, Heavy Metal Index, Carcinogen Index, Risk Index, Material Index, Energy Index, Price Index and Fiber Maintenance Index	277
C	Material and its price per unit of the parameters	289
D	Calculation of inputs parameter for material and energy potential for material phase	290
E	Graphical and calculation of climate change of ReCiPe	299
F	Graphical and calculation of terrestrial acidification of ReCiPe	301
G	Graphical and calculation of Eco99 Respiratory of EcoIndicator99	303
H	Graphical and calculation of Eco99 Radiation of EcoIndicator99	305
I	List of publications	307

# CHAPTER 1

## INTRODUCTION

### 1.1 Background of Research

Sustainability is generally acknowledged to be a result of balancing three pillars or triple bottom line (TBL) of sustainability, namely, environmental, social, and economic aspects, as shown in Figure 1.1. According to Fane (2005), to sustain is ‘to continue without lessening’ and ‘to allow to flourish now and in the future’. However, how well do the use of current membrane technologies and their operation stand up to scrutiny based on sustainable criteria? That is why parameters for membrane system need to be identified specifically for membrane system considering all sustainability aspects.

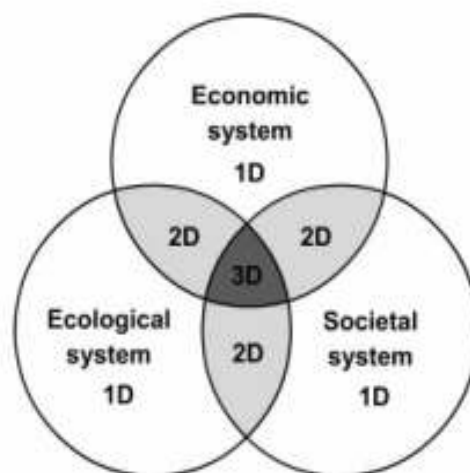

**Figure 1.1** Product sustainability concepts (Sikdar, 2003)

Sustainability assessment have been studied by several researchers focusing on setting up the set of criteria or parameters on membrane system (Fane, 2005; Muga and Mihelcic, 2008; Balkema *et al.*, 2002) and general products (Azapagic, 2004). They concluded that identified parameters influenced the sustainability assessment. In addition, most of researchers assessed the environmental element, which is part of sustainability focused on membrane system and wastewater treatment processes (Sombekke *et al.*, 1997; Parameshwaran *et al.*, 2001; Pillay *et al.*, 2002; Tangsubkul *et al.*, 2006; Fujiwara *et al.*, 2006; Fane, 2007; Vince *et al.*, 2008; Biswas *et al.*, 2008; Mahgoub *et al.*, 2010), and other general products (Fava *et al.*, 1991; Joshi *et al.*, 1999; Olsen *et al.*, 2001; Ishii, 2007).

Several researchers expanded the sustainability assessment study by proposing tools or framework for assessing the sustainability focused on general products or services (EcoIndicator95, 1995; EcoIndicator99, 1999; Khan *et al.*, 2004; Labuschagne, 2005; Hemdi *et al.*, 2011; Singh *et al.*, 2012). Several frameworks were developed for monitoring the various sustainability indicators for assessing performance of governmental progress (United Nation CSD, 2001) and process industry (Greiner, 2001; IChemE, 2002).

Optimal decision can only be made when the environmental, social and economic elements are all considered in one model (Hockerts, 1999). If products have higher level of sustainability, then these products are expected to minimize the environmental impact during product life cycle and have good functionality to users. In addition, the materials used should fully utilized and not harmful for society. These products also should be designed for easily re-manufacture or recycle. Since our human population and social rates continue to grow, it threatening the sustainability of human kind. Such growth creates high demand on mass production of products that consume considerable amount of materials and energy.

Wastewater discharged from industries flow to natural water stream, causing harmful effect to human kind. Since the current activities eventually will have impacts on the next generation, membrane sustainability level need to be monitored by the manufacturer, designer, and the authority who approve the system installation

and operation. The assessment should consider from the early stage of the production until end of product life for minimizing waste and maximizing product recyclability.

## 1.2 Statement of Problems

Sustainability index has become an important sustainability indicator for product life cycle. That considering environmental, social and economic elements. In the past studies, researchers had focused on environmental sustainability aspects in their researches instead of considering all TBL aspects to evaluate sustainable environmental performance (Sombekke *et al.*, 1997; Parameshwaran *et al.*, 2001; Pillay *et al.*, 2002; Tangsubkul *et al.*, 2006; Fujiwara *et al.*, 2006; Gibson, 2006; Fane, 2007; Vince *et al.*, 2008; Biswas *et al.*, 2008; Mahgoub *et al.*, 2010). It is noticed that most of the reports show life cycle assessment (LCA) technique has been used to assess sustainability of products or systems. However, the proposed tools or frameworks only consider either single element i.e. environmental element (EcoIndicator95, 1995; Greiner, 2001) or combination of two sustainability elements of TBL (EcoIndicator99, 1999; Singh *et al.*, 2012). It is believed that measuring the entire TBL elements is more meaningful since the result of sustainability assessment become more precise in the sustainability perspective. As such, a good sustainability assessment tool should evaluate all TBL elements that consist of environmental, social and economic consideration.

There was a general framework that considers all TBL aspects but the system boundary was limited to *cradle-to-gate* only (Khan *et al.*, 2004). It merely covered raw materials and manufacturing process, whereas sustainability requires a wider system boundary from *cradle-to-grave*. In other scenario, there was another general framework but it only covered the end-of-life (EOL) phase (Ullah *et al.*, 2014). Since the system boundary of the above general frameworks were limited, the analysis of sustainability assessment tends to provide bias results to another phase life cycle. Both general frameworks do not provide solution *cradle-to-grave* as expected in sustainability assessment.

In the case of sustainability assessment on the membrane system, it is noticed that the investigations only focused on its performance (Rajabzadeh *et al.*, 2008; Yoon *et al.*, 2004; Wang *et al.*, 1999) rather than the true assessment of sustainability index that covers all three elements. Usually, the measured performance include flux design (Rajabzadeh *et al.*, 2008) and membrane fouling system (Yoon *et al.*, 2004; Wang *et al.*, 1999).

As mentioned earlier, there is hardly found in the literature that reports sustainability assessment of membrane system from cradle-to-grave which covers all the required TBL elements. In addition, earlier assessment tools and frameworks do not indicate clearly the possible weak areas in the entire life cycle of membrane system that needs further improvements. Hence, it is timely a comprehensive methodology for assessing a sustainability of typical membrane system is required.

### **1.3 Research Questions**

The research questions of this research were as follows:

- i. What are the parameters involve in the methodology for assessing the sustainability of membrane system for wastewater treatment?
- ii. How to assess the sustainability of membrane system for wastewater treatment that includes all three main aspects (environmental, social and economic) in their assessment?

#### 1.4 Research Objectives

The research objectives of this research were as follows:

- i. To suggest the parameters involved for methodology for assessing the sustainability of membrane system for wastewater treatment.
- ii. To develop a methodology for assessing the sustainability of membrane system for wastewater treatment considering three pillars of sustainability and product life cycle.

#### 1.5 Research Scopes

The scopes of this research were as follows:

- i. Three pillars of sustainability aspects, i.e environmental, social and economic were considered in the proposed methodology.
- ii. Methodology developed was based on ISO 14040:2006 LCA Framework as the guidelines. The system boundary covered from *cradle-to-grave* including materials, fabrication process, transportation, usage and EOL for wastewater treatment.
- iii. Fuzzy logic approach was employed to determine the sustainability level in term of indices of membrane system.
- iv. A case study conducted was limited to hollow fiber membrane system in laboratory scale environment.

- v. Results of the sustainability assessment using the developed methodology were compared with ReCiPe approach for environmental aspect and EcoIndicator 99 for social aspect. As for economic aspect, result was compared with direct cost.


## **1.6 Summary of Research Methodology**

Figure 1.2 shows the summary of research methodology to perform the research activities. The research methodology is developed to achieve the research objectives and scopes.

## **1.7 Significance of Research**

A new methodology for assessing the sustainability of the membrane system for its entire life cycle phases was proposed in this study. Three important elements of sustainability, namely, environmental, social, and economic, were considered during the development of the methodology. It is expected that the developed methodology would help researchers, manufacturers, and designers to monitor the sustainability level of membrane system. In addition, the weak sustainability areas can be also identified easily using this approach, such as phases that need further improvements. It is believed that such capability is very helpful to produce a sustainable membrane system without sacrificing membrane performance. Using the proposed system, the users are able to reduce excessive time in evaluating sustainability that involving all the three pillars.



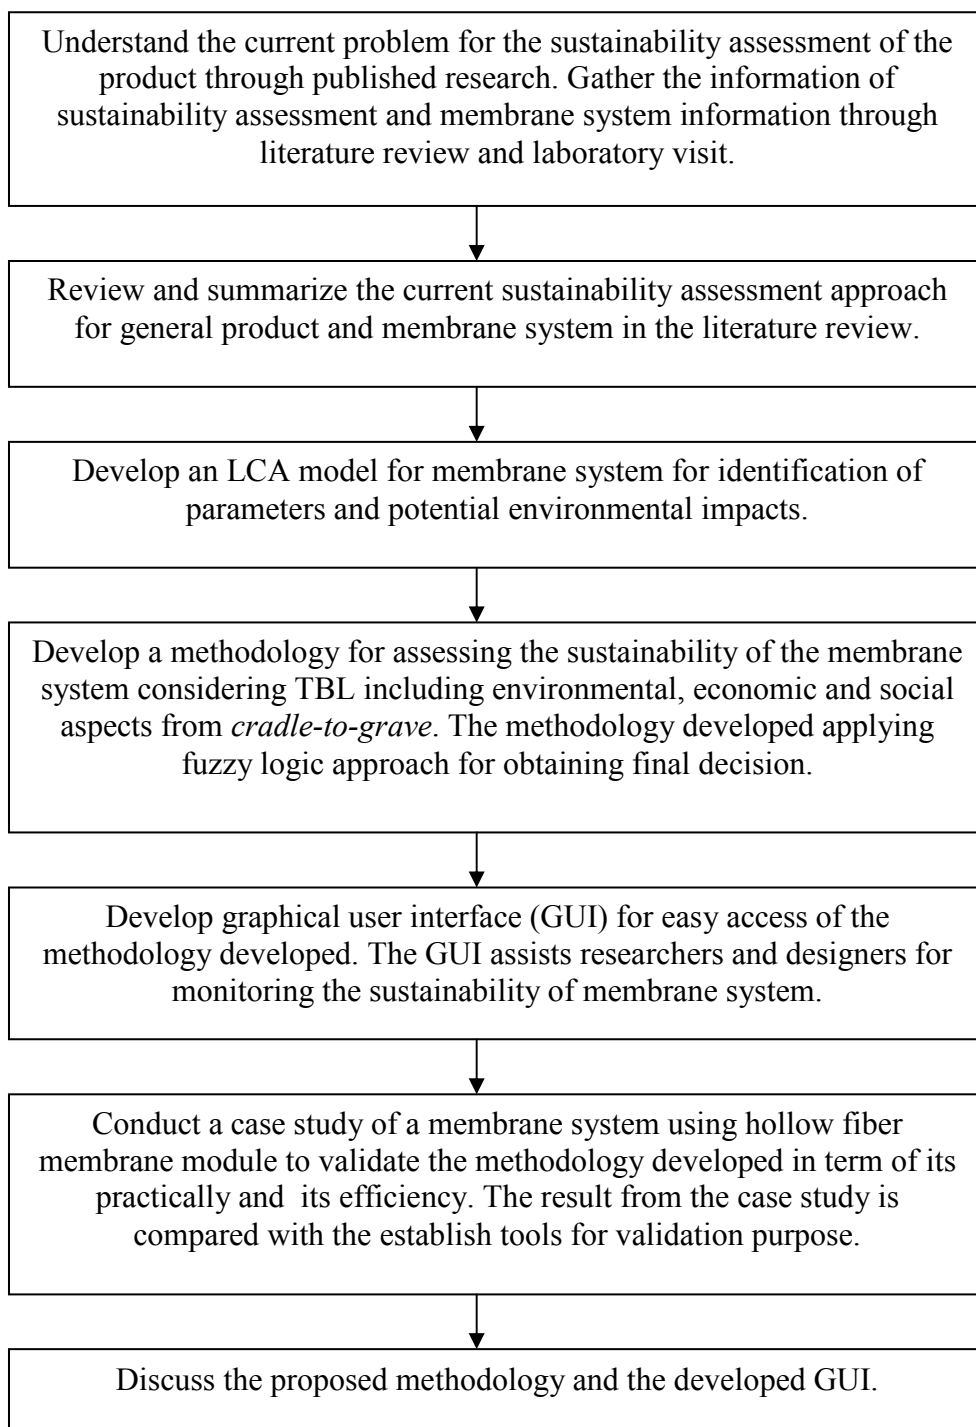

**Figure 1.2** Summary of research methodology

## 1.8 Thesis Structure

This thesis consists of five chapters. Each chapter is briefly described as follows:

Chapter 1 presents the background of the research, membrane system for wastewater treatment, problem definition, research questions, research objectives, summary of research methodology, research scopes, and the significance of the research.

Chapter 2 discusses detailed literature review concerning sustainability concept, and sustainability assessment approach including qualitative and quantitative assessment with the system boundary. This chapter discusses LCA according to ISO 14040 (2006) and membrane system, from *cradle-to-grave* including material, fabrication process, transportation, usage, and EOL. This chapter explores issues on sustainability assessment consisting of sustainability assessment concept in terms of sustainability goals and current method for assessing sustainability. Moreover, sustainability parameters of membrane system during its entire life cycle phases are discussed. In addition, this chapter discusses legislation regarding sustainability and sustainability policy in Malaysia and the life cycle database provided. This chapter also elaborates on artificial intelligence system. Comparison was made between fuzzy logic approach and other approaches.

Chapter 3 explains the development of the methodology for assessing sustainability. The steps of methodology development describes the development of LCA model of membrane system and the determination of parameters, middle-point indices by using fuzzy logic approach, final-point indices, overall sustainability index, and membrane performance index. This chapter also presents the GUI was developed using Matlab software for easy assessment of the proposed methodology.

Chapter 4 describes the application of the developed methodology for the membrane system. In this chapter, a case study was conducted for typical membrane system using hollow fiber membrane module. This chapter begins with product

description, followed by LCA study conducted with its results, and calculations for obtaining reference value when evaluating sustainability assessment using the developed methodology. Hence, the results of each sustainability element were presented. Validations were made for each sustainability aspect. Finally, overall view of the research conducted by developing the methodology for assessing the membrane product sustainability was presented such the review of achievements and critical of appraisal of this study.

Chapter 5 summarizes and concludes the research outcomes of the thesis. This chapter summarizes the research objective achieved. Future research opportunities are also discussed at the end of this chapter.

## REFERENCES

- Abele, E., Anderl, R., Birkhofer, H. (Eds.) (2005). *Environmentally-friendly Product Development: Methods and Tools*. USA: Springer-Verlag London Ltd.
- Adams, W. M. (2006). *The future of Sustainability: Re-thinking Environment and Development in the Twenty-first Century*. Report of the IUCN Renowned Thinkers Meeting.
- Ahmed, I., Idris, A., Noordin, M. Y. and Rajput, R., (2011). High Performance Ultrafiltration Membranes Prepared by the Application of Modified Microwave Irradiation Technique. *Industrial & Engineering Chemistry Research*. 50(2011), 2272-2283.
- Anderson, J. (2003). The Environmental Benefits of Water Recycling and Reuse. *Water Science and Technology*. 3(4), 1-10.
- Asaff, B. Example of Renewable Resources .retrieved via [http://greenliving.lovetoknow.com/Examples\\_of\\_Renewable\\_Resources](http://greenliving.lovetoknow.com/Examples_of_Renewable_Resources) on January 2013 .
- Avouris, N. M. and Finotti, S. (1993). User Interface Design to Expert Systems Based on Hierarchical Spatial Representations. *Expert Systems with Applications*. 6(2), 109-118.
- Balkema, A. J., Preisig, H. A., Otterpohl, R., and Lambert, F. J. D. (2002). Indicators for the Sustainability Assessment of Wastewater Treatment Systems. *Urban Water*. 4, 153-161.
- Benzing, T. (2012). Chances and Limitations for the Use of Renewable Raw Materials in the Chemical Industry. Verband Der Chemischen Industrie. Via <https://www.vci.de/Downloads/PDF.pdf> on December 2012.
- Biswas, W. K. (2009). Life Cycle Assessment of Seawater Desalination in Western Australia. *World Academy of Science, Engineering and Technology*. 56.
- Bossel, H., (1999). *Indicators for Sustainable Development: Theory, Method, Applications: A report to a Balaton Group*. International Institute for Sustainable Development.

- Briassoulis, H. (2001). Sustainable Development and its Indicators: Through a (Planner's) Glass Darkly. *Journal of Environmental Planning and Management*. 44(3), 409-427.
- British Standard Institution (2006). Environmental Management – Life Cycle Assessment – Principle and Framework BS EN ISO 14040. London: British Standard Institution.
- British Standard Institution (2006). Environmental Management – Life Cycle Assessment – Requirements and Guidelines BS EN ISO 14040. London: British Standard Institution.
- Brundtland Commission Report. (1987). *Our Common Future: From One Earth to One World*. Vol 5. Oxford University Press, World Commission on Environment and Development, pp. 22-23.
- Bouhabila E. H., Aim R. B. and Buisson H. (2001). Fouling Characterisation in Membrane Bioreactors. *Separation and Purification Technology*. 22-23, 123-132.
- Byggeth, S. and Hochschorner, E. (2006). Handling Trade-offs in Ecodesign Tools for Sustainable Product Development and Procurement. *Journal of Cleaner Production*. 14(15–16), 1420-1430.
- Canadian Centre for Occupational Health and Safety (CCOHS) , What Are The Effect of Dust on The Lungs? Retrieved from [http://www.ccohs.ca/oshanswers/chemicals/lungs\\_dust.html](http://www.ccohs.ca/oshanswers/chemicals/lungs_dust.html) on 30 July 2012.
- Cao, Z. and Zha, F. (2006). Improving Feed Water Recovery and Reducing Backwash Waste in Membrane Filtration Process. *Water Practice and Technology*. 1 (4).
- Chakrabarti, P. (1994). Designing Revolution: Policy for A Clean and Healthy Electronics Industry. *Proceedings of the 1994 IEEE International Symposium on Electronics and the Environment*. 2-4 May. San Francisco, CA: IEEE, 21-25.
- Chen, E. (2012). Warming Up to 2013. *Green Prospects Asia*, December 2012 issues.
- Cornel, P. and Krause, S. (2008). Membrane Bioreactors for Wastewater Treatment. In Norman N. L., Fane A. G., Winston W. S., and Matsuura T. *Advance*

- Membrane Technology and Application*. (pp. 217-238). Illinois: John Wiley and Sons Inc.
- Cornelissen, A. M. G., Van Den Berg, J., Koops, W. J., Grossman, M., and Udo, H. M. J. (2001). Assessment of the Contribution of Sustainability Indicators to Sustainable Development: A Novel Approach Using Fuzzy Set Theory. *Agriculture, Ecosystem and Environment*. 86(2), 173-185.
- Correia, V. M., Stephenson, T., and Judd, S. J. (1994). Characterisation of Textile Wastewaters: A review. *Environmental Technology*. 15(10), 917-929.
- Correll D. L. (1998). Role of Phosphorus in the Eutrophication of Receiving Waters: A Review. *International Journal of Environmental Quality*. 27(1998), 261-266.
- Culaba, A. B. and Purvis, M. R. I. (1999). A Methodology for the Life Cycle and Sustainability Analysis of Manufacturing Processes. *Journal of Cleaner Production*. 7, 435-445.
- De Almeida Souza, P. F., and de Barros Pereira, H. B. (2006). Towards Indicators of Sustainable Product Design. *Proceedings of the 2006 IEEE International Engineering Management Conference*. 17-20 September. Bahia: IEEE, 274-277.
- De Silva, N., Jawahir, I. S., Dillon, J. O., and Russell, M. (2009). A New Comprehensive Methodology for the Evaluation of Product Sustainability at the Design and Development Stage of Consumer Electronic Products. *International Journal of Sustainable Manufacturing*. 1(3), 251-264.
- Demuth, H. and Beale, M. (2002). *Neural Network Toolbox for Use with Matlab*. The Mathwork, Inc., Natick, MA.
- Department of Environment (2006). *Malaysia Environmental Quality Report 2006*. Malaysia: Ministry of Natural Resources and Environment.
- Dincer, I. (2000). Renewable Energy and Sustainable Development: A Crucial Review. *Renewable and Sustainable Energy Reviews*. 4(2), 157-175.
- EcoInvent Databases (2013) Retrieved from <http://www.ecoinvent.org/database/> on December 2013
- El-Sayed Mohamed Mahgoub, M., Van Der Steen, N. P., Abu-Zeid, and K., Vairavamoorthy, K. (2010). Towards Sustainability in Urban Water: A Life Cycle Analysis of the Urban Water System of Alexandria City, Egypt. *Journal of Cleaner Production*. 18(10-11), 1100-1106.

- Environmental Protection Agency (EPA) (1971). *Methods for the Chemical Analysis of Water and Wastes*. Analytical Quality Control Laboratory, Cincinnati, Ohio.
- Erickson, J. D. (2013). Economics of Renewable Natural Resources. Retrieved from [http://www.uvm.edu/~jdericks/pubs/EOLSS\\_Erickson.pdf](http://www.uvm.edu/~jdericks/pubs/EOLSS_Erickson.pdf) on January 2013.
- EPA Guide (2001). Miles Per Gallon for Typical Vehicle Based on Average. Retrieved from [www.epa.gov/autoemissions](http://www.epa.gov/autoemissions) on 20 June 2013
- European Commission Retrieved from [http://ec.europa.eu/environment/water/water-dangersub/76\\_464.htm](http://ec.europa.eu/environment/water/water-dangersub/76_464.htm) on February 2012
- European Commission Retrieved from <http://ec.europa.eu/environment/air/pollutants/stationary/> on February 2012
- European Life Cycle Database (2012) Retrieved from <http://eplca.jrc.ec.europa.eu/> on September 2012
- European Parliament (2003a). Official Journal of the European Union. Retrieved from <http://eurlex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2003:345:0090:0096:EN:PDF> on December 2012
- Fane, A. G. (2007). Sustainability and Membrane Processing of Wastewater for Reuse. *Desalination*. 202, 53-58.
- Fava, J. A., Denison, R., Jones, B., Curran, M., Vigon, B., Selke, S., and Barnum, J. (1991) . *A technical framework for life cycle assessment*. Society of Environmental Toxicology and Chemistry, Washington D. C.
- Frost and Sullivan. (2009). National Bureau of Statistic of China, *Ministry of Housing and Urban-Rural Development of China*. Retrieved June 2012, from [http://www.hkexnews.hk/listedco/listconews/sehk/2011/0516/02083\\_1075732/E113.pdf](http://www.hkexnews.hk/listedco/listconews/sehk/2011/0516/02083_1075732/E113.pdf)
- Fujiwara, M., Hayashi, N., Kanai, K., Kiyozuka, M., Matsui, Y., Mori, K., Sakakibara, Y. (2006). Application of Life Cycle Assessment (LCA) to Water Purification Facilities: Inventory Analysis for Comparison Between Coagulation Sedimentation + Sand Filtration and Membrane Filtration. *Japan Water Research Centre*. 1, 1-6.
- GaBi Database (2013) Retrieved from <http://www.gabi-software.com/databases/gabi-databases/> on April 2013

- Gehin, A., Zwolinski, D., and Brissaud, D. (2008). A Tool to Implement Sustainable End-of-Life Strategies in the Product Development Phase. *Journal of Cleaner Production*. 16, 566-576.
- Gibson, R. B. (2006). Beyond the Pillars: Sustainability Assessment as A Framework for Effective Integration of Social, Economic and Ecological Considerations in Significant Decision-Making. *Journal of Environmental Assessment Policy and Management*. 8(3), 259-280.
- Global Environmental Center , What is Solid Waste? Retrieved from <http://www.smartranger.net/index.cfm?&menuid=3> on 12 June 2013.
- Greiner, T. J. (2001). *Indicators of sustainable production – Tracking progress: A case study on measuring economic-sustainability at Guilford of Maine, Inc.* 1. Greiner Environment, Lowell Centre for Sustainable Production.
- Hach, C. C., Jr, R. L. K., and Gibbs, C. R. (1997). *Introduction to Biochemical Oxygen Demand*. Technical Information Series-Booklet No 7. USA.
- Haney, T. Fuzzy Logic. Retrieved from <http://www.ortech-engr.com/fuzzy/tutor.txt> on September 2012.
- Hao, W. and Hongfu, Z. (2009). Using Genetic/simulated Annealing Algorithm to Solve Disassembly Sequence Planning. *Journal of System Engineering and Electronic*. 20(4), 906-912.
- He, X. and Xu, S. (2009). *Process Neural Network: Theory and Application*. London: Springer
- Hemdi, A. R. (2013). *Fuzzy Based Sustainability Indicator for Product Design and Development Process* . PhD Thesis Page 66, Universiti Teknologi Malaysia, Skudai.
- Hemdi, A. R., Mat Saman M. Z., and Sharif S. (2011). Sustainability Evaluation Using Fuzzy Inference Methods. *International Journal of Sustainable Energy*. 2011, 1-17.
- Hockerts, K. (1999). The Sustainability Radar: A Tool for the Innovation of Sustainable Product and Service. *Greener Management International*. 1999(25), 29-49.
- Holland, J. H. (1975). *Adaptation in Natural and Artificial System*. University of Michigan Press, Ann Arbor.



- Holsapple, C. W. and Andrew, B. W. (1996). *Fuzzy Variables. Decision Support System: A knowledge-Based Approach*. Course Technology, Cambridge, MA. Pp 521-528.
- Hunkeler, D., and Rebitzer, G. (2005). The Future of Life Cycle Assessment. *International Journal of Life Cycle Assessment*. 10(5), 305-308.
- IChemE. (2002). *The Sustainability metrics: sustainable development progress metrics recommended for use in the process industries*. Warwickshire: Institution of Chemical Engineers.
- Idris, A., Ismail, A. F., Noordin, M. Y., and Shilton, S. J. (2002). Optimization of Cellulose Acetate Hollow Fiber Reverse Osmosis Membrane Production Using Taguchi Method. *Journal of Membrane Science*. 205(1–2), 223-237.
- Ishii, S. (2007) *Environmental System Analysis of Urban Water System*. Department of Urban Engineering, the University of Tokyo.
- Ismail, A. F. (2011). Advance and Value Added Manufacturing. *LRGS 2011*. p. 1-5.
- Jalil, S. B. (2004). *Development of Nanofiltration Polyethersulfone Hollow Fiber Membrane for CycloDextrin Glycosyltransferase (GGTase) Separation*. MEng Thesis Page 87, Universiti Teknologi Malaysia, Skudai.
- Jennie, P. (2011). MBR Technology Propels China into Water Reuse Era. Retrieved from <http://www.waterworld.com/index/display/article-display/2638735017/articles/water-wastewater-international/vol-26/issue-3/regulars/creative-finance/mbr-technology-propels-china-into-water.html> on July 2011.
- Joshi, S. (1999). Product Environmental Life-Cycle Assessment Using Input-Output Techniques. *Journal of Industrial Ecology*. 3(2-3), 95-120.
- Kän-man, E., and Jönsson, H. (2001). Including Oxidisation of Ammonia in the Eutrophication Impact Category. *The International Journal of Life Cycle Assessment*. 6(1), 29-33.
- Kaufmann, A. and Gupta, M. M. (1985). *Introduction to fuzzy arithmetic: Theory and application*. New York: Van Nostrand Reinhold Company Inc.
- Kaur, A. and Kaur, A. (2012). Comparison of Mamdani-Type and Sugeno-Type Fuzzy Inference System for Air Conditioning System. *International Journal of Soft Computing and Engineering*. 2(2), 323-325.

- Kee, C. M. and Idris, A. (2012). Modification of Cellulose Acetate Membrane using Monosodium Glutamate Additives Prepared by Microwave Heating. *Journal of Industrial and Engineering Chemistry*. 18 (2012), 2115-2123.
- KeTTHA (2009). *National Green Technology Policy*, Malaysia: Ministry of Energy, Green Technology and Water.
- KeTTHA (2010). *MyHijau Programme*. Malaysia: Ministry of Energy, Green Technology and Water.
- Khan, F. I., Sadiq, R. and Veitch, B. (2004). Life Cycle Index (LinX): A New Indexing Procedure for Process and Product Design and Decision-making. *Journal of Cleaner Production*. 12(1), 59-76.
- Khayet, M., Feng, C. Y., Khulbe K. C., and Matsuura, T. (2002). Preparation and Characterization of Polyvinylidene Fluoride Hollow Fiber Membranes for Ultrafiltration. *Polymer*. 43 (2002), 3879-3890.
- KOCH Membrane System (2013). *Membrane Filtration Technology: Meeting Today's Water Treatment Challenges*. Koch Chemical Technology Group, LLC Company.
- Kozłowska, E. (2007). Optimization of Handover Mechanism in 802.16e using Fuzzy Logic. In Bestak, R., Simak, B., and Kozłowska E. (Ed.), *Personal Wireless Communications* (pp. 115-122). Boston, MA: Springer US.
- Kozłowska, E. (2012). Basic Principle of Fuzzy Logic. Retrieved from <http://access.feld.cvut.cz/rservice.php?akce=tisk&cisloclanku=2012080002> on April 2013
- Kumar, S., Groth A. and Vlacic L. (2014). An Analytical Index for Evaluating Manufacturing Cost and Performance of Low Pressure Hollow Fiber Membrane Systems. *Desalination*. 332(2014), 44-51.
- Kuo, R. J., Chi, S. C., and Kao, S. S. (2002). A Decision Support System for Selecting Convenience Store Location Through Integration of Fuzzy AHP and Artificial Neural Network. *Computers in Industry*. 47(2), 199-214.
- Labuschagne, C., Brent, A. C., and Van Erck, R. P. G. (2005). Assessing the Sustainability Performances of Industries. *Journal of Cleaner Production*. 13(4), 373-385.
- Lenntech, B. V. (2012). Chemical Properties of Copper. Retrieved from <http://www.lenntech.com/periodic/elements/cu.htm> on 30 July 2012.

- Levan, S. L. (1995). Life Cycle Assessment : Measuring Environmental Impact Life Cycle Environmental Impact Analysis for Forest Products. *Proceedings of the 49<sup>th</sup> Annual Meeting of the Forest Product Society*. Portland, Oregon: 7-16.
- Listowski, A., Ngo, H. H., Guo W. S., Vigneswaran, S., and Palmer, C. G. (1999). *Water and Wastewater Treatment Technologies- Assessment Methodologies for Water Reuse Scheme and Technology*. Encyclopedia of Life Support System (EOLSS) Sample Chapter, 1-17.
- Ljungberg, L. Y. (2007). Materials Selection and Design for Development of Sustainable Products. *Materials and Design*. 28(2), 466-479.
- Malaysia (1974). Environmental Quality Act Regulation. EQA (1974).
- Malaysia (1987). Environmental Impact Assessment (EIA) Regulation. EIA (1987).
- Marcucci, M., Ciabatti, I., Matteucci, A., and Vernaglione, G. (2003). Membrane Technologies Applied to Textile Wastewater Treatment. *Annals of the New York Academy of Sciences*. 984(1), 53-64.
- Marcucci, M., Nosenzo, G., Capannelli, G., Ciabatti, I., Corrieri, D., and Ciardelli, G. (2001). Treatment and Reuse of Textile Effluents Based on New Ultrafiltration and Other Membrane Technologies. *Desalination*. 138(1-3), 75-82.
- Markard, J., Raven, R. and Truffer, B. (2012). Sustainability Transitions: An Emerging Field of Research and Its Prospects. *Research Policy*. 41 (6), 955-967.
- Marriott, J., and Sørensen, E. (2003). A General Approach to Modeling Membrane Modules. *Chemical Engineering Science*. 58(22), 4975-4990.
- Marriott, J., and Sørensen, E. (2003). The Optimal Design of Membrane Systems. *Chemical Engineering Science*. 58(22), 4991-5004.
- Martin, S, and Griswold, W. (2009). *Human Health Effects of Heavy Metals*. Center for Hazardous Substance Research, Kansas State University, Manhattan, USA
- Martins, A. A., Mata, T. M., Costa, C. A. V., and Sikdar, S. K. (2006). Framework for Sustainability Metrics. *Industrial and Engineering Chemistry Research*. 46(10), 2962-2973.
- Matlab and Fuzzy Logic Toolbox Release 2010a, The MathWork, Inc., Natick, Massachusetts, United States. Accessed January 2012
- McCool, S. F., and Stankey, G. H. (2004). Indicators of Sustainability: Challenges and Opportunities at the Interface of Science and Policy. *Environmental Management*. 33(3), 294-305.

- Melin, T., Jefferson, B., Bixio, D., Thoeye, C., De Wilde, W., De Koning, J., *et al.* (2006). Membrane Bioreactor Technology for Wastewater Treatment and Reuse. *Desalination*. 187(1–3), 271-282.
- Mulder, M. (1991). *Basic Principles of Membrane Technology*. Center for Membrane Science and Technology, University of Twente, The Netherland. (original work published on 1951).
- Ness, B., Urbel-Piirsalu, E., Anderberg, S., and Olsson, L. (2007). Categorizing Tools for Sustainability Assessment. *Ecological Economic*. 60(3), 498-508.
- Olsen, S. I., Christensen, F. M., Hauschild, M., Pedersen, F., Larsen, H. F., and Tørsløv, J. (2001). Life Cycle Impact Assessment and Risk Assessment of Chemicals: A Methodological Comparison. *Environmental Impact Assessment Review*. 21(4), 385-404.
- Ong, N. S. and Tan, W. C. (2002). Sequence Placement Planning for High Speed PCB Assembly Machine. *Integrated Manufacturing System*. 13(1), 35-46.
- Othman, M. R., Repke, J.-U., Wozny, G. n., and Huang, Y. (2010). A Modular Approach to Sustainability Assessment and Decision Support in Chemical Process Design. *Industrial and Engineering Chemistry Research*. 49(17), 7870-7881.
- Parameshwaran, K., Fane, A. G., Cho, B. D., and Kim, K. J. (2001). Analysis of Microfiltration Performance with Constant Flux Processing of Secondary Effluent. *Water Research*. 35, 4349-4358.
- PE: GaBi 6 Software-System and Databases for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen 1992-2013. Accessed May 2013
- Phillis, Y. A., and Andriantiatsaholiniaina, L. A. (2001). Sustainability: An Ill-defined Concept and its Assessment using Fuzzy Logic. *Ecological Economics*. 37(3), 435-456.
- Pillay, S. D., Friedrich, E., and Buckley, C. A. (2002). Life Cycle Assessment of an Industrial Water Recycling Plant. *The Biennial Conference of the Water Institute of Southern Africa (WISA), Water Research Commission*. 19-23 May. Durban, South Africa,
- Pope, J., Annandale, D., and Morrison-Saunders, A. (2004). Conceptualizing Sustainability Assessment. *Environmental Impact Assessment Review*. 24(6), 595-616.

- Postel, S. L. and Wolf, A. T. (2001). Dehydrating Conflict. *Foreign Policy*. Sept/Oct 2001, 60-67.
- Rajabzadeh, S., Marumaya, T., Sotani, T. and Matsumaya, H. (2008). Preparation of PVDF Hollow Fiber Membrane from a Ternary Polymer/solvent/nonsolvent System via Thermally Induced Phase Separation (TIPS) Method. *Separation and Purification Technology*. 63, 415-423.
- Rajaram, T. and Das, A. (2010). Modelling of Interactions among Sustainability Components of an Agro-Ecosystem using Local Knowledge Through Cognitive Mapping and Fuzzy Inference System. *Expert Systems with Application*. 37, 1734-1744.
- Reay D. (2006). Other Indirect Greenhouse Gases Carbon Monoxide via <http://www.ghgonline.org/otherco.htm> on March 2012.
- ReCiPe (2013). Retrieved from <http://www.lcia-recipe.net/> on January 2014.
- Roth, B. (2012). Price: The Ultimate Sustainability Metric. *Sustainable Brands*. Retrieve from [http://www.sustainablebrands.com/news\\_and\\_views/new-metrics/price-ultimate-sustainability-metric](http://www.sustainablebrands.com/news_and_views/new-metrics/price-ultimate-sustainability-metric) on January 2015.
- Lee, S., Lye, S. and Khoo, M. (2001). A Multi-objective Methodology for Evaluating Product End-of-Life Options and Disassembly. *The International Journal of Advanced Manufacturing Technology*. 18(2001), 148-156.
- Saaty, T. L. (2008). Decision Making with the Analytic Hierarchy Process. *International Journal Service Sciences*. 1(1), 83-98.
- Sadiq, R. and Khan, F. I. (2006). An Integrated Approach for Risk-Based Life Cycle Assessment and Multi Criteria Decision Making – Selection, Design and Evaluation of Cleaner and Greener Processes. *Business Process Management Journal*. 12(6), 770-792.
- Sadler, B. (1988). Impact Assessment, Development Planning and International Assistance in Post Bruntland Perspective. *Proceeding of the International Workshop on Impact Assessment for International Development*, Vancouver. 775-787.
- Scholz, R. W. and Tietje, O. (2013). Type of Case Study Methods. In Scholz, R. W. and Tietje, O. *Embedded Case Study Methods*. (pp. 2-7). SAGE Publication Inc. DOI <http://dx.doi.org/10.4135/9781412984027.n2> on March 2012.
- Seppälä, J., Posch, M., Johansson, M. and Hetterlingh J-P. (2006). Country-dependent Characterisation Factors for Acidification And Terrestrial

- Eutrophication Based on Accumulated Exceedance as an Impact Category Indicator. *International Journal of Life Cycle Assessment*. 11(6), 403-416.
- Sikdar, S. K. (2003). Journey Towards Sustainable Development: A Role for Chemical Engineers. *Environmental Progress*. 22(4), 227-232.
- Singh, R. K., Murty, H. R., Gupta, S. K., and Dikshit, A. K. (2012). An Overview of Sustainability Assessment Methodologies. *Ecological Indicators*. 15(1), 281-299.
- SIRIM (2011). Sirim Economic-labelling Scheme.[Brochure], Issue 1, rev 1. Retrieve from <http://www.sirim-qas.com.my/pdf/2011/brochure/SIRIM%20Eco-Labelling%2017%20Nov202011.pdf> on June 2013.
- Sombekke, H. D. M., Voorhoeve, D. K., and Hiemstra, P. (1997). Environmental Impact Assessment of Groundwater Treatment with Nanofiltration. *Desalination*. 113(2-3), 293-296.
- Suhana, J., Ismail, A. F. and Shahrir, H. (2004). Preparation and Characterization of Polyethersulfone Hollow Fiber Nanofiltration Membranes Made from PES/NMP/PEG 400/WATER. *Proceedings of Regional Symposium on Membrane Science and Technology 2004*. 21-25 April. Johor Bahru, Malaysia.
- Swedish EPA (2009). Swedish Pollutant Release and Transfer Register-NMVOC. Retrieved from <http://utslappisiffror.naturvardsverket.se/en/Substances/Other-gases/Non-methane-volatile-organic-compounds/> on September 2012.
- Tangsubkul, N., Parameshwaran, K., Lundie, S., Fane, A. G., and Waite, T. D. (2006). Environmental Life Cycle Assessment of the Microfiltration Process. *Journal of Membrane Science*. 284(1-2), 214-226.
- Tillman, A. M., Svingby, M., and Lundström, H. (1998). Life Cycle Assessment of Municipal Waste Water Systems. *The International Journal of Life Cycle Assessment*. 3(3), 145-157.
- Tres M. V., Nobrega R., Carvalho R. B., Oliveira J. V. and Di Luccio M., (2012). Solvent Recovery From Soybean Oil/N-Hexane Mixtures Using Hollow Fiber Membrane. *Brazilian Journal of Chemical Engineering*. 29 (03), 577-584.
- Ullah, A., Mat Saman, M. Z. and Mahmood, S. (2014). Development of Multi-criteria Analysis Methodology to Determine Product End-of-Life Treatment Option. *Advanced Material Research*. 845, 852-856.

- U.S Department of Labor, Occupational Safety and Health Administration (2002). Carbon Monoxide Poisoning. Via [https://www.osha.gov/OshDoc/data\\_General\\_Facts/carbonmonoxide-factsheet.pdf](https://www.osha.gov/OshDoc/data_General_Facts/carbonmonoxide-factsheet.pdf) on April 2013.
- U.S. Department of State (2007). *Fourth Climate Action Report to the UN Framework Convention on Climate Change: Projected Greenhouse Gas Emissions*. U.S. Department of State, Washington, DC, USA.
- Ujang, Z. and Buckley, C. (2002). Water and Wastewater in Developing Countries: Present Reality and Strategy for the Future. *Water Science and Technology*. 46(9), 1-9.
- UNESCO (2003). *Water for People, Water for Life*. World Water Assessment Programme, The United Nation World Water Development Report.
- United Nation Commission on Sustainable Development (2001). Retrieved from <http://sustainabledevelopment.un.org/csd.html> on June 2012.
- US Geological Survey, *Human Health* Retrieved from <http://health.usgs.gov/> on 9 September 2012.
- Vandevivere, P. C., R. Bianchi, *et al.* (1998). Review: Treatment and Reuse of Wastewater from the Textile Wet-Processing Industry: Review of Emerging Technologies. *Journal of Chemical Technology & Biotechnology*. 72(4), 289-302.
- Vince, F., Aoustin, E., Bréant, P., and Marechal, F. (2008). LCA Tool for the Environmental Evaluation of Portable Water Production. *Desalination*. 220(1-3), 37-56.
- Wang, D., Li, K. and Teo, W. K. (1999). Preparation and Characterization of Polyvinylidene Fluoride (PVDF) Hollow Fiber Membranes. *Journal of Membrane Science*. 163, 211-220.
- Ying, H. A. O., and Chen, G. (1997). Necessary Conditions for Some Typical Fuzzy Systems as Universal Approximators. *Automatica*. 33(7), 1333-1338.
- Yoon, S. H., Kim, H. S., Yeom, I. T. (2004). Optimization Model of Submerged Hollow Fiber Membrane Modules. *Journal of Membrane Science*. 234, 147-156.
- Zamagni A. and Pesonen H. (2013). From LCA to Life Cycle Sustainability Assessment: Concept, Practice and Future Directions. *International Journal of Life Cycle Assessment*. 18, 1637-1641.