

IMAGE RECONSTRUCTION TECHNIQUE FOR ULTRASONIC  
TRANSMISSION TOMOGRAPHY

MAHDI FARAMARZI

A thesis submitted in fulfilment of the  
requirements for the award of the degree of  
Doctor of Philosophy (Electrical Engineering)

Faculty of Electrical Engineering  
Universiti Teknologi Malaysia

MARCH 2016

*Dedicated to my beloved family especially my parents, my wife, my lovely daughter  
Yasaman and my supportive supervisors –Associate Prof. Dr. Sallahuddin Bin  
Ibrahim, Dr. Mohd Amri Bin Mohd Yunus and Dr. Sayedehsan Alavi Ghahferokhi.  
Thank you very much for being supportive, helpful and understanding.*

## ACKNOWLEDGEMENT

In the name of Allah the most beneficent the most merciful, first and foremost, I thank God for everything that has made this dissertation possible. This research project would not have been possible without the support of many people. I would like to express my deep gratefulness to my supervisors, Professor Dr. Sallehuddin Bin Ibrahim, Dr. Mohd Amri Bin Md Yunus and Dr. Sayed Ehsan Alavi who were abundantly helpful and offered invaluable assistance, support and guidance.

I would like to thank Muhammad Jaysuman Pusppanathan PhD student from PROTOM group, Ali Taheri Anaraki and Taufiq Khairi PhD students of UTM University for their help and support in collecting data from real ultrasonic tomography system.

And finally, my parents, my wife and my daughter provided me with love and understanding. Their constant encouragement and emotional support kept my vigor and life line alive in research.

## ABSTRACT

Precise flow control has always been a necessity for developing easier approaches or instrumentation for two-phase flow regime. An important method for monitoring this process is called process tomography such as electrical tomography, optical tomography and ultrasonic tomography (UT). In the case of high-acoustic impedance mixtures e.g. bubbly flow, UT has the advantages in monitoring real time data. Although various researches were conducted using UT systems in bubbly flow regimes, there are still weaknesses especially in real time image reconstruction techniques for monitoring the process. Some efforts such as linear back projection (LBP), filter back projection (FBP), convolution back projection (CBP) and iterative techniques are utilized for reconstructing the image with few views data for UT system. Regardless of the utilized method there still exist two main issues in UT image reconstruction both in forward and inverse problems. In the case of forward problem, the gaps between sensitivity maps cause artifacts in a reconstructed image. Moreover, for inverse problem, limited number of sensors causes artifacts in reconstructed image. In the case of high noisy environment, the LBP, FBP and CBP methods are not capable of totally removing the noise and artifacts level. Dynamic motion of flow regime is considered as another issue in UT system which causes inaccuracy in image reconstruction. Therefore, these issues were considered in developing a modified image reconstruction algorithm which was based on improving the CBP algorithm both in forward and inverse problems. A modified sensitivity map based on Gaussian distribution was utilized to combat the gaps in forward problem, and for the case of inverse problem, the wavelet fusion technique was applied to reduce the noise level, artifacts and the effects of dynamic motions. The simulation and the experimental works had been conducted based on different static profiles. Various types of image reconstruction algorithms were implemented and compared with the proposed technique. The quality of the final reconstructed images was evaluated using structural similarity (SSIM) and peak signal to noise ratio (PSNR). Results show that the WCBP outperforms LBP and CBP in case of SSIM and PSNR. Comparing to LBP, the SSIM and PSNR were improved at least by 30% and 5% respectively while for CBP the improvement were about 5% and 1% respectively.

## ABSTRAK

Kawalan aliran jitu sentiasa menjadi satu keperluan untuk membangunkan pendekatan yang lebih mudah atau peralatan untuk rejim aliran dua fasa. Satu kaedah penting bagi memantau proses ini dipanggil proses tomografi seperti tomografi elektrik, optik dan ultrasonik (UT). Dalam kes campuran galangan akustik tinggi contohnya aliran berbuih, UT mempunyai kelebihan dalam memantau data masa sebenar. Walaupun pelbagai kajian telah dijalankan menggunakan sistem UT dalam rejim aliran berbuih, masih terdapat kelemahan terutama dalam teknik-teknik pembinaan semula imej masa sebenar untuk memantau proses. Beberapa algoritma seperti unjuran belakang lurus (LBP), unjuran belakang bertapis (FBP) dan teknik lalaran digunakan untuk membina semula imej dengan beberapa paparan data untuk sistem UT. Tidak kira apa kaedah yang digunakan, masih terdapat dua isu utama dalam pembinaan semula imej UT dalam kedua-dua masalah hadapan dan songsang. Jurang dalam peta sensitiviti mempunyai kesan negatif ke atas imej yang dibina semula dalam kes masalah hadapan. Selain itu, untuk masalah songsang jumlah penderia yang terhad menyebabkan artifak dalam imej yang dibina semula. Dalam kes persekitaran yang amat hingar, kaedah LBP, FBP dan CBP mampu mengeneipkan sepenuhnya tahap hingar dan artifak itu. Gerakan dinamik rejim aliran dianggap sebagai isu lain dalam sistem UT yang menyebabkan ketidaktepatan dalam pembinaan semula imej. Oleh itu, isu-isu tersebut telah diambil kira dalam mengubah suai algoritma pembinaan semula imej yang bertujuan memperbaiki algoritma CBP dalam masalah hadapan dan songsang. Sebuah peta kepekaan yang telah diubah suai berasaskan taburan Gaussian digunakan untuk mengatasi jurang yang wujud dalam masalah hadapan dan bagi kes masalah songsang teknik pelakuran gelombang kecil digunakan untuk mengurangkan tahap hingar, artifak dan kesan gerakan dinamik. Simulasi dan ujikaji telah dijalankan dalam profil statik yang berbeza. Pelbagai jenis algoritma pembinaan semula imej telah dilaksanakan dan dibandingkan dengan teknik yang dibentangkan. Kualiti imej akhir yang dibina semula dinilai dengan menggunakan persamaan struktur (SSIM) dan nisbah isyarat puncak kepada bunyi (PSNR). Keputusan menunjukkan keunggulan kaedah WCBP berbanding dengan LBP dan CBP untuk SSIM dan PSNR. Berbanding dengan LBP, SSIM dan PSNR telah diperbaiki sekurang-kurangnya masing-masing 30% dan 5% manakala untuk CBP, perbaikannya ialah masing-masing 5% dan 1%.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>ACKNOWLEDGEMENT</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	xi
	<b>LIST OF FIGURES</b>	xiii
	<b>LIST OF ABBREVIATIONS</b>	xvi
	<b>LIST OF APPENDICES</b>	xvii
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Background of the Study	1
	1.2 Problem Formulation	4
	1.2.1 Forward Problem	5
	1.2.2 Inverse Problem	6
	1.3 Objectives of Study	7
	1.4 Scope of the Study	8
	1.5 Thesis Layout	8
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>10</b>
	2.1 Introduction	10
	2.2 Flow Regime and Flow Measurement	12
	2.3 Process Tomography (PT)	13
	2.3.1 X-ray Computed Tomography	15

2.3.2	Electrical Capacitance Tomography (ECT)	15
2.3.3	Electrical Impedance and Electrical Resistance Tomography (EIT and ERT)	16
2.3.4	Optical Tomography (OT)	17
2.3.5	Ultrasonic Tomography (UT)	18
2.4	Ultrasonic Physical Concepts	22
2.4.1	Ultrasonic at Material Interfaces	24
2.4.2	Attenuation Modeling	24
2.4.3	Ultrasonic Sensing Modes	25
2.4.4	Real Time Constrains of UTT System	26
2.5	Image Reconstruction Techniques	26
2.5.1	Sensor Geometry and Data Acquisition	30
2.5.2	Data Types in Process Tomography	30
2.5.3	Rebinning	30
2.5.4	Forward Problem	31
2.5.5	Reconstruction Algorithms Applicable to Tomography	32
2.5.5.1	Linear Back Projection (LBP)	33
2.5.5.2	2-D Fourier Transforms	35
2.5.5.3	Filtered Back Projection (FBP)	36
2.5.5.4	Convolution Back Projection (CBP)	37
2.5.6	Iterative Methods	39
2.5.6.1	Mathematics of ART	40
2.6	Image Fusion and Wavelet Transform	42
2.7	Previous Works on Image Reconstruction in UTT Systems	45
2.8	Summary	47

<b>3</b>	<b>IMPLEMENTATION OF WCBP IMAGE RECONSTRUCTION TECHNIQUE</b>	<b>48</b>
3.1	Introduction	48
3.2	System Configuration and Fan Beam Projection	49

3.3	Forward Problem	52
3.4	Inverse Problem	57
3.5	Rebinning	59
3.6	Wavelet Based Convolution Back Projection (WCBP) Method	60
3.6.1	Wavelet Based Image Fusion	62
3.7	Image Quality Assessments	65
3.7.1	Peak Signal to Noise Ratio (PSNR)	65
3.7.2	Structural Similarity Index	66
3.7.3	Area Error (AE) Theory	67
3.8	Summary	67
<b>4</b>	<b>SIMULATION MODEL AND SOFTWARE DEVELOPMENT</b>	<b>68</b>
4.1	Introduction	68
4.2	Software Development	68
4.3	Simulation Analysis	73
4.4	Forward Problem Model	76
4.4.1	Image Reconstruction by LBP Method	77
4.4.1.1	The SSIM Analysis for LBP Method	82
4.4.1.2	AE Analysis for LBP Method	83
4.4.2	Image Reconstruction by CBP Method	85
4.4.2.1	SSIM Analysis for CBP Method	90
4.4.2.2	The AE Analysis for CBP Method	91
4.4.3	Discussion of Study	93
4.5	Inverse Problem	93
4.5.1	Discussion on Inverse Problem	100
4.6	Summary	101
<b>5</b>	<b>HARDWARE DEVELOPMENT AND ANALYSIS</b>	<b>102</b>
5.1	Introduction	102
5.2	Development of the measurement system	102
5.2.1	Ultrasonic Transducers and Switching	104



5.2.2	Ultrasonic Electrical Circuitry	106
5.2.2.1	Transmitter Unit	106
5.2.2.2	Receiver Unit	107
5.2.3	Controller and Data Acquisition Unit	113
5.2.4	PCB design	114
5.3	Experimental Result and Analysis	116
5.3.1	Image Reconstruction by the LBP Method	117
5.3.2	Image Reconstruction by the CBP Method	121
5.3.3	Image Reconstruction by the WCBP Method	124
5.3.4	SSIM Index Analysis	126
5.3.5	PSNR Analysis	128
5.4	Summary	129
<b>6</b>	<b>CONCLUSIONS AND FUTURE WORK</b>	<b>130</b>
6.1	Introduction	130
6.2	Contribution to the Field of Process Tomography	131
6.3	Research Contribution	132
6.4	Suggestion for Future Work	132
	<b>REFERENCES</b>	<b>134</b>
	Appendices A-B	147-154

## LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Flow pattern in a vertical pipe [36]	12
2.2	Sensors for process tomography [31, 37]	14
2.3	Some details of ultrasonic transmission mode configuration and applied image reconstruction techniques of previous works	46
3.1	2D and 3D images of sensitivity maps for different transmitter- receiver pairs	53
3.2	2D and 3D images of proposed sensitivity maps for different transmitter-receiver pair	56
3.3	Reposition fan projections to parallel projections for 16 ultrasonic Transceivers ( $\theta \in [0, 2\pi)$ )	60
4.1	Simulated phantoms and their details	74
4.2	Evaluation of the exponential sensitivity map for noiseless data by LBP method	78
4.3	SSIM Indices for all reconstructed images by LBP	82
4.4	SSIM improvement (%) by using sensitivity map for the LBP method	83
4.5	AE (%) for the LBP Method with a threshold of 0.93	84
4.6	Evaluation of exponential sensitivity map for noiseless data by CBP method	86
4.7	SSIM Indexes for all reconstructed images by CBP	90
4.8	SSIM improvement (%) by using sensitivity map for CBP method	91
4.9	The AE (%) for the CBP Method with a threshold of 0.91	92
4.10	Noiseless and noisy radon space for phantom 3	94

4.11	Image reconstructed by LBP, CBP and WCBP methods for 20% noisy data	95
4.12	SSIM result for 20 % noise added to all phantoms	97
4.13	PSNR result for 20 % noise added to all phantoms	97
4.14	SSIM of reconstructed images of LBP, CBP and WCBP methods for noisy data	98
4.15	PSNR of reconstructed images of LBP, CBP and WCBP methods for noisy data	99
5.1	Relationship between different frequencies and gas cavity	104
5.2	Times of flight ( $\mu s$ ) of ultrasonic signals of all sixteen sensors	112
5.3	Phantoms and their details	116
5.4	Images reconstructed by the LBP method	118
5.5	Images reconstructed by the CBP method	121
5.6	Images reconstructed by the WCBP method	125
5.7	SSIM index for all phantoms using LBP, CBP and WCBP methods	127
5.8	Numerical results of the PSNR for LBP, CBP and WCBP methods	129

## LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	(a) Phantom simulated in MATLAB (b) sensitivity map of S16-S1-S2 sensors in 2-D view (c) ) Image reconstructed by LBP method with gaps in sensitivity maps (d) Image reconstructed by LBP method using sensitivity maps without gap	5
1.2	(a) Phantom simulated in MATLAB (b) Noisy image reconstructed by the LBP method (c) Noisy image reconstructed by the FBP method	6
2.1	Literature Review Map	11
2.2	Ultrasonic wave propagation inside an acrylic pipe (a) only pure water medium in 2D and 3D (b) bubbly air/water two-phase flow medium in 2D and 3D	23
2.3	Region of interest (ROI) in tomography	28
2.4	Radon transform of object for two angles ( $\theta = 0^\circ, 90^\circ$ )	29
2.5	a) Simulated phantom b) Sinogram of phantom by 16-projections and 64 angles	29
2.6	Rebinning from fan projection to parallel for 8 sensors	31
2.7	Linear sensitivity map in discrete format	32
2.8	a) Phantom image b) LBP with 8 sensors shows artifacts c) LBP with 32 sensors resulted in blurred image.	33
2.9	LBP for a point of $f(x, y)$ in fan beam geometry	34
2.10	a) Ram-Lak, Hamming and Hanning filters in the frequency domain b) Ram-Lak, Hamming and Hanning filters in the time domain	38
2.11	Image reconstruction procedure of analytical methods	39

2.12	Sensors sensitivity map	41
2.13	Image reconstruction procedure for ART technique	42
2.14	Block diagram of generic image fusion scheme using DWT	44
3.1	The projections for 16 ultrasonic transceivers mounted at the peripheral of a pipe	49
3.2	Fan beam projection system in which transceiver TR9 works as transmitter and the other sensor functions as a receiver	50
3.3	(a) The system configuration with 16 transceivers sensor (b) sensors arrangement	51
3.4	Sensitivity maps of two parallel transmitter-receiver pairs using (a) conventional sensitivity map and (b) the proposed sensitivity map	54
3.5	Typical example of two parallel projection in fan beam geometry	55
3.6	Image reconstruction by LBP method (a) three bubbles phantom b) LBP method with normal sensitivity map c) LBP method with exponential sensitivity map	57
3.7	(a) Ring array ultrasonic transmission mode tomography with 16 transceivers (b) conversion to parallel beam for $\theta = 157.5^\circ$	59
3.8	(a) Four bubbles phantom (b) and (c) image reconstructed from noiseless data in $0, \pi$ and $\pi, 2\pi$ interval, respectively. (e) and (f) image reconstructed from $0, \pi$ and $\pi, 2\pi$ interval respectively, by adding noise to captured data	61
3.9	WCBP Algorithm	62
3.10	Phantom with five bubbles in different size	63
3.11	(a) Conversion to radon space by using parallel projections at a projection angle $\theta = 0$ (b) data captured in parallel mode from phantom	63
3.12	(a) Ram-Lak filter in spatial domain (b) filtered data of Figure 3.11(b) by convolving to Ram-Lak.	64
3.13	(a) a reconstructed image for $0, \pi$ interval (b) a reconstructed image for $\pi, 2\pi$ interval.	64
3.14	The image reconstructed by The WCBP method	65
4.1	GUI for simulation study	69

4.2	Flowchart of simulation program	69
4.3	LBP algorithm flowchart	70
4.4	CBP algorithm flowchart	71
4.5	WCBP algorithm flowchart	72
4.6	SSIM Indexes for all reconstructed images by LBP	82
4.7	AE Percentage (%) for all reconstructed images by LBP	84
4.8	SSIM Indexes for all reconstructed images by CBP	90
4.9	AE Percentage (%) for all reconstructed images by the CBP	92
5.1	Ultrasonic tomography measurement setup	103
5.2	UTT electrical circuit block diagram	104
5.3	Switch characteristics	105
5.4	(a) Generated pulse from controller (b) Transmitter circuit	107
5.5	TLE 2072 top view	108
5.6	Receiver Circuit [102]	108
5.7	Prototype PCB of two transmitter and receiver circuits	109
5.8	(a) Excitation pulses of transmitter and receiver output of the second amplifier (b) rectified signal after diode (c) amplified signal and its envelope	110
5.9	(a) LF398 sample and hold circuit (b) sample and hold start and end timing	111
5.10	Timing diagram of S&H process	114
5.11	(a) Four Channel ultrasonic transmitter and receiver PCB (b) Sensing Array (c) whole ultrasonic hardware setup	115
5.12	SSIM Index for all reconstructed images using LBP, CBP and WCBP methods	127
5.13	PSNR for all reconstructed images using LBP, CBP and WCBP methods	128

**LIST OF ABBREVIATIONS**

ACM	-	Adjacent Criterion Method
CBP	-	Convolution Back Projection
CT	-	Computed Tomography
DWT	-	Discrete Wavelet Transform
ECT	-	Electrical Capacitance Tomography
EIT	-	Electrical Impedance Tomography
ERT	-	Electrical Resistance Tomography
FBP	-	Filtered Back Projection
FEM	-	Finite Element Method
HIS	-	Hue Intensity Saturation
IF	-	Image Fusion
LBP	-	Linear Back Projection
MRT	-	Magnetic Resonance Tomography
MSE	-	Mean Squared Error
NDT	-	Nondestructive Testing
OT	-	Optical Tomography
PET	-	Positron Emission Tomography
PCA	-	Principal Component Analysis
PT	-	Process Tomography
SART	-	Simultaneous Algebraic Reconstruction Technique
SIRT	-	Simultaneous Iterative Reconstruction Technique
SNR	-	Signal to Noise Ratio
SSIM	-	Structural Similarity Index
UTT	-	Ultrasonic Transmission Tomography
UT	-	Ultrasonic Tomography
VF	-	Void Fraction
WCBP	-	Wavelet based Convolution Back Projection

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	Sensitivity map codes	147
B	Find best threshold for AE	154



## **CHAPTER 1**

### **INTRODUCTION**

#### **1.1 Background of the Study**

Multi-phase flow takes place as two or more discrete phases flow in a closed pipe or a vessel. Examples of phases include gas, liquid or solid and also different immiscible liquids or solids [1]. Two phase flow of fluids (e.g. gas/liquid, liquid/liquid, etc.) is an important phenomenon in which two immiscible phases coexist in a thermodynamic equilibrium. As a two phase flow regime, bubbly flow column are intensively used as multiphase contactors and reactors in chemical, biochemical and petrochemical industries. Investigation of design parameters characterizing the operation and transport phenomena of bubble columns have led to better understanding of the hydrodynamic properties, heat and mass transfer mechanisms and flow regime characteristics ongoing during the operation [2, 3]. Due to the stringent regulations on precise flow control especially in the case of two phase fluid flow,, there has always been a necessity for developing an easier to use, yet more precise approaches or instrumentation. Accordingly, tomographic measurement is more significant and attractable especially in today's industrial process [4].

Process tomography (PT) provides a novel tool for visualizing the internal behavior of industrial processes. PT which has been applied to various industries is a versatile technique for producing cross-sectional images of a continuum with the ability of discerning between the compartments of a heterogeneous phase from the continuous one [3]. These images provide valuable information on a process, which

are applicable in monitoring, mathematical model verification and also intelligent control. In PT the interest is often in extracting valuable information, such as void fraction (VF), mean velocity. [5]. This information which is provided by processing the signals received at multiple locations enables the researchers to acquire a global knowledge of the measured field.

Since 1980 there have been some efforts to develop the industrial PT techniques. Electrical capacitance tomography (ECT), electrical impedance tomography (EIT), electrical charge tomography (ECHAT), optical tomography (OT), Gamma-ray, X-ray, magnetic resonance imaging (MRI) and ultrasonic tomography (UT) are examples of these techniques which are applied in PT based on the inherent properties of materials [6]. These methods can be categorized as hard-field and soft-field which in the former case regardless of the type of material or medium, the direction of travel of the energy waves from the source is constant. UT and X-ray are two examples of hard-field tomography. On the other hand, in the soft-field, the electric current is introduced to the medium being imaged and an electric field distribution is determined based on the physical electrical properties of that material, allowing a map of resistance, capacitance or impedance distribution to be reconstructed by a computer to form the tomogram. The nature of soft field is much more complex than hard field and requires considerably more computer analysis and algorithms to reconstruct the image [7] because soft field is a nonlinear process while hard field is a linear one. ECT is an example of soft-field tomography.

Among all these methods, ultrasound is able to detect changes in acoustic impedance ( $Z$ ), which is closely related to the density ( $\rho$ ) of the media ( $Z = \rho c$ , where  $c$  is the velocity of sound), and thus complements other tomographic imaging technologies such as ECT and EIT [8]. Therefore, UT imaging can be used in liquid/gas two-phase flow regime with two-component high-acoustic impedance mixtures e.g. bubbly flow[9]. Moreover, it is low in cost compared to X-ray or Gamma-ray methods [10].

UT consists of two parts; hardware and software. Hardware includes the sensing array which is mounted peripherally around the pipe, electrical circuits

including signal conditioning and controllers as well as a PC for data processing and monitoring. After exciting a sensor with an electrical pulse, physical waves will propagate from the ultrasonic sensor towards the medium. The propagated waves inside the pipe are scattered and attenuated while they encountered with a wall of two materials. Therefore, a wave with a weak amplitude can be sensed by the receivers mounted on the other side of the pipe. After collecting the data from all receivers, the next step is to feed these data to a PC in order to reconstruct an image which represent the profile of the materials inside the pipe cross section. This procedure is called the image reconstruction technique.

The software consists of image reconstruction algorithms which plays an important role in the last step of cross-sectional monitoring of a pipe. Image reconstruction consists of two parts namely forward and inverse problem. The forward problem deals with the theoretical output of each sensor and the sensing area using sensitivity maps while the objective of the inverse problem is to reconstruct an image to find the distribution of materials such as gas bubbles inside water.

There are two major categories in the field of image reconstruction methods; analytical/single step and series expansion/iterative methods [11]. Beside these two major categories there are some heuristic methods which have been used for image reconstruction including non-linear, artificial neural network (ANN) [12, 13] and fusion methods (wavelet fusion) [14, 15], where a dual mode tomography is applied. Contrary to the speed and simple implementation of analytical methods, they have limitations in terms of the less number of sensors being used or few view data, which leads to less accuracy. On the other hand, iterative methods are insensitive to noise and they are capable of reconstructing an optimal image in the case of incomplete data but they suffered mostly from low computational speed [16].

There have been some attempts to improve the setup of ultrasonic hardware for two-phase flow measurement as reported in [17-22]. They deal with different ultrasonic frequencies, various numbers of sensors, different types of sensors and speeding up the data acquisition systems to enhance the resulting image. Apart from hardware setup, some efforts have been made on utilizing new techniques for

improving the reconstructed image in UT. These image reconstruction techniques mostly use analytical methods such as linear back projection and filter back projection to reconstruct an image from projections [23-25]. The high speed of analytical methods which is a critical point in real-time processing is the main reason in selecting them rather than the iterative methods. However, the drawback of the analytical methods is that they do not generate an optimal quality image in the case of incomplete data.


In UT, the limited number of sensors yields incomplete data which leads to artifacts and noise in images reconstructed using the analytical method. Therefore, in this case the VF which depends on the quality of the reconstructed images in UT is also poor. It should be noted, in industrial process data obtained from VF is used to calculate some parameters of materials which is very important and critical for measurement analysis [26, 27]. In order to improve the VF parameter for reconstructed image, this thesis focuses on developing an image reconstruction algorithm based on an analytical method for ultrasonic transmission mode tomography (UTT) system. To this end, for the forward problem a new sensitivity map is developed to improve the quality of the reconstructed image and in the inverse problem the wavelet fusion is utilized to reduce noise which appears in the image.

## **1.2 Problem Formulation**

Some efforts utilizing linear back projection (LBP) [28], filter back projection (FBP) [29] and algebraic reconstruction techniques [30] have been employed for reconstructing images with few views of data for the UTT system. Regardless of the utilized method there still exist two main issues in UTT image reconstruction both in forward and inverse problems. The subsequent subsections will briefly describe these issues.

### 1.2.1 Forward Problem

Figures 1.1(a) to (d) illustrates the 2-D phantom of three air bubbles in liquid as well as its reconstructed images with LBP method using different sensitivity maps. The images were reconstructed by considering 16-sensors mounted around the cross section of a pipe. Figure 1.1 (b) shows the sensitivity maps generated with respect to the physical length and position of sensors (S1-S16). Figure 1.1 (c) is the reconstructed image by the LBP method using the sensitivity maps with gaps. Finally, Figure 1.1(d) is reconstructed using a sensitivity map without gaps. By comparing Figures 1.1 (c) and (d) it can be concluded that the reconstructed image by modified sensitivity maps improve the quality of images.

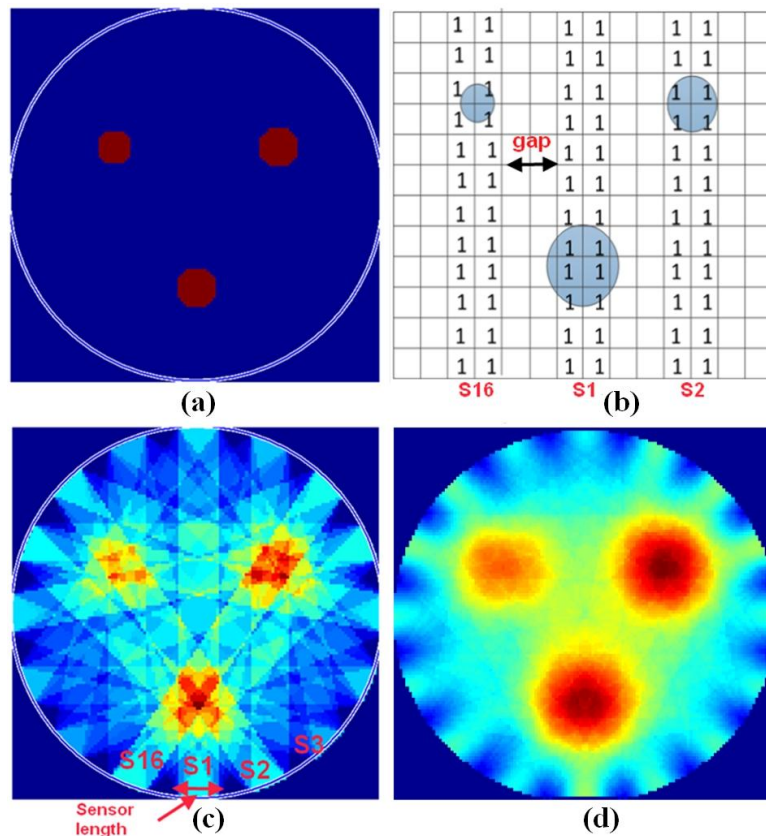


**Figure 1.1** (a) Phantom simulated in MATLAB (b) sensitivity map of S16-S1-S2 sensors in 2-D view (c) Image reconstructed by LBP method with gaps in sensitivity maps (d) Image reconstructed by LBP method using sensitivity maps without gap

In order to reduce the effect caused by gaps, [23] virtually considered the length of the sensors twice than the physical length and used an equation based on the inclusion of each pixel with the line between excited transmitter and receiver. Even this method had covered the gaps but doubling the length of sensors would result to increase the detectable size of bubbles as well, therefore, the error rate is still high.

### 1.2.2 Inverse Problem

Because of the high accuracy of the iterative methods they have been utilized for offline processing, but their accuracy suffered due to the slow processing speed in real-time applications [31]. Hence, the analytical method is the best choice for the UT system.

Based on the physical aspects of the ultrasonic wave propagation which depends on the properties of the medium, the obtained images from the analytical methods are noisy and include artifacts. A four bubbles phantom in Figure 1.2 (a) simulated in MATLAB and its reconstructed images by the LBP and FBP methods in Figures 1.2 (b) and (c) shows an example of such noisy images. In the case of high noisy environment the LBP and FBP methods are not capable of totally removing the noise and artifacts level as shown in Figures 1.2 (b) and (c).

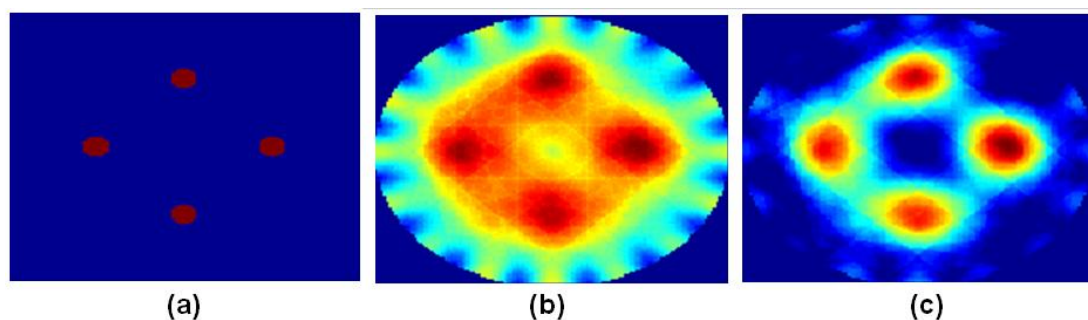

**Figure 1.2** (a) Phantom simulated in MATLAB (b) Noisy image reconstructed by the LBP method (c) Noisy image reconstructed by the FBP method

The dynamic motion of flow regime is considered as another issue in the UT system which causes inaccuracy in image reconstruction. In a vertical pipe, the bubble shape and its velocity is changed during movement from the bottom to top which effects on temporal and spatial resolution. High frequency is needed to achieve higher spatial resolution. As an example, the spatial resolution of a system using array of 333 kHz ultrasonic sensors should be 2.25% of a pipe with inner diameter of 100 mm [32], but conventional method e.g. LBP and CBP reconstruct images with low spatial resolution.

### **1.3 Objectives of Study**

A limited number of sensors in UTT system cause difficulties in two-phase flow regimes image reconstruction such as creating gaps in the resulting image. The presence of noise, which commonly occurs in industrial processes, lead to additional problems. In this research a method is proposed to improve image reconstruction using a limited number of sensors in UTT system.

According to the stated problems, the main objectives of this thesis are as follows:

- (i) To develop an image reconstruction technique based on the analytical method in both forward and inverse problems for two-phase flow regimes inside a vertical pipe using the UT system.
- (ii) To implement a real 16-channel UT system for bubbly flow regime by transceivers sensors.
- (iii) To validate the accuracy of modified method results using different image quality criterions.

## 1.4 Scope of the Study

The research scopes of this thesis consist of the following parts:

- To study image reconstruction principles and methods employed in UTT system i.e. LBP, algebraic reconstruction techniques (ART), and CBP and image fusion techniques based on the wavelet transform.
- To simulate bubbly flow regime in MATLAB software for image reconstruction techniques and accessed the performance of proposed image reconstruction algorithms.
- To implement an experimental UTT setup with transceiver sensors for image reconstruction validity.

## 1.5 Thesis Layout

The organization of this thesis is structured as follows:

In the first chapter of the thesis an overview of process tomography is presented and the existing problems in the theory of image reconstruction by UTT system are elaborated. Based on the formulated problems the objectives and scopes of the thesis have been defined.

Chapter 2 presents a literature review on tomography including ultrasonic tomography system. While, some important related works in this area were critically reviewed and deeply scrutinized, current challenging problems facing each image reconstruction method are also discussed.

Chapter 3 provides the proposed methods to improve the image reconstruction technique for UTT systems in both forward and inverse problems and also presents a new technique to combat the noise effects in image reconstruction.



Chapter 4 describes the proposed technique using software simulation in MATLAB. The analytical formulation of the new technique is also presented in this chapter.

The proposed technique is experimentally verified and the results are presented in chapter 5. Chapter 5 also discusses the system performance and the comparison was made with other research works in this scope.

Finally, the research contributions, conclusions and future work as well as project constraints and limitations are discussed and presented in chapter 6.

## REFERENCES

1. Da Silva, M. J. 2008. Impedance sensors for fast multiphase flow measurement and imaging. PhD Thesis, Technische Universität Dresden.
2. Kantarci, N., F. Borak and K. O. Ulgen. Bubble column reactors. *Process Biochemistry*. 2005. 40(7): 2263-2283.
3. Tan, C., J. Zhao and F. Dong. Gas–water two-phase flow characterization with Electrical Resistance Tomography and Multivariate Multiscale Entropy analysis. *ISA transactions*. 2014, 55, 241-249.
4. Wahab, Y. A., R. A. Rahim, M. H. F. Rahiman, S. R. Aw, *et al.* Non-invasive Process Tomography in Chemical MIXTURES-A Review. *Sensors and Actuators B: Chemical*. 2015, 210(2), 602-617.
5. Hua, L., W. Mi, W. Ying-xiang, M. Yi-xin, *et al.* Measurement of oil volume fraction and velocity distributions in vertical oil-in-water flows using ERT and a local probe. *Journal of Zhejiang University Science A*. 2005. 6(12): 1412-1415.
6. Wahab, Y. A., R. A. Rahim, M. H. F. Rahiman, H. A. Rahim, *et al.* A Review of Process Tomography Application in Inspection System. *Jurnal Teknologi*. 2014. 70(3), 35-39.
7. Wei, H. and M. Soleimani. Electromagnetic Tomography for Medical and Industrial Applications: Challenges and Opportunities [Point of View]. *Proc. IEEE*. 2013. 101(3): 559-565.
8. Rahiman, M., R. ABDUL RAHIM, N. WEI NYAP and C. KOK SAN. Monitoring liquid/gas flow using ultrasonic tomography. Proc. 3<sup>rd</sup> International Symposium on Process Tomography, Lodz, Poland, 2004, 130-133.

9. Rahiman, M. F., R. A. Rahim and Z. Zakaria. Design and modelling of ultrasonic tomography for two-component high-acoustic impedance mixture. *Sensors and Actuators A: Physical*. 2008. 147(2): 409-414.
10. Steiner, G. and F. Podd. A non-invasive and non-intrusive ultrasonic transducer array for process tomography. *Proc.of the XVII IMEKOP WORLD CONGRESS*. Rio de Janeiro. 2006. 17-22.
11. Zeng, G. Image reconstruction—a tutorial. *Computerized Medical Imaging and Graphics*. 2001. 25(2): 97-103.
12. Cierniak, R. New neural network algorithm for image reconstruction from fan-beam projections. *Neurocomputing*. 2009. 72(13): 3238-3244.
13. Cierniak, R. A 2D approach to tomographic image reconstruction using a Hopfield-type neural network. *Artificial intelligence in medicine*. 2008. 43(2): 113-125.
14. Li, S., H. Wang, L. Zhang and W. Fan. Image reconstruction of electrical resistance tomography based on image fusion. *Instrumentation and Measurement Technology Conference (I2MTC), 2011 IEEE: IEEE*. 2011. 1-5.
15. Rahim, R. A., M. H. F. Rahiman, R. M. Zain and H. A. Rahim. Image fusion of dual-modal Tomography (Electrical Capacitance and Optical) for solid/gas flow. *International Journal of Innovative Computing, Information and Control*. 2011. 7(9): 5119-5132.
16. Ismail, I., J. Gamio, S. A. Bukhari and W. Yang. Tomography for multi-phase flow measurement in the oil industry. *Flow Measurement and Instrumentation*. 2005. 16(2): 145-155.
17. Abbaszadeh, J., H. A. Rahim, R. A. Rahim, S. Sarafi, *et al.* Design procedure of ultrasonic tomography system with steel pipe conveyor. *Sensors and Actuators A: Physical*. 2013. 203: 215-224.
18. Ayob, N. M. N., M. J. Puspanathan, R. A. Rahim, M. H. F. Rahiman, *et al.* Small Gas Component Detection using Ultrasonic Transmission-mode Tomography System. *Jurnal Teknologi*. 2014. 69(8): 95-100.
19. Ayob, N. N., M. F. Rahiman, Z. Zakaria, S. Yaacob, *et al.* Dual-Plane Ultrasonic Tomography Simulation using Cross-Correlation Technique for Velocity Measurement in Two-Phase Liquid/Gas Flow. *6th International*

- Colloquium on Signal Processing & Its Applications (CSPA)*. IEEE. 2010, 322-326.
20. Supardan, M. D., Y. Masuda, A. Maezawa and S. Uchida. The investigation of gas holdup distribution in a two-phase bubble column using ultrasonic computed tomography. *Chemical Engineering Journal*. 2007. 130(2): 125-133.
  21. Stotzka, R., G. Gobel and K. Schlote-Holubek. Development of transducer arrays for ultrasound-computer tomography. *Medical Imaging 2003: International Society for Optics and Photonics*. 2003. 513(3): 513-520.
  22. Rahiman, M. F., R. A. Rahim and N. M. N. Ayob. The front-end hardware design issue in ultrasonic tomography. *Sensors Journal, IEEE*. 2010. 10(7): 1276-1281.
  23. Rahiman, M. H. F., R. A. Rahim, H. A. Rahim, Z. Zakaria, *et al.* A Study on Forward and Inverse Problems for an Ultrasonic Tomography. *Jurnal Teknologi*. 2014. 70(3): 113-117.
  24. Desa, M. F. M., M. N. Mansor, A. K. Junoh, A. Ahmed, *et al.* Ultrasonic Sonic Imaging for a Two Phase System Based on Support Vector Machine Classifier. *Advanced Materials Research: Trans Tech Publ*. 2014. 1016(3): 273-278.
  25. Steiner, G., F. Podd, M. Brandner and D. Watzenig. Iterative model-based image reconstruction for ultrasound process tomography. *XVII IMEKO World Congress on Metrology for a Sustainable Development*. Sept. 17-22. Rio de Janiero. 2006.
  26. Tapp, H., A. Peyton, E. Kemsley and R. Wilson. Chemical engineering applications of electrical process tomography. *Sensors and Actuators B: Chemical*. 2003. 92(1): 17-24.
  27. Sardeshpande, M. V., S. Harinarayan and V. V. Ranade. Void fraction measurement using electrical capacitance tomography and high speed photography. *Chemical Engineering Research and Design*. 2015. 94: 1-11.
  28. Abdul Wahab, Y., M. Ahmad, R. Abdul Rahim and M. Fazalul Rahiman. Application of transmission-mode ultrasonic tomography to identify multiphase flow regime. *Electrical, Control and Computer Engineering (INECCE), 2011 International Conference on: IEEE*. 2011. 119-123.

29. Xu, L.-J. and L.-A. Xu. Ultrasound tomography system used for monitoring bubbly gas/liquid two-phase flow. *Ultrasonics, Ferroelectrics, and Frequency Control, IEEE Transactions on*. 1997. 44(1): 67-76.
30. Peterlik, I., R. JI ˇRÍK, N. Ruiter and J. JAN. Regularized image reconstruction for ultrasound attenuation transmission tomography. *Radioengineering*. 2008. 17(2): 125-132.
31. Beck, M. S. *Process Tomography: Principles, Techniques and Applications*: Butterworth-Heinemann. 2012
32. Rahiman, M. H. F., R. A. Rahim and N. M. N. Ayob. The front-end hardware design issue in ultrasonic tomography. *Sensors Journal, IEEE*. 2010. 10(7): 1276-1281.
33. Dyakowski, T. Process tomography applied to multi-phase flow measurement. *Measurement Science and Technology*. 1996. 7(3): 343.
34. Teniou, S. and M. Meribout. Multiphase flow meters principles and applications: a review. *Can. J. Sci. Ind. Res.* 2011. 2(8): 290-293.
35. Deng, X. and W. Yang. Fusion research of electrical tomography with other sensors for two-phase flow measurement. *Measurement Science Review*. 2012. 12(2): 62-67.
36. Banasiak, R., R. Wajman, T. Jaworski, P. Fiderek, *et al.* Study on two-phase flow regime visualization and identification using 3D electrical capacitance tomography and fuzzy-logic classification. *International Journal of Multiphase Flow*. 2014. 58: 1-14.
37. Beck, M. and R. Williams. Process tomography: a European innovation and its applications. *Measurement Science and Technology*. 1996. 7(3): 215-224.
38. York, T. Status of electrical tomography in industrial applications. *Journal of Electronic Imaging*. 2001. 10(3): 608-619.
39. Soleimani, M. Computational aspects of low frequency electrical and electromagnetic tomography: A review study. *Int. J. Numer. Anal. Model.* 2008. 5(3): 407-440.
40. Elmajri, M. M. *A tomography imaging system using two types of sensors*. M.S. Universiti Teknologi Malaysia, Faculty of Electrical Engineering; 2008

41. Wu, C., Y. Cheng, Y. Ding, F. Wei, *et al.* A novel X-ray computed tomography method for fast measurement of multiphase flow. *Chemical engineering science*. 2007. 62(16): 4325-4335.
42. Hori, K. and M. Akai. Measurement of variation in void fraction distribution by the fast x-ray CT scanner Graph. *Simul. Vis. Multiphase Flow*. 1993. 21: 96-114.
43. Hori, K., T. Fujimoto and K. Kawanishi. Application of cadmium telluride detector to high speed X-ray CT scanner. *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*. 1996. 380(1): 397-401.
44. Misawa, M., I. Tiseanu, H. Prasser, N. Ichikawa, *et al.* Ultra-fast x-ray tomography for multi-phase flow interface dynamic studies. *KERNTECHNIK-BILINGUAL EDITION*-. 2003. 68(3): 85-90.
45. E Schmit, C. and R. B. Eldridge. Investigation of X-ray imaging of vapor–liquid contactors. 1. Studies involving stationary objects and a simple flow system. *Chemical engineering science*. 2004. 59(6): 1255-1266.
46. Bieberle, M., F. Fischer, E. Schleicher, U. Hampel, *et al.* Ultrafast limited-angle-type x-ray tomography. *Applied Physics Letters*. 2007. 91(12): 123516.
47. Zhang, W., C. Wang, W. Yang and C.-H. Wang. Application of electrical capacitance tomography in particulate process measurement—A review. *Advanced Powder Technology*. 2014. 25(1): 174-188.
48. Huang, S. Impedance sensors—dielectric systems. *Process Tomography, Butterworth-Heinemann Ltd, London*. 1995: 49-62.
49. Warsito, W. and L.-S. Fan. Measurement of real-time flow structures in gas–liquid and gas–liquid–solid flow systems using electrical capacitance tomography (ECT). *Chemical Engineering Science*. 2001. 56(21): 6455-6462.
50. Huang, Z., B. Wang and H. Li. Application of electrical capacitance tomography to the void fraction measurement of two-phase flow. *Instrumentation and Measurement, IEEE Transactions on*. 2003. 52(1): 7-12.
51. Gamio, J., J. Castro, L. Rivera, J. Alamilla, *et al.* Visualisation of gas–oil two-phase flows in pressurised pipes using electrical capacitance tomography. *Flow Measurement and Instrumentation*. 2005. 16(2): 129-134.

52. Ismail, I., A. Shafquet and M. N. Karsiti. Application of electrical capacitance tomography and differential pressure measurement in an air-water bubble column for online analysis of void fraction. *Modeling, Simulation and Applied Optimization (ICMSAO), 2011 4th International Conference on: IEEE*. 2011. 1-6.
53. Peng, L., J. Ye, G. Lu and W. Yang. Evaluation of effect of number of electrodes in ECT sensors on image quality. *Sensors Journal, IEEE*. 2012. 12(5): 1554-1565.
54. Warsito, W., Q. Marashdeh and L.-S. Fan. Electrical capacitance volume tomography. *Sensors Journal, IEEE*. 2007. 7(4): 525-535.
55. Wang, A., Q. Marashdeh, B. J. Motil and L.-S. Fan. Electrical capacitance volume tomography for imaging of pulsating Flows in a trickle BED. *Chemical Engineering Science*. 2014. 119:77-87.
56. Wang, F., Q. Marashdeh, L.-S. Fan and W. Warsito. Electrical capacitance volume tomography: design and applications. *Sensors*. 2010. 10(3): 1890-1917.
57. Beck, M. S. *Process tomography: principles, techniques and applications*: Butterworth-Heinemann. 1995
58. George, D., J. Torczynski, K. Shollenberger, T. O'Hern, *et al.* Validation of electrical-impedance tomography for measurements of material distribution in two-phase flows. *International Journal of Multiphase Flow*. 2000. 26(4): 549-581.
59. Sharifi, M. and B. Young. Electrical resistance tomography (ERT) applications to chemical engineering. *Chemical Engineering Research and Design*. 2013. 91(9): 1625-1645.
60. Dong, F., X. Qiao, Z. Jiang and L.-a. Xu. Void fraction measurement of the gas-liquid two-phase flows in vertical pipes using electrical resistance tomography. *Tianjin Daxue Xuebao(J. Tianjin Univ. Sci. Technol.)(China)*. 2004. 37(6): 510-514.
61. Dong, F., Y. Xu, L. Hua and H. Wang. Two methods for measurement of gas-liquid flows in vertical upward pipe using dual-plane ERT system. *Instrumentation and Measurement, IEEE Transactions on*. 2006. 55(5): 1576-1586.

62. Hua, S. and F. Dong. Flowrate measurement with characteristic value cross-correlation by ERT in two-phase vertical pipe flows. *Machine Learning and Cybernetics, 2006 International Conference on: IEEE*. 2006. 1428-1432.
63. Meng, Z., Z. Huang, B. Wang, H. Ji, *et al.* Air-water two-phase flow measurement using a Venturi meter and an electrical resistance tomography sensor. *Flow Measurement and Instrumentation*. 2010. 21(3): 268-276.
64. Wang, R., B. A. Lee, J. S. Lee, K. Y. Kim, *et al.* Analytical estimation of liquid film thickness in two-phase annular flow using electrical resistance measurement. *Applied Mathematical Modelling*. 2012. 36(7): 2833-2840.
65. Wang, R., L. Miao and Y. Ma. A reference conductivity fitting method for ERT system to achieve void fraction of gas/liquid flow. *Flow Measurement and Instrumentation*. 2014. 40: 206-215.
66. Rahim, R. A. A tomography imaging system for pneumatic conveyors using optical fibres. Ph.D. Thesis. Sheffield Hallam University; 1996.
67. Ibrahim, S. *Measurement of gas bubbles in a vertical water column using optical tomography*. Ph.D. Thesis. Sheffield Hallam University; 2000
68. Rahmat, M. Dual modality tomography system using optical and electrodynamic sensors for tomographic imaging solid flow. *international Journal on Smart Sensing and intelligent Systems*. 2010. 3(3): 389-399.
69. Coronado Diaz, H. and R. J. Hugo. Experimental Investigation of an Index-Mismatched Multiphase Flow Using Optical Techniques. *Advances in Optical Technologies*. 2013. 2013; 1-12.
70. Rzaşa, M. R. Selection of Optical Tomography Parameters for Gas Bubble Shape Analysis. *Chemical and Process Engineering*. 2014. 35(1): 19-33.
71. Zain, R. M., R. A. Rahim, M. H. F. Rahiman and J. Abdullah. Simulation of image fusion of dual modality (electrical capacitance and optical tomography) in solid/gas flow. *Sensing and Imaging: An International Journal*. 2010. 11(2): 33-50.
72. Mosorov, V., D. Sankowski and R. M. Zain. A dual modality reconstruction algorithm for optical and electrical capacitance tomography. *Automatyka/Akademia Górniczo-Hutnicza im. Stanisława Staszica w Krakowie*. 2006. 10: 195-202.



73. Schabowicz, K. Ultrasonic tomography—The latest nondestructive technique for testing concrete members—Description, test methodology, application example. *Archives of Civil and Mechanical Engineering*. 2014. 14(2): 295-303.
74. Hoyle, B. S. Real-Time Ultrasonic Process Tomography of Flowing Mixtures. *Particle & particle systems characterization*. 1995. 12(2): 81-86.
75. Plaskowski, A., M. Beck and J. Krawaczynski. Flow imaging for multi-component flow measurement. *Transactions of the Institute of Measurement and Control*. 1987. 9(2): 108-112.
76. Wiegand, F. and B. S. Hoyle. Simulations for parallel processing of ultrasound reflection-mode tomography with applications to two-phase flow measurement. *Ultrasonics, Ferroelectrics and Frequency Control, IEEE Transactions on*. 1989. 36(6): 652-660.
77. Wolf, J. Investigation of bubbly flow by ultrasonic tomography. *Particle & Particle Systems Characterization*. 1988. 5(4): 170-173.
78. Gai, H., Y. Li, A. Plaskowski and M. Beck. Flow imaging using ultrasonic time-resolved transmission mode tomography. *Image Processing and its Applications, 1989., Third International Conference on: IET*. 1989. 237-241.
79. Wiegand, F. and B. Hoyle. Real-time parallel processing in industrial flow measurement using transputer arrays. *Proceedings of the conference on CONPAR 88: Cambridge University Press*. 1989. 482-491.
80. Brown, G., D. Reilly and D. Mills. Development of an ultrasonic tomography system for application in pneumatic conveying. *Measurement Science and Technology*. 1996. 7(3): 396.
81. Li, W. and B. Hoyle. Ultrasonic process tomography using multiple active sensors for maximum real-time performance. *Chemical engineering science*. 1997. 52(13): 2161-2170.
82. Yang, M., H. I. Schlaberg, B. S. Hoyle, M. S. Beck, *et al.* Real-time ultrasound process tomography for two-phase flow imaging using a reduced number of transducers. *Ultrasonics, Ferroelectrics, and Frequency Control, IEEE Transactions on*. 1999. 46(3): 492-501.

83. Xu, L.-J. and L.-A. Xu. Ultrasound tomography system used for monitoring bubbly gas/liquid two-phase flow. *Ultrasonics, Ferroelectrics and Frequency Control, IEEE Transactions on*. 1997. 44(1): 67-76.
84. Xu, L., Y. Han, L.-A. Xu and J. Yang. Application of ultrasonic tomography to monitoring gas/liquid flow. *Chemical Engineering Science*. 1997. 52(13): 2171-2183.
85. Xu, L. and L. Xu. Gas/liquid two-phase flow regime identification by ultrasonic tomography. *Flow Measurement and Instrumentation*. 1998. 8(3): 145-155.
86. Yang, M., H. I. Schlaberg, B. S. Hoyle, M. S. Beck, *et al.* Real-time ultrasound process tomography for two-phase flow imaging using a reduced number of transducers. *Ultrasonics, Ferroelectrics and Frequency Control, IEEE Transactions on*. 1999. 46(3): 492-501.
87. Rahim, R. A., M. Fazalul Rahiman and M. Taib. Non-invasive ultrasonic tomography: Liquid/gas flow visualization. *Computers, Communications, & Signal Processing with Special Track on Biomedical Engineering, 2005. CCSP 2005. 1st International Conference on: IEEE*. 2005. 243-247.
88. Rahiman, M. H. F., R. A. Rahim and M. Tajjudin. Ultrasonic transmission-mode tomography imaging for liquid/gas two-phase flow. *Sensors Journal, IEEE*. 2006. 6(6): 1706-1715.
89. Rahim, R. A., M. Rahiman, K. Chan and S. Nawawi. Non-invasive imaging of liquid/gas flow using ultrasonic transmission-mode tomography. *Sensors and Actuators A: Physical*. 2007. 135(2): 337-345.
90. Muhamad, I., Y. Wahab and S. Saat. Identification of water/solid flow regime using ultrasonic tomography. *System Engineering and Technology (ICSET), 2012 International Conference on: IEEE*. 2012. 1-5.
91. Ayob, N. N., S. Yaacob, Z. Zakaria, M. Fazalul Rahiman, *et al.* Improving gas component detection of an ultrasonic tomography system for monitoring liquid/gas flow. *Signal Processing and Its Applications (CSPA), 2010 6th International Colloquium on: IEEE*. 2010. 1-5.
92. Ayob, N. N., M. H. F. Rahiman, Z. Zakaria, S. Yaacob, *et al.* Detection of small gas bubble using ultrasonic transmission-mode tomography system.

- Industrial Electronics & Applications (ISIEA), 2010 IEEE Symposium on: IEEE*. 2010. 165-170.
93. Rahiman, M., R. A. Rahim and Z. Zakaria. Design and modelling of ultrasonic tomography for two-component high-acoustic impedance mixture. *Sensors and Actuators A: Physical*. 2008. 147(2): 409-414.
  94. Rahiman, M. H. F., Z. Zakaria, R. A. Rahim and W. N. Ng. Ultrasonic tomography imaging simulation of two-phase homogeneous flow. *Sensor Review*. 2009. 29(3): 266-276.
  95. Fazalul Rahiman, M., Z. Zakaria and R. A. Rahim. Ultrasonic process tomographic imaging sensor: an approach utilising transceivers method. *Computer and Communication Engineering, 2008. ICCCE 2008. International Conference on: IEEE*. 2008. 1147-1150.
  96. Rahiman, M. H. F., R. A. Rahim, H. A. Rahim and N. M. N. Ayob. Novel adjacent criterion method for improving ultrasonic imaging spatial resolution. *Sensors Journal, IEEE*. 2012. 12(6): 1746-1747.
  97. Rahiman, M., R. Rahim, H. Rahim, E. Mohamad, *et al.* An investigation on chemical bubble column using ultrasonic tomography for imaging of gas profiles. *Sensors and Actuators B: Chemical*. 2014. 202: 46-52.
  98. Takeda, Y. *Ultrasonic Doppler velocity profiler for fluid flow*, ed. Vol. 101: Springer Science & Business Media. 2012
  99. Yang, L., C. G. Xu, X. H. Guo, X. L. Li, *et al.* Multi-Objects Ultrasonic Tomography by Immersion Circular Array. *Advanced Materials Research: Trans Tech Publ*. 2014. 879-883.
  100. Rahim, R. A., N. W. Nyap, M. H. F. Rahiman and C. K. San. Determination of water and oil flow composition using ultrasonic tomography techniques. *Elektrika*. 2007. 9(1): 19-23.
  101. Krautkrämer, J. and H. Krautkrämer. *Ultrasonic testing of materials*: Springer Science & Business Media. 2013
  102. Rahiman, M. H. F., H. A. Rahim, N. M. N. Ayob and R. A. Rahim. *Design and development of ultrasonic process tomography*: InTech Open Access Publisher. 2012
  103. RAHIMAN, M. H. B. F. *Ultrasonic tomography system for liquid/gas bubble column*. Universiti Teknologi Malaysia; 2013

104. Dai, W. Approach to Solve Ill-posed Inverse Problem in Image Reconstruction from Projections. *The 2009 International Symposium on Information Processing (ISIP 2009)*. 2009. 338-341.
105. Deans, S. R. *The Radon transform and some of its applications*: Courier Corporation. 2007
106. Herman, G. T. Image reconstruction from projections. *Real-Time Imaging*. 1995. 1(1): 3-18.
107. Dreike, P. and D. P. Boyd. Convolution reconstruction of fan beam projections. *Computer Graphics and Image Processing*. 1976. 5(4): 459-469.
108. Chaouki, J., F. Larachi and M. P. Dudukovic. *Non-invasive monitoring of multiphase flows*: Elsevier. 1997
109. Lasaygues, P., R. Guillermin and J.-P. Lefebvre. Ultrasonic computed tomography. *Bone Quantitative Ultrasound*. Springer. 441-459; 2011
110. Fessler, J. A. Image reconstruction: Algorithms and analysis. *Under preparation*. 2008.
111. Zürner, A., M. Döblinger, V. Cauda, R. Wei, *et al.* Discrete tomography of demanding samples based on a modified SIRT algorithm. *Ultramicroscopy*. 2012. 115: 41-49.
112. Hsieh, J. Computed tomography: principles, design, artifacts, and recent advances: SPIE Bellingham, WA. 2009.
113. Herman, G. T. *Fundamentals of computerized tomography: image reconstruction from projections*: Springer Science & Business Media. 2009
114. Buzug, T. M. *Computed tomography: from photon statistics to modern cone-beam CT*: Springer. 2008
115. Ramachandran, G. and A. Lakshminarayanan. Three-dimensional reconstruction from radiographs and electron micrographs: application of convolutions instead of Fourier transforms. *PNAS*. 1971. 68(9): 2236-2240.
116. Shepp, L. A. and B. F. Logan. The Fourier reconstruction of a head section. *Nuclear Science, IEEE Transactions on*. 1974. 21(3): 21-43.
117. Hounsfield, G. A method of and apparatus for examination of a body by radiation such as. *X or gamma radiation, The Patent Office, London*. 1972.

118. Gordon, R., R. Bender and G. T. Herman. Algebraic reconstruction techniques (ART) for three-dimensional electron microscopy and X-ray photography. *Journal of theoretical Biology*. 1970. 29(3): 471-481.
119. Andersen, A. and A. C. Kak. Simultaneous algebraic reconstruction technique (SART): a superior implementation of the ART algorithm. *Ultrasonic imaging*. 1984. 6(1): 81-94.
120. Gilbert, P. Iterative methods for the three-dimensional reconstruction of an object from projections. *Journal of Theoretical Biology*. 1972. 36(1): 105-117.
121. Saha, S., M. Tahtali, A. Lambert and M. Pickering. Novel algebraic reconstruction technique for faster and finer CT reconstruction. *Fifth International Conference on Machine Vision (ICMV 12)*: International Society for Optics and Photonics. 2013. 1-6.
122. Pusppanathan, J., M. Faramarzi, F. R. Yunus, N. M. N. Ayob, *et al.* Image Fusion Using Fuzzy Logic Pixel Fusion for Dual Modality Tomography System. *Jurnal Teknologi*. 2014. 70(3): 41-44.
123. Li, H., B. Manjunath and S. K. Mitra. Multisensor image fusion using the wavelet transform. *Graphical models and image processing*. 1995. 57(3): 235-245.
124. Sadjadi, F. Comparative image fusion analysais. *Computer Vision and Pattern Recognition-Workshops, 2005. CVPR Workshops. IEEE Computer Society Conference on: IEEE*. 2005. 3: 20-26.
125. Alexander, M., R. Baumgartner, A. Summers, C. Windischberger, *et al.* A wavelet-based method for improving signal-to-noise ratio and contrast in MR images. *Magnetic Resonance Imaging*. 2000. 18(2): 169-180.
126. Deng, A., J. Wu and S. Yang. An Image Fusion Algorithm Based on Discrete Wavelet Transform and Canny Operator. *Advanced Research on Computer Education, Simulation and Modeling*. Springer. 32-38; 2011
127. Pajares, G. and J. M. De La Cruz. A wavelet-based image fusion tutorial. *Pattern recognition*. 2004. 37(9): 1855-1872.
128. Muji, M. and S. Zarina. *Optical tomography for solid gas measurement using mixed projection*. Universiti Teknologi Malaysia; 2012

129. Marashdeh, Q., W. Warsito, L.-S. Fan and F. L. Teixeira. Nonlinear forward problem solution for electrical capacitance tomography using feed-forward neural network. *Sensors Journal, IEEE*. 2006. 6(2): 441-449.
130. Jovanović, I. *Inverse Problems in Acoustic Tomography: Theory and Applications*. 2008
131. Xie, C., S. Huang, C. Lenn, A. Stott, *et al.* Experimental evaluation of capacitance tomographic flow imaging systems using physical models. *Circuits, Devices and Systems, IEE Proceedings-: IET*. 1994. 357-368.
132. Muji, S. Z. M., R. A. Rahim, M. H. F. Rahiman, S. Sahlan, *et al.* Optical tomography: a review on sensor array, projection arrangement and image reconstruction algorithm. *International Journal of Innovative Computing Information and Control*. 2011. 7(7): 3839-3856.
133. Torras Rosell, A., O. Lylloff, S. Barrera Figueroa and F. Jacobsen. Reconstruction methods for sound visualization based on acousto-optic tomography. *INTER-NOISE 2013*. 2013. 1-10.
134. Wang, Z., A. C. Bovik, H. R. Sheikh and E. P. Simoncelli. Image quality assessment: from error visibility to structural similarity. *Image Processing, IEEE Transactions on*. 2004. 13(4): 600-612.