

CYCLIST TRAINING MONITORING SYSTEM BASED ON WIRELESS  
SENSOR NETWORK

MUHAMAD AIZUDDIN BIN RUSLEE

UNIVERSITI TEKNOLOGI MALAYSIA

CYCLIST TRAINING MONITORING SYSTEM BASED ON WIRELESS  
SENSOR NETWORK

MUHAMAD AIZUDDIN BIN RUSLEE

A thesis submitted in fulfilment of the  
requirement for the award of the degree of  
Master of Engineering (Electrical)

Faculty of Electrical Engineering  
Universiti Teknologi Malaysia

MARCH 2017

To my beloved mother and father,  
to my lecturers, for their guidance and encouragement.

## ACKNOWLEDGEMENT

In the name of ALLAH The Most Gracious and Most Merciful, my utmost gratitude to Him for giving me strength to complete this thesis. Peace be upon Prophet Muhammad S.A.W, Family as well as His Beloved Friends.

Here, I would like to express my sincere gratitude to my supervisor Dr. Nurul Mu'azzah Binti Abdul Latiff for her invaluable advice, guidance as well as support in the effort to accomplish this project. Further appreciation especially to Prof. Dr Norsheila Binti Fisal, Dr. Sharifah Kamilah Binti Syed Yusof, and Dr. Kamaludin Bin Mohd Yusof for their guidance, help, advice as well as criticisms to increase the quality of this project.

I am also very thankful to all my laboratory mates who have helped me both in my research which included Rozaini, Hamdan, and Abdul Hadi Fikri. Not forgetting, I would like to express my appreciation to my family for continuous support and encouragement which contribute to the successful of this project.

## ABSTRACT

Recent innovation of technology in wireless sensor network (WSN) has eased the deployment of WSN in many applications such as health monitoring system. This research presents a cyclist training monitoring system that is equipped with a set of sensors using the WSN technology. This enables continuous monitoring process of cyclist training that can be done anytime and anywhere. A stable and reliable wireless cyclist monitoring system with minimum data loss is vital to establish a smart and efficient sports management program that can lead to better quality outcomes of cyclist training. This cyclist training monitoring system has been developed and tested in real cyclist training environment in velodrome. The system is designed based on WSN that is linked to the cloud network on the Internet. Using TelG node as the basis, customized transceiver nodes are developed to establish the WSN. These nodes have been built with 30% reduction in size from the existing nodes. Seven measurements were conducted to investigate several factors that affect the packet loss rate before the system architecture was constructed. The factors that were taken into account during the measurements are the distance between the transmitter and the receiver, the height and angle of the receiver, the mobility of the transmitter, the transmission power of the transmitter, as well as the packet size and transmission rate. The results from the measurements correspond to the wireless communication theory. Based on the seven measurements, the system architecture was constructed. Several experiments were conducted in a real scenario in velodrome to measure the reliability of the system architecture. It was shown from the experiments that the proposed system is reliable even when the cyclist is moving at high speed which is 30km/h constantly. The packet loss in all experiments conducted is less than 2%, which does not give huge impact to the sensor data transmission. In addition, the results have shown that the proposed system can produce minimum end-to-end delay which is at 11ms when packet size is below 20 bytes which can be neglected.

## ABSTRAK

Inovasi terbaru dalam jaringan penerima tanpa wayar (WSN) telah memudahkan penggunaan WSN dalam banyak aplikasi seperti sistem pemantauan kesihatan. Kajian ini mempersembahkan sistem pemantauan berterusan untuk latihan pelumba basikal yang dilengkapi dengan penerima yang menggunakan teknologi WSN. Ini membolehkan proses pemantauan latihan berbasikal dapat dilakukan pada bila-bila masa dan di mana-mana sahaja. Sistem pemantauan latihan pelumba tanpa wayar yang stabil dan boleh diharap adalah perlu untuk membina program pengurusan sukan yang pintar dan berkesan yang boleh menghasilkan hasil latihan berbasikal yang lebih berkualiti. Sistem pemantauan latihan pelumba ini telah dibangunkan dan diuji dalam persekitaran sebenar latihan pelumba di velodrom. Sistem ini telah direka khusus berdasarkan WSN yang dihubungkan dengan pangkalan data awan di Internet. Menggunakan peranti TelG sebagai asas, peranti penghantar terima telah dibina untuk membentuk WSN. Saiz peranti penghantar terima tersebut telah dikurangkan sebanyak 30% dari nod asal. Tujuh pengukuran telah dijalankan untuk mengenalpasti faktor-faktor yang mempengaruhi kadar kehilangan paket sebelum seni bina sistem dibina. Faktor-faktor yang di ambil kira ketika pengukuran itu adalah jarak antara pemancar dan penerima, tinggi dan sudut penerima, pergerakan peranti pemancar, kuasa pancaran dari peranti pemancar, serta saiz dan kadar paket. Hasil dari pengukuran didapati bertepatan dengan teori komunikasi tanpa wayar. Berdasarkan tujuh pengukuran tersebut, seni bina sistem dibina. Beberapa pengukuran dilakukan dalam keadaan sebenar dalam velodrom untuk mengukur kebolehpercayaan seni bina sistem tersebut. Hasil daripada eksperimen menunjukkan kebolehpercayaan sistem yang dicadangkan termasuk ketika pelumba sedang mengayuh pada kelajuan yang tinggi iaitu 30km/h secara tetap. Kehilangan paket dalam semua pengukuran adalah kurang daripada 2%, dimana ianya tidak memberikan kesan besar kepada penghantaran data penerima. Tambahan lagi, hasil pengukuran menunjukkan sistem yang dicadangkan menghasilkan lengah hujung-ke-hujung yang minima iaitu 11ms apabila saiz paket kurang daripada 20 bait dan boleh diabaikan.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>ACKNOWLEDGEMENT</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	xi
	<b>LIST OF FIGURES</b>	xii
	<b>LIST OF ABBREVIATIONS</b>	xiv
	<b>LIST OF APPENDICES</b>	xvii
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Introduction	1
	1.2 Background of the Research	2
	1.3 Problem Statement	4
	1.4 Objectives	6
	1.5 Scope of Study	6
	1.6 Significance of the Research	7
	1.7 Research Contribution	7
	1.8 Thesis Structure and Organization	9
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>10</b>
	2.1 Introduction	10
	2.2 Wireless Sensor Networks (WSN) Overview	10
	2.2.1 Architecture and Overview of WSN	10

2.2.2	Application of WSN	14
2.3	IEEE 802.15.4 Protocol Features	15
2.3.1	Description	15
2.3.2	MAC Access Mechanisms and Frame Structure	17
2.4	TelG Wireless Network Devices	19
2.5	WiseOS as TelG Node Operating System	22
2.6	Related Work	23
2.6.1	Experiment and Analysis on ZigBee Characteristics in Measurement System	23
2.6.1.1	Measurement Modules	24
2.6.1.2	Measured Parameters	25
2.6.1.3	Testing Procedure and Experimental Results	26
2.6.2	An Experimental Analysis of ZigBee Network	29
2.6.3	Sports Monitoring System	31
2.7	Summary	35
<b>3</b>	<b>PROPOSED SYSTEM AND HARDWARE DEVELOPMENT</b>	<b>36</b>
3.1	Introduction	36
3.2	Proposed Cyclist Training Monitoring System	36
3.3	Development of Cyclist Training Monitoring System	38
3.4	TelG Node Customization Process	40
3.4.1	Design the TelG Node	41
3.5	Casing for the TelG Node	44
3.6	Summary	45



<b>4</b>	<b>SOFTWARE DEVELOPMENT</b>	<b>47</b>
4.1	Overview	47
4.2	Cyclist Training Monitoring System Network Framework	47
4.3	TelG Node Programming	49
4.3.1	Transmitter Node Programming	50
4.3.2	Receiver Node Programming	53
4.3.3	XBEE Setting	56
4.4	Communication in WSN	57
4.4.1	Forwarder Node Operation	58
4.4.2	Relay Node Operation	59
4.5	Cloud Network	60
4.5.1	Base Station	61
4.5.2	Internet Connection	62
4.6	Actual Cyclist Training Monitoring Sytem Environment	63
4.7	End Users Interface	64
4.8	Summary	66
<b>5</b>	<b>PERFORMANCE MEASUREMENTS AND ANALYSIS</b>	<b>68</b>
5.1	Introduction	68
5.2	Performance Metrics	68
5.3	Experimental Setup and Analysis	70
5.3.1	Experiment A: Varied Distance Between Transmitter and Receiver	71
5.3.2	Experiment B: Varied Height of Receiver Measurement	73
5.3.3	Experiment C: Movement of Transmitter	75
5.3.4	Experiment D: Varied of Packet Size	78
5.3.5	Experiment E: Varied Transmission Power	80
5.3.6	Experiment F: Data Transmission from Multiple Node Measurement	82

5.3.7	Experiment G: Varied Angle of Transmitter	84
5.4	Testing System Architecture in a Real Scenario	86
5.4.1	Varied Angle of Transmitter Measurement	88
5.4.2	Varied Transmitter Speed Measurement	90
5.5	Summary	93
<b>6</b>	<b>CONCLUSION AND RECOMMENDATION</b>	<b>96</b>
6.1	Summary and Completed Works	96
6.2	Future Work	98
	<b>REFERENCES</b>	<b>99</b>
	Appendix A	105

## LIST OF TABLES

<b>TABLE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
2.1	QoS Parameters	25
2.2	ZigBee Module Current Consumption	29
2.3	List of Existing Sports Monitoring System	34
5.1	Parameters for Experiment A	71
5.2	Parameters for Varied Height of Receiver Measurement	74
5.3	Parameters for Movement of Transmitter Measurement	76
5.4	Parameters for Varied Packet Size Measurement	79
5.5	Parameter for transmit power against packet loss measurement	80
5.6	Parameter for Data Transmission from Multiple Node Measurement	82
5.7	Value for Parameters used in Experiment F	85
5.8	The Values of Parameters for Varied Angle in the Real System Implementation	88
5.9	Parameter for Varied Transmitter speed in the Real System Implementation	91

## LIST OF FIGURES

<b>FIGURE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
1.1	General Diagram of Cyclist Training Monitoring System	4
2.1	A Typical Wireless Sensor Node Architecture	12
2.2	Main Components of a Sensor Node	12
2.3	The IEEE802.15.4 Protocol Stack	17
2.4	The IEEE802.15.4 Frame Structure	19
2.5	TelG Mote	20
2.6	TelG System Architecture	21
2.7	Differences of Existing Microcontrollers	21
2.8	XBEE Module	22
2.9	RZ RAVEN ZigBee Evaluation Kit	25
2.10	PER Test Setup	27
2.11	DC Characteristic Measurement Circuit	27
2.12	DOF Measurement Circuit	28
2.13	Varied Distance of Transmitter and Receiver VS ZigBee Transmission Power Loss	29
3.1	Cyclist Training Monitoring System Architecture	37
3.2	Cyclist Training Monitoring System Flow Chart	38
3.3	Research Flow Chart	40
3.4	TelG Node Schematics Diagram	42
3.5	PCB Layout	42
3.6	3D Visualization	43
3.7	Completed Fabricated PCB	43
3.8	Customized TelG Node	44
3.9	TelG Node Casing Design	45

3.10	TelG Node Complete Casing	45
4.1	Cyclist Training Monitoring System Network Architecture	48
4.2	Data Flow in Cyclist Training Monitoring Sytem Network	49
4.3	Overview of the Measurements	50
4.4	Initial Packets Transmission Source Code	51
4.5	Initial Packet Tansmission Module	51
4.6	Packets Transmission Source Code	52
4.7	Structure of A Packet	52
4.8	Packets Transmission Process Module	53
4.9	Coding to Reject Duplicate Packets at the Receiver	54
4.10	Module to Check Duplicate Packet	54
4.11	Coding to Display the Number of Packets Received	55
4.12	Flow Chart to Display the Number of Packets Received	56
4.13	X-CTU Software Environment	57
4.14	Multihop Data Transmission	58
4.15	The Operation of the Forwarder Node	59
4.16	Relay node operation	60
4.17	Base Station Operation	61
4.18	Base Station Systems	62
4.19	Device and 3G Connections	62
4.20	Data Packet Arrangement	63
4.21	Velodrome of 330 m length	64
4.22	Cheras Velodrome	64
4.23	Bicycle Speed GUI for Data analysis	65
4.24	Bicycle Power GUI for Data analysis	66
5.1	The Distance of Transmitter and Receiver is Varied at L meter	71
5.2	Packet Receive Ratio versus Varied Distance between Transmitter and Receiver	72
5.3	Transmitter Placement under the Bicycle Seat	73
5.4	Height of the Receiver is Varied at $H$ cm	74
5.5	Packet Receive Ratio versus Varied Height of the Transmitter	75
5.6	The Receiver is Varied at $X$ from the Transmitter Path	76

5.7	Calculation of the number of packets transmitted for Experiment C	77
5.8	Packets Received Ratio versus Varied Radius of the Transmitter Path while the Transmitter is Moving	78
5.9	End to End Delay Versus Packet Size	80
5.10	The Number of Received Packets as The Distance Between The Transmitter and The Receiver is Varied for Different Transmission Power Used	81
5.11	Data transmission from Several Transmitters to A Receiver	82
5.12	The Number of Receiving Packets against Varied Transmission Interval with Four Transmitters	83
5.13	Measurement Setup for Varied Angle of Transmitter	84
5.14	Transmitter Angle Orientation	85
5.15	Packet Loss against Transmitter Angle	86
5.16	System Architecture Designed	87
5.17	Calculation for Total Packets Transmitted for Varied Angle in the Real System Implementation	89
5.18	Packet Loss against Angle of Transmitter	90
5.19	Calculation for Total Packet Transmitted When the Speed of Bicycle is 10km/hour	91
5.20	Packet Loss against Transmitter Speed	92
5.21	Calculation for Time Taken for Relay 1 to Travel to Relay 2 when the Speed of Bicycle is 10km/h	93
5.22	Calculation for Time Taken for Relay 1 to Travel to Relay 2 when the Speed of Bicycle is 30km/h	93

## LIST OF ABBREVIATIONS

API	-	Application Programming Interface
APL	-	Application Layer
APS	-	Application Service
BER	-	Bit Error Rate
BPSK	-	Binary Phase Shift Keying
CAP	-	Carrierless Amplitude Phase
DOD	-	Delay of Frame
DOF	-	Degree of Freedom
FCS	-	Frame Check Sequence
GTS	-	Guaranteed Time Slot
HRM	-	Heart Rate monitor
MAC	-	Media Access Control
MHR	-	Multi Hop Relay
MSDU	-	Media Access Control Service Data Unit
NWL	-	Network Layer
OQPSK	-	Offset Quadrature Phase Shift Keying
PAN	-	Personal Area Network
PC	-	Personal Computer
PER	-	Packet Error Rate
PHY	-	Physical Layer
QoS	-	Quality of Service
RFD	-	Reduce Function Device
RSSI	-	Receive Signal Strength Indicator
RTC	-	Real Time Clock
SCMA-CA	-	Carrier Sense Multiple Access along with Collision Avoidance

SDK	-	Software Development Kit
SEMS	-	Smart Energy Management System
SHAAL	-	Smart Home and Ambient Assisted Living
SRM	-	Schoberer Rad Messtechnik
USB	-	Universal Serial Bus
WMSN	-	Wireless Multimedia Sensor Network
WPAN	-	Wireless Personal Area Networks
WSN	-	Wireless Sensor Network



**LIST OF SYMBOLS**

$\mu\text{A}$	-	Microampere
m	-	Meter
Ms	-	Millisecond
$P_{\text{corr}}$	-	Total number of packet loss
$P_{\text{total}}$	-	Total of transmit packet

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	XBEE/XBEE-PRO Specifications	100

## **CHAPTER 1**

### **INTRODUCTION**

#### **1.1 Introduction**

Wireless sensor networks (WSN) encompass of a number of cheap low-power devices that are small in size and typically powered by battery [1]. These sensor devices work together to establish a smart environment that gathers important data and information to be accessed by human anytime and anywhere. Owing to their simplicity and ad hoc deployment features, WSNs have been applied to various fields of science and technology such as health care, military surveillance, highway traffic, environment monitoring and sport monitoring [2]. Recent state-of-the-art technology of WSNs has enabled the integration of these interconnected sensor nodes in the Internet-of-Things (IoT) area [3]. Using the WSNs as the basis, these smart sensors in IoT collaborate directly without any human intervention to deliver a new class of applications that further contributes to the quality of life.

One of the main tasks of WSNs is data gathering at the sensor field where sensed data are continuously collected. These data can be processed first by sensor nodes before they are being forwarded through wireless communications to a base station for further processing. A base station can be centrally located within the sensor field, or somewhere outside the sensing field. In the latter case, a gateway is required to link the sensor network with the base station since the sensor nodes have limited transmission range. Meanwhile, sensor nodes are often deployed at the specific locations as required by the application. Since the size of a sensor node is small, the node can be attached at any location with minimal disturbance to the

surrounding environment. The flexibility offered by WSNs have reduced the costs and efforts for deployment and maintenance. Consequently, this had made WSNs a competitive approach for data collection compared to its wired counterpart with infrastructure-based network [2].

## **1.2 Background of the Research**


In recent years, wireless communication technology have greatly reduced the dependency of connecting wires to collect the data and power the measurement equipment. As a result, the ability to take multiple measurements over the human body or other apparatus have been improved tremendously [4]. Moreover, with the advancement of smaller, less intrusive communication and sensing technologies, bulky and obtrusive apparatus can be substituted with lighter equipment. There are a wide range of WSNs applications that would benefit enormously from the sensing technologies. Among the applications is sport and health monitoring in which the capability of sensor nodes to collect data unobtrusively and without hindering movement or performance would enable its implementation to improve an athlete's performance in sports. The data collected by sensor nodes could relate information about the body and its relative movement, besides any other performance-related data that is desirable. In addition, new wireless connectivity radio standards could facilitate the data collection process and enable the data from different sensor nodes at multiple points to be collected synchronously [4]. The data fusion process that takes over after the data collection process will compress the information collected, before they are being sent to the base station for further interpretation of data.

Cycling is one of the most popular sports in Malaysia and significant interests are given for this sport recently with the winning of a bronze medal by Malaysia team in the 2016 Olympic tournament in Rio, Brazil. The success of this sport is due to the elite level support provided by the Malaysia government with strong recreational and developmental programs. However, there is still room for improvement in which latest technology can be exploited in order to achieve superior performance in the future. For instance, sports management wireless remote

monitoring system has an important role in observing athlete's performance in his/her daily training. When monitoring the performance of athletes in the field, an applicable method of data transport must be determined in order to get the athlete's performance characteristics back to the coach. Therefore, the development of a stable and efficient wireless sports monitoring system is vital to establish a smart and efficient sports management program that can lead to quality outcomes.

The cyclist training monitoring system is important during cyclist training to avoid over training and to have a high quality of training. Before advances in WSN technologies, the normal practice to measure the performance of athletes in cycling training program is by using conventional stopwatch [5]. The results acquired from the training by using stopwatch is imprecise and uninformative. In addition, this method also has insufficient scientific supports that proves training by using stopwatch can actually improve the performance of an athlete [6]. Hence, this research presents a cyclist training monitoring system that is developed to enhance the sports management program. The general diagram for the cyclist training monitoring system is shown in Figure 1.1. The system consists of hardware components such as server, gateway, sensor nodes and sensor devices. There are four types of nodes used in this research: sensors node, forwarder node, relay node and base station node. Based on the environment in a real cycling track in velodrome, data from the cyclist are collected and sent to the forwarder node. Then, data from the forwarder node is delivered to the base station through multiple hops of relay nodes to be sent to the server. Once the data have been uploaded to the server, it can be accessed by the trainers or coaches at anytime and anywhere.

From a networking perspective, packet delivery performance is the most crucial aspect of wireless communication. Packet delivery performance can be defined as the ability of the packet transmits to reach their destination. Packet delivery performance can be said as unsuccessful if there are a lot of packet losses during the transmission process. Hence, our work aims to develop a reliable real-time monitoring system that takes into account factors that can affect the packet delivery during packet transmission from the forwarder nodes or gateway to the base station.

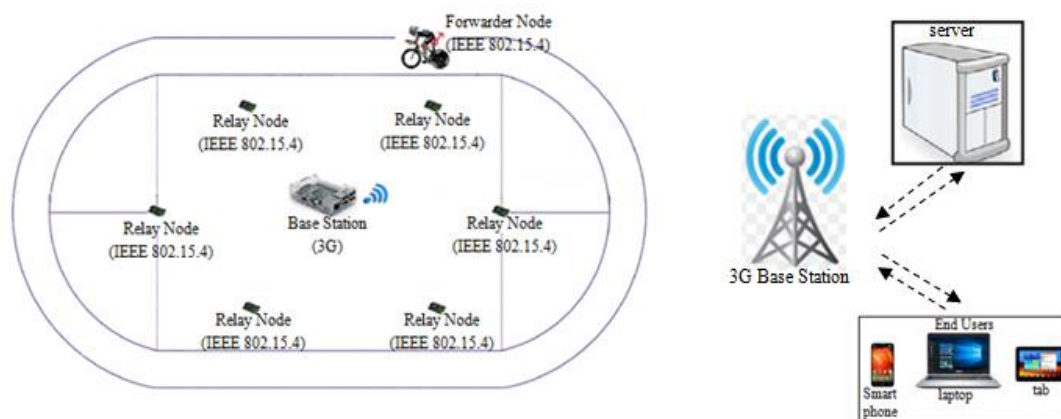

**Figure 1.1** General Diagram of Cyclist Training Monitoring System.

### 1.3 Problem Statement

Cycling is a highly competitive sport that requires a very high level of strength supported by a high fitness level. An appropriate training program and sport management system is necessary in order to improve team skills and consequently increase competitiveness in international tournaments. In addition, statistical data collected during cyclist training sessions can be used to measure an athlete's performance and to produce athlete performance profiles. Ubiquitous and versatile mobile devices can be applied to cyclist activity monitoring, offering a cost-effective ways of widespread performance analysis. The ability to collect data remotely enables the coach or trainer to incorporate feedback into their training regimen and hence, enhance their skills and moderate their activities to meet health outcomes [7].

The current device used by the national cycling team to measure the speed, cadence, heart rate and power of the athletes during the training sessions is SRM (Schoberer Rad Messtechnik). The SRM is a battery power monitoring system that has been widely used to provide an accurate measurement of cycling power [8]. Another device such as Heart Rate Monitor (HRM) is also used to monitor the performance of the athletes. Besides monitoring the performance of the athletes, these devices are also able to monitor their health condition [9]. The data produced by SRM and HRM devices are reliable and accurate data. However, the data

produced are stored first and must be transferred to a laptop or personal computer (PC) through a universal serial bus (USB) cable to enable the coach to observe and analyze the data. Hence, this process is quite time consuming and inefficient for the coach to monitor their athletes performances continuously. Therefore, a wireless cyclist training monitoring system with low power consumption, long communication range between transmitter (cyclist) and receiver (coach) with minimum delay is really desirable in order for the national cycling team to improve their performance as well as to prevent over training.

As WSN forms the basis of cyclist training monitoring system, sensor nodes are required to control the WSN configurations. Such configurations encompass various tasks to ensure reliable network connection that is able to deliver real time data. Moreover, the monitored parameters of the bicycle or cyclist must be real time and accurate so that instant feedback can be given by the coach to improve the performance of cyclists. Due to this reason, packet delivery performance is the most crucial aspect in the developed system [10]. The data delivered will not be accurate if a lot of data is dropped during the transmission process. Packet loss rate around one percent is acceptable [11]. Hence, the transmission ability of sensor nodes is highly depended on the transceivers used in the wireless module. In addition, the issue of end to end delay is also really important when it comes to real time monitoring [12]. It can be elaborated as time taken for a packet to be delivered to the destination. A system with minimum delay is favourable since data can be accessed faster by the end user.

In this research, XBee module is used as transceiver while IEEE 802.15.4 (Institute of Electrical and Electronics Engineers) standard is utilized as transmission protocol. The transmission ability of Xbee module differs according to certain conditions such as distance between transmitter and receiver, height and angle of receiver, the mobility of the receiver, transmission power of transmitter, as well as packet size and rate. Since the training sessions of athletes are held in velodrome, the real size of velodrome as well as its shape must be taken into account when designing the whole system. The velodrome is 330m lengths and the track is banked with a certain degree of angle. The distance and the banked track of the velodrome

are among factors that affect packets received rate during the transmission process. Therefore, it is important to consider these factors during the transmission process and design the system architecture for a wireless cyclist monitoring system that have minimum packet loss rate as well as end to end delay.

#### **1.4 Objectives**

This research is a part of wireless cyclist monitoring system project that aims to have a reliable wireless cyclist monitoring system. In order to achieve the main goal of the work, the specific objectives of this research are listed as below:

- i. To design and develop a wireless cyclist monitoring system in a real test bed environment based on customized TelG node with reduced size.
- ii. To study the factors that affect the packet loss rate and analyze as well as justify the factors based on propagation model using 330 meter Velodrome tracks as the environment of the study and IEEE 802.15.4 as wireless standard.
- iii. To measure and evaluate the performance of the developed wireless cyclist monitoring system in terms of packet loss rate and end to end delay.

#### **1.5 Scope of Study**

The scope of this research is to design a reliable system architecture with acceptable packet loss rate for cyclist training monitoring system in a real experimental test bed. The work includes the hardware design of sensor node and software development for sensor networks. This work is part of the cyclist training monitoring system project developed at Advanced Telecommunication Technology (ATT) laboratory. In this work, a customized wireless sensor node is developed



based on the TelG mote and its operating system [13]. TelG mote has been successful developed and used discretely in Wireless Biomedical Sensor Network (WBSN) project [13] and Wireless Multimedia Sensor Network (WMSN) [14] project. The research work in this thesis is limited to:-

- i. Design a reliable system architecture for wireless cyclist monitoring by conducting several measurements that affect packet loss rate using standard Xbee as transmission module. The factors that are taken into account during the measurements are distance between transmitter and receiver, height and angle of receiver, the mobility of the transceiver, transmission power of transmitter, as well as packet size and rate. In addition, the experiments focus on track cycling racing in 330m velodrome or banked track.
- ii. Develop customized sensor nodes based on TelG mote. These sensor nodes are used as forwarder nodes and relay nodes to deliver the data to the base station. The software used for the design process is SolidWork while C language based on WiseOS operating system is used to program the sensor nodes. The communication standard used is IEEE 802.15.4.
- iii. The performance of the proposed architecture is evaluated based on packet loss rate and end to end delay in a real test bed environment. The network scenario used is according to the environment in 330m velodrome cycling track.

## **1.6 Significance of the Research**

The output of this research is a reliable architecture for cyclist training monitoring system using IEEE802.15.4 as the communication standard. The system that is developed based on the proposed architecture is able to achieve low packet loss rate and low end to end delay. The proposed architecture can be utilized efficiently in a banked cycling track or 330m velodrome environment. The benefits of the proposed system can be significant in which it can be implemented in the national sports management program and leads to improved performance of the athletes. Accordingly, the level of competitiveness among athletes in international tournaments can be increased.

## 1.7 Research Contribution

The contributions achieved in this research are listed as follows:

1. Design and build sensor nodes that are based on the TelG mote.
  - The nodes are designed as transceivers to be used in the cyclist training monitoring system as a forwarder node and relay nodes. The process involved are circuit design, printed circuit board (PCB) layout design, fabrication and electronic component installation. The built sensor nodes are small in size so that they can be attached on the bicycles. The total number of sensor nodes that is built for this research is 10.
2. Programming the nodes to operate as a transceiver to be used for the packet loss measurement.
  - There are seven types of measurements conducted which involved varied distance of transmitter and receiver, varied heights of receiver, the movement of transmitter, different packet size, varied transmitter power, data transmission from multiple nodes, and varied angles of transmitter.
  - The results from these measurements are analysed in terms of packet loss rate to determine the best system architecture for cyclist monitoring system.
3. Reliable architecture for cyclist training monitoring system.
  - With regards to the results from the measurements above, a system architecture for cyclist training monitoring is designed. The location of sensor nodes such as forwarder node and relay nodes are specified in a way that data delivery at the base station is optimum. In other words, packet loss rate performance is considered when placing the sensor nodes in a 330m velodrome cycling track.

## **1.8 Thesis Structure and Organization**

This thesis consists of six chapters. Introduction of this research that has been described in Chapter 1 focuses on the problem statement, research objectives, scope of the work, significance of the research, and thesis contributions. The remainder of this thesis is organized as the following.

Chapter 2 elaborates on the wireless technology such as WSN, IEEE 802.15.4 and WiFi network that are used in the development of cyclist monitoring system. The structure of monitoring system within the focus research area is also highlighted. In addition, related works in this area which motivates the research work presented in this thesis is discussed.

Chapter 3 describes the general methodology for this research. Specifically, this chapter explains on the hardware work involved in this research. The development of the sensor nodes as forwarder nodes and relay node is elaborated in this chapter. Moreover, a performance metrics used to evaluate the system performance will be explained.

Chapter 4 specifies the programming work for sensor nodes design. The details flow of sensor nodes as transmitters and receivers are explained in this chapter. The details setup and methodology during the measurements process are also described.

Chapter 5 presents the performance study of the cyclist monitoring system based on the measurements and experiments conducted in a real test-bed 33m velodrome cycling track. The results obtained in terms of packet loss rate and end to end delay are also justified in this chapter.

Chapter 6 expresses the conclusion of this research work. The contributions achieved are also highlighted. In addition, possible strategies for future work are suggested in this chapter.

## REFERENCES

1. Tubaishat M, Madria S. Sensor network: an overview. *IEEE Potentials*. 2013;22(2):20-23.
2. Wang F, Liu J. Networked Wireless Sensor Data Collection: Issues, Challenges, and Approaches. *IEEE Commun Surv Tutor*. 2011;13(4):673-687.
3. Al-Fuqaha A, Guizani M, Mohammadi M, Aledhari M, Ayyash M. Internet of Things: A Survey on Enabling Technologies, Protocols, and Applications. *IEEE Commun Surv Tutor*. 2015;17(4):2347-2376.
4. Armstrong S. Wireless connectivity for health and sports monitoring: a review. *British Journal of Sports Medicine*. 2007;41(5):285-289.
5. C. Young, P. R. Fleming, S. Dixon and MJC. Shoe signature monitoring for advanced running technique. *Eng Sport* 7. 2008;2(1):35-43.
6. S. K. Gharghan, R. Nordin and MI. A Survey on Energy Efficient Wireless Sensor Networks for Bicycle Performance Monitoring Application. *J Sensors*. 2014;1(1):2014.
7. Aleksandar Subic, Franz Konstantin Fuss, Firoz Alam, Patrick Clifton, T. McNab DA, James DR. iPhone sensor platforms: Applications to sports monitoring. *Procedia Eng*. 2015;13(1):507-512.
8. Gardner AS, Stephens S, Martin DT, Lawton E, Lee H JD. Accuracy of SRM and power tap power monitoring systems for bicycling. *Med Sci Sport Exerc*. 2004;36(1):2004.
9. P. S. Tiwari, L. P. Gite, M. M. Pandey and a. KS. Pedal power for occupational activities: Effect of power output and pedalling rate on physiological responses. *Int J Ind Erg*. 2011;41(3):261-267.
10. W. Dong, Y. Liu, Y. He, T. Zhu. Measurement and Analysis on the Packet Delivery Performance in A Large Scale Sensor Network: *Proceeding of IEEE INFOCOM, Turin, Italy*. ; 2013.

11. J. Shin, U. Ramachandran, M. Ammar. On Improving the Reliability of Packet Delivery in Dense Wireless Sensor Networks. *Proceeding of 16<sup>th</sup> International Conference on Computer Communications and Networks (ICCCN), Hawaii, USA.* ; 2007.
12. K. Liu, Q. Ma, H. Liu, Z. Cao, Y. Liu. End-to-end Delay Measurement in Wireless Sensor Networks without Synchronization. *2013 IEEE 10<sup>th</sup> International Conference on Mobile Ad-Hoc and Sensor Systems.* ; 2013.
13. M. R. Abdul Rahim, R. A. Rashid, S. H. S. Ariffin, N. Fisal, A. H. F. A. Hamid MAS and AM. Development of TelG Mote for Wireless Biomedical Sensor Network (WBSN) Application. *Informatics Eng Inf Sci.* 2011;253(1):678-688.
14. Hamid AHFBWMSN. Wireless Multimedia Sensor Network. M.sc. thesis. Universiti Teknologi Malaysia; 2011.
15. Ha A. *Wireless Sensor Network Desings.* England: John Wiley & Sons, Ltd. 2003
16. Rodrigues LMO and JJ. Wireless Sensor Networks: a Survey on Environmental Monitoring. *J Commun.* 2011;6(2):143 – 151.
17. K. Sohraby, D. Minoli and TZ. *Wireless Sensor Networks: Technology, Protocols, and Applications.*; 2007:Canada: John Wiley & Sons,INC.
18. Healy WSJ and WM. Assessment of Performance Metrics for Use of WSNs in Buildings. *26th Int Symp Autom Robot Constr (ISARC 2009).* 2009;1(1):570-575.
19. C. Suh, Z. H. Mir and Y-BK. Design and implementation of enhanced IEEE 802.15.4 for supporting multimedia service in Wireless Sensor Networks. *Comput Networks.* 2008;52(13):2568-2581.
20. H. T. Mouftah, M. Khanafer and MG. Wireless Sensor Network Architectures for Intelligent Vehicular Systems. *Symp Int Telecommun.* 2010;1(1):1-7.
21. Willig A. Recent and Emerging Topics in Wireless Industrial Communications: A Selection. *IEEE Trans Ind Informatics.* 2008;4(2):102-124.
22. Park P. Protocol Design for Control Applications using Wireless Sensor Networks. Master's Degree Project. Stockholm, Sweden; 2007.

23. F. C. T, T. Talanis, R. German and FD. in Industrial Automation. *IEEE*. 2009;1(1):136-139.
24. Wen Sung T, Ting Wu T, Sing Yang C, Min Huang Y. Reliable data broadcast for ZigBee wireless. *Int J smart Sens Intell Syst*. 2010;3(3):2010.
25. KAMOUN LC and L. PERFORMANCE ANALYSIS OF IEEE 802.15.4/ZIGBEE STANDARD UNDER REAL TIMECONSTRAINTS. *Int J Comput Networks Commun*. 2011;3(5):235-251.
26. Chaari L, Kamoun L. 802 . 15 . 4 / Zigbee Standard Under Real Time. *Int J Comput Netw Commun*. 2011;3(5):235-251.
27. Akyildiz IF, Su W, Sankarasubramaniam Y, Cayirci E. Wireless sensor networks: a survey. *Comput Networks*. 2002;38(4):393-422.
28. Pagano P, Chitnis M, Lipari G, Nastasi C, Liang Y. Simulating Real-Time Aspects of Wireless Sensor Networks. *EURASIP J Wirel Commun Netw*. 2010;2010(1):107946.
29. C. E. Jones, K. M. Sivalingam PA and JCC. A Survey of Energy Efficient Network Protocols for Wireless Networks. *Wirel Networks* 7. 2001;1(1):343-358.
30. Kumari B, Shukla J. Secure Routing in Wireless Sensor Network. *Int J Adv Res Comput Sci Softw Eng*. 2013;3(8):746-751.
31. Kamal JNA-K and AE. Routing Techniques in Wireless Sensor Networks: A Survey. *IEEE Wirel Commun*. 2004;1(1):6.
32. Sharma SPS and SC. A Survey on Cluster Based Routing Protocols in Wireless Sensor Networks. *Procedia Comput Sci Int Conf Adv Comput Technol Appl*. 2015;45(1):687-695.
33. Liu X. Atypical Hierarchical Routing Protocols for Wireless Sensor Networks: A Review. *IEEE Sens J*. 2015;15(10):5372-5382.
34. T. M. Rahayu, S-G. Lee and H-JL. A Secure Routing Protocol for Wireless Sensor Networks Considering Secure Data Aggregation. *Sensors*. 2015;15(1):15127-15158.
35. Satao PJ and R. "A Survey on Opportunistic Routing Protocols for Wireless Sensor Networks. *Procedia Comput Sci*. 2016;79:603-609.
36. P. Rajeswari, S. Pratheeba and SRK. A Comprehensive Overview on Different Applications of Wireless Sensor Network. *Int J Eng Adv Technol*. 2014;3(4):80-84.

37. K. Sohraby, D. Minoli, and T. Znati, *Wireless Sensor Networks: Technology, Protocols, and Applications*. Canada: A John Wiley & Sons, Inc, 2007.
38. Z. Alliance, "ZigBee Specifications," 2005. [Online]. Available: <http://www.zigbee.org/>. [Accessed: 07-Sep-2015].
39. 6LoWPAN Working Group, "IPv6 over Low power WPAN," 2010. [Online]. Available: <http://www.ietf.org/dyn/wg/charter/6lowpan-charter.html>.
40. J. Song, S. Han, A. Mok, D. Chen, M. Lucas, M. Nixon and WP. WirelessHART: Applying Wireless Technology in Real-Time Industrial Process Control. *2008 IEEE Real-Time Embed Technol Appl Symp*. 2008:377-386.
41. S. Han, X. Zhu, A. K. Mok, D. Chen and MN. Reliable and Real-Time Communication in Industrial Wireless Mesh Networks. *2011 17th IEEE Real-Time Embed Technol Appl Symp*. 2011:3-12.
42. Svensson TL and S. A Comparison of WirelessHART and ZigBee for Industrial Applications. *Fact Commun Syst 2008*. 2008:2-5.
43. Buratti C. Performance Analysis of IEEE 802.15.4 Beacon-Enabled Mode. *IEEE Transactions Veh Technol*. 2010;59(4):2031-2045.
44. Saraireh MS, Engineering C. Performance Analysis of Guaranteed Time Slots Allocation in IEEE 802 . 15 . 4 Protocol over Radio. *Middle-East J Sci Res*. 2013;13(9):1137-1143. doi:10.5829/idosi.mejsr.2013.13.9.739.
45. M. R. Abdul Rahim, R. A. Rashid, S. H. S. Ariffin, N. Fisal, A. H. F. A. Hamid MAS and AM. Development of TelG Mote for Wireless Biomedical Sensor Network (WBSN) Application. *Informatics Eng Inf Sci*. 2011;253(1):678-688.
46. Hamid AHFBA. Wireless Multimedia Sensor Network. M.sc. thesis. Universiti Teknologi Malaysia; 2011
47. H. Sayuti, R. A. Rashid, N. M. Abdul Latiff, N. Fisal, M. A. Sarijari AHFAH and MRAR. Simple Scheduling Scheme for Smart Home and Ambient Assisted Living. In: *The Second International Conference on Informatics Engineering & Information Science (ICIEIS2013), Kuala Lumpur.* ; 2013.
48. Rahim MRA. Wireless Biomedical Sensor network for Home-based Healthcare Monitoring System. M.Eng. Thesis, Universiti Teknologi Malaysia: 2011.

49. P. Jurpík, A. Koubâa, M. Alves, E. Tovar and ZH. A Simulation Model for the IEEE 802 . 15 . 4 Protocol : Delay / Throughput Evaluation of the GTS Mechanism. *15th Int Symp Model Anal Simul Comput Telecommun Syst.* 2007:109-116.
50. P. Casey, K. Tepe and NK. Design and Implementation of a Testbed for IEEE 802.15.4 (Zigbee) Performance Measurements. *EURASIP J Wirel Commun Netw.* 2010;2010(1):103406.
51. L. Skrzypczak DG and RR. Basic Characteristics of Zigbee and SimpliciTI Modules to Use in Measurement Systems. *XIX IMEKO World Congr Fundam Appl Metrol Lisbon, Port.* 2009.
52. SimpliciTI Overview (Rev. B), Texas Instruments, 2008.
53. eZ430-RF2500 Development Tool User's Guide (Rev. C), Texas Instruments, 2008.
54. AVR2016: RZRAVEN Hardware User's Guide (rev. A), Atmel, 2008.
55. Amin AH. VOIP PERFORMANCE MEASUREMENT USING QoS PARAMETERS. *Second Int Conf Innov Inf Technol.*1-10.
56. Garcia-Macias EDP-F and JA. An Experimental Analysis of Zigbee Networks. *33rd IEEE Conf Local Comput Networks.* 2008:723-729.
57. I. Freesclae Semiconductor, "BeeKit Wireless Connectivity Toolkit," 2015. [Online]. Available:[http://www.freescale.com/products/arm-processors/kinetis-cortex-m/w-series/beekit-wireless-connectivity-toolkit:BEEKIT\\_WIRELESS\\_CONNECTIVITY\\_TOOLKIT](http://www.freescale.com/products/arm-processors/kinetis-cortex-m/w-series/beekit-wireless-connectivity-toolkit:BEEKIT_WIRELESS_CONNECTIVITY_TOOLKIT). [Accessed: 29-Sep-2015].
58. N. P. Davey DAJ. Signal analysis of accelerometry data using gravity based modelling. *Proc SPIE.* 2004;5274:362-370.
59. D. A. James, B. Burkett and DVT. An Unobtrusive Swimming Monitoring System for Recreational and Elite Performance Monitoring. *5th Asia-Pacific Congr Sport Technol (APCST), Procedia Eng.* 2011;13:113-199.
60. A. Honkasuo, A. Hämäläinen, P. Jäppinen, J. Jääskeläinen, J. Porras and FL. Mobile bicycle monitoring system. *Proc Seventh IEEE Work Mob Comput Syst Appl.* 2006:53851.
61. N. M. Abdul Latiff, M. Musa Mohamad, S. K. Syed Yusof, M. R. Abd. Rahim, H. Sayuti, N. N. Nik Abdul Malik. Training Monitoring System for



- Cyclist Based on Android Application Development. *J Teknol.* 2013;64(3):49-53.
62. Behrendt CK and F. Smart e-bike monitoring system: real-time open source and open hardware GPS assistance and sensor data for electrically-assisted bicycles. *IET Intell Transp Syst.* 2015;10:2.
63. E. Benner, A. B. Sesay. Effects of Antenna Height, Antenna Gain, and Pattern Downtilting for Cellular Mobile Radio. *IEEE Transactions on VehicularTechnology.* 1996;42:2.
- 64 J.Korhonen, Y. Wang. Effect of Packet Size on Loss Rate and Delay in Wireless Links. *IEEE Wireless Communications and Networking Conference (WCNC), San Francisco, CA. ; 2005.*
- 65 N. B. Carvalho, A. georgiadis, a. Costanzo, H. Rogier, A. Callado, J. A. Garcia, S. Lucyszyn, P. Mezzanotte, J. Kracek, D. Masotti, A. J. S. Boaventura, M. D. L. N. R. Lavin, M. Pinuela, D. C. Yates, P. D Mitcheson, M. Mazanek, V. Pankrac. Wireless Power Transmission: R&D Activities Within Europe. *IEEE Transactions on Microwave Theory and Techniques.* 2014;62:4.
- 66 A. Bagula, G. Inggs, S. Scott, M. Zennaro. On the Relevance of Using Open Wireless Sensor Networks in Environment Monitoring. *Sensors* 2009, 9, 4845-4868.