

ELECTRICITY CONSUMPTION PATTERN DISAGGREGATION BASED ON
USER UTILIZATION FACTOR

NUR FARAHIN BINTI ASA @ ESA

A thesis submitted in fulfilment of the
requirement for the award of the degree of
Master of Engineering (Electrical)

Faculty of Electrical Engineering
Universiti Teknologi Malaysia

DECEMBER 2016

To my mother,
my family,
my supervisors,
& my fellow friends,

ACKNOWLEDGEMENT

Alhamdulillah. Thanks to the Almighty Allah S.W.T, for His blessings and guidance for giving me inspiration and strengths to complete this project.

Firstly, I would like to express my sincere gratitude to my main supervisor Dr. Md Pauzi Abdullah for the continuous support of my Master study and related research, for his patience, motivation, and immense knowledge. His guidance helped me in all the time of research and writing of this thesis. I could not have imagined having a better advisors and mentors for my Master study.

I would like to thank the director of Centre of Electrical Energy Systems department, Professor Dr. Mohammad Yusri Hassan for his encouragement and convenient facilities he offers along the research period.

A bunch of appreciations to my fellow lab mates and friends, Shahida, Dayang and Asyikin for the stimulating discussions, for the sleepless nights we were working together before deadlines, and for all the fun we have had in the last three years. My sincere obligation also goes to administrative staffs at Faculty of Electrical Engineering, Research Management Centre (RMC), UTM, and others who have provided assistance at various occasions. Their assessments and tips are useful indeed. Unfortunately, it is not possible to list all of them.

Last but not the least, I would like to thank my family: my lovely mother, Labiah Ariffin, whom always by my side, my brothers and sisters for supporting me spiritually throughout writing this thesis and my life in general. I thank them their confidence and believing in me in times when I could not even believe in myself.

ABSTRACT

Non-Intrusive Appliance Load Monitoring (NIALM) technique has been studied intensively by many researchers to estimate the electricity consumption of each appliance in a monitored building. However, the method requires a detailed, second-by-second power consumption data which is commonly not available without the use of high specification energy meter. The common energy meter used in buildings can only capture low frequency data such as kWh for every thirty minutes. This thesis proposes a bottom-up approach for disaggregating kWh consumption of a building. The relationship between the load profile of a building and electricity usage pattern of the occupants were studied and analysed. From the findings, a method based on utilization factor that relates user usage pattern and kWh electricity consumption was proposed to perform load disaggregation. The method was applied on the practical kWh profile data of electricity consumption of Block P19a, Fakulti Kejuruteraan Elektrik, Universiti Teknologi Malaysia. The disaggregated kWh consumption results for air-conditioning and lighting system were validated with the actual kWh consumption recorded at the respective branch circuits of the building. Results from the analysis showed that the proposed method can be used to disaggregate energy consumption of a commercial building into air-conditioning and lighting systems. The proposed method could be extended to disaggregate the energy consumption for different areas of the building.

ABSTRAK

Teknik Pemantauan Perkakas Beban Tidak Bergantung (PPBTB) telah dikaji secara intensif oleh ramai penyelidik untuk menganggarkan penggunaan elektrik setiap perkakas di dalam sesebuah bangunan yang dipantau. Walau bagaimanapun, kaedah ini memerlukan secara terperinci, data penggunaan kuasa setiap saat yang biasanya tidak boleh didapati tanpa menggunakan meter tenaga berspesifikasi tinggi. Meter tenaga yang kebiasaannya digunakan di dalam bangunan hanya boleh merekod data frekuensi rendah contohnya kWh bagi setiap tiga puluh minit. Tesis ini mencadangkan teknik bawah-ke-atas untuk mengasingkan data penggunaan kWh bagi sesebuah bangunan. Hubungan antara profil beban bangunan dan corak penggunaan elektrik oleh penghuni telah dikaji dan dianalisis. Dari hasil kajian, kaedah berdasarkan faktor penggunaan yang menghubungkan corak penggunaan pengguna dan penggunaan elektrik kWh telah dicadangkan untuk melaksanakan pengasingan beban. Kaedah ini diaplikasikan secara praktikal dengan menggunakan profil data kWh di Blok P19a, Fakulti Kejuruteraan Elektrik, Universiti Teknologi Malaysia. Keputusan pengasingan bagi penggunaan kWh untuk sistem penghawa dingin dan pencahayaan telah disahkan dengan penggunaan kWh sebenar yang dicatatkan daripada litar cawangan bangunan masing-masing. Keputusan daripada analisis menunjukkan bahawa kaedah yang dicadangkan boleh digunakan untuk mengasingkan penggunaan tenaga bangunan komersial kepada sistem penghawa dingin dan lampu. Kaedah yang dicadangkan juga boleh digunakan lebih meluas untuk mengasingkan penggunaan tenaga berdasarkan setiap ruang bangunan yang berbeza.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xv
	LIST OF SYMBOLS	xvii
	LIST OF APPENDICES	xviii
1	INTRODUCTION	1
	1.1 Research Background	1
	1.2 Problem Statement	3
	1.3 Objectives of the Research	4
	1.4 Scope of the Research	4
	1.5 Significance of the research	5
	1.6 Thesis outline	6
2	LITERATURE REVIEW	7
	2.1 Introduction	7

2.2	Energy Management	8
2.3	Non-Intrusive Appliance Load Monitoring	12
	2.3.1 Low-Frequency Hardware Installation	13
	2.3.1.1 Real power and reactive power changes	13
	2.3.1.2 Real power and reactive power with additional “macroscopic” signatures changes	16
	2.3.1.3 Changes of real power only	20
	2.3.2 Higher Frequency Sampling Hardware	26
	2.3.3 Comparison of different Non-Intrusive Appliance Load Monitoring Method	32
2.4	Bottom up approach	36
	2.4.1 Statistical random model	38
	2.4.2 Probabilistic empirical models	40
	2.4.3 Time of use based models	41
2.5	Chapter Summary	44
3	METHODOLOGY	45
	3.1 Introduction	45
	3.2 Implementation Plan	45
	3.3 Data Collection	47
	3.3.1 Load Profile Data	47
	3.3.2 Walk-through audit	50
	3.3.3 Building specification	52
	3.4 Proposed Load Disaggregation method	53
	3.5 Summary of Chapter	61
4	RESULTS AND DISCUSSIONS	62
	4.1 Introduction	62
	4.2 Collected load profile data for analysis	63
	4.3 Load disaggregation results	66

4.3.1	Utilization factor	66
4.4	Estimation of Lighting and Air-Conditioning Energy Consumption	69
4.4.1	Validation of Load Disaggregation results	73
4.5	Electricity consumption profile of individual area	81
4.6	Summary of Chapter	85
5	CONCLUSIONS AND FUTURE RECOMMENDATIONS	86
5.1	Conclusion	86
5.2	Recommendations for future work	87
	REFERENCES	89
	Appendices A-C	98-112

LIST OF TABLES

TABLE NO.	TITLE	PAGE
1.1	Regional and sectoral electricity consumption in Malaysia, 2014	1
2.1	Fragment of a life style matrix	37
2.2	Classification of occupancy pattern for a three-person household	38
3.1	Power input of lighting system according to specified area	52
3.2	Power input of air-conditioning system according to specified area	53
3.3	Electricity usage ratings	56
3.4	Example of utilization factor representation	57
3.5	Utilization factor limits	58
3.6	Example of estimated energy consume by lighting system of overall laboratory in P19a building	59
4.1	Usage ratings defined by occupants of P19a for lighting system	66
4.2	Usage ratings defined by occupants of P19a for air conditioning system	67

4.3	Utilization factor result for lighting system	68
4.4	Utilization factor result for air-conditioning system	68
4.5	Result of load disaggregation on 18 February 2015	69
4.6	Comparison of actual and proposed data on 18 February 2015	73
4.7	Table of percentage error for the proposed method on 18 February 2015	77
4.8	Table of error for remaining days	80
4.9	Energy consumption of individual area of lighting system on 18 February 2015 (kWh)	82
4.10	Energy consumption of individual area of air-conditioning system on 18 February 2015 (kWh)	84

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Non-Intrusive Appliance Load Monitoring Division	3
2.1	Types of behavior-based energy efficiency strategies and approaches	8
2.2	Efficiency programs with different types of feedback systems	9
2.3	Intrusive Load Monitoring process using smart meter by measuring each appliance power consumption	11
2.4	Non-intrusive Appliance Load Monitoring disaggregate data to individual appliance power consumption given aggregate data consumption	12
2.5	Power versus time shows step changes for total load due to individual appliance events	15
2.6	Signature Space and appliance cluster (Reactive versus Real Power)	15
2.7	Application of the method used in Hidden Markov Model	19
	(a) LCD State Transition diagram	
	(b) Hidden Markov Model (HMM) graphical representation	

	(c) Appliance HMMs are organized in a particular structure to form a Factorial HMM and define a combined load model.	
2.8	Noise FFT as a features	32
	(i) Power line shows background noise detected.	
	(ii) After a new device is turned on, new signal that create EMI is present.	
	(iii) After background subtraction the new signal features are extracted. The features are amplitude (A), mean (μ) and variance (σ) of the Gaussian fit	
3.1	Implementation plan flow chart	46
3.2	Data collection process	48
	(a) Kyoritsu Kew Power Quality Analyzer used to record power and energy consumption	
	(b) Connection between power analyzer at main power input of air-conditioning system	
3.3	Overview of connection	49
	(a) single line diagram of installed meter	
	(b) diagram of 3-phase 4-wire connection between power analyzer and load	
3.4	Hourly energy consumption of P19 building	49
3.5	Illustration of the proposed method	54
3.6	Flowchart of proposed load disaggregation method	55
4.1	Building's load profile on Wednesday (18/2/15)	63
4.2	Building's load profile on Monday (23/2/15)	64
4.3	Building's load profile on Tuesday (24/2/15)	64
4.4	Building's load profile on Wednesday (25/2/15)	64
4.5	Building's load profile on Thursday (26/2/15)	65
4.6	Building's load profile on Sunday (1/3/15)	65
4.7	Building's load profile on Monday (2/3/15)	65
4.8	Load profile of disaggregated data on 18 February 2015	70

4.9	Load profile of disaggregated data for corresponding days	72
	(a) 23 February 2015	
	(b) 24 February 2015	
	(c) 25 February 2015	
	(d) 26 February 2015	
	(e) 1 March 2015	
	(f) 2 March 2015	
4.10	Comparison of actual data and proposed data load profile	75
	(a) lighting system	
	(b) air-conditioning system	
4.11	Comparison of disaggregated data between actual and proposed data	76
4.12	Comparison of disaggregated data between actual and proposed data for corresponding days	79
	(a) 23 February 2015	
	(b) 24 February 2015	
	(c) 25 February 2015	
	(d) 26 February 2015	
	(e) 1 March 2015	
	(f) 2 March 2015	
4.13	Load profile of lighting system for individual area	83
4.14	Load profile of air-conditioning system for individual area	85

LIST OF ABBREVIATIONS

AC	-	Air-conditioning system
ANNOT	-	Automated Electricity Data Annotation
APEC	-	Asia-Pacific Economic Cooperation
CU	-	Concordia University
CHP	-	Combine Heat Power
CPU	-	Central Processor Unit
DHW	-	Domestic hot-water
DSM	-	Demand Side Management
DSP	-	Data Signal Processor
EE	-	Energy Efficiency
EMI	-	Electromagnetic Interference
FFT	-	Fast Fourier Transform
FL	-	Lighting system
FKE	-	Fakulti Kejuruteraan Elektrik
FHMM	-	Factorial Hidden Markov Model
FSM	-	Finite State Machines
H	-	High
HELP	-	Heuristic End-Use Load Profiler
HMM	-	Hidden Markov Model
HVAC	-	Heating, ventilation and air-conditioner
IALM	-	Intrusive Appliance Load Monitoring
kHz	-	Kilohertz
kW	-	Kilowatt
kWh	-	Kilowatt-hour

MOHE	-	Ministry of Higher Education's
NIALM	-	Non-Intrusive Appliance Load Monitoring
N-N	-	Neural-network
PE	-	Pencawang Elektrik
PF	-	Power factor
RBF	-	Radial Basis Function
RECAP	-	Recognition of electrical Appliances and Profiling
SMLP	-	Simple Method of formulating Load Profile
SMPS	-	Switch Mode Power Supplies
SVM	-	Support Vector Machines
TOU	-	Time of Use
T5	-	Fluorescent Tube Lamp Type T5
T8	-	Fluorescent Tube Lamp Type T8
UEC	-	Unit Energy Consumption
UK	-	United Kingdom
UNEP	-	United Nations Environment Program
UTM	-	Universiti Teknologi Malaysia
US	-	United States
VH	-	Very high
VL	-	Very low
VRV	-	Variable Refrigerant Volume
W	-	Watt
W/h	-	Watt per hour

LIST OF SYMBOLS

A	-	Utilization factor
i	-	Area
j	-	Time/hour
μ_j	-	mean electricity consumption at hour j
σ	-	Variance
P_i	-	Power input
E_j	-	kWh electricity consumption
N_s	-	Total number of areas
PF	-	Power factor
P_{std}	-	Standard deviation for real power

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	List of Author's Publication	95
B	Schedule of Split-Unit Air-Conditioning System	96
C	Load Profile of P19a block	106

CHAPTER 1

INTRODUCTION

1.1 Research Background

Asia-Pacific Economic Cooperation (APEC) Energy Demand and Supply Outlook estimate that electricity demand in Malaysia will significantly rise to 206 TW/h in 2035 from 96.3 TW/h in 2009 [1]. It is said that approximately 30% from the total demand nationwide is contributed by commercial buildings alone [2-4]. Table 1.1 presents regional and sectoral electricity consumption in Malaysia for year 2014. Thus, Malaysia must explore available initiatives to encourage efficient usage of the electricity demand for a better energy management control [5]. University buildings are also one of the high energy consumers and thus, education centres are advised by Ministry of Higher Education's (MOHE) to apply a better energy practice [6-8].

Table 1.1: Regional and sectoral electricity consumption in Malaysia, 2014

REGION	INDUSTRY GWH	COMMERCIAL GWH	RESIDENTIAL GWH	TRANSPORTATION GWH	AGRICULTURE GWH	TOTAL GWH
PENINSULAR MALAYSIA	46,755	37,108	23,721	261	413.5	108,259
SARAWAK	10,966	2,290	1,896	-	-	15,152
SABAH	1,230	2,043	1,647	-	-	4,919
TOTAL	58,951	41,441	27,264	261	414	128,330

There are many strategies to reduce electricity consumption such as demand side management (DSM) and energy efficiency (EE) program. DSM focuses on consumer demand adjustment in energy usage to control energy consumption at end-user through education or financial incentives. EE program is a system to manage and restraining the increase in energy demand. A building that provides same services for less energy input or more services for the same energy input is said to be energy efficient [2, 9]. There are several options to reduce energy consumption waste by providing consumer with their energy level consumption such as smart meter installation known as intrusive appliance load monitoring and analysis of current and voltage waveform through non-intrusive appliance load monitoring method.

Intrusive Appliance Load Monitoring (IALM) is known as one of the most accurate and reliable systems to recognize load consumption of an individual appliance. A few smart meter will be installed to recognized consumers' energy consumption in a building where each meter directly interacts with each involve appliances and finally decomposes the total energy consumption. Apparently, this method is not the common preferred option due to the high cost of installation that requires smart meter to be set up on each appliance.

Meanwhile, the study on Non-Intrusive Appliance Load Monitoring (NIALM) is widely evolving which focuses on load signature behaviour to perform load disaggregation. This method delivers reliable results which conforms with one of the objectives of feedback system that is to achieve appliance disaggregation. A NIALM is designed to monitor an electrical circuit that contains a number of appliances. NIALM estimates the number and nature of the individual loads, their individual energy consumption, and other relevant statistics such as time-of-day variations by a sophisticated analysis of the current and voltage waveforms of the total load. This method is often used to disaggregate overall consumption into individual energy usage of experimented appliances. Besides, the analysis requires less cost than the IALM technique because access to individual components is unnecessary for installing sensors or making measurements.

The study of NIALM is divided into two categories which are low sampling and high sampling installation. Figure 1.1 shows the NIALM method separated into

several divisions, depending on the frequency of input data [10]. Low sampling installation normally analyses the behaviour of power changes and applies macroscopic features due to fundamental period that is 1/60 s or 1/50 s while higher frequency sampling hardware focuses on the study of harmonic and waveforms.

Various studies on NIALM could offer historical usage information to consumers which provide more detail in energy use comparisons and their energy usage per appliance data. Therefore, consumers who are well informed of their current energy usage will be more motivated to change their behaviours toward energy consumption to reduce electricity bill.

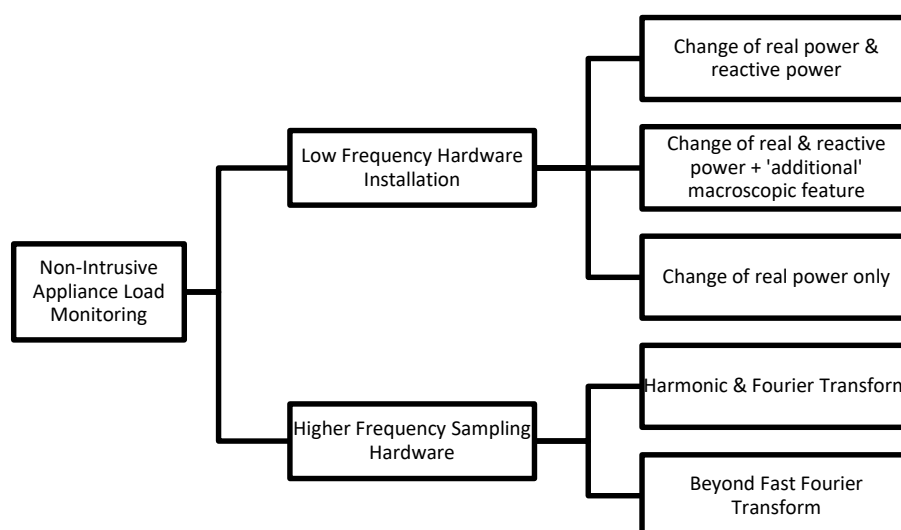


Figure 1.1 Non-Intrusive Appliance Load Monitoring Division [10]

1.2 Problem Statement

Most NIALM method requires high frequency sampling data for load signature tracing before load disaggregation can be made. It also requires a recorder with extensive memory space to store such detail and huge data, which can only be done by

specialized high specification energy meter. In practice, most commercial buildings are only equipped with a standard energy meter, which is only capable in capturing hourly kWh data. Applying NIALM method for such data to disaggregate load is impossible. A load disaggregation method for limited data i.e. low frequency sampling kWh data is needed. The method must able to estimate the usage pattern of major electrical equipment in the building that reflects the electricity usage behaviour of the occupants.

1.3 Objective of the research

The objectives of this research are:

- i. To study the relationship between recorded energy consumption (kWh) pattern of a building and the occupant's energy usage behaviour
- ii. To propose a load disaggregation method that reflects occupant's energy usage behaviour through bottom-up based utilization factor
- iii. To validate the proposed method against actual data

1.4 Scope of the research

This thesis proposes Non-Intrusive Appliance Load Monitoring to disaggregate overall load profile into specific appliance energy usage. Due to the requirement of high specification device and extensive amount of data storage, this study makes use of bottom-up concept to evaluate the relationship between load profile pattern and occupant utilization behaviour. For this purpose, block P19a, Faculty of Electrical Engineering, University Teknologi Malaysia (UTM) is used as a test system for this research. The test system is an academic building which consists of

administration offices, lecturer rooms, class rooms and laboratories. The developed method is tested against practical data of the test system to validate the results. The experimental analysis focuses on estimating the energy usage pattern of two main equipment that influence the high energy consumption of P19a building, which is lighting and air-conditioning system. Other electrical equipment are neglected due to their very low power rating and their presence in total energy consumption is too small compared to lighting and air-conditioning system.

1.5 Significance of the research

Standard energy meter commonly does not provide individual energy data of the equipment installed in a building. Thus, the prospect of estimating energy consumption of various appliance is definitely appealing. Load disaggregation explored in NIALM requires high frequency data and high specification devices. Therefore, a simplified way of load disaggregation method is introduced in this study by correlating the relationship between load profile pattern and occupant utilization behaviour. The proposed method only requires historical data per hour which is accessible through a standard energy meter and simple calculations are involved so that it can be practically applied by the general consumers. The relevance of this study is to offer historical usage information to consumers with more detail energy use comparisons, their energy usage pattern as well as historical data of regular energy consumption. The disaggregated load information provided by the proposed method can inform consumer of their individual appliance energy usage and identifying which appliances are consuming and contribute the most power from their total electricity bills as well as providing guidance for energy-saving behaviours.

1.6 Thesis outline

This thesis is separated into five chapters. Chapter 1 describes the project overview. This chapter consist of background of the research, problem statement, objectives, scope of research and the significance of the research. Chapter 2 presents the literature review that discusses the concept of non-intrusive appliance load monitoring where the idea to disaggregate electrical appliance data consumption is developed. Chapter 2 also reviews the method that was implemented in previous researches that are related to this study. Later in this chapter, the basic idea of bottom-up concept is briefly reviewed. Chapter 3 present the proposed method to be applied in this analysis. It explains the steps taken throughout the proposed method in this study to meet the research objectives. Chapter 4 presents the results and analyses obtain through the proposed method. The result is presented in simple tables, figures and charts as well as detailed clarification of the findings. In this chapter, the extended application of the proposed method is also presented. Chapter 5 is the concluding section of this thesis. The recommendations for future work are also presented in this chapter.

factor and power input of that building needs to be calculated and observed to fit the user behaviour and characteristic of the building.

REFERENCES

1. *APEC Energy Demand and Supply Outlook, 5th Edition*. 2013. p. 424.
2. Saidur, R., *Energy consumption, energy savings, and emission analysis in Malaysian office buildings*. *Energy Policy*, 2009. 37(10): p. 4104-4113.
3. Bakar, N.N.A., et al., *Sustainable Energy Management Practices and Its Effect on EEI: A Study on University Buildings*.
4. Moghimi, S., et al. *Building energy index (BEI) in large scale hospital: case study of Malaysia*. in *In Proceeding GEMESSED'11, Proceedings of the 4th WSEAS international conference on "Recent Researches in Geography Geology, Energy, Environment and Biomedicine"*, Corfu Island, Greece. 2011.
5. Syafrudin, M. and H. Amir Rabani Abd. *Demand control & monitoring system as the potential of energy saving*. in *Research and Development (SCOReD), 2014 IEEE Student Conference on*. 2014.
6. Ahmad, A.S., et al. *Energy efficiency measurements in a Malaysian public university*. in *Power and Energy (PECon), 2012 IEEE International Conference on*. 2012. IEEE.
7. Shakur, A., et al., *Energy conservation opportunities in Malaysian universities*. *Malaysian Journal of Real Estate*, 2010. 5(1): p. 26-35.
8. Wai, C.W., A.H. Mohammed, and L.S. Ting, *Energy management key practices: A proposed list for Malaysian universities*. Journal homepage: www.IJEE.IEEFoundation.org, 2011. 2(4): p. 749-760.
9. Patterson, M.G., *What is energy efficiency?: Concepts, indicators and methodological issues*. *Energy Policy*, 1996. 24(5): p. 377-390.
10. Nur Farahin Asa @ Esa, M.P.A., Mohammad Yusri Hassan, Faridah Hussin, *Electricity Consumption Pattern Disaggregation Using Non-Intrusive Appliance Load Monitoring Method*, in *Advanced Research in Electrical and Electronic Engineering Technology (ARiEET)*. 2015, Jurnal Teknologi Bandung, Indonesia.

11. Amber Mahone, B.H., *Overview of Residential Energy Feedback and Behavior-based Energy Efficiency*. 2011, Energy Environmental Economics.
12. Derijcke, E. and J. Uitzinger, *Residential behavior in sustainable houses*, in *User Behavior and Technology Development: Shaping Sustainable Relations Between Consumers and Technol*, P.-P. Verbeek and A. Slob, Editors. 2006, Springer Netherlands: Dordrecht. p. 119-126.
13. Workgroup, E.G.B., *Buildings and their impact on the environment: a statistical summary*. 2009.
14. Frontczak, M., R.V. Andersen, and P. Wargocki, *Questionnaire survey on factors influencing comfort with indoor environmental quality in Danish housing*. *Building and Environment*, 2012. 50: p. 56-64
15. Frontczak, M. and P. Wargocki, *Literature survey on how different factors influence human comfort in indoor environments*. *Building and Environment*, 2011. 46(4): p. 922-937.
16. Lindelöf, D. and N. Morel, *A field investigation of the intermediate light switching by users*. *Energy and Buildings*, 2006. 38(7): p. 790-801.
17. Masoso, O.T. and L.J. Grobler, *The dark side of occupants' behaviour on building energy use*. *Energy and Buildings*, 2010. 42(2): p. 173-177.
18. Andersen, R.V., et al., *Survey of occupant behaviour and control of indoor environment in Danish dwellings*. *Energy and Buildings*, 2009. 41(1): p. 11-16.
19. Heinonen, J. and S. Junnila, *Residential energy consumption patterns and the overall housing energy requirements of urban and rural households in Finland*. *Energy and Buildings*, 2014. 76: p. 295-303.
20. Gul, M.S. and S. Patidar, *Understanding the energy consumption and occupancy of a multi-purpose academic building*. *Energy and Buildings*, 2015. 87: p. 155-165.
21. D. Parker, D.H., A. Meier, and R. Brown, *How much energy are we using? potential of residential energy demand feedback devices*, in *Proceedings of the 2006 Summer Study on Energy Efficiency in Buildings, American Council for an Energy Efficiency Economy*. 2006: Asilomar, CA. p. 13.
22. Darby, S., *The effectiveness of feedback on energy consumption: a review for DEFRA of the literature on metering, billing and direct displays*. 2006.

23. Fischer, C., *Feedback on household electricity consumption: a tool for saving energy?* Energy Efficiency, 2008. 1(1): p. 79-104.
24. *Residential Electricity Use Feedback: A Research Synthesis and Economic Framework*. 2009, Power Delivery & Utilization - Distribution & Utilization. p. 126.
25. *Advancing Energy Efficiency in Calgary: Energy Savings Through Consumer Feedback Programs*. 2014, Alberta Energy Efficiency Alliance: www.aeea.ca.
26. Faruqui, A., S. Sergici, and A. Sharif, *The impact of informational feedback on energy consumption—A survey of the experimental evidence*. Energy, 2010. 35(4): p. 1598-1608.
27. RIBEIRO SERRENHO Tiago, Z.P., BERTOLDI Paolo, *Energy Feedback Systems: Evaluation of Meta-studies on energy savings through feedback*. 2015.
28. Xiaofan, J., et al. *Design and implementation of a high-fidelity AC metering network*. in *Information Processing in Sensor Networks, 2009. IPSN 2009. International Conference on*. 2009.
29. Suzuki, K., et al. *Nonintrusive appliance load monitoring based on integer programming*. in *SICE Annual Conference, 2008*. 2008.
30. Ridi, A., C. Gisler, and J. Hennebert. *A Survey on Intrusive Load Monitoring for Appliance Recognition*. in *Pattern Recognition (ICPR), 2014 22nd International Conference on*. 2014.
31. Hart, G.W., *Nonintrusive appliance load monitoring*. Proceedings of the IEEE, 1992. 80(12): p. 1870-1891.
32. Tsai, M.S. and Y.H. Lin. *Development of a non-intrusive monitoring technique for appliance' identification in electricity energy management*. in *Advanced Power System Automation and Protection (APAP), 2011 International Conference on*. 2011.
33. Adabi, A., et al. *Status and challenges of residential and industrial non-intrusive load monitoring*. in *Technologies for Sustainability (SusTech), 2015 IEEE Conference on*. 2015.
34. Yung Fei, W., et al. *Recent approaches to non-intrusive load monitoring techniques in residential settings*. in *Computational Intelligence Applications In Smart Grid (CIASG), 2013 IEEE Symposium on*. 2013.

35. Zeifman, M. and K. Roth, *Nonintrusive appliance load monitoring: Review and outlook*. Consumer Electronics, IEEE Transactions on, 2011. 57(1): p. 76-84.
36. Stickels, T.D., *Residential Load Control and Metering Equipment: Costs and Capabilities ; Final Report*. 1987: Electric Power Research Inst.
37. Zeifman, M., *Disaggregation of home energy display data using probabilistic approach*. Consumer Electronics, IEEE Transactions on, 2012. 58(1): p. 23-31.
38. Sultanem, F., *Using appliance signatures for monitoring residential loads at meter panel level*. Power Delivery, IEEE Transactions on, 1991. 6(4): p. 1380-1385.
39. Belley, C., et al., *An efficient and inexpensive method for activity recognition within a smart home based on load signatures of appliances*. Pervasive and Mobile Computing, 2014. 12: p. 58-78.
40. Norford, L.K. and S.B. Leeb, *Non-intrusive electrical load monitoring in commercial buildings based on steady-state and transient load-detection algorithms*. Energy and Buildings, 1996. 24(1): p. 51-64.
41. Figueiredo, M., A. de Almeida, and B. Ribeiro, *Home electrical signal disaggregation for non-intrusive load monitoring (NILM) systems*. Neurocomputing, 2012. 96: p. 66-73.
42. Cole, A.I. and A. Albicki. *Data extraction for effective non-intrusive identification of residential power loads*. in *Instrumentation and Measurement Technology Conference, 1998. IMTC/98. Conference Proceedings. IEEE*. 1998.
43. Zoha, A., et al. *Low-power appliance monitoring using Factorial Hidden Markov Models*. in *Intelligent Sensors, Sensor Networks and Information Processing, 2013 IEEE Eighth International Conference on*. 2013.
44. Powers, J., B. Margossian, and B.A. Smith, *Using a rule-based algorithm to disaggregate end-use load profiles from premise-level data*. Computer Applications in Power, IEEE, 1991. 4(2): p. 42-47.
45. Farinaccio, L. and R. Zmeureanu, *Using a pattern recognition approach to disaggregate the total electricity consumption in a house into the major end-uses*. Energy and Buildings, 1999. 30(3): p. 245-259.

46. Baranski, M. and J. Voss. *Nonintrusive appliance load monitoring based on an optical sensor*. in *Power Tech Conference Proceedings, 2003 IEEE Bologna*. 2003.
47. Baranski, M. and J. Voss. *Detecting patterns of appliances from total load data using a dynamic programming approach*. in *Data Mining, 2004. ICDM '04. Fourth IEEE International Conference on*. 2004.
48. Bouloutas, A., G.W. Hart, and M. Schwartz, *Two extensions of the Viterbi algorithm*. *Information Theory, IEEE Transactions on*, 1991. 37(2): p. 430-436.
49. Hart, G.W. and A.T. Bouloutas, *Correcting dependent errors in sequences generated by finite-state processes*. *Information Theory, IEEE Transactions on*, 1993. 39(4): p. 1249-1260.
50. Jian, L., et al. *Load signature study <inf>#x00A1;</inf>V part I: Basic concept, structure and methodology*. in *Power and Energy Society General Meeting, 2010 IEEE*. 2010.
51. Laughman, C., et al., *Power signature analysis*. *Power and Energy Magazine, IEEE*, 2003. 1(2): p. 56-63.
52. Lee, K.D., et al., *Estimation of Variable-Speed-Drive Power Consumption From Harmonic Content*. *Energy Conversion, IEEE Transactions on*, 2005. 20(3): p. 566-574.
53. Wichakool, W., et al., *Modeling and Estimating Current Harmonics of Variable Electronic Loads*. *Power Electronics, IEEE Transactions on*, 2009. 24(12): p. 2803-2811.
54. Srinivasan, D., W.S. Ng, and A.C. Liew, *Neural-network-based signature recognition for harmonic source identification*. *Power Delivery, IEEE Transactions on*, 2006. 21(1): p. 398-405.
55. Meehan, P., C. McArdle, and S. Daniels, *An Efficient, Scalable Time-Frequency Method for Tracking Energy Usage of Domestic Appliances Using a Two-Step Classification Algorithm*. *Energies*, 2014. 7(11): p. 7041-7066.
56. Aladesanmi, E.J. and K.A. Folly, *Overview of non-intrusive load monitoring and identification techniques*. *IFAC-PapersOnLine*, 2015. 48(30): p. 415-420.
57. Akbar, M. and D.Z.A. Khan. *Modified Nonintrusive Appliance Load Monitoring For Nonlinear Devices*. in *Multitopic Conference, 2007. INMIC 2007. IEEE International*. 2007.

58. Tarter, R.E., *Solid-state power conversion handbook*. 1993: Wiley,.
59. Umeh, K. and A. Mohamed. *Intelligent system for identification of harmonics originating from single phase nonlinear loads*. in *SoutheastCon, 2005. Proceedings. IEEE*. 2005.
60. Chahine, K., et al., *Electric Load Disaggregation in Smart Metering Using a Novel Feature Extraction Method and Supervised Classification*. *Energy Procedia*, 2011. 6: p. 627-632.
61. Bouhouras, A.S., A.N. Milioudis, and D.P. Labridis, *Development of distinct load signatures for higher efficiency of NILM algorithms*. *Electric Power Systems Research*, 2014. 117: p. 163-171.
62. Froehlich, J., et al., *Disaggregated End-Use Energy Sensing for the Smart Grid*. *Pervasive Computing, IEEE*, 2011. 10(1): p. 28-39.
63. Patel, S.N., et al., *At the flick of a switch: detecting and classifying unique electrical events on the residential power line*, in *Proceedings of the 9th international conference on Ubiquitous computing*. 2007, Springer-Verlag: Innsbruck, Austria. p. 271-288.
64. Gupta, S., M.S. Reynolds, and S.N. Patel, *ElectriSense: single-point sensing using EMI for electrical event detection and classification in the home*, in *Proceedings of the 12th ACM international conference on Ubiquitous computing*. 2010, ACM: Copenhagen, Denmark. p. 139-148.
65. Trung, K.N., et al. *Using FPGA for real time power monitoring in a NIALM system*. in *Industrial Electronics (ISIE), 2013 IEEE International Symposium on*. 2013.
66. Zoha, A., et al., *Non-Intrusive Load Monitoring Approaches for Disaggregated Energy Sensing: A Survey*. *Sensors*, 2012. 12(12): p. 16838-16866.
67. Marchiori, A., et al., *Circuit-Level Load Monitoring for Household Energy Management*. *Pervasive Computing, IEEE*, 2011. 10(1): p. 40-48.
68. Marceau, M.L. and R. Zmeureanu, *Nonintrusive load disaggregation computer program to estimate the energy consumption of major end uses in residential buildings*. *Energy Conversion and Management*, 2000. 41(13): p. 1389-1403.
69. Najmeddine, H., et al. *State of art on load monitoring methods*. in *Power and Energy Conference, 2008. PECon 2008. IEEE 2nd International*. 2008.
70. Kato, T., et al., *Appliance Recognition from Electric Current Signals for Information-Energy Integrated Network in Home Environments*, in *Ambient*

- Assistive Health and Wellness Management in the Heart of the City*, M. Mokhtari, et al., Editors. 2009, Springer Berlin Heidelberg. p. 150-157.
71. Cole, A. and A. Albicki. *Nonintrusive identification of electrical loads in a three-phase environment based on harmonic content*. in *Instrumentation and Measurement Technology Conference, 2000. IMTC 2000. Proceedings of the 17th IEEE*. 2000.
 72. Ruzzelli, A.G., et al. *Real-Time Recognition and Profiling of Appliances through a Single Electricity Sensor*. in *Sensor Mesh and Ad Hoc Communications and Networks (SECON), 2010 7th Annual IEEE Communications Society Conference on*. 2010.
 73. Jiaming, L., S. West, and G. Platt. *Power decomposition based on SVM regression*. in *Modelling, Identification & Control (ICMIC), 2012 Proceedings of International Conference on*. 2012.
 74. Lee, W.K., et al., *Exploration on load signatures*, in *International Conference on Electrical Engineering (ICEE)*. 2004.
 75. Lam, H.Y., G.S.K. Fung, and W.K. Lee, *A Novel Method to Construct Taxonomy Electrical Appliances Based on Load Signatures of*. *Consumer Electronics, IEEE Transactions on*, 2007. 53(2): p. 653-660.
 76. Chang, H.-H., H.-T. Yang, and C.-L. Lin, *Load Identification in Neural Networks for a Non-intrusive Monitoring of Industrial Electrical Loads*, in *Computer Supported Cooperative Work in Design IV*, W. Shen, et al., Editors. 2008, Springer Berlin Heidelberg. p. 664-674.
 77. Chang, H.-H., *Non-Intrusive Demand Monitoring and Load Identification for Energy Management Systems Based on Transient Feature Analyses*. *Energies*, 2012. 5(11): p. 4569-4589.
 78. Shaw, S.R., et al., *Nonintrusive Load Monitoring and Diagnostics in Power Systems*. *Instrumentation and Measurement, IEEE Transactions on*, 2008. 57(7): p. 1445-1454.
 79. Cole, A.I. and A. Albicki. *Algorithm for nonintrusive identification of residential appliances*. in *Circuits and Systems, 1998. ISCAS '98. Proceedings of the 1998 IEEE International Symposium on*. 1998.
 80. Hazas, M., A. Friday, and J. Scott, *Look Back before Leaping Forward: Four Decades of Domestic Energy Inquiry*. *Pervasive Computing, IEEE*, 2011. 10(1): p. 13-19.

81. Schoofs, A., et al. *ANNOT: Automated Electricity Data Annotation Using Wireless Sensor Networks*. in *Sensor Mesh and Ad Hoc Communications and Networks (SECON), 2010 7th Annual IEEE Communications Society Conference on*. 2010.
82. Capasso, A., et al., *A bottom-up approach to residential load modeling*. *IEEE Transactions on Power Systems*, 1994. 9(2): p. 957-964.
83. Kiichiro Tsuji, F.S., Tsuyoshi Ueno, Osamu Saeki, Takehiko Matsuoka. *Bottom-Up Simulation Model for Estimating End-Use Energy Demand Profiles in Residential Houses*. in *2004 ACEEE Summer Study on Energy Efficiency in Buildings*. 2004.
84. Michalik, G., et al., *Structural modelling of energy demand in the residential sector: 1. Development of structural models*. *Energy*, 1997. 22(10): p. 937-947.
85. Michalik, G., et al., *Structural modelling of energy demand in the residential sector: 2. The use of linguistic variables to include uncertainty of customers' behaviour*. *Energy*, 1997. 22(10): p. 949-958.
86. Yao, R. and K. Steemers, *A method of formulating energy load profile for domestic buildings in the UK*. *Energy and Buildings*, 2005. 37(6): p. 663-671.
87. Grandjean, A., J. Adnot, and G. Binet, *A review and an analysis of the residential electric load curve models*. *Renewable and Sustainable Energy Reviews*, 2012. 16(9): p. 6539-6565.
88. Rice, A., S. Hay, and D. Ryder-Cook. *A limited-data model of building energy consumption*. in *BuildSys'10 - Proceedings of the 2nd ACM Workshop on Embedded Sensing Systems for Energy-Efficiency in Buildings*. 2010.
89. Stokes, M., *Removing barriers to embedded generation : a fine-grained load model to support low voltage network performance analysis*. 2005, De Montfort University.
90. Swan, L.G. and V.I. Ugursal, *Modeling of end-use energy consumption in the residential sector: A review of modeling techniques*. *Renewable and Sustainable Energy Reviews*, 2009. 13(8): p. 1819-1835.
91. Paatero, J.V. and P.D. Lund, *A model for generating household electricity load profiles*. *International Journal of Energy Research*, 2006. 30(5): p. 273-290.
92. Pratt, R.G., P.N. Laboratory, and U.S.B.P. Administration, *Description of Electric Energy Use in Single-family Residences in the Pacific Northwest*:

- End-use Load and Consumer Assessment Program (ELCAP)*. 1989: Bonneville Power Administration.
93. Walker, C.F. and J.L. Pokoski, *Residential Load Shape Modelling Based on Customer Behavior*. IEEE Transactions on Power Apparatus and Systems, 1985. PAS-104(7): p. 1703-1711.
 94. Armstrong, M.M., et al., *Synthetically derived profiles for representing occupant-driven electric loads in Canadian housing*. Journal of Building Performance Simulation, 2009. 2(1): p. 15-30.
 95. Widén, J., et al., *Constructing load profiles for household electricity and hot water from time-use data—Modelling approach and validation*. Energy and Buildings, 2009. 41(7): p. 753-768.
 96. Richardson, I., et al., *Domestic electricity use: A high-resolution energy demand model*. Energy and Buildings, 2010. 42(10): p. 1878-1887.