

PARALLELIZATION OF MULTIDIMENSIONAL HYPERBOLIC PARTIAL
DIFFERENTIAL EQUATION ON DÉTENTE INSTANTANÉE CONTRÔLÉE
DEHYDRATION PROCESS

HAFIZAH FARHAH BINTI SAIPAN @ SAIPOL

UNIVERSITI TEKNOLOGI MALAYSIA

PARALLELIZATION OF MULTIDIMENSIONAL HYPERBOLIC PARTIAL
DIFFERENTIAL EQUATION ON DÉTENTE INSTANTANÉE CONTRÔLÉE
DEHYDRATION PROCESS

HAFIZAH FARHAH BINTI SAIPAN @ SAIPOL

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Mathematics)

Faculty of Science
Universiti Teknologi Malaysia

MARCH 2017

To my dear husband, abah, mak, and family.

ACKNOWLEDGEMENT

All the praises and thanks to Allah the Almighty for giving me the strength to complete and submit this thesis. I would like to express my sincere gratitude to my beloved supervisor, Assoc. Prof. Dr. Norma binti Alias for her sincere and valuable guidance and encouragement. I am extremely grateful and indebted to her for sharing her knowledge and ideas, giving continuous support, and advice throughout this journey.

I sincerely thank Ibnu Sina Institute and the staff members for providing help and guidance and the necessary facilities I need. I also would like to thank all my friends, and to one and all who has been involved directly or indirectly in completing this thesis.

Finally, a special thanks to my beloved parents and parents in law, Saipol bin Juraimi, Azizah binti Abdul Ghani, Zainol Abidin, and Lailawati for their endless supports and prayers. My sincere appreciation to my dear husband, Aezal Muhammad Faim for being such a very supportive husband and has always kept me motivated. I am also very grateful to my family for their support and encouragement.

ABSTRACT

The purpose of this research is to propose some new modified mathematical models to enhance the previous model in simulating, visualizing and predicting the heat and mass transfer in dehydration process using instant controlled pressure drop (DIC) technique. The main contribution of this research is the mathematical models which are formulated from the regression model (Haddad *et al.*, 2007) to multidimensional hyperbolic partial differential equation (HPDE) involving dependent parameters; moisture content, temperature, and pressure, and independent parameters; time and dimension of region. The HPDE model is performed in multidimensional; one, two and three dimensions using finite difference method with central difference formula is used to discretize the mathematical models. The implementation of numerical methods such as Alternating Group Explicit with Brian (AGEB) and Douglas-Rachford (AGED) variances, Red Black Gauss Seidel (RBGS) and Jacobi (JB) method to solve the system of linear equation is another contribution of this research. The sequential algorithm is developed by using Matlab R2011a software. The numerical results are analyzed based on execution time, number of iterations, maximum error, root mean square error, and computational complexity. The grid generation process involved a fine grained large sparse data by minimizing the size of interval, increasing the dimension of the model and level of time steps. Another contribution is the implementation of the parallel algorithm to increase the speedup of computation and to reduce computational complexity problem. The parallelization of the mathematical model is run on Matlab Distributed Computing Server with Linux operating system. The parallel performance evaluation of multidimensional simulation in terms of execution time, speedup, efficiency, effectiveness, temporal performance, granularity, computational complexity and communication cost are analyzed for the performance of parallel algorithm. As a conclusion, the thesis proved that the multidimensional HPDE is able to be parallelized and PAGEB method is the alternative solution for the large sparse simulation. Based on the numerical results and parallel performance evaluations, the parallel algorithm is able to reduce the execution time and computational complexity compared to the sequential algorithm.

ABSTRAK

Kajian ini dilakukan bertujuan untuk mengemukakan model baru yang diubah untuk menambah baik model sebelum ini dalam menjalankan simulasi, menggambarkan dan meramal pemindahan haba dan jisim dalam proses pengeringan menggunakan teknik kawalan segera kejatuhan tekanan (DIC). Sumbangan utama kajian ini ialah model matematik diformulasikan daripada model regresi (Haddad *et al.*, 2007) kepada persamaan pembezaan separa hiperbolik (HPDE) pelbagai dimensi yang melibatkan parameter bersandar; kandungan air, suhu, dan tekanan, dan parameter tidak bersandar; masa dan rantau dimensi. Model HPDE dilaksanakan dalam pelbagai dimensi; satu, dua dan tiga dimensi menggunakan kaedah beza terhingga dengan rumus beza tengah telah digunakan untuk mendiskretasikan model matematik tersebut. Pelaksanaan kaedah berangka seperti Kaedah Tak Tersirat Kumpulan Berselang-seli dengan variasi Brian (AGEB), dan variasi Douglas-Rachford (AGED), Gauss Seidel Merah Hitam (RBGS), dan Jacobi (JB), dalam menyelesaikan sistem persamaan linear juga merupakan satu lagi sumbangan dalam kajian ini. Algoritma berjjukan dibangun menggunakan perisian Matlab R2011a. Keputusan berangka dianalisis berdasarkan masa pelaksanaan, bilangan lelaran, ralat maksima, ralat punca min kuasa dua, dan pengiraan kompleksiti. Proses penjanaan grid melibatkan butiran halus data yang besar dan jarang iaitu dengan meminimumkan saiz selang ruang, meningkatkan dimensi model dan peringkat paras masa. Antara sumbangan lain ialah algoritma selari dicadangkan untuk meningkatkan kecepatan pengiraan dan mengurangkan masalah pengiraan kompleksiti. Model matematik yang diselarikan dilaksanakan menggunakan Pengkomputeran Teragih Matlab dengan sistem operasi Linux. Penilaian prestasi selari bagi model pelbagai dimensi berdasarkan masa pelaksanaan, kecepatan, kecekapan, keberkesanan, prestasi sementara, granulariti, pengiraan kompleksiti dan kos komunikasi dianalisis untuk prestasi algoritma selari. Sebagai kesimpulan, kajian ini membuktikan HPDE pelbagai dimensi dapat diselarikan dan kaedah PAGEB merupakan penyelesaian alternatif bagi simulasi yang besar dan jarang. Berdasarkan keputusan berangka dan penilaian prestasi selari, algoritma selari dapat mengurangkan masa pelaksanaan dan kompleksiti pengiraan berbanding dengan algoritma berjjukan.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xii
	LIST OF FIGURES	xv
	LIST OF ABBREVIATIONS	xxi
	LIST OF SYMBOLS	xxiii
	LIST OF APPENDICES	xxiv
1	INTRODUCTION	1
	1.1 Background of Research	1
	1.2 DIC Technique	3
	1.2.1 Mathematical Model in DIC Technique	6
	1.3 Statement of Problem	10
	1.4 Objectives of Research	11
	1.5 Scope of Research	12
	1.6 Significance of Research	14
	1.7 Thesis Organization	14
2	LITERATURE REVIEW	17

2.1	Finite Difference Method	17
	2.1.1 Finite Difference Grid	18
	2.1.2 Taylor's Theorem	18
2.2	Basic Scheme for PDE	20
	2.2.1 Classical Explicit Method	20
	2.2.2 Fully Implicit Method	21
2.3	Numerical Methods for Solving SLE	22
	2.3.1 Classical JB Method	23
	2.3.2 Classical RBGS Method	25
	2.3.3 AGE Method	26
	2.3.3.1 Convergence Analysis for AGE Method	28
	2.3.4 AGED Method	32
	2.3.5 AGE B Method	35
2.4	Numerical Analysis	36
	2.4.1 Consistency	37
	2.4.2 Convergence	38
	2.4.3 Stability	38
	2.4.4 Measurements of Numerical Errors	39
	2.4.5 Computational Complexity Cost	40
2.5	Distributed Memory Parallel Computing System	41
	2.5.1 Designing Parallel Programming	42
	2.5.2 Distributed Parallel Computing Architecture	45
	2.5.3 Matlab Distributed Computing Server	48
	2.5.3.1 Development of MDCS	51
	2.5.4 Parallel Performance Evaluations	53
	2.5.4.1 Speedup	53
	2.5.4.1.1 Amdahl's Law	54
	2.5.4.1.2 Gustafson-Barsis Law	55
	2.5.4.2 Efficiency	55
	2.5.4.3 Effectiveness	57
	2.5.4.4 Temporal Performance	57
	2.5.4.5 Granularity	57
	2.5.4.6 Communication Cost	58

3	FORMULATION OF REGRESSION MODEL TO PDE	60
3.1	Introduction	60
3.2	Formulating the Statistical Regression Analysis to Parabolic PDE	61
3.3	1D Parabolic PDE Model	64
3.3.1	2D Parabolic PDE Model	67
3.4	Formulation from Parabolic to Hyperbolic Equation	72
3.4.1	1D HPDE Model	76
3.4.2	2D HPDE Model	79
3.4.3	3D HPDE Model	81
3.5	Chapter Summary	83
4	SEQUENTIAL AND PARALLEL ALGORITHMS FOR 1D MODEL	88
4.1	Introduction	88
4.2	Discretization using Weighted Average Method	89
4.3	Numerical Methods	90
4.3.1	1D_SJB Method	91
4.3.2	1D_SRBGS Method	92
4.3.3	1D_SAGED Method	94
4.3.4	1D_SAGEB Method	98
4.4	Parallelization of Numerical Methods	102
4.4.1	1D_PJB Method	109
4.4.2	1D_PRBGS Method	110
4.4.3	1D_PAGED Method	112
4.4.4	1D_PAGEB Method	115
4.5	Computational Complexity	124
4.5.1	Computational Complexity for Sequential Algorithm	124
4.5.2	Computational Complexity for Parallel Algorithm	125
4.5.3	Communication Cost for Parallel Algorithm	126

4.6	Results and Discussion	127
4.6.1	Numerical Results for Sequential Algorithm	127
4.6.2	Parallel Performance Evaluations for Parallel Algorithm	130
4.7	Chapter Summary	137
5	SEQUENTIAL AND PARALLEL ALGORITHMS FOR 2D MODEL	139
5.1	Introduction	139
5.2	Discretization using Weighted Average Method	140
5.3	Numerical Methods	142
5.3.1	2D_SJB Method	142
5.3.2	2D_SRBGS Method	144
5.3.3	2D_SAGED Method	145
5.3.4	2D_SAGEB Method	155
5.4	Parallelization of Numerical Methods	163
5.4.1	2D_PJB Method	164
5.4.2	2D_PRBGS Method	166
5.4.3	2D_PAGED Method	168
5.4.4	2D_PAGEB Method	171
5.5	Computational Complexity and Communication Cost	173
5.5.1	Computational Complexity for Sequential Algorithm	174
5.5.2	Computational Complexity for Parallel Algorithm	175
5.5.3	Communication Cost for Parallel Algorithm	176
5.6	Results and Discussion	176
5.6.1	Numerical Results for Sequential Algorithm	177
5.6.2	Parallel Performance Evaluations for Parallel Algorithm	179
5.7	Chapter Summary	187

6	SEQUENTIAL AND PARALLEL ALGORITHMS FOR 3D MODEL	188
6.1	Introduction	188
6.2	Discretization using Weighted Average Method	189
6.3	Numerical Methods	192
6.3.1	3D_SJB Method	192
6.3.2	3D_SRBGS Method	194
6.3.3	3D_SAGED Method	196
6.3.4	3D_SAGEB Method	215
6.4	Parallelization of Numerical Methods	229
6.4.1	3D_PJB Method	231
6.4.2	3D_PRBGS Method	233
6.4.3	3D_PAGED Method	236
6.4.4	3D_PAGEB Method	239
6.5	Computational Complexity and Communication Cost	241
6.5.1	Computational Complexity for Sequential Algorithm	242
6.5.2	Computational Complexity for Parallel Algorithm	242
6.5.3	Communication Cost for Parallel Algorithm	244
6.6	Results and Discussion	244
6.6.1	Numerical Results for Sequential Algorithm	245
6.6.2	Parallel Performance Evaluations for Parallel Algorithm	247
6.7	Chapter Summary	255
7	CONCLUSION AND RECOMMENDATION	256
7.1	Introduction	256
7.2	Conclusion	256
7.3	Recommendation for Future Research	261
	REFERENCES	262
	Appendices A-D	276 - 310

LIST OF TABLES

TABLE NO.	TITLE	PAGE
1.1	Summary of the conventional dehydration techniques	2
1.2	Value of parameters for pressure, water content and processing time	4
2.1	The comparison between sequential and parallel computing	41
2.2	Command for communication activities in MDCS	50
3.1	Input parameters involved to simulate the 1D parabolic PDE model	66
3.2	The absolute and relative errors from Haddad <i>et al.</i> (2007) and 1D parabolic PDE model (Equation 3.4)	66
3.3	Input parameters for 1D parabolic PDE for heat and mass equation	70
3.4	The absolute and relative errors from Haddad <i>et al.</i> (2007) and 1D hyperbolic PDE model (Equation 3.14)	74
3.5	Value of parameters of HPDE model for heat and mass transfer	76
3.6	The chronology to enhance the mathematical model in dehydration using DIC technique	84
4.1	Arithmetic operations per iteration in sequential algorithm for 1D heat and mass equations ($m =$ problem size)	124
4.2	Arithmetic operations per iteration in parallel algorithm for 1D heat and mass equations	125
4.3	Communication cost in parallel algorithm for 1D heat and mass equations	126
4.4	Parameter values for 1D HPDE heat and mass equations	128

4.5	The numerical results of heat and mass equations when $\theta = 1$ and $\varepsilon = 10^{-5}$	129
4.6	The numerical results of heat and mass equations when $\theta = 1$ and $\varepsilon = 10^{-10}$	129
4.7	Execution time for heat and mass equations for $\varepsilon = 10^{-5}$ and $\varepsilon = 10^{-10}$ and its percentage	135
4.8	Granularity for heat and mass equations using 1D_PAGEB method	135
4.9	Granularity for heat and mass equations using 1D_PAGED method	136
4.10	Granularity for heat and mass equations using 1D_PRBGS method	136
4.11	Granularity for heat and mass equations using 1D_PJB method	137
5.1	Arithmetic operations per iteration in sequential algorithm for 2D heat and mass equations	174
5.2	Arithmetic operations per iteration in parallel algorithm for 2D heat and mass equations	175
5.3	Communication cost in parallel algorithm for 2D heat and mass equations where $m = 401 \times 401$ and $m = 901 \times 901$	175
5.4	Value of parameters for 2D heat and mass equations	177
5.5	The numerical results for 2D heat and mass equations when $\theta = 1, N_i = N_j = 401, \Delta x = \Delta y = 1.25e - 05$ and $\Delta t = 2.025e - 06$	177
5.6	The numerical results for 2D heat and mass equations when $\theta = 1, N_i = N_j = 901, \Delta x = \Delta y = 5.556e - 06$ and $\Delta t = 9.0001e - 07$	178
5.7	Execution time for heat and mass equation for size of matrix 401×401 and 901×901 and its percentage	180
5.8	Granularity for size of matrix 401×401 and 901×901 using 2D_PAGEB method	185
5.9	Granularity for size of matrix 401×401 and 901×901 using 2D_PAGED method	185
5.10	Granularity for size of matrix 401×401 and 901×901 using	

	2D_PRBGS method	186
5.11	Granularity for size of matrix 401×401 and 901×901 using 2D_PJB method	186
6.1	Arithmetic operations per iteration for sequential algorithm of 3D heat and mass equations ($m = \text{problem size}$)	243
6.2	Arithmetic operations per iteration for parallel algorithm of 3D heat and mass equations	243
6.3	Communication cost in parallel algorithm for 3D heat and mass equations	243
6.4	Value of parameters for 3D heat and mass equations	245
6.5	The numerical results for 3D heat and mass equations when $\theta = 1$, $N_i = N_j = N_k = 21$, $\Delta x = \Delta y = \Delta z = 2.38e - 04$ and $\Delta t = 2.38e - 05$	245
6.6	The numerical results for 3D heat and mass equations when $\theta = 1$, $N_i = N_j = N_k = 41$, $\Delta x = \Delta y = \Delta z = 1.22e - 04$ and $\Delta t = 1.22e - 05$	246
6.7	Execution time for heat and mass equations for size of matrix, $21 \times 21 \times 21$ and $41 \times 41 \times 41$ and its percentage	247
6.8	Granularity for size of matrix $21 \times 21 \times 21$ and $41 \times 41 \times 41$ using 3D_PAGEB method	253
6.9	Granularity for size of matrix $21 \times 21 \times 21$ and $41 \times 41 \times 41$ using 3D_PAGED method	253
6.10	Granularity for size of matrix $21 \times 21 \times 21$ and $41 \times 41 \times 41$ using 3D_PRBGS method	254
6.11	Granularity for size of matrix $21 \times 21 \times 21$ and $41 \times 41 \times 41$ using 3D_PJB method	254

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Schematic diagram of the DIC reactor	4
1.2	Temperature and pressure changes during DIC treatment	5
1.3	Parallel algorithm design	9
2.1	Computational grid points	18
2.2	The computational molecules for explicit method	21
2.3	The computational molecules for fully implicit method	22
2.4	The computational molecules for RBGS method	25
2.5	Problem solving using sequential computing	42
2.6	Problem solving using parallel computing	42
2.7	The computing systems according to a) SISD, b) SIMD, c) MISD, and d) MIMD	44
2.8	Phases of designing the parallel algorithm	45
2.9	Communication activities involved in JB method	47
2.10	Parallel Command Window	49
2.11	Example code for pmode command and its output	50
2.12	MDCS cluster workstation in Ibnu Sina Insitute, UTM	51
2.13	Parallel architecture of MDCS cluster	52
2.14	Parallel process using MDCS	53
2.15	Speedup versus number of processors	55
3.1	The phytate content during dehydration process using DIC technique	63
3.2	The comparison of phytates in <i>L.albus</i> seed by regression model function in Haddad <i>et al.</i> (2007) and 1D parabolic PDE	

	model (Equation 3.4)	65
3.3	The phytate content with a) respect to x -axis and with b) increasing of time	65
3.4	2D drying material	67
3.5	The phytate content with respect to x - and y - axis	68
3.6	Mass transfer after a) 1, 5 and 10 seconds and b) after 10 seconds	71
3.7	Temperature of drying material a) after 1, 5 and 10 seconds and b) after 10 seconds	71
3.8	The comparison of phytates in <i>L.albus</i> seed by regression model function in Haddad <i>et al.</i> (2007) and 1D hyperbolic PDE model (Equation 3.14)	73
3.9	The visualization of the (a) 1D, and (b) 2D equations from Equation (3.14) and (3.16)	75
3.10	The visualization of the mass transfer a) based on x -axis, and b) time in second	78
3.11	The visualization of the heat transfer a) based on x -axis, and b) time in second	78
3.12	The visualization of the 2D HPDE of a) mass transfer and b) heat transfer in x - and y -axis	80
3.13	The visualization of the 3D HPDE of a) mass transfer and b) heat transfer in x -, y - and z -axis	83
3.14	The schematic diagram of the 3D HPDE model using Comsol Multiphysics software	83
4.1	The computational molecules for 1D_SJB method	91
4.2	The computational molecules of red and black points for 1D_SRBGS method	93
4.3	The computational molecules for 1D_SAGED method at a) $\left(n + \frac{1}{2}\right)$ and b) $(n+1)$ time level	97
4.4	The computational molecule for 1D_SAGEB method at a) $\left(n + \frac{1}{4}\right)$, b) $\left(n + \frac{1}{2}\right)$ and c) $(n+1)$ time level	101

4.5	Non overlapping domain decomposition of 1D problem	103
4.6	Algorithm for Matlab client	103
4.7	Pseudocode for defining the left and right workers	105
4.8	Pseudocode for data decomposition for each worker	105
4.9	The structure of parallel strategy from Matlab client to each worker	106
4.10	Pseudocode for global convergence test in the Matlab client	106
4.11	Pseudocode for local convergence test in the Matlab worker	107
4.12	Message passing for the communication activities between client-workers and between neighboring workers	107
4.13	Parallel algorithm for 1D_PJB method	109
4.14	Send and receive points in 1D_PJB method	110
4.15	Parallel algorithm for 1D_PRBGS method	111
4.16	Send and receive points in 1D_PRBGS method	112
4.17	Parallel algorithm for 1D_PAGED method	114
4.18	Send and receive points in 1D_PAGED method	114
4.19	Data partition for matrix a) G_1 and b) G_2 to a number of worker	115
4.20	Parallel algorithm for 1D_PAGEB method	117
4.21	Send and receive points in 1D_PAGEB method	118
4.22	Sequential algorithms for a) 1D_SJB, b) 1D_SRBGS, c) 1D_SAGED, and d) 1D_SAGEB method	119
4.23(a)	Parallel algorithm for 1D_PJB method	120
4.23(b)	Parallel algorithm for 1D_PRBGS method	121
4.23(c)	Parallel algorithm for 1D_PAGED method	122
4.23(d)	Parallel algorithm for 1D_PAGEB method	123
4.24	Execution time for tolerance a) $\varepsilon = 10^{-5}$ and b) $\varepsilon = 10^{-10}$ on 1D i) mass and ii) heat equations versus number of workers	130
4.25	Speedup for tolerance a) $\varepsilon = 10^{-5}$ and b) $\varepsilon = 10^{-10}$ on 1D i) mass and ii) heat equations versus number of workers	131
4.26	Efficiency value for tolerance a) $\varepsilon = 10^{-5}$ and b) $\varepsilon = 10^{-10}$ on 1D i) mass and ii) heat equations versus number of workers	132
4.27	Effectiveness value for tolerance a) $\varepsilon = 10^{-5}$ and b) $\varepsilon = 10^{-10}$	

	on 1D i) mass and ii) heat equations versus number of workers	133
4.28	Temporal performance for tolerance a) $\varepsilon = 10^{-5}$ and b) $\varepsilon = 10^{-10}$ on 1D i) mass and ii) heat equations versus number of workers	133
4.29	Granularity analysis for tolerance (a) $\varepsilon = 10^{-5}$ and (b) $\varepsilon = 10^{-10}$ on 1D (i) mass and (ii) heat equations versus number of workers	134
5.1	The computational molecules for 2D_SJB method	143
5.2	The computational molecules for 2D_SRBGS method	144
5.3	Column-wise ordering of the mesh points parallel to the y-axis	152
5.4	The computational molecule of 2D_SAGED method at a) $\left(n + \frac{1}{4}\right)$, b) $\left(n + \frac{1}{2}\right)$, c) $\left(n + \frac{3}{4}\right)$ and d) $(n+1)$ time level	155
5.5	The computational molecule of 2D_SAGEB method at a) $\left(n + \frac{1}{5}\right)$, b) $\left(n + \frac{2}{5}\right)$, c) $\left(n + \frac{3}{5}\right)$, d) $\left(n + \frac{4}{5}\right)$ and e) $(n+1)$ time level	162
5.6	Domain decomposition technique and message passing strategy for 2D problem	163
5.7	Parallel algorithm for 2D_PJB method	166
5.8	Send and receive lines in 2D_PJB method	166
5.9	Parallel algorithm for 2D_PRBGS method	168
5.10	Send and receive lines in 2D_PRBGS method	168
5.11	Parallel algorithm for 2D_PAGED method	170
5.12	Send and receive lines in 2D_PAGED method	171
5.13	Parallel algorithm for 2D_PAGEB method	173
5.14	Execution time for size of matrix a) 401×401 and b) 901×901 on 2D i) mass and ii) heat equation versus number of workers	180
5.15	Speedup for size of matrix a) 401×401 and b) 901×901 on 2D i) mass and ii) heat equation versus number of workers	182
5.16	Efficiency for size of matrix a) 401×401 and b) 901×901 on 2D i) mass and ii) heat equation versus number of workers	182

5.17	Effectiveness for size of matrix a) 401×401 and b) 901×901 on 2D i) mass and ii) heat equation versus number of workers	183
5.18	Temporal performance for size of matrix a) 401×401 and b) 901×901 on 2D i) mass and ii) heat equation versus number of workers	183
5.19	Granularity analysis for size of matrix a) 401×401 and b) 901×901 on 2D i) mass and ii) heat equation versus number of workers	184
6.1	The computational molecule for 3D_SJB method	193
6.2	The computational molecule for 3D_SRBGS method	195
6.3	Planes parallel to xy -axis	201
6.4	Planes parallel to yz -axis	208
6.5	Planes parallel to xz -axis	211
6.6	The computational molecules for 3D_SAGED method	215
6.7	The computational molecules for 3D_SAGEB method	228
6.8	Domain decomposition technique and message passing strategy for 3D problem	230
6.9	Parallel algorithm for 3D_PJB method	232
6.10	Send and receive surface in 3D_PJB method	233
6.11	Parallel algorithm for 3D_PRBGS method	235
6.12	Send and receive surface in 3D_PRBGS method	235
6.13	Parallel algorithm for 3D_PAGED method	237
6.14	Send and receive surface in 3D_PAGED method	238
6.15	Parallel algorithm for 3D_PAGEB method	241
6.16	Execution time for size of matrix a) $21 \times 21 \times 21$ and b) $41 \times 41 \times 41$ on 3D i) mass and ii) heat equation versus number of workers	248
6.17	Speedup for size of matrix a) $21 \times 21 \times 21$ and b) $41 \times 41 \times 41$ on 3D i) mass and ii) heat equation versus number of workers	249
6.18	Efficiency for size of matrix a) $21 \times 21 \times 21$ and b) $41 \times 41 \times 41$ on 3D i) mass and ii) heat equation versus number of workers	250
6.19	Effectiveness for size of matrix a) $21 \times 21 \times 21$ and	

	b) $41 \times 41 \times 41$ on 3D i) mass and ii) heat equation versus number of workers	251
6.20	Temporal performance for size of matrix a) $21 \times 21 \times 21$ and b) $41 \times 41 \times 41$ on 3D i) mass and ii) heat equation versus number of workers	251
6.21	Granularity analysis for size of matrix a) $21 \times 21 \times 21$ and b) $41 \times 41 \times 41$ on 3D i) mass and ii) heat equation versus number of workers	252

LIST OF ABBREVIATIONS

1D_PAGEB	-	1D Parallel Alternating Group Explicit with Brian variant
1D_PAGED	-	1D Parallel Alternating Group Explicit with Douglas-Rachford variant
1D_PJB	-	1D Parallel Jacobi
1D_PRBGS	-	1D Parallel Red Black Gauss Seidel
1D_SAGEB	-	1D Sequential Alternating Group Explicit with Brian variant
1D_SAGED	-	1D Sequential Alternating Group Explicit with Douglas-Rachford variant
1D_SJB	-	1D Sequential Jacobi
1D_SRBGS	-	1D Sequential Red Black Gauss Seidel
2D_PAGEB	-	2D Parallel Alternating Group Explicit with Brian variant
2D_PAGED	-	2D Parallel Alternating Group Explicit with Douglas-Rachford variant
2D_PJB	-	2D Parallel Jacobi
2D_PRBGS	-	2D Parallel Red Black Gauss Seidel
2D_SAGEB	-	2D Sequential Alternating Group Explicit with Brian variant
2D_SAGED	-	2D Sequential Alternating Group Explicit with Douglas-Rachford variant
2D_SJB	-	2D Sequential Jacobi
2D_SRBGS	-	2D Sequential Red Black Gauss Seidel
3D_PAGEB	-	3D Parallel Alternating Group Explicit with Brian variant
3D_PAGED	-	3D Parallel Alternating Group Explicit with Douglas-Rachford variant
3D_PJB	-	3D Parallel Jacobi
3D_PRBGS	-	3D Parallel Red Black Gauss Seidel

3D_SAGEB	-	3D Sequential Alternating Group Explicit with Brian variant
3D_SAGED	-	3D Sequential Alternating Group Explicit with Douglas-Rachford variant
3D_SJB	-	3D Sequential Jacobi
3D_SRBGS	-	3D Sequential Red Black Gauss Seidel
AGE	-	Alternating Group Explicit
AGEB	-	Alternating Group Explicit with Briant variant
AGED	-	Alternating Group Explicit with Douglas-Rachford variant
API	-	Application Programming Interface
CPU	-	Central Processing Unit
DIC	-	Détente Instantanée Contrôlée
DPCS	-	Distributed Parallel Computing System
FDM	-	Finite Difference Method
FEM	-	Finite Element Method
FVM	-	Finite Volume Method
HPDE	-	Hyperbolic Partial Differential Equation
JB	-	Jacobi
LAN	-	Local Area Network
MDCS	-	Matlab Distributed Computing Server
MIMD	-	Multiple Instruction Multiple Data
MISD	-	Multiple Instruction Single Data
MPI	-	Message Passing Interface
PCT	-	Parallel Computing Toolbox
PCW	-	Parallel Command Window
PPE	-	Parallel performance evaluations
PVM	-	Parallel Virtual Machine
RBGS	-	Red Black Gauss Seidel
RMSE	-	Root Mean Square Error
SIMD	-	Single Instruction Multiple Data
SISD	-	Single Instruction Single Data
SLE	-	System of Linear Equations

LIST OF SYMBOLS

C_p	-	Specific heat capacity
D_o	-	Diffusivity
h_m	-	Mass transfer coefficient
M	-	Moisture content
M_o	-	Initial moisture content
N_i	-	Total grid on the x -axis
N_j	-	Total grid on the y -axis
N_k	-	Total grid on the z -axis
P	-	Pressure
P_o	-	Initial pressure
p	-	Number of workers
r	-	Acceleration parameter
t	-	Time
T	-	Temperature
T_o	-	Initial temperature
V	-	Velocity
Δx	-	Step size at x -axis
Δy	-	Step size at y -axis
Δz	-	Step size at z -axis
Δt	-	Time step size
ε	-	Tolerance
ρ	-	Density

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	1D_SAGED and 1D_SAGEB method for 1D model problem	276
B	2D_SAGED and 2D_SAGEB method for 2D model problem	285
C	3D_SAGED and 3D_SAGEB method for 3D model problem	295
D	List of publications	310

CHAPTER 1

INTRODUCTION

1.1 Background of Research

Food dehydration is one of the most ancient and efficient preservation methods. Numerous food products are routinely preserved using dehydration techniques, which include grains, marine products, meat products, as well as fruits and vegetables. There are several other food preservation techniques such as storing, freezing, pickling, and canning. Some of the storage techniques require low temperatures and are difficult to maintain throughout the distribution chain (Sagar and Suresh Kumar, 2010). Meanwhile, for pickling and canning, chemical preservative is added to extend the shelf life (Silva and Lidon, 2016). On the contrary, the dehydration involves heat, mass transfer phenomena and frequently used in most food processing industries (Cohen and Yang, 1995; Kristiawan *et al.*, 2011). It is a suitable alternative for post-harvest tasks.

Dehydration is a process of removing the water vapor from food into the surrounding area under controlled conditions that cause minimum changes in the food properties (Chen and Mujumdar, 2008; Potter and Hotchkiss, 1998). The purposes of dehydration are to extend the life of the food product, decrease weight

for transportation, enhance storage stability and minimize the packaging requirements. Besides, it is necessary to remove the moisture content to a certain level in order to prevent the growth of bacteria, yeast, and molds thus slowing down or stopping food spoilage (Mujumdar and Law, 2010). The conventional dehydration techniques found in the food processing industry are freeze, hot air, osmotic, solar, and vacuum (George *et al.* 2004). Unfortunately, these conventional dryers have several limitations such as high operating cost, low quality and slow process. Table 1.1 shows the advantages and disadvantages of these conventional dehydration techniques.

Table 1.1 : Summary of the conventional dehydration techniques

Drying techniques	Characteristic	Advantages	Disadvantages	References
Freeze	The frozen water is removed from food without going through liquid phase.	Highest quality product, minimal reduction in shape, color and structure.	High operating costs.	Marques <i>et al.</i> (2006), Ratti (2001), Shishegharha <i>et al.</i> (2007)
Hot air	The food is in contact with hot air.	Product extends the life of a year.	Low quality compared to the original food.	Ratii (2001)
Osmotic	The food is soaked in hypertonic solution.	High quality, little energy, reduces process temperature, short drying time.	A slow process because depends on the cell membrane permeability and architecture.	Ahmed <i>et al.</i> (2016), Amami <i>et al.</i> (2007)
Solar	The food is dried using solar light.	Simple, low cost.	Large space, labor-intensive, difficult to control, slow process, bacterial contamination.	Sagar and Suresh Kumar (2010)
Vacuum	The food is operated under low pressure and temperature.	High quality product, low energy consumption	A slow process.	Saberian <i>et al.</i> (2014), Thorat <i>et al.</i> (2012)

Based on the limitations from Table 1.1, the conventional dehydration techniques have been improved to enhance the quality of end drying products in terms of color, flavor, nutritional value and texture (Alves-Filho, 2007; Chen and Mujumdar, 2008; Fernandes *et al.* 2011; Mujumdar, 2006). Some of the novel dehydration techniques are microwave, fluidized-bed, ultrasonic and microwave-augmented freeze (Cohen and Yang, 1995; Falade and Omojola, 2010; Fernandes *et al.*, 2011; Jangam, 2011; Mujumdar and Law, 2010; Sagar and Suresh Kumar, 2010).

1.2 DIC Technique

Another alternative of dehydration is Détente Instantanée Contrôlée (DIC) technique. DIC is known as instant control pressure drop technique. This technique has the potential to be the most commonly used dehydration methods for high value products. DIC is developed by the Laboratory for Mastering Agro-Industrial Technologies (LMTAI) research team (Allaf *et al.*) since 1988 (Allaf *et al.*, 1999; Setyoprato *et al.*, 2009) from the University of La Rochelle, France. It is based on the high temperature short time heating (HTST) and followed by an instant pressure drop. DIC consists of three main parts which are processing chamber, vacuum reservoir and valve. The products are treated in the processing chamber at high temperature (up to 170°C) and at high pressure (up to 8×10^5 Pa) with steam. The volume of vacuum tank is at least 50 times greater than the processing chamber. The DIC layout diagram is shown in Figure 1.1 (Haddad and Allaf, 2007). Figure 1.1 shows the vacuum pump, vacuum tank with cooling liquid jacket; instant pressure-drop valve, DIC reactor with heating jacket; and steam boiler. Table 1.2 shows the value of parameters used in DIC technique such as pressure, water content and processing time.

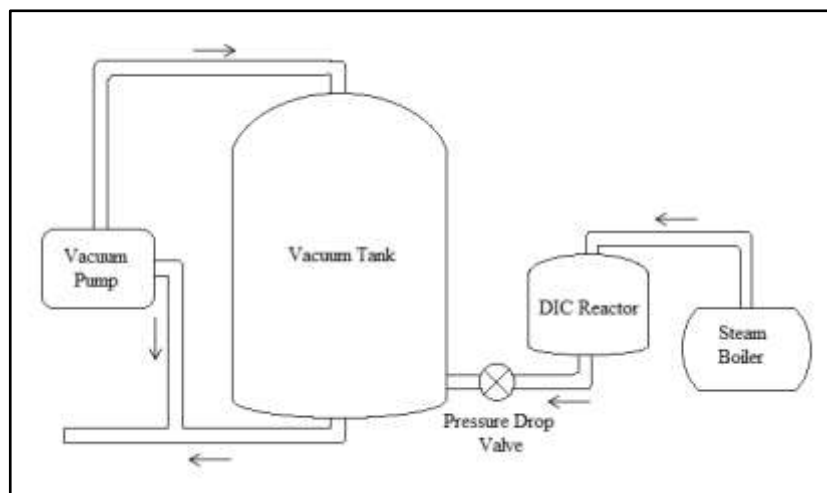


Figure 1.1 Schematic diagram of the DIC reactor

Table 1.2 : Value of parameters for pressure, water content and processing time

No	Parameter	Symbol	Value	References
1	Pressure	Pa	$4-7 \times 10^5$	Haddad and Allaf (2007), Haddad <i>et al.</i> (2007), Setyoprato <i>et al.</i> (2012)
			$4-5 \times 10^5$	Haddad <i>et al.</i> (2008)
2	Initial water content	g water/100g dry matter	30-50	Haddad and Allaf (2007), Haddad <i>et al.</i> (2007)
3	Time	s	40-60	Haddad and Allaf (2007), Haddad <i>et al.</i> (2007)
			10-20	Haddad <i>et al.</i> (2008)
			30-45	Setyoprato <i>et al.</i> (2012)

The temperature and pressure changes are presented in Figure 1.2 where stage (a) is at atmospheric pressure. Then, a vacuum condition is created within the reactor to get the greatest contact between steam and materials surface by opening the discharge valve (Figure 1.2(b)). Steam is injected to the materials to create a pressurized atmosphere (Figure 1.2(c)). The materials are left in contact with high pressure for a few seconds (Figure 1.2(d)). Then, a sudden pressure drop in the reactor is created by opening the discharge valve in less than a second (Figure 1.2(e)) which is called as instantaneous pressure drop since the value of $\frac{\Delta P}{\Delta t}$ is higher than $5 \times 10^5 \text{ Pa s}^{-1}$. This instantaneous pressure drop induces rapid auto-vaporization of

the moisture from the material and lead to texture change which results in higher porosity. Besides, it also intensifies functional behavior of drying product (Setyoprato *et al.*, 2009). The material is maintained in vacuum condition (Figure 1.2(f)). The final step is returning the reactor to atmospheric pressure (Figure 1.2(g)). DIC increases the material porosity and surface area and reduces the diffusion resistance of moisture during the final dehydration step.

This technique has been successfully used for various products including: fruit swell drying and vegetables drying (Djilali *et al.*, 2016; Haddad *et al.*, 2008; Louka and Allaf, 2002; Tellez-Perez *et al.*, 2015), texturing and drying various biological products by instant auto vaporization (Haddad and Allaf, 2007; Kristiawan *et al.*, 2011; Louka and Allaf, 2004; Louka *et al.*, 2004; Nouviaire *et al.*, 2008; Setyoprato *et al.*, 2012), and microbiological decontamination (Setyoprato *et al.*, 2009), post harvesting or steaming paddy rice (Pilatoski *et al.*, 2010) and essential oil extraction (Amor *et al.*, 2008; Besombes *et al.*, 2010). Besides, some experiments have been done to investigate the effect of the DIC technique on Lupin (Haddad *et al.*, 2007); soybean (Haddad and Allaf, 2007); glucose polymer (Rezzoug *et al.*, 2000); and milk (Mounir *et al.*, 2010).

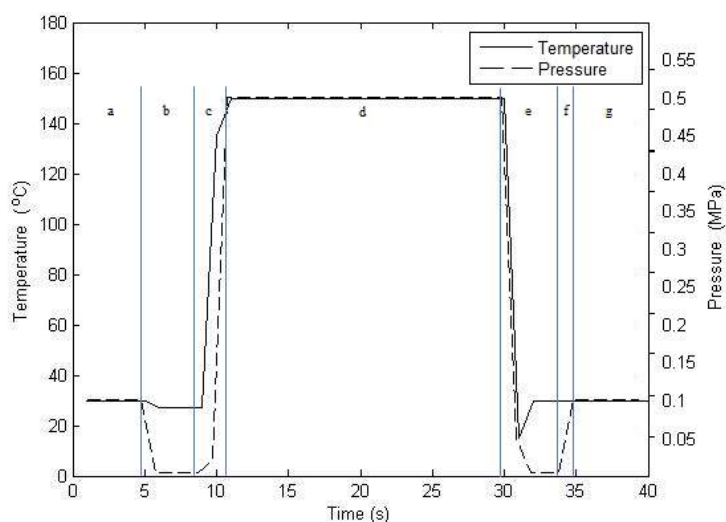


Figure 1.2 Temperature and pressure changes during DIC treatment

1.2.1 Mathematical Model in DIC Technique

Researches on the experiment and mathematical model have been done in order to understand the dehydration mechanism since it is a very complex process. The development of mathematical models is to predict, design and control water losses, weight reduction, dehydration rates and temperature behavior. It is also able to perform an optimal strategy for dryer process control. Parameters during dehydration can range from a very simple to complicated parameter in order to upgrade the quality of dehydration technology.

The mathematical model in drying method can be classified as empirical, semi-empirical and theoretical models depending on the different applications (Vijayaraj *et al.*, 2006). The empirical and semi-empirical model take into account the external resistance to moisture transfer meanwhile the theoretical model considers the internal resistance to moisture transfer between the food product and air (Midilli *et al.*, 2002; Panchariya *et al.*, 2002). Theoretical models require assumptions of geometry of food, its mass diffusivity and conductivity (Demirtas *et al.*, 1998; Wang *et al.*, 2007). The fundamental of drying process is not taken into consideration for empirical model and this model presents a direct relationship between average time and drying time using regression analysis (Ozdemir and Devres, 1999).

In DIC literature, most researches focused on statistical method of regression model (Haddad and Allaf, 2007; Haddad *et al.*, 2007; Mounir *et al.*, 2010; Setyopratoomo *et al.*, 2012). The regression model estimated the relationships among a dependent variable and one or more independent variables. Haddad and Allaf (2007) and Haddad *et al.* (2007) demonstrated the efficiency of DIC in drying the soybean trypsin inhibitors and phytate content, respectively. The steam pressure, treatment time, and initial water content were the DIC operating parameters that were taken into consideration. The results obtained show the reduction of trypsin inhibitors and phytate content were affected due to these operating parameters which

was in a quadratic form. Besides, it is found that pressure and treatment time gave high impact to the reduction of the trypsin inhibitors. The regression model presented a good fit to the observed data but it is limited to a certain experiment (Kaushal and Sharma, 2014). When the experiment is implemented under different conditions, the model did not provide good simulation of dehydration process. Besides, the regression model neglects the fundamental of dehydration process where the parameters involved have no physical meaning (Simal *et al.*, 2005).

Based on the limitations from the regression model, parabolic PDE is shown to be fit with the regression model. The parabolic PDE or Fick's law of diffusion equation is proposed to analyze the effect of DIC technique on the drying kinetics of drying materials but neglected the effects of possible shrinkage (Abdulla *et al.*, 2010; Kamal *et al.*, 2012; Mounir *et al.*, 2011; Mounir *et al.*, 2012; Pilatowski *et al.*, 2010; Setyoprato *et al.*, 2009; Setyoprato *et al.*, 2012). However, most of the researchers only discussed the fundamental of the dehydration model in DIC technique without solving the equation (Haddad *et al.*, 2008; Mounir *et al.*, 2012). Some of the authors solved the model using Crank (1975) solution according to the geometry of the solid matrix to solve the diffusion equation for mass transport of water within the drying material (Abdulla *et al.*, 2010; Mounir *et al.*, 2011; Mounir *et al.*, 2014; Setyoprato *et al.*, 2009; Setyoprato *et al.*, 2012; Tellez-Perez *et al.*, 2012). Meanwhile, other authors (Albitar *et al.*, 2011; Kamal *et al.*, 2012) solved the PDE model with the logarithmic transformation. Zarguili *et al.* (2009) solved the first order partial differential equation (PDE) of mass transfer equation by using integration method. Only a few researchers in DIC technique solved the model using numerical methods.

The existing parabolic model does not involve the main parameter in DIC technique which is pressure. Besides, based on the simulation results obtained in Chapter 3, the diffusion is found to be a very slow process which contradicts to the DIC technique where it involves high temperature high pressure process. Therefore, a new modified mathematical model based on the hyperbolic PDE (HPDE) is proposed. This model is relevant based on Meszaros *et al.* (2004) and Reverbi *et al.*

(2008) where they stated that hyperbolic heat and mass transfer is an alternative model because the classical parabolic equation is impossible to solve the extreme condition such as high temperature. The HPDE model is able to integrate between the dependent parameters; moisture content, temperature, and pressure, and independent parameters; time and dimension of region in order to simulate, visualize, and predict the heat and mass transfer during the dehydration process using DIC technique. Further details on the formulation of the HPDE model will be discussed in Chapter 3.

Numerical methods are able to solve a complex system of PDE which is almost impossible to be solved analytically. The Finite Element (FEM), Finite Volume (FVM) and Finite Difference methods (FDM) are some alternative numerical methods to solve the PDE (Peiro and Sherwin, 2005). For the other applications of drying, the FDM has been widely used to solve the heat and mass transfer models (Braud *et al.*, 2001; Karim and Hawlader, 2005; Liu *et al.*, 2014; Naghavi *et al.*, 2010; Rovedo *et al.*, 1995; Simal *et al.*, 2000). The FDM scheme is chosen because this method is simple to formulate a set of discretized equations from the transport differential equations in a differential manner (Botte *et al.*, 2000; Chandra and Singh, 1994). Besides, this method is straightforward in determining the unknown values (Incopera and DeWitt, 1996). Thus, due to this reason, the mathematical model in this research will be solved using FDM scheme. Further details of FDM will be discussed in Chapter 2.

A large sparse data of system of linear equations (SLE) is governed by the FDM to present the actual region of the dehydration proses for numerical simulation. The grid generation process involved a fine grained of the large sparse data by minimizing the size of interval, increasing the dimension of the model and level of time steps. However, using only one CPU will take too high execution time to compute for the solution. Therefore, parallelization in solving a large sparse data is a great important process. The objective is to speed up the computation and increase the efficiency by using massively parallel computers. Thus, it is important to design

the parallel algorithm before implementing on the DPCS. The strategy to design the parallel algorithm is illustrated in Figure 1.3.

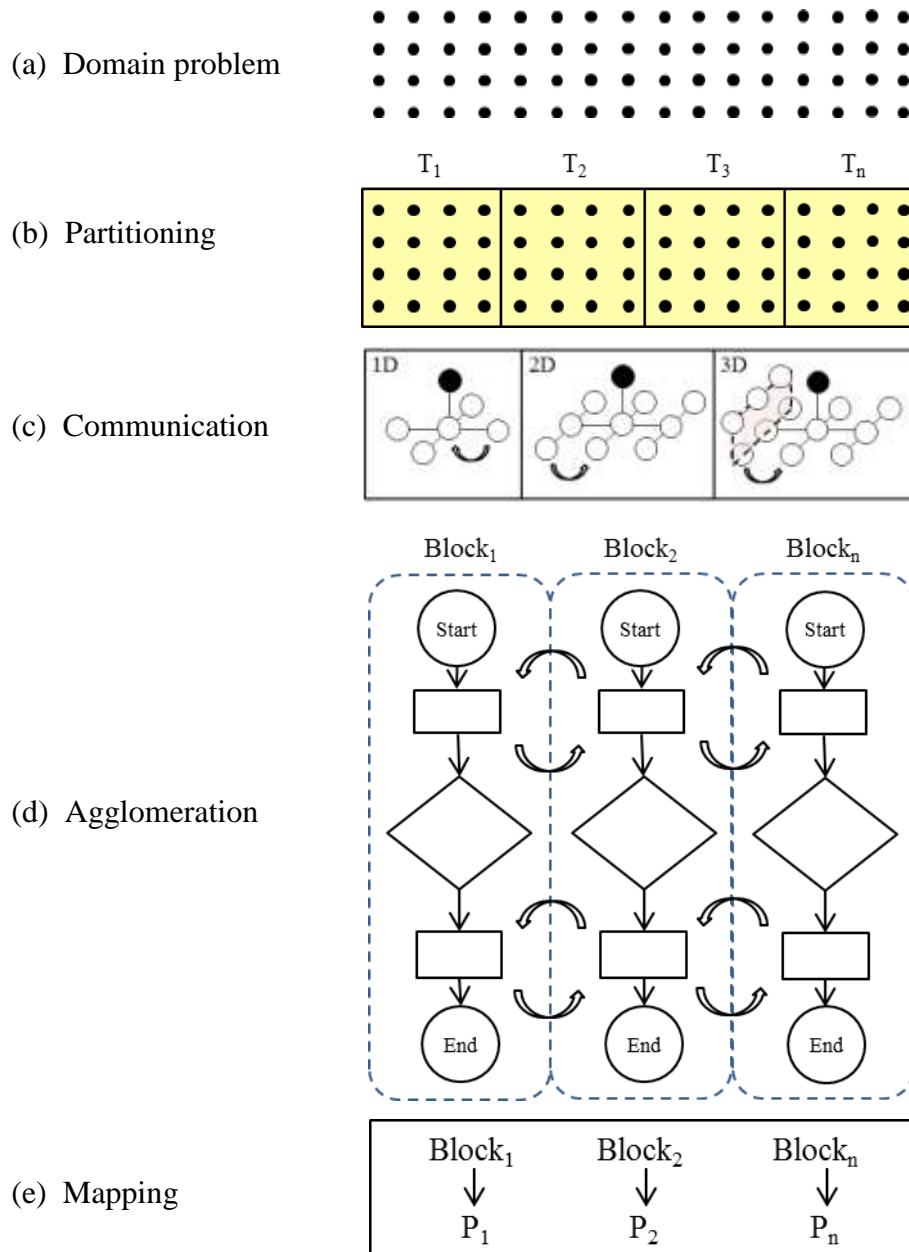


Figure 1.3 Parallel algorithm design

The domain depends on the problem where it can be in 1D, 2D or 3D domain (Figure 1.3(a)). The domain problem is partitioned column-wise distribution into equal sized tasks, T_1, T_2, \dots, T_n where n is number of processors involved in the

parallel algorithm (Figure 1.3(b)). Then, the tasks are connected to each other through local and global communication (Figure 1.3(c)). The local communication involves communication by sending and receiving data between the neighboring points where the data is sent by point for 1D, by line for 2D and by surface for 3D. Meanwhile global communication requires communication with other tasks. The number of tasks is combined into a set of tasks; $Block_1, Block_2, \dots, Block_n$ to improve the performance of parallelization. This strategy is called as agglomeration (Figure 1.3(d)). Lastly, each block is assigned to a processor (Figure 1.3(e)). Static mapping is implemented because it is easier to design and implemented on the distributed parallel computing architecture compared to dynamic mapping which is more complicated in message passing program.

The hardware computational tool to support the parallel algorithm is based on distributed parallel computing system (DPCS). The software tool to support DPCS is based on Matlab Distributed Computing Server (MDCS) version 7.12 (R2011a). The MDCS consists of a heterogeneous computing system contains 8 computers with Intel Core Duo CPUs under Fedora 8 featuring a 2.6.23 based Linux kernel operating system, connected with internal network 10/100/1000 NIC. The DPCS and MDCS are discussed further in Chapter 2.

1.3 Statement of Problem

The existing mathematical model in dehydration process using DIC technique is focused on the statistical method of regression model. However, this model limits to certain experiment (Kaushal and Sharma, 2014). Besides, this model neglects the fundamental of dehydration process where the parameters involved have no physical meaning. Thus, the dehydration process cannot be predicted using the regression model. The second problem is some of the researchers in DIC technique only discussed the fundamental of the dehydration model in DIC technique without

produced any solution to the mathematical model. The third problem is some of them solved the PDE analytically which involves too many parameters. Therefore, it is almost impossible to be solved and it is time consuming.

Based on these limitations, the main aim of this research is to formulate a new modified mathematical model based on HPDE from the regression model obtained from Haddad *et al.* (2007). The HPDE is able to integrate between the dependent parameters; moisture content, temperature, and pressure, and independent parameters; time and dimension of region in order to simulate, visualize, and predict the heat and mass transfer during the dehydration process using DIC technique. The mathematical model performs in multidimensional problem and FDM is used to discretize the mathematical model. Numerical methods such as Jacobi (JB), Red Black Gauss Seidel (RBGS), Alternating Group Explicit with Douglas-Rachford (AGED), and Brian (AGEB) variances are used to solve the SLE. A large sparse matrix from the SLE is obtained from the discretization, thus, it performs high execution time using a single CPU. Therefore, a DPCS is implemented on MDCS to reduce the computational time and increase the speedup performance.


1.4 Objectives of Research

This section explains the objectives of this research which are:

- a) To formulate the regression model from Haddad *et al.* (2007) to a new modified mathematical model of heat and mass transfer in DIC technique and discretized using FDM to approximate the solution of the mathematical model.
- b) To solve the SLE in (a) using some numerical methods such as AGEB, AGED, RBGS, JB methods.
- c) To develop sequential and parallel algorithms from (b) using MDCS.
- d) To analyze the results in (c) based on the numerical results for sequential algorithm and PPE for parallel algorithm.

1.5 Scope of Research

The main research problem of this thesis is to solve the dehydration process involved using DIC technique. Based on the limitations of the existing mathematical model in DIC technique, a new modified mathematical model based on the HPDE is formulated from the regression model. HPDE model is chosen because this model is able to integrate between the time, dimension of region, moisture content, temperature and pressure. The HPDE is discretized using FDM based on the central difference formula. Then, the SLE obtained from the discretization is solved using some numerical methods such as AGEB, AGED, RBGS and JB methods where JB is the benchmark for the other numerical methods. The numerical methods are solved using the sequential algorithm on the Matlab software. Since it involves a large sparse matrix which results in high execution time and high computational complexity, thus, the parallel algorithm is implemented on the MDCS. The scope of this research is illustrated in the table below:

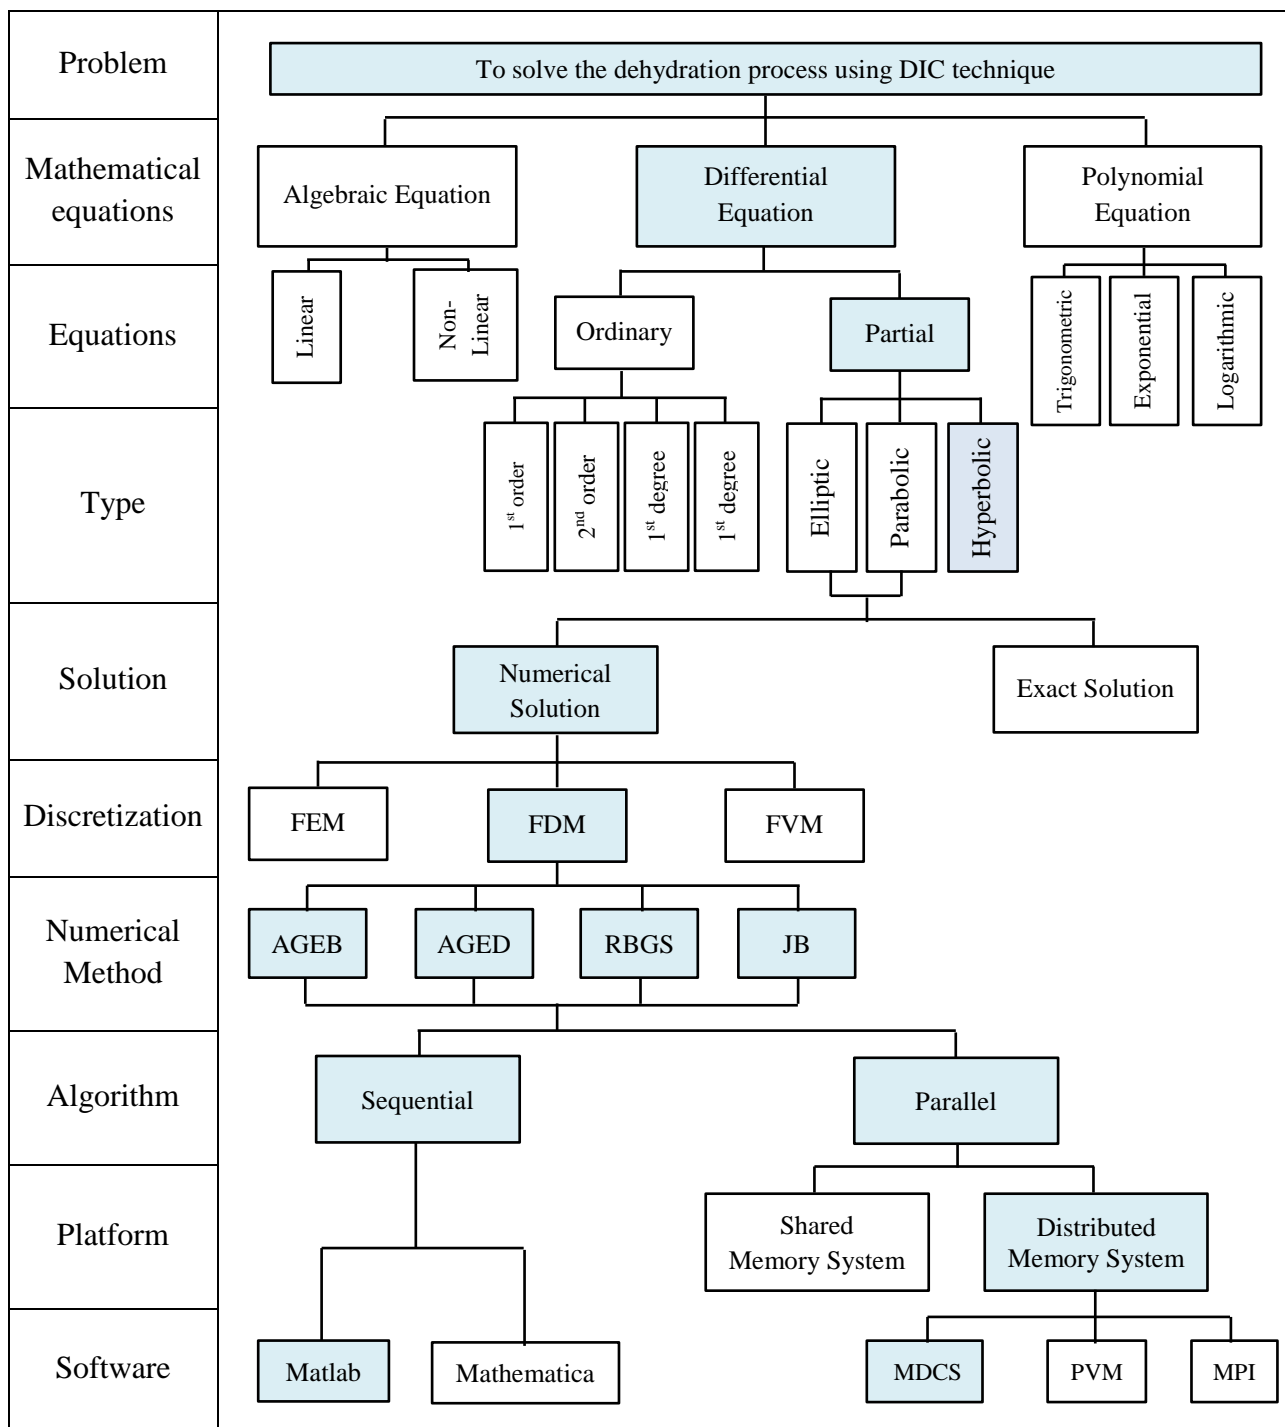

1.6 Significance of Research

The first significance of this research is the HPDE is the alternative model to simulate, visualize, predict and control the independent and dependent parameters of dehydration process. The second significance is the implementation of the numerical methods such as AGEB, AGED, RBGS and JB methods are suitable to solve the multidimensional HPDE. The third significance is the parallel implementation to solve the large sparse data for the multidimensional HPDE on DPCS successfully reduces the computational time and increases the performance of speedup. The numerical results and PPE are the indicators to measure the performance of multidimensional HPDE and the large sparse simulation. From the numerical results and PPE, AGEB is the best method to solve the HPDE model followed by AGED, RBGS and JB methods. It is also found that the parallel algorithm is performed better than the sequential algorithm.

1.7 Thesis Organization

In this thesis, there are seven chapters including the introduction and conclusion parts. Chapter 1 comprises a description of the research problem statement on DIC technique. The dehydration process is described based on the previous literature review on mathematical model developed in DIC technique. This chapter also discusses the research objectives, scope and the significance of the research.

Chapter 2 discusses the literature review on the FDM and the basic scheme for PDE. The numerical methods such as JB, RBGS, AGED, and AGEB, and its algorithm procedure are presented in this chapter. It follows by explaining the numerical analysis based on the consistency, convergence, stability, numerical errors

and computational complexity. Finally, this chapter will discuss the platform of DPCS to support the MDCS and PPE based on speedup, efficiency, effectiveness, temporal performance, granularity and communication cost to measure the parallel algorithm.

The new modified mathematical model development in DIC technique is covered in Chapter 3. In this chapter, the formulation of the hyperbolic partial differential equation (HPDE) from the regression model from Haddad *et al.* (2007) is presented. The simulations of the mathematical models are analyzed and shown through graphical representation using Matlab 7.12 (R2011a) software. The HPDE is visualized in multidimensional model which are in 1D, 2D and 3D model.

The contribution of Chapter 4 is the numerical results and parallel performance evaluations of sequential and parallel algorithms for 1D HPDE model. The SLE for 1D model is obtained from FDM and it is solved using some numerical methods such as 1D_SJB, 1D_SRBGS, 1D_SAGED, and 1D_SAGEB. These numerical methods are compared according to execution time, number of iteration, maximum error and root mean square error. Then, these numerical methods are parallelized to improve the performance of the sequential algorithm. The parallel performances for these methods: 1D_PJB, 1D_PRBGS, 1D_PAGED and 1D_PAGEB are measured based on speedup, efficiency, effectiveness, temporal performance and granularity.

The 1D model is then upgraded into 2D because it reflects the real physical phenomena. The numerical results and parallel performance evaluations for 2D HPDE model are the main contribution for Chapter 5. The 2D HPDE model is discretized using FDM with central difference formula and numerical methods such as 2D_SJB, 2D_SRBGS, 2D_SAGED, and 2D_SAGEB are used to solve the SLE. The numerical results are compared based on execution time, number of iteration, maximum error and RMSE. Meanwhile, the parallelization of these numerical

methods such as 2D_PJB, 2D_PRBGS, 2D_PAGED, and 2D_PAGEB are analyzed based on speedup, efficiency, effectiveness, temporal performance and granularity.

Furthermore, the contribution of Chapter 6 focuses on the numerical results and parallel performance of the sequential and parallel algorithms for 3D HPDE model. The discretization of the model is based on the FDM. It is then solved by some numerical methods which are 3D_SJB, 3D_SRBGS, 3D_SAGED, and 3D_SAGEB. The numerical methods are parallelized into 3D_PJB, 3D_PRBGS, 3D_PAGED, and 3D_PAGEB. The PPE of these methods are measured using speedup, efficiency, effectiveness, temporal performance and granularity.

Lastly, Chapter 7 concludes the research findings based on every chapter in the thesis. Some general remarks on the recommendation for future research are discussed.

REFERENCES

- Abdulla, G., Belghit, A., and Allaf, K. (2010). Impact of the Instant Controlled Pressure Drop Treatment on Hot Air Drying of Cork Granules. *Drying Technology: An International Journal*. 28, 180-185.
- Ahmed, I., Qazi, I. M. and Jamal, S. (2016). Developments in Osmotic Dehydration Technique for the Preservation of Fruits and Vegetables. *Innovative Food Science and Emerging Technologies*. 34, 29-43.
- Akhir, M. K. M., Othman, M. Sulaiman, J. Majid, Z. A. and Suleiman, M. (2012) Half-Sweep Iterative Method for Solving Two-Dimensional Helmholtz Equations. *International Journal of Applied Mathematics and Statistics*. 29(5), 101-109.
- Albitar, N., Mounir, S., Besombes, C., and Allaf, K. (2011). Improving the Drying of Onion Using the Instant Controlled Pressure Drop Technology, *Drying Technology: An International Journal*. 29(9), 993-1001.
- Alias, N. (2004). *Pembinaan Pelaksanaan Algoritma Selari Bagi Kaedah Kelas TTHS dan TTKS dalam Menyelesaikan Persamaan Parabolik Pada Sistem Komputer Selari Ingatan Teragih*. Doctor Philosophy, Universiti Kebangsaan Malaysia, Bangi.
- Alias, N., Saipol, H. F. S., Ghani, A. C. A. and Mustaffa, M. N. (2014). Parallel Performance Comparison of Alternating Group Explicit Method between Parallel Virtual Machine and Matlab Distributed Computing for Solving Large Sparse Partial Differential Equations. *Advanced Science Letters*. 20(2), 477-482.
- Alias, N., Anwar, R., Teh, C. R. C., Satam, N., Hamzah, N., Ghaffar, Z. S. A., Darwis, R. and Islam, M. R. (2011). Performance Evaluation of Multidimensional Parabolic Type Problems on Distributed Computing Systems. Proceedings-16th *IEEE Symposium on Computers and Communications, ISCC'11*. 28 June-1 July. Corfu: Greece, 103-110.

- Alias, N., Darwis, R., Satam, N., and Othman, M. (2009). Parallelization of Temperature Distribution Simulations for Semiconductor and Polymer Composite Material on Distributed Memory Architecture. In Malyskin, V. (Ed.). *Parallel Computing Technologies*. (pp. 392-398). Berlin: Springer-Verlag.
- Alias, N., Sahimi, M. S. and Abdullah, A. R. (2003). The AGEB Algorithm for Solving the Heat Equation in Two Space Dimensions and Its Parallelization on a Distributed Memory Machine. In Dongarra, J., Laforenza, D. and Orlando, S. (Ed.) *Recent Advances in Parallel Virtual Machine and Message Passing Interface*. (pp. 214-221). Berlin: Springer-Verlag.
- Allaf, K., Louka, N., Bouvier, J. M., Parent, F. and Forget, M. (1999). Method for Processing Materials to Change Their Texture, Apparatus Therefor, and Resulting Materials. Document Type and Number: United States Patent 5855941. French Patent No. 93 09720.
- Alves-Filho, O., Eikevik, T., Mulet, A., Garau, C. and Rossello, C. (2007). Kinetics and Mass Transfer during Atmospheric Freeze Drying of Red Pepper. *Drying Technology*. 25, 1155-1161.
- Amami, E., Fersi, A., Khezami, L., Vorobiev, E. and Kechaou, N. (2007). Centrifugal Osmotic Dehydration and Rehydration of Carrot Tissue Pre-Treated By Pulsed Electric Field. *LWT Food Science and Technology*. 40, 1156-1166.
- Amdahl, G. M. (1967). Validity of the Single Processor Approach to Achieving Large Scale Computer Capabilities. *Proceedings AFIPS Spring Joint Comp. Conference*. 18-20 April. Atlantic City: New Jersey, 483-485.
- Amor, B. B., Lamy, C., Andre, P. and Allaf, K. (2008). Effect of Instant Controlled Pressure Drop Treatments on the Oligosaccharides Extractability and Microstructure of Tephrosia Purpurea Seeds. *Journal of Chromatography A*. 1213, 118–124.
- Arballo, J. R., Campañone, L. A. and Mascheroni, R. H. (2012). Numerical Solution of Coupled Mass and Energy Balances during Osmotic Microwave Dehydration. *Computational and Applied Mathematics*. 31(3), 539-558.
- Aregba, A. W. and Driollet, D. A. (2006). Modelisation and Simulation of Static Grain Deep-Bed Drying. In Castro, A., B., Gomez, D., Quintela, P., and Salgado, P. (Ed.). *Numerical Mathematics and Advanced Applications*. (638-645). Berlin Heidelberg: Springer.

- Banks, H. T., Kapraun, D. F., Thompson, W. C., Peligero, C., Argilaguet, J. and Meyerhans, A. (2013). A Novel Statistical Analysis and Interpretation of Flow Cytometry Data. *Journal of Biological Dynamics*. 7(1), 96-132.
- Banks, H. T., Thompson, W. C., Peligero, C., Giest, S., Argilaguet, J. and Meyerhans, A. (2012). A Division-Dependent Compartmental Model for Computing Cell Numbers in CFSE-Based Lymphocyte Proliferation Assays. *Mathematical Bioscience and Engineering*. 9(4), 699–736.
- Besombes, C., Berka-Zougali, B. and Allaf, K. (2010). Instant Controlled Pressure Drop Extraction of Lavandin Essential Oils: Fundamentals and Experimental Studies. *Journal of Chromatography A*. 1217, 6807-6815.
- Botte, G. G., Ritter, J. A. and White, R. E. (2000). Comparison of Finite Difference and Control Volume Methods for Solving Differential Equations. *Computer and Chemical Engineering*. 24, 2633-2654.
- Braud, L. M., Moreira, R. G. and Castell-Perez, M. E. (2001). Mathematical Modelling of Impingement Drying of Corn Tortillas. *Journal of Food Engineering*. 50, 121-128.
- Byrd, R. H., Dert, C. L., Kan, A. H. G. R. and Schnabel, R. B. (1989). Concurrent Global Optimization on a Network of Computers. In Wouk, A. (Ed.) *Parallel Processing and Medium-Scale Multiprocessors*. (pp. 76-96). Philadelphia: Siam.
- Chandra, P. K. and Singh, R. P. (1994). *Applied Numerical Methods for Food and Agricultural Engineers*. Florida: CRC Press, Inc.
- Chartres, B. and Stepleman, R. (1972) A General Theory of Convergence for Numerical Methods. *SIAM Journal on Numerical Analysis*. 9(3), 476-492.
- Chen, G. and Mujumdar, A. S. (2008). *Drying Technologies in Food Processing*. New York: Blackwell Publishing.
- Chien, Y. P., Carpenter, F., Ecer, A. and Akay, H. U. (1995). Load-Balancing for Parallel Computation of Fluid Dynamics Problems. *Computer Methods in Applied Mechanics and Engineering*. 120, 119-130.
- Cohen, J. S. and Yang, T. C. S. (1995). Progress in Food Dehydration. *Trends in Food Science and Technology*. 6, 20-25.
- Crank, J. (1975). *The Mathematics of Diffusion*. Oxford, England: Clarendon Press.
- Crank, J. and Nicolson, P. (1947). A Practical Method for Numerical Evaluation of Solutions of Partial Differential Equations of the Heat-Conduction Type. *Proc.*

- Cambridge Philos. Soc., 43, 50-67, re-published in: John Crank 80th birthday special issue *Advances in Computational Mathematics*. 6, 207–226.
- De Boland, A. R., Garner, G. B. and O'Dell, B. L. (1975). Identification and Properties of Phytate in Cereal Grains and Oilseed Products. *Journal of Agricultural and Food Chemistry*. 23(6), 1186-1189.
- Demirtas, C., Ayhan, T. and Kaygusuz, K. (1998). Drying Behavior of Hazelnuts. *Journal of the Science of Food and Agriculture*. 76, 559–564.
- Ding, Z., Xiao, A. and Li, M. (2010). Weighted Finite Difference Methods for A Class of Space Fractional Partial Differential Equations with Variable Coefficients. *Journal of Computational and Applied Mathematics*. 233, pp. 1905-1914.
- Djilali, A. B., Nabiev, M., Gelicus, A., Benamara, S. and Allaf, K. (2016). Evaluation of Physical-Chemical, Pharmacodynamic and Pharmacological Attributes of Hot Air Dried and Swell Dried Jujube Powders. *Journal of Food Process Engineering*. Article in Press. doi:10.1111/jfpe.12364
- Dolicanin, C. B., Nikolic, V. B. and Dolicanin, D. C. (2010). Application of Finite Difference Method to Study of the Phenomenon in the Theory of Thin Plates. *Appl. Math. Inform. and Mech*. 2, 29-43.
- Eager, D. L., Zahorjan, J., and Lazowska, E. D. (1989). Speedup versus Efficiency in Parallel Systems. *IEEE Transactions on Computers*. 38(3), 408-423.
- Evans, D. J. (1985). Group Explicit Iterative Methods for Solving Large Linear Systems. *International Journal Computer Mathematics*. 17, 81-108.
- Evans, D. J. (1987). The Alternating Group Explicit (AGE) Matrix Iterative Method. *Applied Mathematical Modeling*. 11(4), 256-263.
- Evans, D. J. (1992). Parallel Computer Solution of the Wave Equation. In Donato, A. and Oliveri, F. (Ed.). *Nonlinear Hyperbolic Problems: Theoretical, Applied, and Computational Aspects*. (pp. 204-216). German: Springer Verlag
- Evans, D. J. (1989). Parallel Algorithm Design. Evans. In D. J. and Sutti, C. N. (Ed). *Parallel Computing: Methods, Algorithms and Applications*. (pp. 1-24). England: CRC Press.
- Evans, D. J. and Bulut, H. (2003). The Numerical Solution of the Telegraph Equation by the Alternating Group Explicit (AGE) Method. *International Journal of Computer Mathematics*. 80(10), 1289-1297.

- Evans, D. J. and Sahimi, M. S. (1988a). Group Explicit Methods for Hyperbolic Equations. *Computers & Mathematics with Applications*. 15, 659-697.
- Evans, D. J. and Sahimi, M. S. (1988b). The Alternating Group Explicit (AGE) Iterative Method for Solving Parabolic Equations. I: Two-Dimensional Problems. *International Journal of Computer Mathematics*. 24, 311-341.
- Evans, D. J. and Sahimi, M. S. (1990). The Solution of Nonlinear Parabolic Partial Differential Equations by the Alternating Group Explicit (AGE) Method. *Computer Methods in Applied Mechanics and Engineering*. 84, 15-42.
- Fadlallah, G., Lavoie, M. and Dessaint, L. A. (2000). Parallel Computing Environments and Methods. *International Conference on Parallel Computing in Electrical Engineering, PARELEC 2000*. 27-30 August. Trois-Rivieres: Canada, 2-7.
- Falade, K. O. and Omojola, B. S. (2010). Effect of processing methods on physical, chemical, rheological, and sensory properties of okra (*Abelmoschus esculentus*). *Food Bioprocess Technology*. 3, 387-394
- Feng, Q. (2009). AGE Method for Hyperbolic Equation. *Applied Mathematical Sciences*. 3, 1381-1385.
- Fernandes, F. A. N., Rodrigues, S., Law, C. L. and Mujumdar, A. S. (2011). Drying of Exotic Tropical Fruits: A Comprehensive Review. *Food and Bioprocess Technology*. 4, 163-185.
- Flatt, H. P. and Kennedy, K. (1989). Performance of Parallel Processors. *Parallel Computing*. 12, 1-20.
- George, S. D. S., Cenkowski, S. and Muir, W. E. (2004). A Review of Drying Technologies for the Preservation of Nutritional Compounds in Waxy Skinned Fruit. *North Central ASAE/CSAE Conf, Winnipeg*. 24-25 September, Manitoba, Canada, MB 04-104.
- Haddad, J. and Allaf, K. (2007). A Study of the Impact of Instantaneous Controlled Pressure Drop on the Trypsin Inhibitors of Soybean. *Journal of Food Engineering*. 79, 353-357.
- Haddad, J., Greiner, R. and Allaf, K. (2007). Effect of Instantaneous Controlled Pressure Drop on the Phytate Content of Lupin. *LWT*. 40, 448-453.
- Haddad, M. A, Mounir, S., Sobolik, V., and Allaf, K. (2008). Fruits & Vegetables Drying Combining Hot Air, DIC Technology and Microwaves. *International Journal of Food Engineering*. 4 (6), Article 9.

- Hamby, D. M. (1994). A Review of Techniques for Parameter Sensitivity Analysis of Environmental Models. *Environmental Monitoring and Assessment*. 32(2), 135-154.
- Hamdi, S., Schiesser, W. E. and Griffiths, G. W. (2007). Methods of Lines. *Scholarpedia*, 2(7), Art. No. 2859, pp. 1-11.
- Harris, K. R. and Woolf, L. A. (1980). Pressure and Temperature Dependence of the Self Diffusion Coefficient of Water and Oxygen-18 Water. *Journal of the Chemical Society, Faraday Transactions 1: Physical Chemistry in Condensed Phases*. 76, 377-385.
- Ilyas, M. and Mouftah, H. T. (2003). *The Handbook of Optical Communication Networks*. Boca Raton, Florida: CRC Press.
- Incopera, F. P. and DeWitt, D. P. (1996). *Fundamentals of Heat and Mass Transfer*. New York: Wiley.
- Jangam, S. V. (2011). An Overview of Recent Developments and Some R&D Challenges Related to Drying of Foods. *Drying Technology: An International Journal*, 29(12), 1343-1357.
- Jha, N. (2010). The Application of Sixth Order Accurate Parallel Quarter Sweep Alternating Group Explicit Algorithm for Nonlinear Boundary Value Problems with Singularity.
- Jin, J. M. (2010). *Theory and Computation of Electromagnetic Fields*. Hoboken, New Jersey: John Wiley & Sons.
- Jin, Y., Jin, G. and Li, J. (2011). A Class of High-Precision Finite Difference Parallel Algorithms for Convection Equations. *Journal of Convergence Information Technology*. 6, 79-82.
- Kai, L. (1988). IVY: A Shared Virtual Memory System for Parallel Computing. *Proceedings of the International Conference on Parallel Processing*, University Park: USA. 2, 94-101.
- Kamal, I., Gelicus, A. and Allaf, K. (2012). Impact of Instant Controlled Pressure Drop (DIC) Treatment on Drying Kinetics and Caffeine Extraction from Green Coffee Beans. *Journal of Food Research*. 1(1), 24-47.
- Karim, M. A. and Hawlader, M. N. A. (2005). Mathematical Modelling and Experimental Investigation of Tropical Fruits Drying. *International Journal of Heat and Mass Transfer*. 48, 4914-4925.

- Kaushal, P. and Sharma, H. K. (2014). Osmo-Convective Dehydration Kinetics of Jackfruit (*Artocarpusheterophyllus*). *Journal of the Saudi Society of Agricultural Sciences*. doi:10.1016/j.jssas.2014.08.001
- Kiranoudis, C. T., Maroulis, Z. B. and Marinos-Kouris, D. (1995). Design and Production Planning for Multiproduct Dehydration Plants. *Computers and Chemical Engineering*. 19(5), 581-606.
- Kocak, S. and Akay, H. U. (2001). Parallel Schur Complement Method for Large-Scale Systems on Distributed Memory Computers. *Applied Mathematical Modelling*. 25, 873-886.
- Kristiawan, M., Sobolik, V., Klíma, L. and Allaf, K. (2011). Effect of Expansion by Instantaneous Controlled Pressure Drop on Dielectric Properties of Fruits and Vegetables. *Journal of Food Engineering*. 102(4), 361-368.
- Kwiatkowski, J. (2002). Evaluation of Parallel Programs by Measurement of Its Granularity. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*. 2328, 145-153.
- Kwiatkowski, J. (2014). Parallel Applications Performance Evaluation using The Concept of Granularity. *Lecture Notes in Computer Science (including subseries Lecture Notes in Artificial Intelligence and Lecture Notes in Bioinformatics)*. 8385, 215-224.
- Li, K. (1988). IVY: A Shared Virtual Memory System for Parallel Computing. *Proceedings of the International Conference on Parallel Processing*. 2, 94-101.
- Li, N., Gao, P., Lu, Y. and Yu, W. (2010). The Implementation and Comparison of Two Kinds of Parallel Genetic Algorithm Using Matlab. *Proceedings-9th International Symposium on Distributed Computing and Applications to Business, Engineering and Science, DCABES 2010*, 10-12 August. Hong Kong; Hong Kong, 13-17.
- Lin, P. (2004) A Compact Numerical Algorithm for Solving the Time-Dependent Mild Slope Equation. *International Journal for Numerical Methods in Fluids*. 45 (6), 625-642.
- Liu, Y., Zhu, W., Luo, L., Li, X., and Yu, H. (2014). A Mathematical Model for Vacuum Far-Infrared Drying of Potato Slices. *Drying Technology*. 32, 180-189.

- Louka, N. and Allaf, K. (2002). New Process for Texturizing Partially Dehydrated Biological Products Using Controlled Sudden Decompression to the Vacuum: Application on Potatoes. *Journal of Food Science*. 67, 3033-3038.
- Louka, N. and Allaf, K. (2004). Expansion Ratio and Color Improvement of Dried Vegetables Texturized by a New Process “Controlled Sudden Decomposition to the Vacuum” Application to Potatoes, Carrots and Onions. *Journal of Food Engineering*. 65, 233-243.
- Louka, N., Juhel, F. and Allaf, K. (2004). Quality Studies on Various Types Of Partially Dried Vegetables Texturized By Controlled Sudden Decompression General Patterns For The Variation Of The Expansion Ration. *Journal Food of Engineering*. 65, 245–253.
- Marques, L. G., Silveira, A. M. and Freire, J. T. (2006). Freeze-Drying Characteristics of Tropical Fruits. *Drying Technology*. 24, 457-463.
- Martinello, M. A., Mattea, M. A. and Crapiste, G. (2003). Superheated Steam Drying of Parsley: A Fixed Bed Model for Predicting Drying Performance. *Latin American Applied Research*. 33(3), 333-337.
- Martinello, M. A., Muñoz, D. J. and Giner, S. A. (2013). Mathematical Modelling of Low Temperature Drying of Maize: Comparison of Numerical Methods for Solving the Differential Equations. *Biosystems Engineering*. 114(2), 187-194.
- Midilli, A., Kucuk, H. and Yapar, Z. (2002). A New Model for Single-Layer Drying. *Drying Technology*. 20, 1503-1513.
- Mounir, S. and Allaf, K. (2008). Three-Stage Spray Drying: New Process Involving Instant Controlled Pressure Drop. *Drying Technology: An International Journal*. 26(4), 452-463.
- Mounir, S., Allaf, T., Berka, B., Hassani, A. and Allaf, K. (2014). Instant Controlled Pressure Drop Technology: From A New Fundamental Approach of Instantaneous Transitory Thermodynamics to Large Industrial Applications on High Performance–High Controlled Quality Unit Operations. *Comptes Rendus Chimie*. 17, 261-267.
- Mounir, S., Allaf, T., Mujumdar, A. S., and Allaf, K. (2012). Swell Drying: Coupling Instant Controlled Pressure Drop DIC to Standard Convection Drying Processes to Intensify Transfer Phenomena and Improve Quality—An Overview. *Drying Technology: An International Journal*. 30(14), 1508-1531.

- Mounir, S., Besombes, C., Al-Bitar, N. and Allaf, K. (2011). Study of Instant Controlled Pressure Drop DIC Treatment in Manufacturing Snack and Expanded Granule Powder of Apple and Onion. *Drying Technology: An International Journal*. 29(3), 331-341.
- Mounir, S., Schuck, P. and Allaf, K. (2010). Structure and Attribute Modifications of Spray-Dried Skim Milk Powder Treated by DIC (Instant Controlled Pressure Drop) Technology. *Dairy Science and Technology*. 90, 301-320.
- Mujumdar, A. S. (2006). *Handbook of Industrial Drying: Third Edition*. Boca Raton, Florida: CRC Press.
- Mujumdar, A. S. and Law, C. L. (2010). Drying Technology: Trends and Applications in Postharvest Processing. *Food Bioprocess Technology*. 3, 843-852.
- Mulet, A., Berna, A. and Rossello, C. (1989). Drying of Carrots. I. Drying Models. *Drying Technology: An International Journal*. 7(3), 537-557.
- Naghavi, Z., Moheb, A. and Ziaei-rad, S. (2010). Numerical Simulation of Rough Rice Drying in a Deep-Bed Dryer using Non-Equilibrium Model. *Energy Conversion and Management*. 51, 258-264.
- Nouvinaire, A. Lancien, R. and Maache-Rezzoug, Z. (2008). Influence of Hydrothermal Treatment on Rheological and Cooking Characteristics of Fresh Egg Pasta. *Journal of Cereal Science*. 47, 283-291.
- Noye, J. (2000). Finite Difference Techniques for Partial Differential Equations. In Noye, J. (Ed.) *Computational Techniques for Differential Equations*. (pp. 95-354). Amsterdam: Elsevier-Science Publishers B. V.
- Noye, B. J. and Hayman, K. J. (1993). Implicit Two-Level Finite-Difference Methods for the Two-Dimensional Diffusion Equation. *International Journal of Computer Mathematics*. 48(3-4), 219-227.
- Oko, C. O. C. and Nnamchi, S. N. (2013). Coupled Heat and Mass Transfer in a Solar Grain Dryer. *Drying Technology*. 31(1), 82-90.
- Olman, V., Mao, F., Wu, H., Xu, Y. (2009). Parallel Clustering Algorithm for Large Data Sets with Applications in Bioinformatics. *IEEE/ACM Transactions on Computational Biology and Bioinformatics*. 6(2), 344-352.
- Ozdemir, M. and Devres, Y. O. (1999). The Thin Layer Drying Characteristics of Hazelnuts during Roasting. *Journal of Food Engineering*. 42, 225-233.

- Panchariya, P. C., Popovic, D. and Sharma, A. L. (2002). Thin-Layer Modeling Of Black Tea Drying Process. *Journal of Food Engineering*. 52, 349–357.
- Peiro, J. and Sherwin, S. (2005). Finite Difference, Finite Element and Finite Volume for Partial Differential Equations. In Yip, S. (Ed.) *Handbook of Materials Modeling*. (pp. 2415-2446). Netherlands: Springer.
- Peishi, C. and Pei, D. C. T. (1989). A Mathematical Model of Drying Processes. *International Journal of Heat and Mass Transfer*. 32(2), 297-310.
- Pilatowski, I., Mounir, S., Haddad, J., Cong, D. T. and Allaf, K. (2010). The Instant Controlled Pressure Drop Process as a New Post Harvesting Treatment of Paddy Rice: Impacts on Drying Kinetics and End Product Attributes. *Food Bioprocess Technology*. 3, 901–907.
- Potter, N. N. and Hotchkiss, J. H. (1998). Food Dehydration and Concentration. In Potter, N. N. and Hotchkiss, J. H. (Ed.) *Food Science*. (pp. 200–244). New York: Springer.
- Ramaswamy, H. S. and Nsonzi, F. (1998). Convective-Air Drying Kinetics of Osmotically Pre-Treated Blueberries. *Drying Technology*. 16, 743-759.
- Ratti, C. (2001). Hot Air and Freeze-Drying of High-Value Foods: A Review. *Journal of Food Engineering*. 49, 311-319.
- Rezzoug, S. A., Maache-Rezzoug, Z., Mazoyer, J., Jeannin, M., Allaf, K. (2000). Effect of Instantaneous Controlled Pressure Drop Process on the Hydration Capacity of Scleroglucan: Optimisation of Operating Conditions by Response Surface Methodology. *Carbohydrate Polymers*. 42, 73-84.
- Rovedo, C. O., Suarez, C., and Viollaz, P. E. (1995). Drying of Foods: Evaluation of A Drying Model. *Journal of Food Engineering*. 26, 1-12.
- Saad, Y. (2003). *Iterative Methods for Sparse Linear Systems: Second Edition*. Philadelphia, Pennsylvania: SIAM.
- Saberian, H., Amooi, M. and Hamidi-Esfahani, Z. (2014). Modeling of Vacuum Drying of Loquat Fruit. *Nutrition & Food Science*. 44, 24-31.
- Sagar, V. R. and Suresh Kumar, P. (2010). Recent Advances in Drying and Dehydration of Fruits and Vegetables: A Review. *Journal Food Science Technology*. 47(1), 15-26.
- Sahimi, M. S., Ahmad, A. and Bakar, A. A. (1993) The Iterative Alternating Decomposition Explicit (IADE) Method to Solve the Heat Conduction Equation. *International Journal of Computer Mathematics*. 47, 219-229.

- Sahimi, M. S., Alias, N. and Sundararajan, E. (2001). The AGEB Algorithm for Solving the Heat Equation in Three Space Dimensions and Its Parallelization using PVM. In Alexandrov, V. N., Dongarra, J. J., Juliano, B. A., Renner, R. S., and Tan, C. J. K. (Eds.). *Lecture Notes in Computational Science*. (pp. 918-927). Berlin: Springer Verlag.
- Sahimi, M. S. and Evans, D. J. (1988). Group Explicit Methods for the Numerical Solution of the Wave Equation. *Computers & Mathematics with Applications*. 15, 699-709.
- Serik, M., Bakiyev, M. N. and Balgozhina, G. B. (2014). Using Cluster Parallel Computing In the Content of Information-Didactic System. *Life Science Journal*. 11, 537-539.
- Setyoprato, P., Fatmawati, A. and Allaf, K. (2009). Texturing by Instant Controlled Pressure Drop DIC in the Production of Cassava Flour: Impact on Dehydration Kinetics, Product Physical Properties and Microbial Decontamination. *World Congress on Engineering and Computer Science*. 20-22 October. San Francisco, USA, 112-117.
- Setyoprato, P., Fatmawati, A., Sutrisna, P. D., Savitri, E. and Allaf, K. (2012). The Dehydration Kinetics, Physical Properties and Nutritional Content of Banana Textured By Instantaneous Controlled Pressure Drop. *Asia-Pacific Journal of Chemical Engineering*. 7, 726-732.
- Shishegarha, F., Makhlof, J. and Ratti, C. (2002). Freeze-Drying Characteristics of Strawberries. *Drying Technology*. 20, 131-145.
- Silva, M. M. and Lidon, F. C. (2016). Food Preservatives – An Overview on Applications and Side Effects. *Emirates Journal of Food and Agriculture*. 28(6), 366-373.
- Simal, S., Femenia, A., Garau, M. C. and Rossello, C. (2005). Use of Exponential, Page's and Diffusional Models to Simulate the Drying Kinetics of Kiwi Fruit. *Journal of Food Engineering*. 66, 323-328.
- Simal, S., Femenia, A., Llull, P., and Rossello, C. (2000). Dehydration of Aloe Vera: Simulation of Drying Curves and Evaluation of Functional Properties. *Journal of Food Engineering*. 43, 109-114.
- Sleijpen, G. L. G. and Van Der Vost, H. A. (1996). A Jacobi-Davidson Iteration Method for Linear Eigenvalue Problems. *SIAM Journal on Matrix Analysis and Applications*. 17, 401-425.

- Smith, G. D. (1985). *Numerical Solution of Partial Differential Equations: Finite Difference Methods*. Oxford, United Kingdom: Clarendon Press.
- Su, L. and Cheng, P. (2013). A Weighted Average Finite Difference Method for the Frictional Convection-Diffusion Equation. *Advances in Mathematical Physics*. Art. 129404, 1-5.
- Sulaiman, H., Ibrahim, A. and Alias, N. (2011). Segmentation of Tumor in Digital Mammograms Using Wavelet Transform Modulus Maxima on a Low Cost Parallel Computing System. *Proceedings-5th Kuala Lumpur International Conference on Biomedical Engineering, BIOMED 2011*. 20-23 June. Kuala Lumpur; Malaysia, 720-723.
- Sun, D. W. and Woods, J. L. (1997). Simulation of the Heat and Moisture Transfer Process during Drying in Deep Grain Beds. *Drying Technology*. 15(10), 2479-2508.
- Sun, X. H. and Gustafson, J. L. (1991). Toward A Better Parallel Performance Metric. *Parallel Computing*. 17, 1093-1109.
- Tan, E. L. (2008). Fundamental Schemes for Efficient Unconditionally Stable Implicit Finite-Difference Time-Domain Methods. *IEEE Transactions on Antennas and Propagation*. 56(1), 170-177.
- Tellez-Perez, C., Sabah, M. M., Montejano-Gaitan, J. G., Sobolik, V., Martinez, C. – A. and Allaf, K. (2012). Impact of Instant Controlled Pressure Drop Treatment on Dehydration and Rehydration Kinetics of Green Moroccan Pepper (*Capsicum Annuum*). *Procedia Engineering*. 42, 978-1003.
- Téllez-Pérez, C., Sobolik, V., Montejano-Gaitán, J. G., Abdulla, G. and Allaf, K. (2015). Impact of Swell-Drying Process on Water Activity and Drying Kinetics of Moroccan Pepper (*Capsicum annum*). *Drying Technology*. 33, 131-142.
- Thomas, J. W. (1998). *Numerical Partial Differential Equations: Finite Difference Methods*. New York: Springer-Verlag.
- Thorat, I. D., Mohapatra, D., Sutar, R. F., Kapdi, S. S., and Jagtap, D. D. (2012). Mathematical Modeling and Experimental Study on Thin-Layer Vacuum Drying of Ginger (*Zingiber Officinale R.*) Slices. *Food Bioprocess Technology*. 5, 1379-1383.
- Tomas, G. and Ueberhuber, C. W. (1994). Performance Modelling and Evaluation of Parallel IDeC Methods. In Tomas, G. and Ueberhuber, C. W. (Ed.) *Visualization of Scientific Parallel Programs*. (pp. 107-128). Berlin: Springer-Verlag.

- Varga, R. S. (2009). *Matrix Iterative Analysis*. Berlin Heidelberg, New York: Springer Series in Computational Mathematics.
- Vijayaraj, B., Saravanan, R., and Renganarayanan, S. (2006). Studies on Thin Layer Drying of Bagasse. *International Journal of Energy Research*, 31, 422-437.
- Wang, H., Lu, T. and Jiang, P. (2014). Mathematical Model and Numerical Simulation of Biological Porous Medium during Hot Air Drying. *Transactions of the Chinese Society of Agricultural Engineering*. 30(20), 325-333.
- Wang, H., Lu, Z., Zhao, H. and Feng, H. (2015). Application of Parallel Computing in robust Optimization Design using MATLAB. *Proceedings-5th International Conference on Instrumentation and Measurement, Computer, Communication, and Control, IMCCC 2015*, 18-20 September. Qinhuangdao, China, 1228-1231.
- Wang, N. and Brennan, J. G. (1995). A Mathematical Model of Simultaneous Heat and Moisture Transfer during Drying of Potato. *Journal of Food Engineering*. 24, 47-60.
- Wang, Z., Sun, J., Liao, X., Chen, F., Zhao, G., Wu, J. and Hu, X. (2007). Mathematical Modeling on Hot Air Drying of Thin Layer Apple Pomace. *Food Research International*. 40, 39-46.
- Whitaker, T. B. and Young, J. H. (1972). Simulation of Moisture Movement in Peanut Kernels: Evaluation of the Diffusion Equation. *Transactions of the American Society of Agricultural Engineers*. 15, 163-166.
- Wu, X. (1999). Parallel Performance Measurement and Analysis. In Wu, X. (Ed.) *Performance Evaluation, Prediction and Visualization of Parallel Systems*. (pp. 103-162). Massachusetts, USA: Kluwer Academic Publisher.
- Yanenko, N. N. (1971). *The Method of Fractional Steps*. Berlin: Springer-Verlag.
- Yuste, S. B. (2006). Weighted Average Finite Difference Methods for Fractional Diffusion Equations. *Journal of Computational Physics*. 216, 264-274.
- Yusuf, L. M., Alias, N., Ghouse, M. S. B., Shamsuddin, S. M. and Othman, M. S. (2011a). The Parallel AGE Variances Method for Temperature Prediction on Laser Glass Interaction. *IEEE Symposium on Computers and Informatics, ISCI 2011*. 20-22 March. Kuala Lumpur; Malaysia: 279-283.
- Yusuf, L. M., Ghouse, M. S. B., Othman, M. S., Shamsuddin, S. M. and Alias, N. (2011b). Parallel Numerical Solution for Temperature Prediction on Laser Glass Cutting Using AGE Variances Method. *IEEE Conference on Sustainable*

Utilization Development in Engineering and Technology, STUDENT 2011. 20-21 October. Semenyih, Malaysia, 79-84.

Zarguili, I., Rezzoug, Z. M., Loisel, C., and Doublier, J. L. (2009). A Mathematical Model to Describe the Change in Moisture Distribution in Maize Starch during Hydrothermal Treatment. *International Journal of Food Science and Technology*. 44, 10-17.

Zhang, L., Lyu, C., Wang, L., Zheng, J., Luo, W. and Ma, K. (2013). Parallelized Genetic Identification of the Thermal-Electrochemical Model for Lithium-Ion Battery. *Advances in Mechanical Engineering*. art. no. 754653, 1-12.

Zhou, S., Stumm, M., Wortman, D., and Li, K. (1992). Heterogeneous Distributed Shared Memory. *IEEE Transactions on Parallel and Distributed Systems*. 3 (5), 540-554.