

SPECTRUM AND TRANSMISSION RANGE AWARE CLUSTERING FOR  
COGNITIVE RADIO AD HOC NETWORKS

MAHASSIN MOHAMED AHMED OSMAN

UNIVERSITI TEKNOLOGI MALAYSIA

SPECTRUM AND TRANSMISSION RANGE AWARE CLUSTERING FOR  
COGNITIVE RADIO AD HOC NETWORKS

MAHASSIN MOHAMED AHMED OSMAN

A thesis submitted in fulfilment of the  
requirements for the award of the degree of  
Doctor of Philosophy (Electrical Engineering)

Faculty of Electrical Engineering  
Universiti Teknologi Malaysia

MAY 2018

*I dedicate this work to*

*My beloved mother,*

*My Late father,*

*And*

*My sisters*

## **ACKNOWLEDGEMENT**

First, all praises and thanks be to Allah, without his blessing, guidance and mercy this work would never see the light. I would like to express my sincere gratitude and appreciation to my main supervisor, Associate Professor Dr. Sharifah Kamilah Syed Yusof for her patience, encouragement, guidance, and kindness. I would also like to thank my co-supervisor Dr. Nik Noordini Nik Abd Malik for her encouragement and advices. My profound gratitude goes to my beloved mother and my sisters for believing in me, for their love, prayers, and encouragement. My especial thanks to my friend, Aida Elrasheed, for her help and kindness during the initial settlement in UTM campus and afterward.

## ABSTRACT

Cognitive radio network (CRN) is a promising technology to overcome the problem of spectrum shortage by enabling the unlicensed users to access the under-utilization spectrum bands in an opportunistic manner. On the other hand, the hardness of establishing a fixed infrastructure in specific situations such as disaster recovery, and battlefield communication imposes the network to have an ad hoc structure. Thus, the emerging of Cognitive Radio Ad Hoc Network (CRAHN) has accordingly become imperative. However, the practical implementation of CRAHN faced many challenges such as control channel establishment and the scalability problems. Clustering that divides the network into virtual groups is a reliable solution to handle these issues. However, previous clustering methods for CRAHNs seem to be impractical due to issues regarding the high number of constructed clusters and unfair load distribution among the clusters. Additionally, the homogeneous channel model was considered in the previous work despite channel heterogeneity is the CRN features. This thesis addressed these issues by proposing two clustering schemes, where the heterogeneous channel is considered in the clustering process. First, a distributed clustering algorithm called Spectrum and Transmission Range Aware Clustering (STRAC) which exploits the heterogeneous channel concept is proposed. Here, a novel cluster head selection function is formulated. An analytical model is derived to validate the STRAC outcomes. Second, in order to improve the bandwidth utilization, a Load Balanced Spectrum and Transmission Range Aware Clustering (LB-STRAC) is proposed. This algorithm jointly considers the channel heterogeneity and load balancing concepts. Simulation results show that on average, STRAC reduces the number of constructed clusters up to 51% compared to conventional clustering technique, Spectrum Opportunity based Clustering (SOC). In addition, STRAC significantly reduces the one-member cluster ratio and re-affiliation ratio in comparison to non-heterogeneity channel consideration schemes. LB-STRAC further improved the clustering performance by outperforming STRAC in terms of uniformity and equality of the traffic load distribution among all clusters with fair spectrum allocation. Moreover, LB-STRAC has been shown to be very effective in improving the bandwidth utilization. For equal traffic load scenario, LB-STRAC on average improves the bandwidth utilization by 24.3% compared to STRAC. Additionally, for varied traffic load scenario, LB-STRAC improves the bandwidth utilization by 31.9% and 25.4% on average compared with STRAC for non-uniform slot allocation and for uniform slot allocation respectively. Thus, LB-STRAC is highly recommended for multi-source scenarios such as continuous monitoring applications or situation awareness applications.

## ABSTRAK

Rangkaian radio kognitif (CRN) adalah teknologi berpotensi untuk mengatasi masalah kekurangan spektrum dengan membolehkan pengguna yang tidak berlesen untuk mengakses jalur spektrum terkurang penggunaan secara oportunistik. Selain itu, kesukaran untuk menubuhkan infrastruktur yang tetap dalam situasi tertentu seperti pemulihan bencana dan komunikasi medan perang memerlukan rangkaian yang mempunyai struktur ad hoc. Oleh itu, Rangkaian Ad Hoc Radio Kognitif (CRAHN) yang baharu muncul sewajarnya menjadi imperatif. Walau bagaimanapun, pelaksanaan praktikal CRAHN menghadapi banyak cabaran seperti penubuhan saluran kawalan dan masalah kebolehskalaan. Penggugusan yang membahagikan rangkaian kepada kumpulan maya adalah penyelesaian yang boleh dipercayai untuk menangani isu-isu ini. Walau bagaimanapun, kaedah penggugusan terdahulu untuk CRAHN seolah-olah tidak praktikal disebabkan oleh isu berkaitan jumlah tinggi bilangan gugusan yang dibina dan pengagihan beban tidak adil antara gugusan tersebut. Di samping itu, model saluran homogen telah dipertimbangkan dalam kajian terdahulu walaupun kepelbagaian saluran adalah ciri-ciri CRN. Tesis ini menangani isu-isu ini dengan mencadangkan dua skim penggugusan, iaitu saluran yang heterogen dipertimbangkan di dalam proses penggugusan. Pertama, algoritma penggugusan teragih yang dipanggil Penggugusan Sedar Julat Spektrum dan Transmisi (STRAC) yang mengeksploitasikan konsep saluran heterogen adalah dicadangkan. Di sini, satu fungsi pemilihan kepala gugusan yang baru dirumuskan. Satu model analisis diterbitkan untuk mengesahkan hasil STRAC. Kedua, bagi meningkatkan penggunaan lebar jalur, Penggugusan Sedar Julat Spektrum dan Transmisi Beban Seimbang (LB-STRAC) dicadangkan. Algoritma ini bersama-sama mempertimbangkan konsep keheterogenan saluran dan pengimbangan beban. Keputusan simulasi menunjukkan bahawa secara purata, STRAC mengurangkan bilangan gugusan yang dibina sehingga 51% berbanding teknik penggugusan konvensional, Penggugusan berasaskan Peluang Spektrum (SOC). Di samping itu, STRAC mengurangkan nisbah gugusan satu ahli dan nisbah gabungan semula dengan ketara berbanding skim pertimbangan saluran bukan heterogen. LB-STRAC selanjutnya meningkat prestasi penggugusan dengan mengatasi prestasi STRAC dari segi keseragaman dan kesaksamaan pengagihan beban trafik antara semua gugusan dengan peruntukan spektrum yang saksama. Selain itu, LB-STRAC telah terbukti sangat berkesan dalam meningkatkan penggunaan lebar jalur. Bagi senario beban trafik yang sama, LB-STRAC secara purata mempertingkatkan penggunaan lebar jalur sebanyak 24.3% berbanding STRAC. Di samping itu, untuk senario beban trafik yang berbeza-beza, LB-STRAC meningkatkan penggunaan lebar jalur sebanyak 25.4% dan 31.9% secara purata berbanding STRAC untuk peruntukan slot tidak seragam dan peruntukan slot seragam masing-masing. Oleh itu, LB-STRAC amat disyorkan untuk senario pelbagai sumber seperti penggunaan pemantauan berterusan atau penggunaan kesedaran situasi.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vi
	LIST OF TABLES	xi
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xvi
	LIST OF SYMBOLS	xviii
	LIST OF APPENDICES	xxi
1	INTRODUCTION	1
	1.1 Background	1
	1.2 Problem Statement	4
	1.3 Objectives of the Thesis	6
	1.4 Scope of the Research	6
	1.5 Research Contributions	7
	1.6 Thesis Outline	8

<b>2</b>	<b>LITERATURE REVIEW</b>	<b>10</b>
2.1	Introduction	10
2.2	Cognitive Radio Technology	11
2.3	CRNs Architecture and Spectrum Access Techniques	13
2.3.1	CRNs Architecture	13
2.3.2	Spectrum Access Techniques	15
2.4	Control Channel Assignment Schemes in CRAHNs	16
2.5	Clustering Concept	21
2.6	Clustering in Traditional Wireless Ad Hoc Network	22
2.7	Clustering Formation in CRAHNs	24
2.7.1	Clustering Formation Design	24
2.7.2	Classification of Clustering Algorithms	31
2.7.3	Analysis on Clustering Schemes for CRAHNs	34
2.7.3.1	Motivation and Research Gaps	42
2.8	Chapter Summary	43
<b>3</b>	<b>DESIGN CONCEPT AND METHODOLOGY</b>	<b>44</b>
3.1	Introduction	44
3.2	Conceptual Design Framework	45
3.3	Channel Heterogeneity	47
3.3.1	Heterogeneous Transmission Ranges	48
3.3.2	Heterogeneous Set of Available Channels	49
3.3.3	Heterogeneous Set of Neighbours	49
3.4	Network Models and Assumptions	49
3.4.1	Primary Network Model	50
3.4.2	Secondary Network Model	50



3.5	STRAC Algorithm Design	53
3.5.1	Cluster Head Selection Process	53
3.5.2	Cluster Construction Process	54
3.6	LB-STRAC Algorithm Design	56
3.7	Control Channel Selection Process	57
3.8	Evaluation Setup	58
3.9	Performance Metrics	60
3.10	Chapter Summary	62
<b>4</b>	<b>SPECTRUM AND TRANSMISSION RANGE AWARE CLUSTERING</b>	<b>63</b>
4.1	Introduction	63
4.2	Spectrum and Transmission Aware Clustering Algorithm	64
4.2.1	Cluster Head Selection Process	65
4.2.1.1	Selection Factor Metric Computation	65
4.2.1.2	Cluster Heads Determination	68
4.2.2	Cluster Construction Process	71
4.2.3	Demonstration Scenario for STRAC Algorithm	75
4.3	Analytical Model of STRAC	77
4.3.1	Channel Availability Estimation Model	77
4.3.2	Link Availability Estimation Model	79
4.3.3	Expected Cluster Size Model	82
4.3.4	Expected Number of Clusters	91
4.3.5	Expected Number of Common Channels per Clusters	91
4.4	Performance Evaluation	93
4.4.1	Analytical Validation of STRAC	95

4.4.2	Evaluation of the impact of the Channel Heterogeneity on the Clustering Algorithm	98
4.4.3	Evaluation of the Impact of the Numbers of Primary User on the STRAC	101
4.4.4	Comparison Study of STRAC	107
4.4.4.1	Basic Clustering Performance Evaluation	107
4.4.4.2	Evaluation of Uniformity of Constructed Clusters	111
4.4.4.3	Evaluation of Re-Affiliation Ratio	112
4.4.4.4	Evaluation of the Clustering Energy	115
4.5	Summary	116
<b>5</b>	<b>LOAD BALANCED SPECTRUM AND TRANSMISSION RANGE AWARE CLUSTERING</b>	<b>118</b>
5.1	Introduction	118
5.2	Load Balanced Spectrum and Transmission Aware Clustering Algorithm	120
5.2.1	Cluster Head Selection Process	120
5.2.2	Initial Cluster Formation Process	121
5.2.3	Cluster Membership Clarification Process	123
5.2.4	Demonstration Scenario for LB-STRAC Algorithm	126
5.3	Comparison Study of LB-STRAC	127
5.3.1	Basic Clustering Performance Evaluation	128
5.3.2	Evaluation of Uniformity of Constructed Clusters	131
5.3.3	Evaluation of Influence of Load Balance Mechanism on the Intra-Clustering Communication	134

5.3.3.1	Equal Traffic Load Scenario	134
5.3.3.2	Varied Traffic Load Scenario	136
5.4	Chapter Summary	139
<b>6</b>	<b>CONCLUSION AND FUTURE WORK</b>	<b>140</b>
6.1	Conclusion	140
6.2	Future Work	142
	<b>REFERENCES</b>	<b>144</b>
	<b>APPENDIX A</b>	<b>161</b>

**LIST OF TABLES**

<b>TABLE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
<b>2.1</b>	Summary of Control Channel Assignment Schemes in CRNs	20
<b>2.2</b>	Basic Performance Metrics for CRAHNs Clustering Algorithms	26
<b>2.3</b>	Clustering Formation Approaches	27
<b>2.4</b>	Design Techniques used for Clustering	29
<b>2.5</b>	Summary of Five Clustering Schemes	33
<b>2.6</b>	Summary and Comparison of Related Work on Clustering Algorithms	40
<b>3.1</b>	List of Notations used in Framework Design	47
<b>4.1</b>	Secondary User's Selection Factor based on Figure 4.3 (a)	76
<b>4.2</b>	The Simulation Parameters	94

## LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Control Channel Assignment Issues (a) Spectrum Heterogeneity.(b) Primary User (PU) Activity.	2
1.2	Cognitive Radio Channel Models Scenarios (a) Homogeneous Transmission Ranges.(b) Heterogeneous Transmission Ranges.	5
2.1	Cognitive Radio Block Diagram	12
2.2	Architecture of CRN Co-located with Primary Networks	14
2.3	Spectrum Hole Concept. [22]	15
2.4	Control Channel Assignment Schemes Classification	19
2.5	Clustering Architecture	21
2.6	Taxonomy of Clustering Formation Attributes	25
3.1	Research Operational Framework	46
3.2	Co-existence of a SUs with a PUs. (a) Spatial Variations of Channel Availability in CRAHN (b) Illustration of the Neighbourhood Relationship between the SUs.	52
3.3	Flowchart of STRAC Algorithm	55
3.4	Flowchart of LB-STRAC Algorithm	57
4.1	Flowchart of Cluster Head Selection Process	70
4.2	Flowchart of Cluster Construction Process	74
4.3	Demonstration Scenario for STRAC algorithm (a) Connectivity Graph (b) Clusters Formed at the First Round. (c) Final Clustered Structure.	76
4.4	Illustration of the Cluster Coverage Areas	83

<b>4.5</b>	The Average Number of Neighbours versus the Number of Secondary Users For Different Common Channels Constraint.	95
<b>4.6</b>	The Average Cluster Size versus the Number of Secondary Users for Different Common Channels Constraint	96
<b>4.7</b>	The Average Cluster Numbers versus the Number of Secondary Users for Different Common Channels Constraint	96
<b>4.8</b>	The Average Common Channels per Cluster versus the Number of Secondary Users for Different Common Channels Constraint	97
<b>4.9</b>	The Average Clusters Number versus the Number of Secondary Users for HetCh and HomCh Models	99
<b>4.10</b>	The Average Cluster Size versus the Number of Secondary Users for HetCh and HomCh Models	99
<b>4.11</b>	The Average Number of One-member Clusters versus the Number of Secondary Users for HetCh and HomCh Models	100
<b>4.12</b>	The Average Number Common Channels per Cluster versus the Number of Secondary Users for HetCh and HomCh Models	101
<b>4.13</b>	The Effect of Number of Primary Users on the Probability of Channel Availability for both SPC and MPC Occupancy Models.	103
<b>4.14</b>	The Effect of Number of Primary Users on the Average Number of Neighbours for both SPC and MPC Occupancy Model.	103
<b>4.15</b>	The Effect of Number of Primary Users on the Average Cluster Size for both SPC and MPC Occupancy Models.	104

<b>4.16</b>	The Effect of Number of Primary Users on the Average Number of Clusters for both SPC and MPC Occupancy Models.	105
<b>4.17</b>	The Effect of Number of Primary Users on the Average Number of One-member Clusters for both SPC and MPC Occupancy Models.	105
<b>4.18</b>	The Effect of Number of Primary Users on Average Number of CCs per Cluster for both SPC and MPC Occupancy Models.	106
<b>4.19</b>	The Average Number of Clusters versus the Number of Secondary Users	108
<b>4.20</b>	The Average Cluster Size versus the Number of Secondary Users	108
<b>4.21</b>	The Average Number of One-member Clusters versus the Number of Secondary Users	109
<b>4.22</b>	The Average Number of CCs per Cluster versus the Number of Secondary Users	110
<b>4.23</b>	Gini Coefficient Index for Cluster Sizes.	111
<b>4.24</b>	Re-affiliation ratio versus the Ratio of Current Distance to the Initial Distance for (a) $N = 100$ , (b) $N = 250$ and (c) $N = 500$	114
<b>4.25</b>	Total Energy Consumption for Clustering versus Number of Secondary Users	116
<b>5.1</b>	Illustration of Regular Clustering	119
<b>5.2</b>	Flow chart of Initial Clusters Construction Process in LB-STRAC	122
<b>5.3</b>	Flow chart of Cluster Membership Clarification Process	125
<b>5.4</b>	Demonstration Scenario for LB-STRAC Algorithm. (a) Constructed Clusters after the First Round (b). Initial Clusters Formation. (c) Final Clustering Structure.	127
<b>5.5</b>	The Average Number of Clusters versus the Number of Secondary Users	129

<b>5.6</b>	The Average Cluster Size versus the Number of Secondary Users.	130
<b>5.7</b>	The Average Number of One-member Clusters versus the Number of Secondary Users	130
<b>5.8</b>	The Average Number of CCs per Cluster versus the Number of Secondary Users.	131
<b>5.9</b>	Gini Coefficient Index for Cluster Sizes	133
<b>5.10</b>	Gini Coefficient Index for CCs per Cluster	133
<b>5.11</b>	Bandwidth Utilization versus the Number of Secondary Users	135
<b>5.12</b>	Blocking Rate versus the Number of Secondary Users	136
<b>5.13</b>	Bandwidth Utilization versus the Number of Secondary Users	137
<b>5.14</b>	Blocking Rate versus the Number of Secondary Users	138



## LIST OF ABBREVIATIONS

AP	-	Affinity Propagation
CC	-	Control Channel
CCC	-	Common Control Channel
CDMA	-	Code Division Multiple Access
CH	-	Cluster Head
CHDF	-	Cluster head Determination Factor
CR	-	Cognitive Radio
CRAHN	-	Cognitive Radio Ad Hoc Network
CRN	-	Cognitive Radio Network
CRB	-	Cognitive Radio Base station
CRT	-	Cognitive Radio Terminal
CRSN	-	Cognitive Radio Sensor Network
CV	-	Coefficient of Variation
DSA	-	Dynamic Spectrum Access
DS	-	Dominant Set
DCA	-	Distributed Clustering Algorithm
IEEE	-	Institute of Electrical and Electronics Engineers
ISM	-	Industrial, Scientific and Medical
FCC	-	Federal Communications Commission
GUI	-	Graphic User Interface
HetCh	-	Heterogeneous Channel
HomCh	-	Homogenous Channel
KM	-	KiloMeter
LAN	-	Local Area Network
LB	-	Load Balancing
LCCC	-	Local Common Control Channel

MANET	-	Mobile Ad hoc Network
MCMR	-	Multi-Channel Multi Radio
MDS	-	Minimum Dominant Set
MEB	-	Maximum Edge Biclique
MEBC	-	Maximum one side Edge Cardinality Biclique
MNB	-	Maximum Node Biclique
MPC	-	Multiple Primary user Channel
MRCC	-	Multiple Rendezvous Control Channel
OSA	-	Opportunistic Spectrum Access
PU	-	Primary User
RF	-	Radio Frequency
ROSS	-	RObust Spectrum Sharing
SABC	-	Spectrum Aware Based Clustering
SDR	-	Software Defined Radio
SF	-	Selection Factor
SMART	-	SpectruM-Aware clusteR-based rouTing
SOC	-	Spectrum Opportunity based Clustering
SPC	-	Single Primary user Channel
STRAC	-	Spectrum Transmission Range Aware Clustering
SU	-	Secondary user
TDMA	-	Time Division Multiple Access
TR	-	Transmission Range
TV	-	TeleVision
VANET	-	Vehicular Ad Hoc Network
UWB	-	Ultra Wide-Band
Wi-Fi	-	Wireless Fidelity
WIMAX	-	Worldwide Interoperability for Microwave Access
WSN	-	Wireless Sensor Network

## LIST OF SYMBOLS

$N$	-	Number of secondary users
$M$	-	Number of target channels
$L$	-	Channel type number
$r_l$	-	Transmission range of type $l$ channel
$r_{max}$	-	Maximum transmission range
$C_i$	-	Set of available channel for $su_i$
$M_i$	-	Number of available channels for $su_i$
$D_{im}$	-	The distance between $su_i$ and $pu_m$
$d_{ij}$	-	The distance between $su_i$ and $su_j$
$C_{ij}$	-	A set of common channel between $su_i$ and $su_j$
$N_i$	-	Set of 1-hop neighbour for $su_i$
$N_{ic}$	-	Set of 1-hop neighbour for $su_i$ in channel $c$
$P_{idle}$	-	Probability of licensed channel to be idle
$SF_i$	-	Selection factor for $su_i$
$CH_i$	-	Cluster head $i$
$CL_i$	-	Set of member of cluster $i$
$CLCC_i(I)$	-	Set of ccs between the $CH_i$ and its members at iteration $I$
$K$	-	Minimum channel threshold per cluster
$PL_j$	-	Potential CHs set for $su_j$
$Load_i$	-	Potential load of $CH_i$
$C^l$	-	A set of type $l$ channels
$B$	-	Control message length in bits
$E_{tx}(B, d)$	-	Energy consumption to transmit $b$ bits
$E_{elec}$	-	Consumed energy in the transmitter or receiver circuitry
$E_{amp}$	-	Consumed energy in the transmitter amplifier

$E_{rx}$	-	Energy consumption to receive $B$ bits
$R^m$	-	Channel reward vector
$V^{ij}$	-	Common channel availability vector of $su_i, su_j$
$v_m^{ij}$	-	Common channel availability vector element of $su_i, su_j$
$c_m^{ij}$	-	Channel availability vector element of $su_i, su_j$
$l^{ij}$	-	Link robustness vector of $su_i, su_j$
$l_m^{ij}$	-	Link robustness vector element of $su_i, su_j$ in $m^{th}$ channel
$L_{ij}$	-	Relative link robustness of $su_i, su_j$
$L_i$	-	Cumulative link robustness of $su_i$
$CLCC_i$	-	Custer $i$ common channels set
$P$	-	Probability of channel to be available
$P_l$	-	Probability of channel type $l$ be available
$R_l$	-	Protection range of type $l$ channel
$P_{lav}$	-	Probability of link availability
$P_{l,L}^{1,2}$	-	Probability of the of at least one channel from types $l$ to $l$ available between two SUs
$P_{cc,2}$	-	Probability of availability of a single channel of type $l$ to $L$ between two SUs.
$\overline{P_{cc,2}}$	-	Complement probability of $P_{cc,2}$
$\overline{P_{cc,2,m_l}}$	-	Probability there is no any available cc of type $l$ among $m_l$ channels between two SUs
$\overline{P_{cc,2,M}}$	-	Probability there is no any available CC of type $l$ among $M$ channels between two SUs
$P_{cc,2,M}^1$	-	Probability of the existence of at least one CC available between two secondary users among $M$ channels
$E[Z]$	-	Expected cluster size
$E[D]$	-	Expected number of neighbours
$P_{join}$	-	Probability of neighbours to fulfil the clustering requirements
$P_{K,l,L}$	-	Probability of at least $K$ channels from types $l$ to $l$ common between any ch and its neighbours
$P_{area,l}$	-	Probability all expected neighbours to be inside $a_l$

$P_{cc,D1}$	-	Probability of a single type $l$ channel to be available to any CH and its expected neighbours ( $E[D]$ )
$P_{l,L}$	-	Probability of a channel from type $l$ to $L$ be available for any CH and its neighbours
$\overline{P_{area,l}}$	-	Probability of at least one neighbour to be outside $a_l$
$P_{total}$	-	Total probability of channel availability
$P_{av,l}$	-	Probability of any channel to be available and from type $l$
$E[CL\_No]$	-	Expected cluster number
$D_{upper,l}$	-	The upper value of $E[D]$
$E[CCCL]$	-	Expected number of common channels per cluster
$P_{cccl}$	-	Probability of common channels per cluster
$P_{CL\_area,L}$	-	Probability of all cluster members to be inside $a_l$
$p^{l,L}$	-	Probability of the channel to be of type $l$ to $L$
$P_{l,CL}$	-	Probability of channels of type $l$ to $L$ to be available and common in each cluster
$P_{l,L}^{K,CL}$	-	Probability of at least $K$ channels of types $l$ to $L$ are common between all members in each cluster
$Rank_{ij}$	-	Rank value of $su_j$ in cluster $i$
$\overline{PL}_j$	-	Set of claiming clusters in which $su_j$ has the same rank value
$\lambda$	-	Average connections generation rate
$\mu$	-	Mean of connection duration

**LIST OF APPENDICES**

APPENDIX	TITLE	PAGE
A	List of publications	161

## CHAPTER 1

### INTRODUCTION


#### 1.1 Background

Static spectrum apportionment policies eliminate interference between various wireless technologies by separating their operating frequency. However, the static apportionment policy has caused a spectrum shortage. As a result, modern wireless services and technologies have struggled to survive in congested, uncontrollable interference unlicensed bands such as the industrial, scientific and medical (ISM) bands. On the other hand, it has been found out that, a huge amount of the licensed spectrum is extremely underutilized [1, 2]. In order to handle the spectrum shortage problem, a new policy, that permits unlicensed users to opportunistically use unoccupied licensed spectrum, is presently being endorsed by the Federal Communications Commission (FCC) [1, 2]. Consequently, opportunistic spectrum access (OSA) techniques and cognitive radio technology are introduced as smart wireless communication technologies that enabling the cognitive radio (CR) also called the secondary users (SUs) to access the license bands in opportunistic manner. However, the feature brought by CR technology introduces spectrum management and network coordination challenges. Precisely in cognitive radio ad hoc networks(CRAHNs), the distributed multi-hop architecture.

Recently, CRAHNs has gained a great interest in the research community. This is due to its valuable role in situations, where the infrastructure network is neither available nor economical to establish, such as battlefield communication and disaster relief [3]. However, the absence of infrastructure and rapid topology changes inherit from the wireless ad hoc network, along with the intrinsic feature of cognitive radio networks (CRNs), known as the dynamicity of channel availability, present unprecedented challenges that hinder the practical implementation of CRAHNs. The most critical challenges can be abstracted as following:

Control channel (CC) assignment is one of most critical challenge facing the cognitive radio ad hoc networks. As illustrated in Figure 1.1, the challenge arises in the following two aspects:

- i. Spectrum heterogeneity, secondary users (SUs) usually observe different sets of available channels. So, it is improbable to find a channel available to all SUs. However, SUs in same neighbourhood do share a significant number of available channels. Hence, different channels have to be assigned for control in different neighbourhood [4],[5].
- ii. Primary user (PU) activity, unless the CC allocated in frequency band free from PUs (out-band), the CC is susceptible to PU activity and can be occupied by PUs at any time [4, 5].

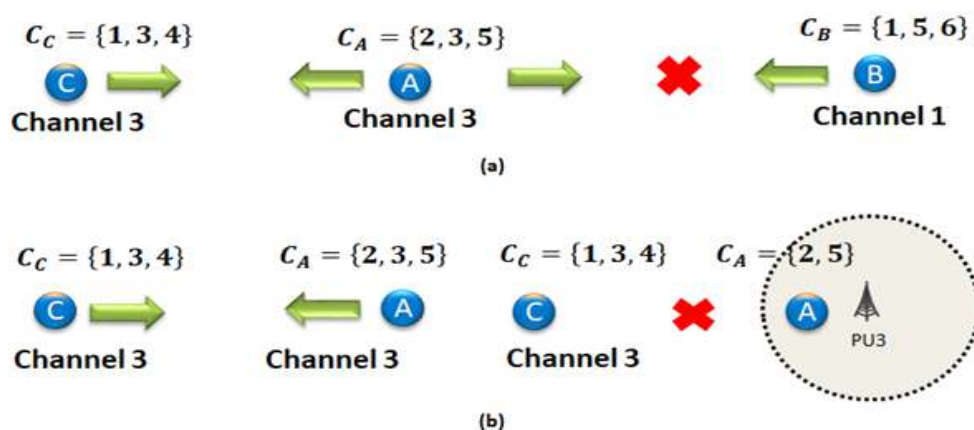

**Figure 1.1:** Control Channel Assignment Issues (a) Spectrum Heterogeneity.(b) Primary User (PU) Activity.



Another critical challenge, CRAHNs encounters scalability problems with increased network size, resulting from routing difficulties as well as congestion from flooding. Routes might have to recomputed and updated in entire network even if only a small number of SUs changed their locations. So routing protocol based on flat network become infeasible because of high protocol overhead [6]. Hence a method to scale down the network is needed.

Clustering is a reliable solution to address the aforementioned challenges. Clustering is topology management technique that efficiently improves the performance of the network by dividing the flat ad hoc network into virtual groups according to specific rules. These rules are determined based on the purpose of clustering.


In CRAHNs grouping the SUs into clusters according to the similarity of their available channels, solve the problem of control channel assignment. Furthermore, in cluster based networks only few users (cluster heads and gateways) participate in finding routes, which greatly reduces the routing table size and the number of necessary broadcasts. In addition, the clustered structure make the network appear smaller and more stable in the view of each user, since any change in network topology only need to be updated locally. Designing a clustering scheme that considers the spectrum availability known as spectrum-aware clustering [5].

Although a number of researchers have proposed spectrum-aware clustering design schemes for CRAHNs in order to support the network management and fix the problem of control channel assignment [5, 7-14]. However, these schemes seem to be unpractical due to the lack of the consideration of the heterogeneous nature of the channels in term of transmission ranges. Moreover, these schemes ignored the needing of a fair distribution of traffic load among the constructed clusters so some of these clusters will be overcrowded which will lead to unfairness spectrum allocation and poor bandwidth utilization specifically if it adopted in multi-source scenarios such as continuous monitoring applications or situation awareness applications.

## 1.2 Problem Statement

In order to efficiently constructed cluster based network to solve the problem of control channel and support the scalability in CRAHNs two issues need to be addressed namely heterogeneous channels transmission ranges and the load balance among clusters. In this respect, the problems addressed in this thesis are as follows:

As depicted in Figure 1.2, unlike the traditional multi channels network in which all channels have homogeneous transmission ranges, the CRAHNs introduces the heterogeneous transmission ranges issue. That is because the targeted (observed) channels may be located on separated bands with different propagation characteristics. Also, FCC regulations define different transmission ranges for different channels [15-17] . Moreover, considering a constant transmission range for the secondary users is unacceptable due to the following. First, using a fixed transmission range in all channels will eliminate the distinguishing feature of SUs: interacting and adapting with the surrounding environments [18]. Second, the value of the radio communication range has significant impact on the network connectivity. Using the longest channel transmission range as common transmission range in all targeted channels improves the connectivity by increasing the number of direct connections but it against FCC regulations. On the other hand, using the shortest channel transmission range as common transmission range decreases the connectivity. So, while considering the channel heterogeneity, what is the best way of development clustering scheme that solve the problem of CC and ensures network stability (large number of common channels per cluster) while increasing the network scalability (small clusters number)?

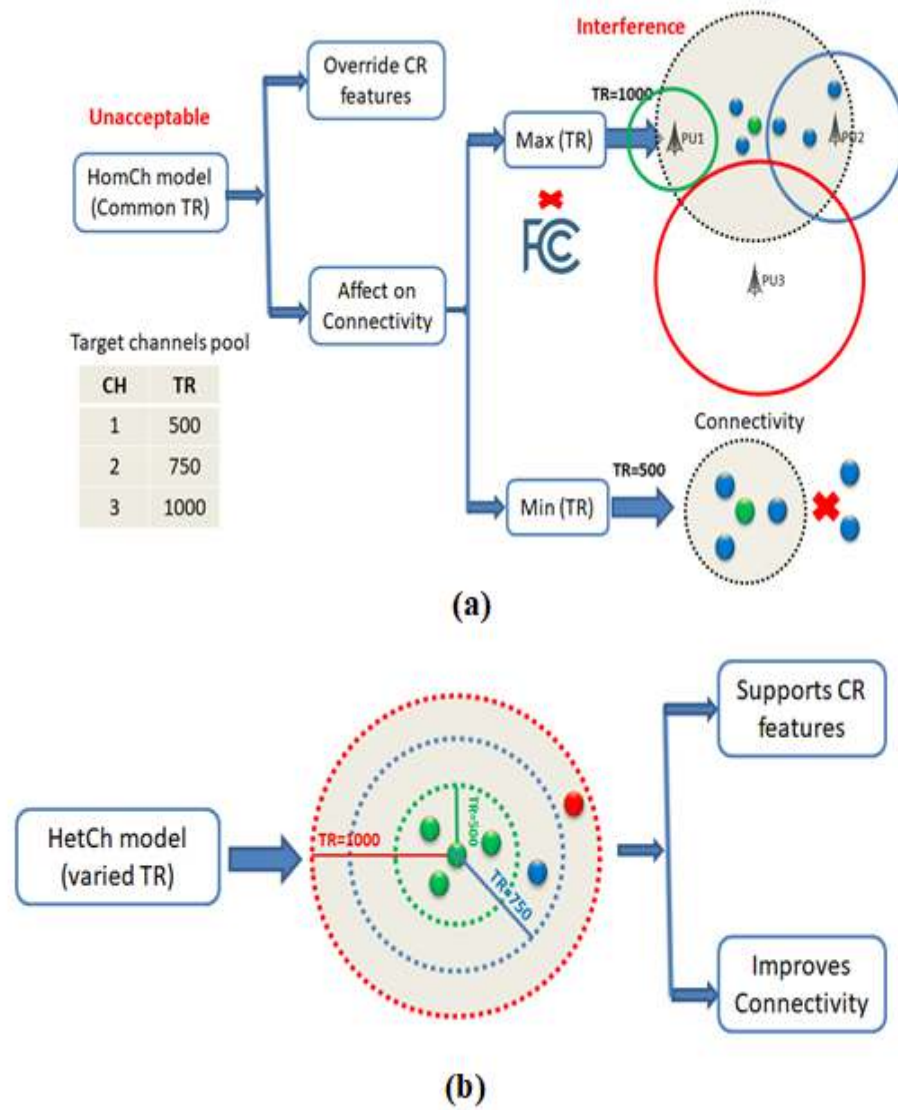

**Figure 1.2:** Cognitive Radio Channel Models Scenarios (a) Homogeneous Transmission Ranges.(b) Heterogeneous Transmission Ranges.

Additionally, in traditional clustering schemes the normal secondary users usually join the neighbouring cluster head which have the best feature with reference to the used metric for clustering [7, 13]. This attitude causes some clusters to be overcrowded while other may have only one member. Recalling the inverse relationship between the cluster size and the number of common channels per cluster [5, 13, 19], overcrowded clusters means large number of secondary users share a small amount of bandwidth for intra-clustering communication which causes traffic

congestion. While the small size clusters have more bandwidth than their needs. This results in misuse of available bandwidth which will consequently affect the performance of cluster based network negatively. Thus, the question arises on finding a reliable way of distributing the load (secondary users) among the clusters that would lead to bandwidth utilization improvement.

### **1.3 Objectives of the Thesis**

The aim of this thesis is to develop an efficient clustering scheme that facilitates the practical implementation of CRAHNs. This goal is achieved by considering both the channel heterogeneity and load balancing concepts during clustering formation process. The specific objectives of the research are:

- i. To design and develop spectrum and transmission range aware clustering technique (STRAC) for CRAHN that establishes a local common control channel and supports the network scalability.
- ii. To investigate the impact of heterogeneous channel transmission ranges in the clustering performance.
- iii. To design and develop a load balancing mechanism during clustering process (LB-STRAC) in order to enhance the bandwidth utilization.
- iv. To evaluate and validate the simulated results based on the performance metrics.

### **1.4 Scope of the Research**

This research focuses on the design of clustering formation algorithms in cognitive radio ad hoc networks (CRAHNs). This work attends to design new clustering algorithms by integrating the cognitive features, channel heterogeneity and

load balancing concepts to enhance the clustering performance. These algorithms mainly concern with the situation at the initialization of the network.

In this research CRAHN that co-exists with primary user network is considered. Here, the availability of the channels to secondary users is determined based on their proximity to the primary user of that channel and its activities on it. Each secondary user determines its available channels set independently where the targeted spectrum band is composed of finite number of channels. These channels are assumed to have different transmission ranges.

The proposed clustering algorithms work in a distributed manner based on local information. Specifically, each secondary user is assumed to acquire knowledge of its 1-hop neighbours through the neighbour discovery process which is out of scope of this thesis. The proposed clustering formation algorithms are developed based on the snapshot of network. Thus, the channel availability information and secondary user's location do not change during cluster formation process. Moreover, multi-source network scenario where each secondary user is a data source is considered.

## **1.5 Research Contributions**

In a bid to achieve the proposed objectives, this work made the following contributions:

- i. In order to achieve the first and second objectives, a novel spectrum-aware clustering algorithm based on the channel heterogeneity named Spectrum and Transmission Range Aware clustering (STRAC) is developed. STRAC is an efficient algorithm for solving the CC problem in CRAHNs and enhancing the network scalability. In addition to STRAC being a new algorithm for clustering in CRAHNs, it exploits the heterogeneity of channels in term of

transmission range to further enhance the clustering performance. Here, a new metric for the cluster head selection called selection factor which is calculated based on the number of neighbours, the number of common channels with neighbours, the number of available channels, and the available channels coverage is provided.

- ii. To validate the STRAC performance a mathematical model is developed. This model characterizes the channel availability in CRAHNs. This model also provides mathematical expressions for the probability of channel availability, probability of link availability, expected number of neighbours, expected cluster size, expected number of clusters and expected number of common channels per cluster.
- iii. To achieve the third objective, Load Balance Spectrum and Transmission Range Aware clustering (LB-STRAC) algorithm that alleviates the non-uniformity of load distribution among the clusters is developed. LB-STRAC is a distributed clustering algorithm that jointly considers the channel heterogeneity and load balancing concepts to further improve the efficient of constructed cluster based network by enhancing the bandwidth utilization.

## 1.6 Thesis Outline

The rest of this thesis is organized as follows:

Chapter 2, presents a critical review on the available literature related to the scope of this thesis. It discusses on the cognitive radio networks taking into account the cognitive radio technology concept, CRNs Architecture and spectrum access techniques. Moreover, in this chapter, the control channel assignment techniques in CRAHNs are elaborated. Clustering is critically reviewed in this chapter; a brief background on clustering and different situations where clustering is used in ad hoc network are provided. Then, a detail discussion on clustering in CRAHNs is carried out, including the benefits of clustering in CRAHNs, the approaches for modelling

clustering formation problem, the performance metric, the techniques that are utilized for clustering and the classification of clustering algorithms. Finally, related works are presented.

Chapter 3 presents an overview of the proposed framework used throughout the thesis and the methodology perused in accomplishing the proposed objectives. First, an overview of the channel heterogeneity concepts is presented. Then, the adopted network model and assumptions are stated. Afterwards, the fundamental steps of development and implementation of proposed clustering algorithms are explained. Finally, the evaluation setup and the evaluation metrics were stated.

Chapter 4 explains the STRAC algorithm to establish control channel for CRAHNS and enhance the network scalability. The operational modules of STRAC along with implementation method are introduced. A mathematical model for STRAC is then derived to emulate the behaviour and features of STRAC, and validate its outcomes. Afterwards, the performance evaluation results of STRAC which includes, the results of the validation of STRAC with its analytical model, the effect of the channel heterogeneity on the clustering performance results, the results of the effect of the number of PUs on STRAC performance, and comparison results with similar algorithms from literature are presented.

Chapter 5 presents LB-STRAC algorithm to enhance the bandwidth utilization. First, it demonstrates the detail of implementation of the proposed LB-STRAC. Then, it presents the performance evaluation, including how the results were obtained and the discussion of the results.

Chapter 6 summarizes the work that has been done in this thesis, restating the research objectives and the contributions made in order to achieve the proposed objectives. Lastly, suggestions on the directions for future work are mentioned.

## REFERENCES

1. Akyildiz, I.F., et al., *NeXt generation/dynamic spectrum access/cognitive radio wireless networks: A survey*. Computer Networks, 2006. **50**(13): p. 2127-2159.
2. FCC, *Spectrum Policy Tasks Force. Rep.* 2002. **ET Docket No. 02-135.** .
3. Khattab, A., D. Perkins, and M. Bayoumi, *Cognitive Radio Networking Preliminaries*, in *Cognitive Radio Networks: From Theory to Practice*. 2013, Springer New York: New York, NY. p. 11-20.
4. Lo, B.F., *A survey of common control channel design in cognitive radio networks*. Physical Communication, 2011. **4**(1): p. 26-39.
5. Liu, S., L. Lazos, and M. Krunz, *Cluster-Based Control Channel Allocation in Opportunistic Cognitive Radio Networks*. IEEE Transactions on Mobile Computing, 2012. **11**(10): p. 1436-1449.
6. Yu, J.Y. and P.H.J. Chong, *A survey of clustering schemes for mobile ad hoc networks*. IEEE Communications Surveys & Tutorials, 2005. **7**(1): p. 32-48.
7. Mansoor, N., *Spectrum aware cluster-based architecture for cognitive radio ad-hoc networks*. 2016, Electrical Engineering, Universiti Teknologi Malaysia.
8. Chen, T., et al. *CogMesh: A Cluster-Based Cognitive Radio Network*. in *2007 2nd IEEE International Symposium on New Frontiers in Dynamic Spectrum Access Networks*. 2007.



9. Baddour, K.E., O. Ureten, and T.J. Willink. *Efficient Clustering of Cognitive Radio Networks Using Affinity Propagation*. in *Computer Communications and Networks, 2009. ICCCN 2009. Proceedings of 18th International Conference on*. 2009.
10. Asterjadhi, A., N. Baldo, and M. Zorzi. *A cluster formation protocol for cognitive radio ad hoc networks*. in *2010 European Wireless Conference (EW)*. 2010.
11. Li, D. and J. Gross. *Robust Clustering of Ad-Hoc Cognitive Radio Networks under Opportunistic Spectrum Access*. in *2011 IEEE International Conference on Communications (ICC)*. 2011.
12. Lazos, L., S. Liu, and M. Krunz. *Spectrum Opportunity-Based Control Channel Assignment in Cognitive Radio Networks*. in *2009 6th Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks*. 2009.
13. Bradonjić, M. and L. Lazos, *Graph-based criteria for spectrum-aware clustering in cognitive radio networks*. *Ad Hoc Networks*, 2012. **10**(1): p. 75-94.
14. Zhang, H., et al., *Graph cut based clustering for cognitive radio ad hoc networks without common control channels*. *Wireless Networks*, 2016: p. 1-13.
15. Ma, M. and D.H.K. Tsang, *Joint design of spectrum sharing and routing with channel heterogeneity in cognitive radio networks*. *Physical Communication*, 2009. **2**(1-2): p. 127-137.
16. Ma, M. and D.H.K. Tsang. *Impact of Channel Heterogeneity on Spectrum Sharing in Cognitive Radio Networks*. in *2008 IEEE International Conference on Communications*. 2008.

17. Sengupta, S. and K.P. Subbalakshmi, *Open research issues in multi-hop cognitive radio networks*. IEEE Communications Magazine, 2013. **51**(4): p. 168-176.
18. FCC, *Notice of proposed rulemaking and order*. 2004.
19. Javed, Z., et al., *RL-Budget: A Learning-Based Cluster Size Adjustment Scheme for Cognitive Radio Networks*. IEEE Access, 2018. **6**: p. 1055-1072.
20. Kuang-Ching, W. and P. Ramanathan. *End-to-end delay assurances in multihop wireless local area networks*. in *Global Telecommunications Conference, 2003. GLOBECOM '03. IEEE*. 2003.
21. Mitola, J., *The software radio architecture*. IEEE Communications Magazine, 1995. **33**(5): p. 26-38.
22. Akyildiz, I.F., W.-Y. Lee, and K.R. Chowdhury, *CRAHNs: Cognitive radio ad hoc networks*. Ad Hoc Networks, 2009. **7**(5): p. 810-836.
23. Haykin, S., *Cognitive radio: brain-empowered wireless communications*. IEEE Journal on Selected Areas in Communications, 2005. **23**(2): p. 201-220.
24. Tragos, E.Z., et al., *Spectrum Assignment in Cognitive Radio Networks: A Comprehensive Survey*. IEEE Communications Surveys & Tutorials, 2013. **15**(3): p. 1108-1135.
25. Devroye, N., M. Vu, and V. Tarokh, *Cognitive Radio Networks: Information Theory Limits, Models and Design*. 2008.
26. C. Cordeiro, K.C., D. Birru, S. Shankar N, and Others, *IEEE 802.22: An introduction to the first wireless standard based on cognitive radios*. 2006.
27. Čabrić, D., et al. *A cognitive radio approach for usage of virtual unlicensed spectrum*. 2005.

28. Brown, T.X. *An analysis of unlicensed device operation in licensed broadcast service bands*. in *First IEEE International Symposium on New Frontiers in Dynamic Spectrum Access Networks, 2005. DySPAN 2005*. 2005.
29. DaSilva, L.A. and I. Guerreiro. *Sequence-Based Rendezvous for Dynamic Spectrum Access*. in *2008 3rd IEEE Symposium on New Frontiers in Dynamic Spectrum Access Networks*. 2008.
30. Bian, K., J.-M. Park, and R. Chen, *A quorum-based framework for establishing control channels in dynamic spectrum access networks*, in *Proceedings of the 15th annual international conference on Mobile computing and networking*. 2009, ACM: Beijing, China. p. 25-36.
31. Baldo, N., A. Asterjadhi, and M. Zorzi, *Dynamic Spectrum Access Using a Network Coded Cognitive Control Channel*. *IEEE Transactions on Wireless Communications*, 2010. **9**(8): p. 2575-2587.
32. Masri, A.M., et al., *Common control channel allocation in cognitive radio networks through UWB communication*. *Journal of Communications and Networks*, 2012. **14**(6): p. 710-718.
33. Lo, B.F., I.F. Akyildiz, and A.M. Al-Dhelaan, *Efficient Recovery Control Channel Design in Cognitive Radio Ad Hoc Networks*. *IEEE Transactions on Vehicular Technology*, 2010. **59**(9): p. 4513-4526.
34. Chen, T., et al. *Topology Management in CogMesh: A Cluster-Based Cognitive Radio Mesh Network*. in *2007 IEEE International Conference on Communications*. 2007.
35. Doerr, C., D. Grunwald, and D.C. Sicker. *Dynamic control channel management in presence of spectrum heterogeneity*. in *MILCOM 2008 - 2008 IEEE Military Communications Conference*. 2008.

36. Cormio, C. and K.R. Chowdhury, *Common control channel design for cognitive radio wireless ad hoc networks using adaptive frequency hopping*. Ad Hoc Networks, 2010. **8**(4): p. 430-438.
37. Chowdhury, K.R. and I.F. Akyldiz, *OFDM-Based Common Control Channel Design for Cognitive Radio Ad Hoc Networks*. IEEE Transactions on Mobile Computing, 2011. **10**(2): p. 228-238.
38. Motamedi, A. and A. Bahai. *MAC Protocol Design for Spectrum-agile Wireless Networks: Stochastic Control Approach*. in *2007 2nd IEEE International Symposium on New Frontiers in Dynamic Spectrum Access Networks*. 2007.
39. Hamdaoui, B. and K.G. Shin, *OS-MAC: An Efficient MAC Protocol for Spectrum-Agile Wireless Networks*. IEEE Transactions on Mobile Computing, 2008. **7**(8): p. 915-930.
40. Jia, J., Q. Zhang, and X.S. Shen, *HC-MAC: A Hardware-Constrained Cognitive MAC for Efficient Spectrum Management*. IEEE Journal on Selected Areas in Communications, 2008. **26**(1): p. 106-117.
41. Le, L. and E. Hossain. *A MAC Protocol for Opportunistic Spectrum Access in Cognitive Radio Networks*. in *2008 IEEE Wireless Communications and Networking Conference*. 2008.
42. Su, H. and X. Zhang, *Cross-Layer Based Opportunistic MAC Protocols for QoS Provisionings Over Cognitive Radio Wireless Networks*. IEEE Journal on Selected Areas in Communications, 2008. **26**(1): p. 118-129.
43. Sahin, M.E. and H. Arslan. *System Design for Cognitive Radio Communications*. in *2006 1st International Conference on Cognitive Radio Oriented Wireless Networks and Communications*. 2006.

44. Kozat, U.C., et al. *Virtual dynamic backbone for mobile ad hoc networks*. in *ICC 2001. IEEE International Conference on Communications. Conference Record (Cat. No.01CH37240)*. 2001.
45. Ephremides, A., J.E. Wieselthier, and D.J. Baker, *A design concept for reliable mobile radio networks with frequency hopping signaling*. Proceedings of the IEEE, 1987. **75**(1): p. 56-73.
46. Konstantopoulos, C., D. Gavalas, and G. Pantziou, *Clustering in mobile ad hoc networks through neighborhood stability-based mobility prediction*. Computer Networks, 2008. **52**(9): p. 1797-1824.
47. Ni, M., Z. Zhong, and D. Zhao, *MPBC: A Mobility Prediction-Based Clustering Scheme for Ad Hoc Networks*. IEEE Transactions on Vehicular Technology, 2011. **60**(9): p. 4549-4559.
48. Hussein, A.H., A.O.A. Salem, and S. Yousef. *A flexible weighted clustering algorithm based on battery power for Mobile Ad hoc Networks*. in *2008 IEEE International Symposium on Industrial Electronics*. 2008.
49. Fathi, A. and H. Taheri. *Enhance topology control protocol(ECEC) to conserve energy based clustering in wireless ad hoc networks*. in *2010 3rd International Conference on Computer Science and Information Technology*. 2010.
50. Ahmad, M., et al., *Honey bee algorithm-based efficient cluster formation and optimization scheme in mobile ad hoc networks*. International Journal of Distributed Sensor Networks, 2017. **13**(6): p. 1550147717716815.
51. Khatoon, N. and Amritanjali, *Mobility Aware Energy Efficient Clustering for MANET: A Bio-Inspired Approach with Particle Swarm Optimization*. Wireless Communications and Mobile Computing, 2017. **2017**: p. 12.

52. Pathak, S. and S. Jain, *An optimized stable clustering algorithm for mobile ad hoc networks*. EURASIP Journal on Wireless Communications and Networking, 2017. **2017**(1): p. 51.
53. Piyalikar, P. Kar, and M.K.D. Barma, *Forecast Weighted Clustering in MANET*. Procedia Computer Science, 2016. **89**: p. 253-260.
54. Karaoglu, B. and W. Heinzelman, *Cooperative Load Balancing and Dynamic Channel Allocation for Cluster-Based Mobile Ad Hoc Networks*. IEEE Transactions on Mobile Computing, 2015. **14**(5): p. 951-963.
55. Pandey, A. and J.S. Lim. *CTB-MAC: Cluster-Based TDMA Broadcast MAC Protocol for Mobile Ad-Hoc Network*. in *2010 5th International Conference on Future Information Technology*. 2010.
56. Natesapillai, K., V. Palanisamy, and K. Duraiswamy, *Reducing Broadcast Overhead Using Clustering Based Broadcast Mechanism in Mobile Ad Hoc Network* *Journal of Computer Science*. Journal of Computer Science, 2012. **5**(8).
57. Pathak, S. and S. Jain, *A novel weight based clustering algorithm for routing in MANET*. Wireless Networks, 2016. **22**(8): p. 2695-2704.
58. Kanakala, S., V.R. Ananthula, and P. Vempaty, *Energy-Efficient Cluster Based Routing Protocol in Mobile Ad Hoc Networks Using Network Coding*. Journal of Computer Networks and Communications, 2014. **2014**: p. 12.
59. Kumar, R., P. Verma, and Y. Singh, *Mobile Ad Hoc Networks and It's Routing Protocols*. International Journal of Computer, Electrical, Automation, Control and Information Engineering, 2013. **7**: p. 1150-1160.
60. Liu, W., et al., *Cluster-Based Certificate Revocation with Vindication Capability for Mobile Ad Hoc Networks*. IEEE Transactions on Parallel and Distributed Systems, 2013. **24**(2): p. 239-249.

61. Jarang, M.R. and M. Nimbalkar. *Implementation of cluster based certificate revocation in mobile ad hoc networks*. in *2015 International Conference on Green Computing and Internet of Things (ICGCIoT)*. 2015.
62. El-Sayed, A. *Clustering Based Group Key Management for MANET*. 2013. Berlin, Heidelberg: Springer Berlin Heidelberg.
63. Saurabh, V.K., et al. *Cluster-based technique for detection and prevention of black-hole attack in MANETs*. in *2017 International conference of Electronics, Communication and Aerospace Technology (ICECA)*. 2017.
64. Hassanabadi, B., et al., *Clustering in Vehicular Ad Hoc Networks using Affinity Propagation*. *Ad Hoc Networks*, 2014. **13**(Part B): p. 535-548.
65. Chen, Y., et al., *Distributed multi-hop clustering algorithm for VANETs based on neighborhood follow*. *EURASIP Journal on Wireless Communications and Networking*, 2015. **2015**(1): p. 98.
66. Evangeline, C.S. and S. Appu, *An Efficient Data Transmission in VANET Using Clustering Method*, in *International Journal of Electronics and Telecommunications*. 2017. p. 309.
67. Hafeez, K.A., et al. *A fuzzy-logic-based cluster head selection algorithm in VANETs*. in *2012 IEEE International Conference on Communications (ICC)*. 2012.
68. Khan, A., M. Abolhasan, and W. Ni, *An Evolutionary Game Theoretic Approach for Stable and Optimized Clustering in VANETs*. *IEEE Transactions on Vehicular Technology*, 2018: p. 1-1.
69. Rossi, G.V., et al. *Stable Clustering for Ad-Hoc Vehicle Networking*. in *2017 IEEE Wireless Communications and Networking Conference (WCNC)*. 2017.

70. Omar, H.A., W. Zhuang, and L. Li, *VeMAC: A TDMA-Based MAC Protocol for Reliable Broadcast in VANETs*. IEEE Transactions on Mobile Computing, 2013. **12**(9): p. 1724-1736.
71. Bharati, S. and W. Zhuang, *CAH-MAC: Cooperative ADHOC MAC for Vehicular Networks*. IEEE Journal on Selected Areas in Communications, 2013. **31**(9): p. 470-479.
72. Hadded, M., et al., *TDMA-Based MAC Protocols for Vehicular Ad Hoc Networks: A Survey, Qualitative Analysis, and Open Research Issues*. IEEE Communications Surveys & Tutorials, 2015. **17**(4): p. 2461-2492.
73. Bhaumik, M., S. DasGupta, and S. Saha, *Affinity Based Clustering Routing Protocol for Vehicular Ad hoc Networks*. Procedia Engineering, 2012. **38**(Supplement C): p. 673-679.
74. Mohammed Nasr, M.M., et al., *VANET Clustering Based Routing Protocol Suitable for Deserts*. Sensors (Basel, Switzerland), 2016. **16**(4): p. 478.
75. Abuashour, A., *Control Overhead Reduction In Cluster-Based VANET Routing Protocol*. 2017.
76. Heinzelman, W.B., A.P. Chandrakasan, and H. Balakrishnan, *An application-specific protocol architecture for wireless microsensor networks*. IEEE Transactions on Wireless Communications, 2002. **1**(4): p. 660-670.
77. Lin, C., et al., *Energy efficient ant colony algorithms for data aggregation in wireless sensor networks*. Journal of Computer and System Sciences, 2012. **78**(6): p. 1686-1702.
78. Din, S., et al., *A Cluster-Based Data Fusion Technique to Analyze Big Data in Wireless Multi-Sensor System*. IEEE Access, 2017. **5**: p. 5069-5083.



79. Sinha, A. and D.K. Lobiyal, *Performance evaluation of data aggregation for cluster-based wireless sensor network*. Human-centric Computing and Information Sciences, 2013. **3**(1): p. 13.
80. Yu, J., et al., *A Local Energy Consumption Prediction-Based Clustering Protocol for Wireless Sensor Networks*. Sensors (Basel, Switzerland), 2014. **14**(12): p. 23017-23040.
81. Siavoshi, S., Y.S. Kavian, and H. Sharif, *Load-balanced energy efficient clustering protocol for wireless sensor networks*. IET Wireless Sensor Systems, 2016. **6**(3): p. 67-73.
82. He, J., et al., *Constructing load-balanced virtual backbones in probabilistic wireless sensor networks via multi-objective genetic algorithm*. Transactions on Emerging Telecommunications Technologies, 2015. **26**(2): p. 147-163.
83. Younis, O. and S. Fahmy, *HEED: a hybrid, energy-efficient, distributed clustering approach for ad hoc sensor networks*. IEEE Transactions on Mobile Computing, 2004. **3**(4): p. 366-379.
84. Li, Z. and P. Xin, *Evidence-Efficient Multihop Clustering Routing Scheme for Large-Scale Wireless Sensor Networks*. Wireless Communications and Mobile Computing, 2017. **2017**: p. 14.
85. Zhang, Y., M. Liu, and Q. Liu, *An Energy-Balanced Clustering Protocol Based on an Improved CFSFDP Algorithm for Wireless Sensor Networks*. Sensors (Basel), 2018. **18**(3).
86. Sun, C., W. Zhang, and K.B. Letaief. *Cluster-Based Cooperative Spectrum Sensing in Cognitive Radio Systems*. in *2007 IEEE International Conference on Communications*. 2007.

87. Guo, C., et al. *Cooperative Spectrum Sensing with Cluster-Based Architecture in Cognitive Radio Networks*. in *VTC Spring 2009 - IEEE 69th Vehicular Technology Conference*. 2009.
88. Nguyen-Thanh, N. and I. Koo, *A cluster-based selective cooperative spectrum sensing scheme in cognitive radio*. *EURASIP Journal on Wireless Communications and Networking*, 2013. **2013**(1): p. 176.
89. Zhang, W., Y. Yang, and C.K. Yeo, *Cluster-Based Cooperative Spectrum Sensing Assignment Strategy for Heterogeneous Cognitive Radio Network*. *IEEE Transactions on Vehicular Technology*, 2015. **64**(6): p. 2637-2647.
90. Wang, Y., et al., *Optimization of Cluster-Based Cooperative Spectrum Sensing Scheme in Cognitive Radio Networks with Soft Data Fusion*. *Wireless Personal Communications*, 2014. **77**(4): p. 2871-2888.
91. Jiao, Y., P. Yin, and I. Joe, *Clustering scheme for cooperative spectrum sensing in cognitive radio networks*. *IET Communications*, 2016. **10**(13): p. 1590-1595.
92. Mashreghi, M. and B. Abolhassani, *A Cluster-Based Cooperative Spectrum Sensing Strategy to Maximize Achievable Throughput*. *Wireless Personal Communications*, 2017. **96**(3): p. 4557-4584.
93. Bhatti, D.M.S., B. Shaikh, and S.I.H. Zaidi. *Fuzzy C-means and spatial correlation based clustering for cooperative spectrum sensing*. in *2017 International Conference on Information and Communication Technology Convergence (ICTC)*. 2017.
94. Wu, H., et al., *Cluster-Based Energy Efficient Collaborative Spectrum Sensing for Cognitive Sensor Network*. *IEEE Communications Letters*, 2017. **21**(12): p. 2722-2725.

95. Jun, Z., Z. Haitao, and Y. Guang-Hua. *Distributed coordination in dynamic spectrum allocation networks*. in *First IEEE International Symposium on New Frontiers in Dynamic Spectrum Access Networks, 2005. DySPAN 2005*. 2005.
96. Zhao, J., H. Zheng, and G.-H. Yang, *Spectrum sharing through distributed coordination in dynamic spectrum access networks*. *Wireless Communications and Mobile Computing*, 2007. **7**(9): p. 1061-1075.
97. Li, X., et al., *A Cluster-Based MAC Protocol for Cognitive Radio Ad Hoc Networks*. *Wireless Personal Communications*, 2013. **69**(2): p. 937-955.
98. Mir Mehedi Ahsan, P., et al., *A Multiconstrained QoS Aware MAC Protocol for Cluster-Based Cognitive Radio Sensor Networks*. *International Journal of Distributed Sensor Networks*, 2015. **11**(5): p. 262871.
99. Zareei, M., et al., *CMCS: a cross-layer mobility-aware MAC protocol for cognitive radio sensor networks*. *EURASIP Journal on Wireless Communications and Networking*, 2016. **2016**(1): p. 160.
100. Sultana, S., et al., *Traffic Adaptive Synchronized Cluster Based MAC Protocol for Cognitive Radio Ad Hoc Network*. *MATEC Web Conf.*, 2017. **140**: p. 01011.
101. Alsarhan, A. and A. Agarwal. *Cluster-Based Spectrum Management Using Cognitive Radios in Wireless Mesh Network*. in *2009 Proceedings of 18th International Conference on Computer Communications and Networks*. 2009.
102. Dai, J. and S. Wang, *Clustering-Based Spectrum Sharing Strategy for Cognitive Radio Networks*. *IEEE Journal on Selected Areas in Communications*, 2017. **35**(1): p. 228-237.
103. Talay, A.C. and D.T. Altılar, *United nodes: cluster-based routing protocol for mobile cognitive radio networks*. *IET Communications*, 2011. **5**(15): p. 2097-2105.

104. Huang, X.L., et al., *Stability-Capacity-Adaptive Routing for High-Mobility Multihop Cognitive Radio Networks*. IEEE Transactions on Vehicular Technology, 2011. **60**(6): p. 2714-2729.
105. Shah, G.A., et al., *A Spectrum-Aware Clustering for Efficient Multimedia Routing in Cognitive Radio Sensor Networks*. IEEE Transactions on Vehicular Technology, 2014. **63**(7): p. 3369-3380.
106. Zubair, S. and N. Faisal, *Reliable Geographical Forwarding in Cognitive Radio Sensor Networks Using Virtual Clusters*. Sensors, 2014. **14**(5): p. 8996.
107. Saleem, Y., et al., *SMART: A Spectrum-Aware ClusteR-based rouTing scheme for distributed cognitive radio networks*. Computer Networks, 2015. **91**: p. 196-224.
108. Dutta, N., H.K.D. Sarma, and Z. Polkowski, *Cluster based routing in cognitive radio adhoc networks: Reconnoitering SINR and ETT impact on clustering*. Computer Communications, 2018. **115**: p. 10-20.
109. Abbasi, S. and G. Mirjalily. *A cluster-based geographical routing protocol for multimedia cognitive radio sensor networks*. in *2017 7th IEEE International Conference on Electronics Information and Emergency Communication (ICEIEC)*. 2017.
110. Zhang, H., et al. *Distributed Spectrum-Aware Clustering in Cognitive Radio Sensor Networks*. in *2011 IEEE Global Telecommunications Conference - GLOBECOM 2011*. 2011.
111. Ozger, M. and O.B. Akan. *Event-driven spectrum-aware clustering in cognitive radio sensor networks*. in *INFOCOM, 2013 Proceedings IEEE*. 2013.
112. Ozger, M., E. Fadel, and O.B. Akan, *Event-to-Sink Spectrum-Aware Clustering in Mobile Cognitive Radio Sensor Networks*. IEEE Transactions on Mobile Computing, 2016. **15**(9): p. 2221-2233.

113. Pei, E., et al., *LEAUCH: low-energy adaptive uneven clustering hierarchy for cognitive radio sensor network*. EURASIP Journal on Wireless Communications and Networking, 2015. **2015**(1): p. 122.
114. Helal, E., A. Khattab, and Y.A. Fahmy. *Energy-efficient cluster head selection for cognitive radio sensor networks*. in *2016 28th International Conference on Microelectronics (ICM)*. 2016.
115. Srividhya, V. and T. Shankar, *Energy proficient clustering technique for lifetime enhancement of cognitive radio-based heterogeneous wireless sensor network*. International Journal of Distributed Sensor Networks, 2018. **14**(3): p. 1550147718767598.
116. Takyu, O., et al., *Optimal cluster head selection and rotation of cognitive wireless sensor networks for simultaneous data gathering and long life system*. International Journal of Distributed Sensor Networks, 2017. **13**(12): p. 1550147717747859.
117. ul Hasan, N., et al., *GSM: gateway selection mechanism for strengthening inter-cluster coordination in cognitive radio ad hoc networks*. EURASIP Journal on Wireless Communications and Networking, 2013. **2013**(1): p. 171.
118. Zhang, J., et al. *Robust clustering for cognitive radio ad hoc networks with group mobility*. in *2015 IEEE/CIC International Conference on Communications in China (ICCC)*. 2015.
119. Chen, K.-C. and R. Prasad, *Cognitive Radio Networks*, in *Cognitive Radio Networks*. 2009, John Wiley & Sons, Ltd. p. 145-181.
120. Xu, G., et al. *An Energy-Driven Adaptive Cluster-Head Rotation Algorithm for Cognitive Radio Network*. in *2010 First International Conference on Pervasive Computing, Signal Processing and Applications*. 2010.

121. Cabric, D., S.M. Mishra, and R.W. Brodersen. *Implementation issues in spectrum sensing for cognitive radios*. in *Conference Record of the Thirty-Eighth Asilomar Conference on Signals, Systems and Computers, 2004*. 2004.
122. Bahl, P., et al., *White space networking with wi-fi like connectivity*. SIGCOMM Comput. Commun. Rev., 2009. **39**(4): p. 27-38.
123. Basagni, S. *Distributed clustering for ad hoc networks*. in *Parallel Architectures, Algorithms, and Networks, 1999. (I-SPAN '99) Proceedings. Fourth International Symposium on*. 1999.
124. Saleem, Y., et al., *Clustering and Reinforcement-Learning-Based Routing for Cognitive Radio Networks*. IEEE Wireless Communications, 2017. **24**(4): p. 146-151.
125. Di, L., F. Erwin, and G. James, *Robust clustering for ad hoc cognitive radio network*. Transactions on Emerging Telecommunications Technologies, 2018. **29**(5): p. e3285.
126. Cacciapuoti, A.S., I.F. Akyildiz, and L. Paura. *Primary-user mobility impact on spectrum sensing in Cognitive Radio networks*. in *2011 IEEE 22nd International Symposium on Personal, Indoor and Mobile Radio Communications*. 2011.
127. Cacciapuoti, A.S., et al., *Channel availability for mobile cognitive radio networks*. Journal of Network and Computer Applications, 2015. **47**: p. 131-136.
128. Tse, D. and P. Viswanath, *Fundamentals of Wireless Communication*. Cambridge University Press, 2005.
129. Asterjadhi, A., *Network Coding for Cognitive Radio Networks*. 2011, Information Engineering department, Faculty of Engineering, University of Padua.

130. Akbari Torkestani, J. and M.R. Meybodi, *A Learning Automata-Based Cognitive Radio for Clustered Wireless Ad-Hoc Networks*. Journal of Network and Systems Management, 2011. **19**(2): p. 278-297.
131. Akbari Torkestani, J. and M.R. Meybodi, *An efficient cluster-based CDMA/TDMA scheme for wireless mobile ad-hoc networks: A learning automata approach*. Journal of Network and Computer Applications, 2010. **33**(4): p. 477-490.
132. Wu, C.-M., *Hybrid Dynamic Channel Assignment in Clustered Wireless Multihop CDMA/TDMA Ad Hoc Networks*. Wireless Personal Communications, 2007. **42**(1): p. 85-105.
133. Agrawal, D.P. and Q.A. Zeng, *Introduction to Wireless and Mobile Systems*. Cengage Learning, 2011.
134. Yu, G.-J. and C.-Y. Chang, *An efficient cluster-based multi-channel management protocol for wireless Ad Hoc networks*. Computer Communications, 2007. **30**(8): p. 1742-1753.
135. Gini, C., *Measurement of Inequality of Incomes*. The Economic Journal, 1921. **31**(121): p. 124-126.
136. Spyropoulos, A. and C.S. Raghavendra. *Energy efficient communications in ad hoc networks using directional antennas*. in *Proceedings. Twenty-First Annual Joint Conference of the IEEE Computer and Communications Societies*. 2002.
137. Heinzelman, W.R., A. Chandrakasan, and H. Balakrishnan. *Energy-efficient communication protocol for wireless microsensor networks*. in *Proceedings of the 33rd Annual Hawaii International Conference on System Sciences*. 2000.
138. Lindsey, S. and C.S. Raghavendra. *Energy efficient broadcasting for situation awareness in ad hoc networks*. in *International Conference on Parallel Processing, 2001*. 2001.

139. Yau, K.-L.A., et al., *Clustering algorithms for Cognitive Radio networks: A survey*. Journal of Network and Computer Applications, 2014. **45**(Supplement C): p. 79-95.
140. Bettstetter, C., *On the Connectivity of Ad Hoc Networks*. The Computer Journal, 2004. **47**(4): p. 432-447.
141. Pfeiffer, P.E., *Concepts of probability theory*. Courier Dover Publications, 1978.
142. Nejatian, S., et al., *Proactive integrated handoff management in cognitive radio mobile ad hoc networks*. EURASIP Journal on Wireless Communications and Networking, 2013. **2013**(1): p. 224.
143. Ting-Chao, H. and L. Victor, *Transmission Range Control in Multihop Packet Radio Networks*. IEEE Transactions on Communications, 1986. **34**(1): p. 38-44.