

SPECTRALLY EFFICIENT AND LOW COST TIME AND WAVELENGTH  
DIVISION MULTIPLEXED PASSIVE OPTICAL NETWORK SYSTEMS

SALEM MOHAMMED SALEM BINDHAIQ

UNIVERSITI TEKNOLOGI MALAYSIA

SPECTRALLY EFFICIENT AND LOW COST TIME AND WAVELENGTH  
DIVISION MULTIPLEXED PASSIVE OPTICAL NETWORK SYSTEMS

SALEM MOHAMMED SALEM BINDHAIQ

A thesis submitted in fulfilment of the  
requirements for the award of the degree of  
Doctor of Philosophy (Electrical Engineering)

Faculty of Electrical Engineering  
Universiti Teknologi Malaysia

APRIL 2018

I dedicate this dissertation  
*To my parents and family....*

## ACKNOWLEDGEMENT

My PhD journey is a challenging, enjoyable, and has a lot of inspiration that pushed me to learn, grow in order to set my sights high. I would like to express my heartfelt gratitude for all the people who accompanied me to reach this point.

I would like to thank my supervisors, Prof. Ir. Dr. Abu Sahmah Mohd Supa'at and Dr. Nadiatulhuda Binti Zulkifli who had spent a lot of time in helping, guidance and supporting me in this journey. They have been great sources of inspiration for me and I am so lucky to have such great supervisors. I am deeply touched for their remarkable thoughtfulness and kindness to me on my PhD research works.

Moreover, several individuals played key roles in my PhD journey, I am deeply indebted and thankful to Dr. Ning Cheng (R&D Huawei, USA), Dr. Lawrence R. Chen (McGill University, Canada), Dr. Ioannis Tomkos (Athens Information Technology Center (AIT), Greece), Dr. Hoon Kim and Dr. Yung. C. Chung (KAIST Center, South Korea) for their suggestions, precious time, support and kindness to me on my PhD research work. Finally, no word can express the support from my beloved parents for their support and encouragement during my work on this research. My sincere thanks go to all, who have directly or indirectly helped me in completing my PhD journey.

## ABSTRACT

The next-generation passive optical network stage 2 (NG-PON2) intends to support stacking 10 Gb/s wavelengths and maintaining the compatibility with the deployed legacy passive optical network (PON) systems. Essentially, Time and Wavelength Division Multiplexed-PON (TWDM-PON) is the best solution for NG-PON2 that aims to support a symmetric 40 Gb/s data rate transmission, a split ratio of 1:64 and a distance up to 60 km. Unfortunately, most of the existing low cost and practical TWDM-PON solutions are still incapable to support remote users and inefficient for spectral bandwidth in higher services. Typically, low cost transceivers are avoided as they suffer from significant frequency chirp that seriously impact its transmission performance at the bit rate above 10 Gb/s. Therefore, the objectives of this thesis are to improve the current TWDM-PON power budget in supporting more access services reaching the remote customers to enhance the bandwidth capacity at lower cost and to reduce the complexity implementation problem. This is achieved by overcoming the significant frequency chirp of the low cost transceivers used such as reflective semiconductor optical amplifier (RSOA) and directly modulated lasers (DMLs), which are suitable for high data rate transmission. The RSOA chirp is mitigated using a single bi-pass delay interferometer (DI) at the optical line terminal (OLT) while the DML chirp is managed by ensuring its resulting current is in phase with the bandwidth enhancement factor,  $\alpha$ , at both optical network unit (ONU) and OLT. Apart from that, DML equipped with dispersion compensation fiber (DCF) technique for power budget improvement is also proposed. Furthermore, low cost schemes for even higher data rate TWDM-PON up to 56 Gb/s is proposed utilizing highly spectral efficient 16-quadrature amplitude modulation (16-QAM). The results are obtained from physical layer simulation, Optisystem<sup>Trademark</sup> and Matlab<sup>Trademark</sup>, where relevant significant parts are verified through theoretical analysis. The simulation results demonstrate a sufficient dispersion compensation with a record of 56.6 dB power budget for DML-based TWDM-PON transmission system. While results are not absolute due to variations that can occur in practical implementation, analysis demonstrates the feasibility of the proposed methods.

## ABSTRAK

Generasi seterusnya rangkaian pasif optik peringkat kedua (NG-PON2) berhasrat untuk menyokong panjang gelombang tindaan 10 Gb/s dan mengekalkan keserasian dengan sistem rangkaian pasif optik (PON) sedia ada. Pada asasnya, pemultipleksan masa dan panjang gelombang PON (TWDM-PON) adalah penyelesaian terbaik NG-PON2 bertujuan untuk menyokong penghantaran data 40 Gb/s secara simetri, nisbah pecahan 1:64 dan jarak capaian sehingga 60 km. Malangnya, kebanyakan penyelesaian TWDM-PON berkos rendah dan praktikal masih tidak mampu untuk menyokong pengguna terpencil dan penggunaan jalur lebar spektrum yang tidak cekap bagi perkhidmatan lebih tinggi. Biasanya, penghantar-penerima berkos rendah dielakkan kerana isu '*frequency chirp*' yang serius dan sangat mempengaruhi prestasi penghantarannya pada kadar lebih tinggi daripada 10 Gb/s. Justeru itu, objektif-objektif tesis ini adalah untuk meningkatkan peruntukan kuasa TWDM-PON semasa bagi menyokong lebih capaian perkhidmatan bagi pelanggan terpencil, meningkatkan kapasiti jalur lebar dengan kos lebih rendah dan pengurangan masalah kerumitan perlaksanaan. Ini dicapai dengan mengatasi isu '*frequency chirp*' yang signifikan bagi penghantar-penerima hulu berkos rendah seperti penguat reflektif semikonduktor optik (RSOA) dan laser termodulat secara langsung (DMLs) untuk penghantaran kadar data yang tinggi. '*Chirp*' RSOA diatasi menggunakan sebuah interferometer lengah (DI) dwi-lulus pada terminal talian optik (OLT) manakala '*Chirp*' DML diuruskan dengan memastikan fasa arusnya adalah sepadan dengan faktor pengembangan jalur lebar,  $\alpha$ , di kedua-dua unit rangkaian optik (ONU) dan OLT. Selain itu, DML yang dilengkapi dengan teknik fiber pampasan penyerakan (DCF) bagi peningkatan peruntukan kuasa juga dicadangkan. Tambahan pula, skim-skim berkos rendah untuk kadar data TWDM-PON yang lebih tinggi sehingga 56 Gb/s dicadangkan menggunakan spektrum berkecekapan tinggi 16-pemodulation amplitud kuadratur (16-QAM). Hasil keputusan diperolehi daripada simulasi lapisan fizikal, Optisystem<sup>Trademark</sup> dan Matlab<sup>Trademark</sup> dengan bahagian-bahagian penting yang berkaitan disahkan melalui analisis teori. Hasil keputusan simulasi menunjukkan pampasan penyerakan yang mencukupi dengan rekod 56.6 dB bughet kuasa untuk sistem penghantaran TWDM-PON berasaskan DML. Walaupun hasilnya tidak mutlak kerana variasi yang boleh berlaku dalam pelaksanaan secara praktikal, analisis kami menunjukkan kebolehlaksanaan kaedah-kaedah yang dicadangkan.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>ACKNOWLEDGEMENT</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	xii
	<b>LIST OF FIGURES</b>	xiii
	<b>LIST OF ABBREVIATIONS</b>	xvii
	<b>LIST OF SYMBOLS</b>	xx
	<b>LIST OF APPENDICES</b>	xxiii
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Background	1
	1.2 Motivation	5
	1.3 Problem statement	6
	1.4 Research objectives	7
	1.5 Research scope	8
	1.6 Research methodology	8
	1.6.1 DML Simulation	9
	1.6.2 RSOA Simulation	10
	1.6.3 TWDM-PON Simulation	11
	1.6.4 Theoretical approach	12
	1.7 Thesis contribution	13

1.8	Thesis organization	14
<b>2</b>	<b>NEXT GENERATION PASSIVE OPTICAL NETWORK SECOND STAGE (NG-PON2) AND TECHNOLOGIES</b>	<b>17</b>
2.1	Introduction	17
2.2	NG-PON2 System technologies	18
2.2.1	Time division multiplexed-PON (TDM-PON)	19
2.2.2	Wavelength division multiplexed-PON (WDM-PON)	19
2.2.3	Time and wavelength division multiplexed PON (TWDM-PON)	25
2.2.4	Orthogonal frequency division multiplexed PON (OFDM-PON)	25
2.2.5	Optical code division multiplexed-PON (OCDM-PON)	26
2.3	Time and wavelength division multiplexed passive optical network (TWDM-PON)	29
2.3.1	TWDM-PON remarkable feature	30
2.3.1.1	Data rate capability	30
2.3.1.2	Standard wavelength bands	31
2.3.1.3	Co-existence with legacy PON system capability	33
2.3.1.4	Bandwidth flexibility	33
2.3.1.5	Compatibility concept	34
2.3.1.6	Pay-as-you grow and local loop unbundling (LLU) application	34
2.3.1.7	ONU tunable transceivers	35
2.3.1.8	Agile of wavelength concept	36
2.4	Physical layer aspects of TWDM-PON system design	37
2.4.1	Raman nonlinearity	37
2.4.2	Chromatic dispersion	38
2.5	Related work on TWDM-PON architecture	39
2.5.1	TWDM-PON architecture based RSOA, VSCEL, MZM and EML transmission	40



	2.5.2	TWDM-PON architecture based on DML transmission	46
	2.6	Summary	51
<b>3</b>		<b>CAPACITY IMPROVEMENT OF TIME AND WAVELENGTH DIVISION MULTIPLEXED PASSIVE OPTICAL NETWORKS</b>	<b>52</b>
	3.1	Introduction	52
	3.2	DML simulation modelling and assumption	53
	3.2.1	DML transmitter theoretical approach	54
	3.2.2	DML characterization theoretical results	63
	3.3	Proposed efficient bandwidth and low cost TWDM- PON system	69
	3.4	Performance evaluation	73
	3.4.1	Four wavelength performance evaluation	74
	3.4.2	Single wavelength performance evaluation	77
	3.4.3	Power budget evaluation	78
	3.5	Feasibility of DML transmission	80
	3.5.1	$\alpha$ Parameter (bandwidth enhancement factor)	80
	3.5.2	$\alpha$ Parameter (bandwidth enhancement factor) versus extinction ratio	81
	3.5.3	Launched input power	82
	3.6	Proposed efficient TWDM-PON system benchmark	84
	3.7	Summary	85
<b>4</b>		<b>POWER BUDGET IMPROVEMENT OF TIME AND WAVELENGTH DIVISION MULTIPLEXED PASSIVE OPTICAL NETWORKS</b>	<b>86</b>
	4.1	Introduction	86
	4.2	Theoretical approach	87
	4.2.1	Determining DML with SMF theoretical behavior	88
	4.2.2	Determining theoretical power budget	93
	4.2.3	Determining net accumulated dispersion of SMF and DCF	96
	4.2.4	Determining bandwidth enhancement	100

	factor and receiver sensitivity	
4.3	Performance comparison between 10 Gb/s DML and EML transmitter	101
4.4	Proposed improved power budget TWDM-PON system	105
4.5	Performance evaluation	108
4.5.1	Four channel performance evaluation	109
4.5.2	Single channel performance evaluation	111
4.5.3	Power budget evaluation	114
4.6	Feasibility evaluation	116
4.6.1	Dispersion compensation	116
4.6.2	Bandwidth enhancement factor	118
4.6.3	Power budget with dispersion	120
4.7	Comparison with existing TWDM-PON schemes	122
4.8	Summary	123
<b>5</b>	<b>BANDWIDTH ENHANCEMENT OF RSOA BASED ON TIME AND WAVELENGTH DIVISION MULTIPLEXED PASSIVE OPTICAL NETWORKS</b>	<b>125</b>
5.1	Introduction	125
5.2	Theoretical approach	127
5.2.1	Determining RSOA chirp	127
5.2.2	Determining frequency response	130
5.2.1.1	RSOA frequency response	130
5.2.1.2	RSOA frequency response after DI	133
5.2.3	Determining free spectral range of DI	133
5.3	40 Gb/s TWDM-PON system architecture	134
5.3.1	Principles of RSOA DI transmission	134
5.3.2	Proposed TWDM-PON system architecture	138
5.4	Performance evaluation	142
5.4.1	Transmission performance	142
5.4.2	RSOA data rate evaluation	143
5.5	Feasibility evaluation	146

5.5.1	FSR of DI transmission feasibility	146
5.6	Comparison of our proposed scheme with existing TWDM-PON schemes	148
5.7	Summary	150
<b>6</b>	<b>CONCLUSIONS AND FUTURE DIRECTION</b>	<b>151</b>
6.1	Conclusion	151
6.2	Future direction	153
6.2.1	Enabling TWDM-PON with 128 Gb/s using FBG	153
6.2.2	Enabling TWDM-PON with wireless technology	154
6.2.3	Enabling protected TWDM-PON scheme	155
6.3	Future reconfigurable TWDM-PON system	155
6.3.1	Flexible TWDM-PON	156
6.3.1.1	Flexible transceivers	156
6.3.1.2	Flexible grid	157
6.3.1.3	Flexible optical switches	157
6.3.2	TWDM-PON energy management	157
6.3.2.1	TWDM-PON energy management	159
6.3.2.2	Energy efficient passive optical network (PON)	159
6.3.2.3	Sleep and doze operation	160
6.3.2.4	Wavelength reallocation	160
6.3.2.5	Dynamic bandwidth allocation(DBA)	161
6.3.2.6	Dynamic wavelength and bandwidth allocation (DWBA)	162
6.4	Space division multiplexing (SDM)-TWDM-PON2 system	162
	<b>REFERENCES</b>	<b>163</b>
	<b>APPENDIX A</b>	<b>177</b>

## LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	WDM-PON architecture variants comparison [2, 6, 9, 21, 36-40]	22
2.2	NG-PON2 variants comparison [28], [34], [21,40, 2,6,40,9, 41,42,43,44,45]	27
2.3	TWDM-PON data rate options per wavelength [2]	31
2.4	Tuning time options [2,28]	36
2.5	Summary of records on TWDM-PON architecture based on RSOA, VSCEL, MZM and EML (*NA: Not Available)	43
2.6	Summary of records on DMLTWDM-PON architecture (*NA: Not Available )	47
3.1	Proposed parameter values for DML[88]	63
3.2	System simulation parameters[80,92]	73
3.3	Power budget estimation	79
3.4	Comparison of capacity performance of TWDM-PON system	84
4.1	System simulation parameters [80]	107
4.2	Power budget estimation	115
4.3	Comparisons of power budget performance of TWDM-PON system	123
5.1	System simulation parameters [59,60]	140
5.2	Comparison of bandwidth RSOA performance based TWDM-PON system	149

## LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	PON Architecture	2
1.2	Trends of PONs standardization roadmap	4
1.3	Flow chart of DML simulation	9
1.4	Flow chart of RSOA simulation	10
1.5	Flow chart of TWDM-PON system simulation	11
1.6	Flow chart of theoretical approach	12
2.1	NG-PON2 technology	19
2.2	WDM-PON technology architecture variants	21
2.3	TWDM-PON system diagram	30
2.4	TWDM-PON standard wavelength bands	33
3.1	Optical spectra of DML with (a) $\kappa = 125 \times 10^{-5} \text{ HzW}^{-1}$ (b) $\kappa = 125 \times 10^{12} \text{ HzW}^{-1}$ . Theoretical waveforms for adiabatic chirp and power for DML 10 Gb/s signals when (c) $\kappa = 125 \times 10^{-5} \text{ HzW}^{-1}$ (d) $\kappa = 125 \times 10^{12} \text{ HzW}^{-1}$ using Eq. 3.33	65
3.2	(a) Theoretical relaxation oscillation frequency of the DML versus the square root of the bias current above threshold using Eq. 3.40 (b) Theoretical frequency responses of the DML using Eq. 3.41 (with assumed bias current of 75 mA)	66
3.3	Simulation setup of DML	67
3.4	Comparison of theoretical and simulated results for (a) frequency response (b) frequency chirp $\Delta F(t)$	68
3.5	TWDM-PON architecture, the inset (i) the spectra of the downstream channels, (ii) the spectra of the upstream channels, and (iii) the spectra of radio frequency 20 GHz	72
3.6	BER performances as a function of receiver sensitivity for (a) downstream signals, and (b) upstream signals	75

3.7	(a) Constellation diagrams of downstream signal at 1570.74nm (b) Constellation diagrams of downstream signals 1572.34nm (c) Eye diagram of I-branch for downstream signal at 1573.14nm (d) Eye diagram of Q-branch for downstream signal at 1573.14nm (e) Eye diagram of upstream signal at 1537.59 nm	76
3.8	BER performances as a function of received power of BTB and 40 km transmission (a) downstream signals and (b) upstream signals	78
3.9	Received power as a function of BER performance with $\alpha$ parameter (bandwidth enhancement factor) variation	81
3.10	Received power as a function of $\alpha$ parameter (bandwidth enhancement factor) and extinction ratio variation	82
3.11	Average transmitted power of DML as a function of BER performance	83
4.1	Theoretical frequency responses of DML after SMF distances of 20, 50, 100, and 140 km using Eq. 4.2	89
4.2	The simulated setup of DML characterization	90
4.3	The simulated frequency responses of SSMF in a DML system in comparison with the theoretically calculated curves by using Eq. 4.2	91
4.4	Frequency response of the SMF induced by adiabatic and transient chirp after 140 km long transmission	92
4.5	The theoretical power budget of TWDM-PON system using Eq. 4.5	95
4.6	Simulation setup of power budget	95
4.7	Comparison of simulated and theoretical power budget	96
4.8	The theoretical dispersion with SMF distances variation under 13 km DCF using Eq. 4.14	98
4.9	Simulation setup of SMF and DCF	99
4.10	Comparison of the simulated and theoretical results of SMF and DCF dispersion	99
4.11	The theoretical bandwidth enhancement factor as a function of theoretical receiver sensitivity using Eq. 4.6	100
4.12	Comparison of simulated and theoretical results of bandwidth enhancement factor and receiver sensitivity	101
4.13	Schematic of the performance comparison of DML and EML based DCF	101
4.14	Performance comparison of DML and EML based DCF at (a) ER=8 dB and (b) ER= 10 dB	103
4.15	Proposed improved power budget TWDM-PON system, the inset (i) the spectra of the downstream channels, (ii)	

	the spectra of the upstream channels	106
4.16	BER performance curves as a function of the received power for (a) downstream and (b) upstream signals using DCF at OLT side	110
4.17	BER performance curves as a function of the received power for (a) downstream signal at 1597.74 nm and (b) upstream signal at 1544.11 nm	112
4.18	Sensitivities as a function of SMF transmission distance for (a) downstream signal at 1597.74 nm and (b) upstream signal at 1544.11 nm	113
4.19	Dispersion as a function of SMF distance under different DCF length for (a) downstream link and (b) upstream link	117
4.20	BER performance as a function of received power under different bandwidth enhancement factor ( $\alpha$ ) values	119
4.21	Power budget as a function of SMF distance under varied DCF lengths for (a) downstream link and (b) upstream link	121
5.1	Chirp and output power of RSOA at normal condition from Eq. 5.3	128
5.2	Simulation setup of RSOA chirp	129
5.3	Comparison between theoretical and simulated chirp of RSOA at normal condition	129
5.4	The theoretical and simulated frequency response for RSOA at normal condition with assumed bias current below the threshold current	131
5.5	Simulation setup of RSOA frequency response after DI	132
5.6	The theoretical and simulated frequency response for RSOA after DI with FSR of 40 GHz	132
5.7	Simulation setup of FSR and receiver sensitivity	133
5.8	The theoretical and simulated FSR of DI as a function of receiver sensitivity using Eq. 5.6 and 4.6	134
5.9	The DI diagram	135
5.10	(a) Downstream transmission DI curves (b) upstream transmission DI curves (c) DI phase at $180^\circ$ as HPF (d) frequency offset for input DI signal and output DI signal (e) DI phase at $90^\circ$ as LPF (f) and (g) are the captured waveforms after 40 km SMF transmission without and with DI	138
5.11	Proposed TWDM-PON system, the inset (i) the spectra of the downstream channels, and (ii) the spectra of the upstream channels	139
5.12	BER curves as a function of power received for (a) RSOA	

	DI downstream signals	143
5.13	(a) BER curves as a function of power received for (a) RSOA DI downstream signals and (b) RSOA DI upstream signals at bit rates of 5, 7, and 10 Gb/s	144
5.14	Optical eye diagrams for (a) 10 Gb/s after RSOA signal without DI (b) 10 Gb/s RSOA signal with the DI (c) after the upstream laser and (d) Q Factor for 10 Gb/s RSOA with DI	145
5.15	SMF distance as a function of the received power for different DI-FSR values for (a) downstream link and (b) upstream link	147



**LIST OF ABBREVIATIONS**

ASE	-	Amplified Spontaneous Emission
AWR	-	Arrayed Waveguide Router
APD	-	Avalanche Photodiode
AWG	-	Arrayed Waveguide Grating
A/D	-	Analog to Digital
BER	-	Bit Error Rate
BPF	-	Band Pass Filter
BTB	-	Back to Back
CDR	-	Data Recovery
DP-MZM	-	Dual Parallel Mach Zehnder Modulator
DI	-	Delay Interferometer
DCF	-	Dispersion Compensation Fiber
DML	-	Directly Modulated Laser
DAM	-	Dual-Arm Modulator
Dmux	-	Demultiplexer
DSP	-	Digital Signal Processing
D/A	-	Digital To Analog
DFB-LD	-	Distributed Feedback Laser Diode
DSB	-	Double Side Band
EML	-	Electro-absorption Modulated Laser
EDFA	-	Erbium Doped Fiber Amplifier
EDC	-	Electronic Dispersion Compensation
FSAN	-	Full-Service Access Network
FTTx	-	Fiber-To-The-x

FTTH	-	Fiber-To-The-Home
FTTC	-	Fiber-To-The-Curb
FTTB	-	Fiber-To-The-Building
FP-LD	-	Fabry Perot-Laser Diode
FSR	-	Free Spectrum Range
FEC	-	Forward Error Correction
GPON	-	Gigabit Passive Optical Network
GEPON	-	Gigabit Ethernet Passive Optical Network
Gb/s	-	Gigabit/second
HD	-	High Definition
ICT	-	Information and Communication Technology
ITU-T	-	International Telecommunication Union- Telecommunications
IEEE	-	Institute of Electrical and Electronics Engineers
LLU	-	Local Loop Unbundling
Mb/s	-	Megabit/second
Mux	-	Multiplexer
MAI	-	Multiple Access Interference
NG	-	Next Generation
NRZ	-	Non-Return-To-Zero
OLT	-	Optical Line Terminal
ONU	-	Optical Network Unit
ODN	-	Optical Distribution Network
OSA	-	Optical Spectrum Analyzer
OOK	-	On-Off-Keying
OPEX	-	Operational Expenditure
OFDM-PON	-	Orthogonal Frequency Division Multiplexing-Passive Optical Network
OCDM-PON	-	Optical Code Division Multiplexing-Passive Optical Network
OCS	-	Optical Carrier Suppression
P2MP	-	Physical Point-To-Multi-Point
PON	-	Passive Optical Network

PRBS	-	Pseudorandom Binary Sequence
PIN	-	Positive Intrinsic Negative
QAM	-	Quadrature Amplitude Modulation
RN	-	Remote Node
RSOA	-	Reflective Semiconductor Optical Amplifier
RoF	-	Radio over Fiber
RX	-	Receiver
RF	-	Radio Frequency
SNI	-	Service Node Interface
SMF	-	Single Mode Fiber
SSB	-	Single Sideband
SOA	-	Semiconductor Optical Amplifier
SBS	-	Stimulated Brillouin Scattering
SPM	-	Self-Phase Modulation
TDMA	-	Time Division Multiplexing Access
TDM-PON	-	Time Division Multiplexing- Passive Optical Network
TECL	-	Tunable External Cavity Laser
TOF	-	Tunable Optical Filter
TX	-	Transmitter
TFF	-	Thin-Film Filter
TWDM- PON	-	Time and Wavelength Division Multiplexed-Passive Optical Network
TIA	-	Trans-impedance Amplifier
UNI	-	User Network Interface
VCSEL	-	Vertical Cavity Surface Emitting Laser
WDM-PON	-	Wavelength Division Multiplexing- Passive Optical Network
WBF	-	Wavelength Blocking Filter

## LIST OF SYMBOLS

$E_{in}(t)$	-	DML Complex Output
$\omega_o$	-	Angular Frequency of DML Optical Source
$I_{in}(t)$	-	Intensity Modulation Signal
$P_o$	-	DML Output Power at a Certain Time
$m_{IM}$	-	Intensity Modulation Index
$\omega$	-	Angular Modulation Frequency
$\varphi_{IM}$	-	Phase Associated with the Intensity Modulation
$P_{in}(t)$	-	Output Power to Intensity Modulation Signal $I_{in}(t)$
$A_o$	-	Mean Amplitude of the Signal
$m_{AM}$	-	Amplitude Modulation Index
$\Phi_{in}(t)$	-	Phase Modulation
$m_{PM}$	-	Phase Modulation Index
$\varphi_{PM}$	-	The initial Phase Associated to $\Phi_{in}(t)$ .
$N(t)$	-	DML Carrier Density
$S(t)$	-	DML Photon Density
$\Xi$	-	Confinement Factor
$N_o$	-	Carrier Density at Transparency
$\tau_p$	-	photon lifetimes
$\tau_e$	-	electron lifetimes
$r_{sp}$	-	Fraction of Spontaneous Emission
$q$	-	Electron Charge
$V$	-	Active Layer Volume
$\varepsilon$	-	Gain Compression
$\gamma_o$	-	Differential Quantum Efficiency
$g_o$	-	Gain Slope Constant
$R_{sp}$	-	Carrier Recombination Rate

$A$	-	Non-radiative Recombination Rate
$B$	-	Radiative Recombination Coefficient
$C$	-	Auger Recombination Coefficient
$v_g$	-	Group Velocity
$a_o$	-	Active Layer Gain Coefficient
$I_{th}$	-	Construction Industry Directory
$N_{th}$	-	Decision Support System
$\phi$	-	Multiple Criteria Decision Making
$\Delta F(t)$	-	Common building Structural Systems
$\alpha$	-	Bandwidth Enhancement Factor
$\kappa$	-	Adiabatic Chirp Coefficient
$h\nu$	-	photon energy
$P(t)$	-	DML output power
$t_s$	-	Turn on Delay
$N_{initi}$	-	Initial Carrier Density
$I$	-	Total Injection Current
$I_{initi}$	-	threshold current
$I_{th}$	-	Threshold Current
$I_b$	-	Bias Current
$I_m$	-	Modulation Current
$\Delta B_{3-dBDML}$	-	3-dB Bandwidth of DML
$G$	-	DML damping Rate Ratio of the Gain
$f_r$	-	Relaxation oscillation frequency
$H_\omega(\omega)$	-	Amplitude Frequency Response
$\omega_r$	-	Angular Modulation of Relaxation Oscillation Frequency
$i$	-	Common building Structural Systems
$EVM$	-	Common building Structural Systems
$X_{tx,n}$	-	transmitted symbol of the constellation associated with the $n_{th}$ symbol
$X_{rx,n}$	-	received symbol associated with $X_{tx,n}$
$M$	-	Symbols for the in-phase quadrature constellation
$X_{tx,max}$	-	Field Vector of the outermost constellation point
$X_{tx,y}$	-	Ideal Transmitted Field Vector

<i>f</i>	-	Modulation Frequency
<i>n</i>	-	Modulation Format

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	List of Publications	177

## **CHAPTER 1**

### **INTRODUCTION**


#### **1.1 Background**

The incessant growth of converged broadband access network service and the increasing demands for multimedia applications have led to a notable and sustained development and adaptation in information and communication technology (ICT). For instance, multimedia applications such as video on demand (3D video and super HD), cloud computing, social network, peer to peer file sharing and online gaming are the main bandwidth driver's in future broadband convergence services [1-3]. Hence, the incessant rise of bandwidth demand in broadband access networks in both industry and academia is a challenge that requires intensive innovations to be satisfactorily met.

This demand for bandwidth, to some-extent, can be met by moving the optical fiber deeper to the access network segment towards the subscribers and new applications demanding deeper fiber architectures such as mobile backhaul/front-haul backhauling wireless networks [4]. For access segment and in view of supporting this demand, networks such as Fiber-To-The-x(FTTx) have been increasingly deployed in various parts of the world. There are different types of FTTx networks such as FTTH (home), FTTC (curb) and FTTB (building) that offer direct fiber connection to or close to the home [5, 6]. Since FTTx network implementations are based on a physical point-to-multi-point (P2MP) topology, it is



a favorable solution that FTTx is implemented based on passive optical networks (PONs) technology. To be more economically viable by offering high bandwidth to subscribers and to gain low energy consumption per bit based on PONs access technologies, efforts are being made to overcome the hurdles of the pending common carriers such as bandwidth scarcity, capacity and cost efficient implementations. The PON technology has a P2MP topology with no active elements in the signal's path which connects optical line terminal (OLT) with several optical network units (ONUs) at the customer sites through one or more 1: N optical splitter based optical distribution network (ODN) [7, 8]. Figure 1.1 shows a general architecture of PON.

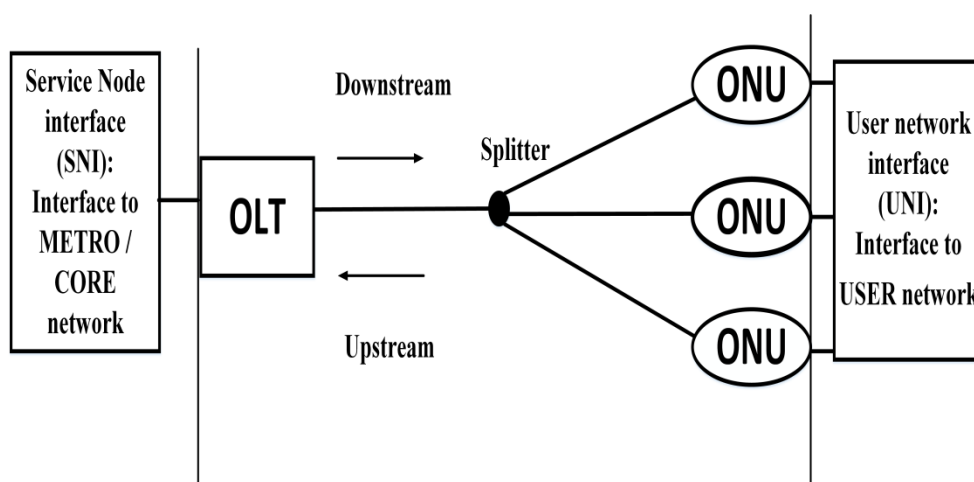

**Figure 1.1** PON Architecture.


In order to provide broadband access services, different cost effective implementations of pertinent types of PON technologies have been standardized. The most common PON technologies are Gigabit PON (GPON) and Gigabit Ethernet PON (GE-PON) standards. GPON is mainly deployed in North America and Europe while the deployment of GE-PON is more common in East Asia. GPON standard was commercially specified based on ITU-T G.984 while GE-PON was standardized by IEEE working group 802.3ah [9]. The state of the art of PON technologies are based on time division multiplexing (TDM)/time division multiplexing access (TDMA) transmission mechanisms. The data rate capability of GPON standard is 2.5 Gb/s for the downstream transmission direction and 1.25 for the upstream transmission direction. As for GE-PON, the data rate capability is 1.25 Gb/s for the downstream and upstream directions. However, the bandwidth spectrum is shared by

all subscribers in the system where a subscriber can only get access to several Mb/s [9-11].

In spite of the progress that has been made by GPON and GE-PON, the passive splitter loss based on ODN presents a hurdle to support higher user data rate, an increased number of users and longer reach. At the same time, emerging applications such as Ultra HD videos will continue to push bandwidth demands further. However, multimedia applications continue to proliferate where the current PON bandwidth scarcity is unable to meet demands for new applications of broadband converged services. Hence, it presents a challenge for the current PON systems to keep pace with the ever increasing demands for higher bandwidth and the migration of legacy PON systems for future converged services. This represents an inadequate contribution that warrants meeting new future broadband access network requirements [12]. Therefore, network operators decided that next-generation-PONs (NG-PONs) deployment was obliged to satisfy the following requirements: (1) larger split ratio, (2) greater maximum reach than the current GE-PON/GPON architectures, (3) support higher bandwidth for business, residential, and back hauling services, (4) support backward compatibility, (5) allow coexistence with the current PONs systems, and (6) lower cost implementation [13,14]. As a result, the first stage of next-generation called NG-PON1 or 10 Gb/s PON systems was standardized with two bodies of NG-PON1 defined by both IEEE and ITU-T. In view of adhering to future bandwidth growth over existing ODNs after GPON and GE-PON, trials of 10 Gb/s solution (in both downstream and upstream directions), namely IEEE Std. 802.3av 10 GE-PON and ITU-T XG-PONs, were defined by IEEE and the ITU-T with FSAN group [14-16].

Even though the NG-PON1 (10 Gb/s systems) brought good effort and progressive upgrades have been made for optical access network, it is still not sufficient to meet the requirements of new broadband optical access network. In addition, network operators continue to see extraordinary growth of traffic carried over their networks for more services accommodation. Trials beyond 10 Gb/s classes systems must fulfill major requirements for new broadband access network. These requirements are; (1) simultaneous support of legacy, new and mobile backhaul

services, (2) maximum reuse of existing ODN and achievement of minimum service interruption to the subscribers that do not migrate, (3) flexibility, reliability, efficiency and scalability in both bandwidth and power consumption, (4) larger split ratio and reach than the previously deployed 10 Gb/s systems, and (5) cost effective implementation, (6) higher performance transmission, (7) resiliency and (8) security optimization [17]. In order to keep pace with the above needs of new and future broadband access network, the second stage passive optical network (NG-PON2) beyond 10 Gb/s was initiated in 2010 [17,18]. The physical media dependent (PMD) layer recommendation (ITU-T G.989.2) was conducted by members of the FSAN and ITU-T Study Group 15, Question 2 groups. NG-PON2 architecture standard is aimed to support 40 Gb/s as a multiple wavelength bidirectional system and compatible with power split ODN with a concern of high priority for industry application [18-20]. There are several access technologies that can potentially satisfy the above criteria which can be grouped into beyond 10 Gb/s trials. Such technologies include 40 Gb/s TDM-PON, wavelength division multiplexing PON (WDM-PON), time and wavelength division multiplexing-PON (TWDM-PON), orthogonal frequency division multiplexed PON (OFDM-PON) and optical code division multiplexed-PON (OCDM-PON) [21-23]. Figure 1.2 shows the trends on PON standardization roadmap based on technological deployment.

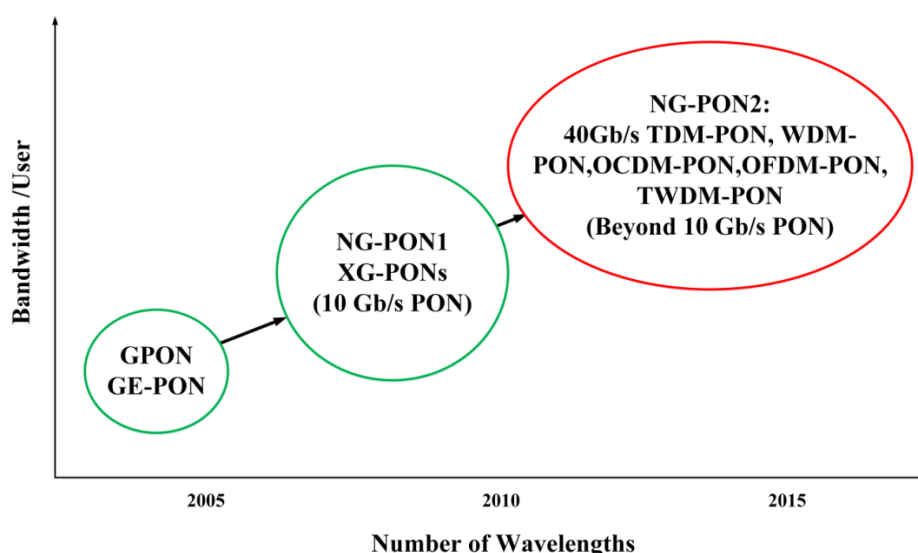

**Figure 1.2** Trends of PONs standardization roadmap

After intensive studies of the above beyond 10 Gb/s PON technologies, TWDM-PON was selected to be a pragmatic solution in both industry and academia aspects for NG-PON2 by FSAN group of telecomm companies members. The rest of the NG-PON2 or beyond 10 Gb/s PON technologies, such as WDM-PON and OFDM-PON, are believed to be less suitable due to high immaturity, high cost sensitivity and no adherence to the ODN backward compatibility [23, 24]. The TWDM-PON system is identified in FSAN as their best opportunity to support 40 Gb/s via stack multiple wavelengths and appears to be compatible with power split ODN that meets the NG-PON2 requirements. It also satisfies the requirements of operational expenditure (OPEX) involved in running their networks and this drives an aim to keep inventory to a minimum [25]. TWDM-PON system is also highly mature to be scalable, flexible, reliable and efficient in both bandwidth and power consumption [26, 27].

## 1.2 Motivation

The tremendous contribution and expansion of the deployable standard access networks and systems is still in progress. This is simply due to the continuous increase of bandwidth demand powered by industry and academia innovation. In response to that, the full service access network (FSAN) group has been using the roadmap shown in Figure.1.2 to guide the development of passive optical networking (PON) standards beyond GPON (gigabit PON). The FSAN roadmap shows two generations of PON beyond GPON: so-called the next-generation PON (NG-PON) 1 and 2, respectively. Although this roadmap figure is fairly simple, it conveys several key guiding principles that have served to steer the development of ITU-T PON standards and systems. The goal for practitioners and researchers of PON technologies is to enhance the capacity in a single fiber. It has been clear that the history tells us that a successful next-generation PON is one with increased capacity per user while maintaining low cost per user. Thus, the goal of the PON researcher is to come up with ideas that improve the performance with a clear low cost path. Good performance at low cost is preferable to great performance at high cost.

The recent trend of PON technologies is TWDM-PON which has been nominated as the current NG-PON2 technology. The TWDM-PON supports 40 Gb/s data transmission through four XG-PONs that are stacked using four pairs of wavelengths. For simpler network deployment and inventory management purposes, the ONUs aimed to use colorless tunable transmitters and receivers. Ideally, the transmitter is tunable to any of the upstream wavelengths while the receiver can tune to any of the downstream ones. In order to achieve a power budget, optical amplifiers are employed at the OLT side to boost the downstream signals as well as to pre-amplify the upstream signals. ODN remains passive since both the optical amplifier and WDM Mux/DeMux are placed at the OLT side.

While most of TWDM-PON components are commercially available, it is interesting for technology planners or system operators (researchers or practitioners) to overcome the hurdles of TWDM-PON system such as bandwidth scarcity, capacity and cost effective implementations. Most of the existing works, based on performance evaluation of the TWDM-PON, are concerned with physical layer aspects. In this thesis, several key enabling technologies to improve the state of art of TWDM-PON system has been explored and presented. The advantages of the pure TWDM-PON system are its ability to facilitate symmetric applications and its flexibility in future scaling of bandwidth, power budget, cost implementation. Therefore, the technical choices and challenges are analyzed in terms of bandwidth, power budget, data rate transmission, cost and feasibility.

### **1.3 Problem Statement**

The current challenge in a bidirectional TWDM-PON system specification based on fiber communication technology is that they are less efficient in terms of bandwidth and cost implementation. Most of the existing low cost and practical TWDM-PON solutions are still incapable to support remote users and to support efficient spectral bandwidth for higher services. For example, reflective semiconductor optical amplifier (RSOA) and direct modulated lasers (DMLs) have a

serious chirp issue that can degrade the transmission performance as the modulation bandwidth is limited by the carrier lifetime in the active layer and typically ranges between 2 to 3.5 GHz. Therefore, it is challenging to accommodate high speed data rate signals with this severely limited band device. Hence, optical equalization is required in this system to mitigate the distortions induced by chirp and compensate for signal deterioration. In addition and in contrast to existing improvement of power budget, there is still great demand for TWDM-PON access systems with improved link budgets that can offer services to more customers to more remote areas effectively. Here, high splitting ratio and long reach TWDM-PON system require investigation. More data rate transmission on TWDM-PON system requires more wavelengths that lead to increase cost and complexity. Thus, to cope with further increase capacity in an efficient manner, spectral efficient techniques are needed for a more scalable and efficient TWDM-PON system.

#### **1.4 Research Objectives**

The main objective of this thesis is to foster and propose solutions for TWDM-PON system that are efficient in terms of bandwidth and cost implementation. This can be achieved by the following sub-objectives.

- 1- To design and implement an efficient TWDM-PON system with high spectral techniques.
- 2- To improve the power budget of 40 Gb/s TWDM-PON system based DMLs through DCF dispersion compensation technique.
- 3- To enhance the bandwidth transmission of a low cost RSOA using delay interferometer (DI) for 40 Gb/s TWDM-PON system.

## 1.5 Research Scope

The scope of this research is covering work in the following aspects.

- TWDM-PON architecture and key enabling technologies for the state of the art of TWDM-PON for NG-PON2 technology.
- Key application of TWDM-PON architecture.
  - ✓ Optical line terminal (OLT): Non-return-to-zero-on-off-keying (NRZ-OOK) modulation format, 16 quadrature amplitude modulation (QAM) modulation format, Pseudorandom binary sequence (PRBS), absorption modulated laser (EML), directly modulated laser (DML), erbium-doped fiber amplifier (EDFA), delay interferometer (DI), semiconductor optical amplifier (SOA), optical spectrum analyzer (OSA), WDM multiplexer (Mux), WDM demultiplexer (DeMux), dispersion compensation fiber (DCF), circulators and avalanche photodiode (APD) receiver.
  - ✓ Optical distribution network (ODN): Single mode fiber (SMF), Splitter/Combiner device.
  - ✓ Optical network unit (ONU): Non-return-to-zero-on-off-keying (NRZ-OOK), pseudorandom binary sequence (PRBS), directly modulated laser (DML), semiconductor optical amplifier (SOA), optical spectrum analyzer (OSA), tunable optical filter (TOF) and Avalanche photodiode (APD) receiver.


## 1.6 Research Methodology

In order to achieve the objective of this research, the following method of work will be done into subsections of methods:

### 1.6.1 DML Simulation

In order to achieve the DML simulation of this research, the following method of work will be done as shown in Figure 1.3:

- A literature review on related topics such as state of the art of direct modulation laser (DML) and the characterization of the chirp of DML.
- Choose the suitable parameters of chirp for reasonable designed less chirped DML, such as bandwidth enhancement factor, adiabatic chirp and the bias current of DML.
- Simulation and analysis of DML based on the selected chirp reduction parameters.
- The performance evaluation of DML at 10 Gb/s transmission.
- Implement four stacked wavelength TWDM-PON system based on the enhanced DML performance transmission.

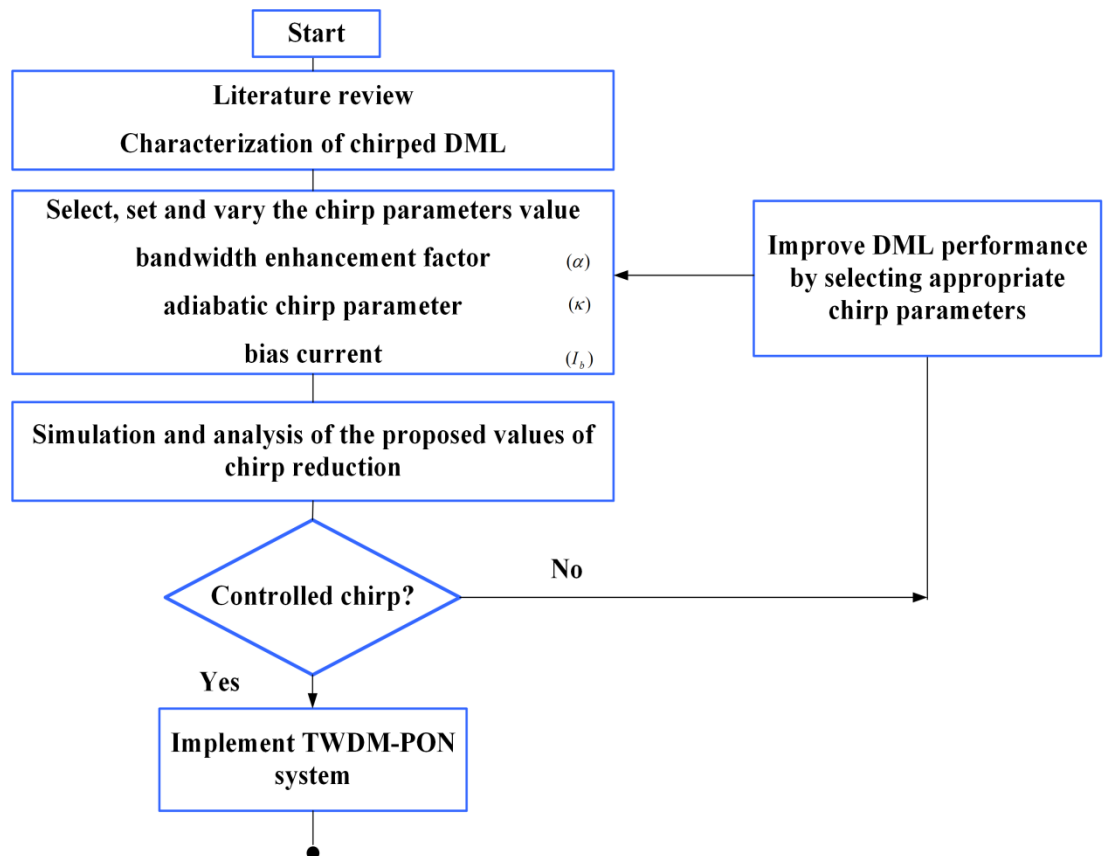


**Figure 1.3** Flow chart of DML simulation



## 1.6.2 RSOA Simulation

In order to achieve the RSOA simulation of this research, the following method of work will be done as illustrated in Figure 1.4:

- A literature review on related topics such as state of the art of direct modulation laser (DML) and the characterization of the chirp of DML.
- Choose the suitable parameters of chirp for a reasonable design of less chirped DML, such as bandwidth enhancement factor, adiabatic chirp and the bias current of DML.
- Simulation and analysis of DML based on the selected chirp reduction parameters.
- The performance evaluation of DML at 10 Gb/s transmission.
- Implement four stacked wavelength TWDM-PON system based on the enhanced DML performance transmission.

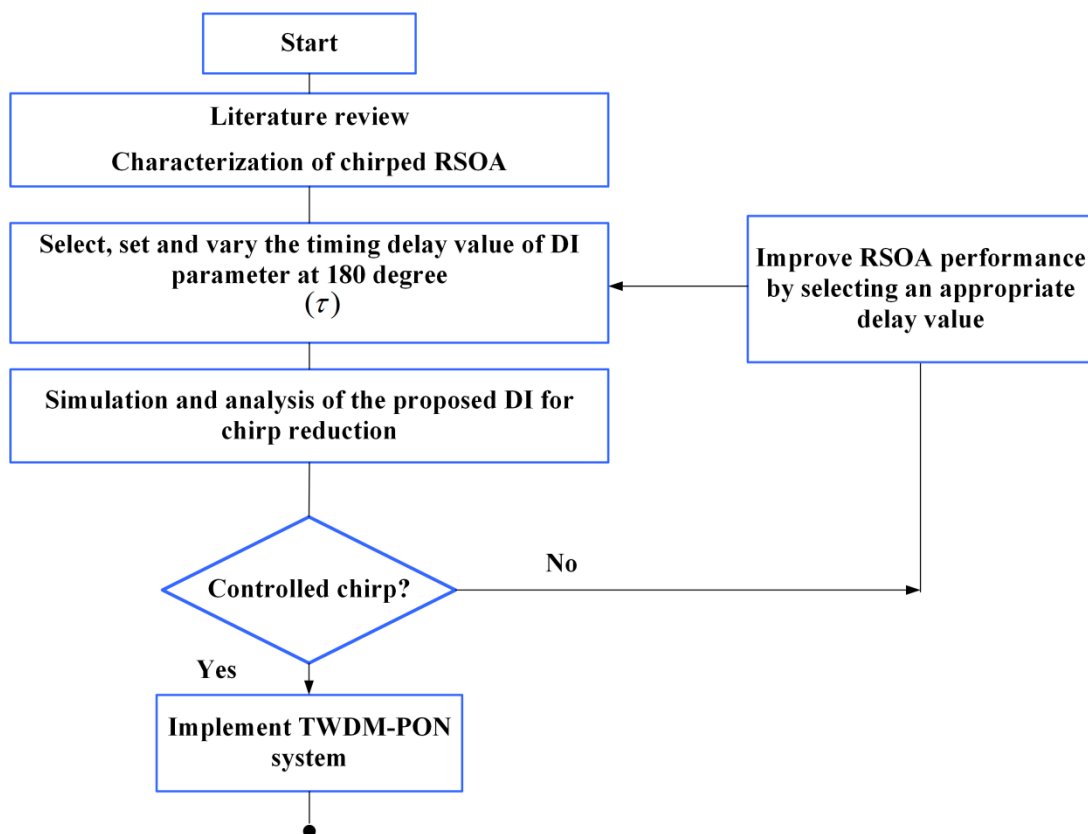


**Figure 1.4** Flow chart of RSOA simulation

### 1.6.3 TWDM-PON Simulation

In order to achieve TWDM-PON system simulation of this research, the following method of work will be done through the following steps as shown in Figure 1.5.

- A comprehensive review on related works of direct modulation laser (DML) based on TWDM-PON state of the art configuration system.
- Implement and design a 10 Gb/s DML TWDM-PON for improved capacity, power budget and bandwidth with different techniques such as 16 QAM, DCF and DI.
- Simulation and analysis of the proposed TWDM-PON.
- The performance evaluation of the proposed TWDM-PON transmission at bit error rate (BER) of  $10^{-5}$  and  $10^{-6}$  at optical transmission, electrical eye diagram and proposed schemes feasibility.
- The superiority of the new TWDM-PON system is verified by comparing its performance against related techniques used in literature.

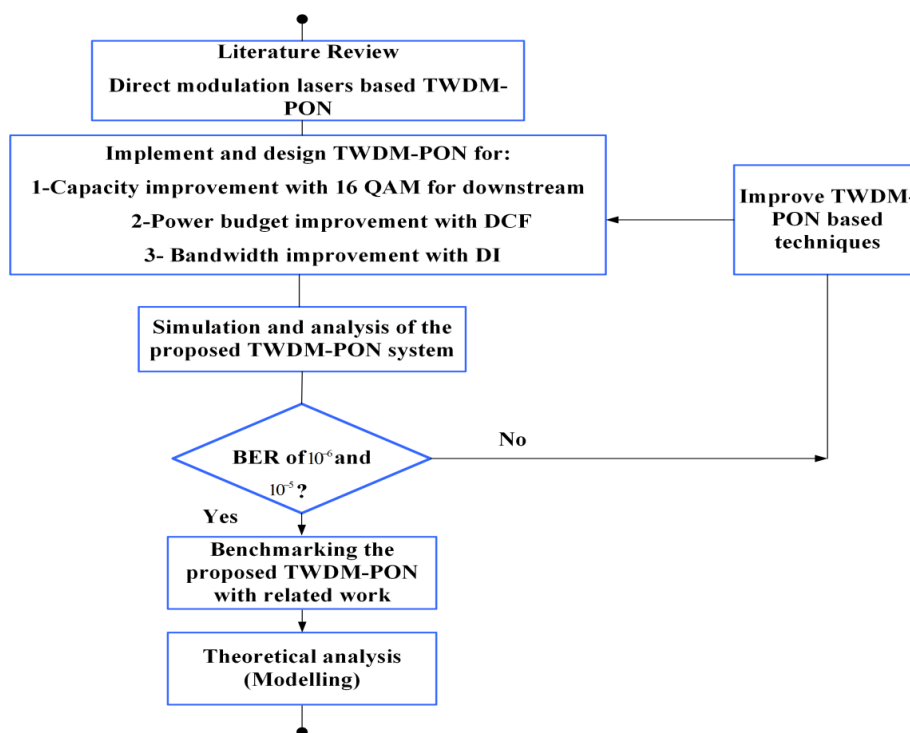


**Figure 1.5** Flow chart of TWDM-PON system simulation

### 1.6.4 Theoretical approach

The theoretical approach of this research is achieved through the following method as shown in Figure 1.6:

- An intensive study to find the suitable and accurate model for DML and RSOA transmitters, exact wavelength of DCF and SMF, DI and power budget equations.
- Propose and set parameter values of the above aspects equation (step 1) that similar to the simulated parameter values.
- Calculation and analysis of the equation parameter values.
- Compare the calculated and simulated results.
- The results are validated.

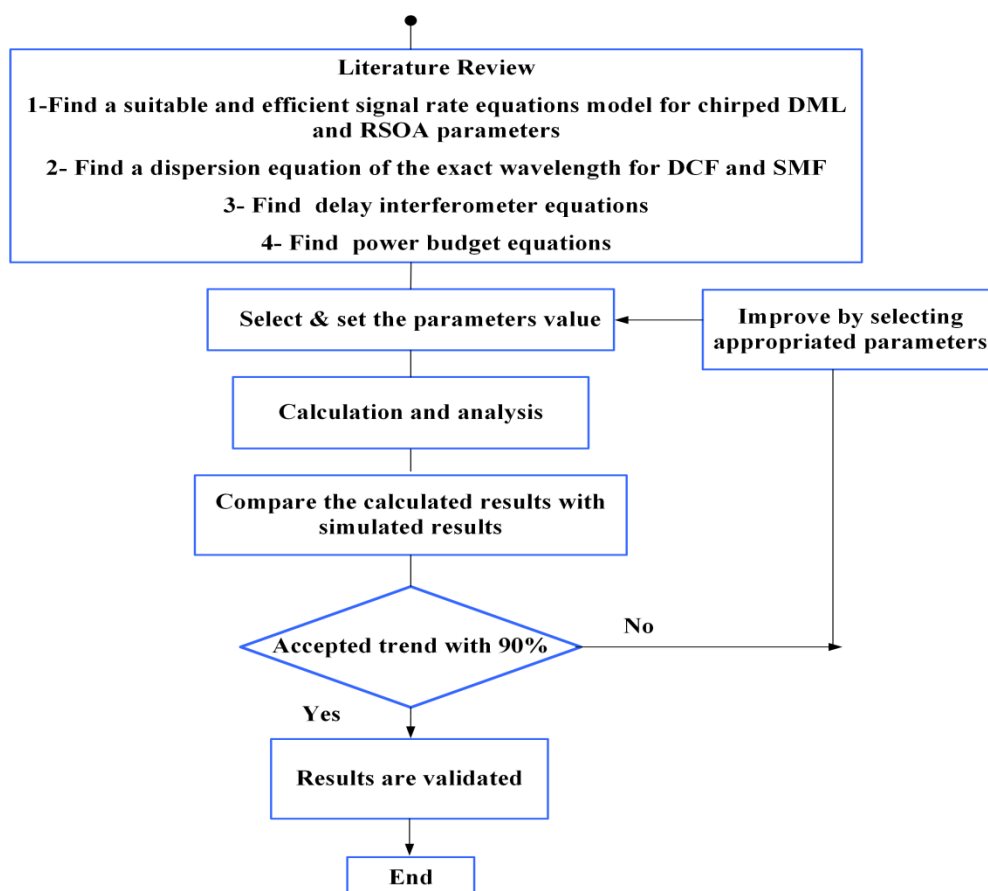

**Figure 1.6** Flow chart of theoretical approach

## 1.7 Thesis Contribution

This thesis presents significant contributions which mainly fall on TWDM-PON architecture. It is worth noting that the simulations of the development on TWDM-PON architecture proposed in this thesis are performed using Optisystem software. In addition, MATLAB software is a powerful for modelling calculations design system. Finally, mathematical formulas to support the chirp model and validation are presented. A brief description on this thesis contribution is illustrated in the following subsections.

- The design of a new, efficient and low cost TWDM-PON system that aims to improve the capacity to 56 Gb/s for downstream and with 128 users over 40 km single mode fiber (SMF) reach. The proposed TWDM-PON system utilizes the highly spectral efficient 16 quadrature amplitude modulation (QAM) with a 20 GHz radio frequency signal distribution using single sideband signal (SSB) that is generated by an optical dual-arm modulator (DAM) for each wavelength to support 14 Gb/s. Compared to the existing techniques, the design presents an impressive improvement in terms of the capacity of TWDM-PON system.
- The design of a new technique that employs chirped DML for upstream link each wavelength without dispersion technique utilization at optical network unit (ONU) of TWDM-PON system to improve the capacity to 40 Gb/s. The chirp of DML is minimized by output waveform such as output power (bias current that was assumed to be 75 mA and above the threshold current), and bandwidth enhancement factor. The feasibility of DML is verified in-terms of bandwidth enhancement factor, extinction ratio and launched input power.
- Development of a symmetric 40 Gb/s TWDM-PON system based on DML transmission that utilizes dispersion compensation fiber (DCF) technique for an efficient power budget. The findings reveal that a good performance quality with less than 2 dB dispersion penalty can be achieved over 140 km standard single mode fiber (SMF). As a result, a system power budget of 56.6 dB and more than 512 users with 140 km purely passive reach is achieved.

- The feasibility is verified in terms of dispersion compensation, power budget with dispersion and bandwidth enhancement factor. Its performance is compared against the other schemes used in literature in terms of power budget TWDM-PON system. The proposed scheme is an asset of TWDM-PON technology and its implementation complexity is minimal to a level that is comparable to the existing commercialized systems with a cost that is sufficiently low to meet the cost constraints of the access networks (Chapter 4).
- Development of a new 40 Gb/s TWDM-PON system which incorporates low cost and chirped reflective semiconductor optical amplifier (RSOA) for both downstream and upstream directions is designed based on a delay interferometer (DI). A successful transmission of the proposed work study where an aggregate capacity of 40 Gb/s is transported over 40 km transmission distance with 32 splits.
- A single bi-pass DI with 40 GHz free spectrum range (FSR) deployed in the optical line terminal (OLT) is used to enhance the poor bandwidth performance of the RSOA due to frequency chirp. The feasibility is verified in-terms of 40 GHz free spectrum range (FSR) DI. This scheme is benchmarked by comparing its performance against the other schemes used in literature in terms of low cost ONU implementation, simplicity and the data rate based on RSOA TWDM-PON system. (Chapter 5).
- Theoretical and Simulation analysis of the chirp, output power, bandwidth enhancement factor, power budget, dispersion, FSR of DI and frequency response is presented for the purpose of this thesis validation.

## **1.8 Thesis organization**

A detailed description of our research undertaken to achieve the objectives is presented in this section. Each of the following paragraphs explains the contents of each chapter.

Chapter 1 provides a general introduction to PON access networks and the motivation behind TWDM-PON system. This chapter also introduces the problem statement of this research, objectives, research scope and the research methodology of the proposed schemes on TWDM-PON is illustrated. Finally, the thesis contributions and organization are outlined.

Chapter 2 discusses the literature review part which will define the important concepts of this research. Key enabling technologies for next generation passive optical networks second stage (NG-PON2) are presented and compared in this chapter. Then architecture of TWDM-PON and its remarkable features are presented. Finally, this chapter covers the different TWDM-PON schemes and the important findings of previous studies which are most related to this work.

Chapter 3 intends to improve the TWDM-PON system capacity in a scalable, efficient and cost-effective manner. A simple and cost effective scheme to improve highly spectral efficient 16 quadrature amplitude modulation (QAM) with 20 GHz Radio over fiber (RoF) is presented to improve the capacity of downstream link signal. Two critical performance parameters of DML are investigated to mitigate the chirp frequency of DMLs in upstream link. This results in a successful transmission of 56 Gb/s downstream and 40 Gb/s upstream bandwidth. The BER performance of four wavelengths of downstream and upstream directions is evaluated. Moreover, the effect of the DML nonlinearity is studied for high power transmission. In this chapter, the results are compared with the performance of previous schemes of TWDM-PON system in terms of data rate accommodation, low cost and simplicity of implementation.

Chapter 4 is dedicated to improve the power budget of a symmetric 40 Gb/s TWDM-PON system that utilizes a dispersion compensation fiber (DCF) technique. In this chapter, the performances of directly modulated laser (DML) and electro absorption modulated laser (EML) in the downstream direction under high launched power is compared. The BER performance and power budget for one and four wavelengths for both is evaluated. The feasibility of DCF techniques to compensate

positively accumulated dispersions from different transmission fiber distances is presented. The performances and improvements of the proposed 40 Gb/s TWDM-PON is benchmarked with previous TWDM-PON schemes in terms of achieved ODN power budget.

Chapter 5 presents the architecture of the a symmetric 40 Gb/s TWDM-PON based on transmission of low cost reflective semiconductor optical amplifier (RSOA) for both downstream and upstream directions. The drawback of the low cost RSOA is the low frequency chirp to accommodate high data rate transmission. To overcome this shortfall, a single bi-pass delay interferometer (DI), deployed in the optical line terminal (OLT), is proposed to enhance the poor performance of the RSOA with respect to the low bandwidth induced by laser chirp. The performance of four wavelengths of downstream and upstream directions is evaluated. Different line rates for RSOA transmission for downstream and upstream links are presented. The performance of the proposed scheme is verified by comparing it with previous schemes of TWDM-PON system in terms of data rate accommodation, low cost implementation of lasers such as a tunable external cavity laser (T-ECL) and dual parallel Mach Zehnder modulator (DP-MZM).

Chapter 6 summarizes the research outcomes and concludes the thesis. A few schemes for future research are also proposed and discussed.

## REFERENCES

1. Jain, S., Effenberger, F., Szabo, A., Feng, Z., Forcucci, A., Guo, W., Luo, Y., Mapes, R., Zhang, Y. and O'Byrne, V., 2011. World's first XG-PON field trial. *Journal of Lightwave Technology*, 29(4), 524-528.
2. Cheng, N., 2015. Flexible TWDM PON with WDM overlay for converged services. *Optical Fiber Technology*, 26, 21-30.
3. Harstead, E. and Sharpe, R., 2012. Future fiber-to-the-home bandwidth demands favor time division multiplexing passive optical networks. *IEEE Communications Magazine*, 50(11), 218–223.
4. Wong, E., 2014. Survivable architectures for time and wavelength division multiplexed passive optical networks. *Optics Communications*, 325, 152-159.
5. Lee, J.H., Cho, S.H., Lee, H.H., Jung, E.S., Yu, J.H., Kim, B.W., Lee, S.H., Koh, J.S., Sung, B.H., Kang, S.J. and Kim, J.H., 2010. First commercial deployment of a colorless gigabit WDM/TDM hybrid PON system using remote protocol terminator. *Journal of Lightwave Technology*, 28(4), 344-351.
6. Kazovsky, L.G., Shaw, W.T., Gutierrez, D., Cheng, N. and Wong, S.W., 2007. Next-generation optical access networks. *Journal of lightwave technology*, 25(11), 3428-3442.
7. Skubic, B., Chen, J., Ahmed, J., Wosinska, L. and Mukherjee, B., 2009. A comparison of dynamic bandwidth allocation for EPON, GPON, and next-generation TDM PON. *IEEE Communications Magazine*, 47(3), S40-S48.
8. Newaz, S.S., Cuevas, Á., Lee, G.M., Crespi, N. and Choi, J.K., 2013. Adaptive delay-aware energy efficient TDM-PON. *Computer Networks*, 57(7), 1577-1596.
9. Srivastava, A., February 2013. Next generation PON evolution. In proceeding of the *Broadband Access Communication Technologies VII*, 8645, 864509-1–864509-15.



10. Li, Z., Yi, L. and Hu, W., 2013. Key technologies and system proposals of TWDM-PON. *Frontiers of Optoelectronics*, 6(1), 46-56.
11. Lee, C.H., Sorin, W.V. and Kim, B.Y., 2006. Fiber to the home using a PON infrastructure. *Journal of lightwave technology*, 24(12), 4568-4583.
12. Cheng, N., Zhou, M. and Effenberger, F.J., 2015. 10 Gbit/s delay modulation using a directly modulated DFB laser for a TWDM PON with converged services. *Journal of Optical Communications and Networking*, 7(1), A87-A96.
13. Aurzada, F., Scheutzow, M., Reisslein, M., Ghazisaidi, N. and Maier, M., 2011. Capacity and delay analysis of next-generation passive optical networks (NG-PONs). *IEEE Transactions on Communications*, 59(5), 1378-1388.
14. 10-Gigabit-Capable Passive Optical Networks (XG-PON), ITU-T G.987Series, 2010.
15. Ragheb, A.M. and Fathallah, H., December 2011. Performance analysis of next generation-PON (NG-PON) architectures. In proceeding of the *High Capacity Optical Networks and Enabling Technologies (HONET), 2011*, IEEE, 339-345.
16. Physical Layer Specifications and Management Parameters for 10 Gb/s Passive Optical Networks, IEEE Standard 802.3av, 2009.
17. Chanclou, P., Cui, A., Geilhardt, F., Nakamura, H. and Nettet, D., 2012. Network operator requirements for the next generation of optical access networks. *IEEE Network*, 26(2), 8-14.
18. 40-Gigabit-Capable Passive Optical Networks (NG-PON2), ITU-T G.989 Series, 2013.
19. 40-Gigabit-Capable Passive Optical Networks 2 (NG-PON2): Physical Media Dependent (PMD) Layer Specification, ITU-T Recommendation G.989.2, 2014.
20. Raharimanitra, F., Chanclou, P. and Murano, R., September 2011. 40 Gb/s NG-PON system using low electrical bandwidth tunable receiver and emitter at 10 Gb/s. In proceeding of the *European Conference and Exposition on Optical Communications*, Optical Society of America, Mo-1.

21. Vetter, P., September 2012. Next generation optical access technologies. In proceeding of the *European Conference and Exhibition on Optical Communication*, Optical Society of America, Tu-3.
22. Ma, Y., Qian, Y., Peng, G., Zhou, X., Wang, X., Yu, J., Luo, Y., Yan, X. and Effenger, F., March 2012. Demonstration of a 40Gb/s time and wavelength division multiplexed passive optical network prototype system. In proceeding of the *Optical Fiber Communication Conference and Exposition (OFC/NFOEC), 2012 and the National Fiber Optic Engineers Conference*, IEEE, 1-3.
23. Qian, D., Mateo, E. and Huang, M.F., September 2012. A 105km reach fully passive 10G-PON using a novel digital OLT. In proceeding of the *European Conference and Exhibition on Optical Communication*, Optical Society of America, Tu-1.
24. Iwatsuki, K. and Kani, J.I., 2009. Applications and technical issues of wavelength-division multiplexing passive optical networks with colorless optical network units. *Journal of Optical Communications and Networking*, 1(4), C17-C24.
25. Taguchi, K., Asaka, K., Fujiwara, M., Kaneko, S., Yoshida, T., Fujita, Y., Iwamura, H., Kashima, M., Furusawa, S., Sarashina, M. and Tamai, H., 2016. Field trial of long-reach and high-splitting  $\lambda$ -tunable TWDM-PON. *Journal of Lightwave Technology*, 34(1), 213-221.
26. Kani, J.I., 2010. Enabling technologies for future scalable and flexible WDM-PON and WDM/TDM-PON systems. *IEEE Journal of Selected Topics in Quantum Electronics*, 16(5), 1290-1297.
27. Nettet, D., 2017. PON roadmap. *IEEE/OSA Journal of Optical Communications and Networking*, 9(1), A71-A76.
28. Wey, J.S., Nettet, D., Valvo, M., Grobe, K., Roberts, H., Luo, Y. and Smith, J., 2016. Physical layer aspects of NG-PON2 standards—Part 1: Optical link design. *IEEE/OSA Journal of Optical Communications and Networking*, 8(1), 33-42.
29. 40-gigabit-capable passive optical networks (N-PON2): Physical media dependent (PMD) layer specification, ITU-T Recommendation G.989.2, 2014.
30. Bindhaiq, S., Supa, A.S.M., Zulkifli, N., Mohammad, A.B., Shaddad, R.Q., Elmagzoub, M.A. and Faisal, A., 2015. Recent development on time and

- wavelength-division multiplexed passive optical network (TWDM-PON) for next-generation passive optical network stage 2 (NG-PON2). *Optical Switching and Networking*, 15, 53-66.
31. Van, D., Suvakovic, D., Chow, H., Houtsma, V., Harstead, E., Winzer, P.J. and Vetter, P., June 2012. Options for TDM PON beyond 10G. In proceeding of the *Access Networks and In-house Communications*, Optical Society of America, AW2A-1.
  32. Van, D., Houtsma, V., Gnauck, A. and Iannone, P., September 2014. 40-Gb/s TDM-PON over 42 km with 64-way power split using a binary direct detection receiver. In proceeding of the *Optical Communication (ECOC), 2014 European Conference on*, IEEE, 1-3.
  33. Iannone, P.P., Gnauck, A.H., van Veen, D.T. and Houtsma, V.E., 2016. Increasing TDM rates for access systems beyond NG-PON2. *Journal of Lightwave Technology*, 36(6), 1545-1550.
  34. Lee, C.H., Sorin, W.V. and Kim, B.Y., 2006. Fiber to the home using a PON infrastructure. *Journal of lightwave technology*, 24(12), 4568-4583.
  35. Roppelt, M., Pohl, F., Grobe, K., Eiselt, M.H. and Elbers, J.P., March 2011. Tuning methods for uncooled low-cost tunable lasers in WDM-PON. In proceeding of the *National Fiber Optic Engineers Conference*, Optical Society of America, NTuB1.
  36. Prince, K., Gibbon, T.B., Rodes, R., Hviid, E., Mikkelsen, C.I., Neumeyr, C., Ortsiefer, M., Rönneberg, E., Roskopf, J., Öhlén, P. and de Betou, E.I., 2012. GigaWaM—Next-Generation WDM-PON enabling gigabit per-user data bandwidth. *Journal of Lightwave Technology*, 30(10), 1444-1454.
  37. Yu, J.H., Kim, N. and Kim, B.W., 2007. Remodulation schemes with reflective SOA for colorless DWDM PON. *Journal of optical networking*, 6(8), 1041-1054.
  38. Wong, E., Lee, K.L. and Anderson, T.B., 2007. Directly modulated self-seeding reflective semiconductor optical amplifiers as colorless transmitters in wavelength division multiplexed passive optical networks. *Journal of Lightwave Technology*, 25(1), 67-74.
  39. Park, S.J., Lee, C.H., Jeong, K.T., Park, H.J., Ahn, J.G. and Song, K.H., 2004. Fiber-to-the-home services based on wavelength-division-multiplexing

- passive optical network. *Journal of Lightwave Technology*, 22(11), 2582–2591.
40. Smolorz, S., Gottwald, E., Rohde, H., Smith, D. and Poustie, A., March 2011. Demonstration of a coherent UDWDM-PON with real-time processing. In proceeding of the *Optical Fiber Communication Conference and Exposition (OFC/NFOEC), 2011 and the National Fiber Optic Engineers Conference*, IEEE., 1-3.
  41. Cho, K.Y., Takushima, Y., Oh, K.R. and Chung, Y.C., February 2008. Operating wavelength range of 1.25-Gb/s WDM PON implemented by using uncooled RSOA's. In proceeding of the *Optical Fiber Communication Conference*, Optical Society of America, OTuH3.
  42. Luo, Y., Zhou, X., Effenberger, F., Yan, X., Peng, G., Qian, Y. and Ma, Y., 2013. Time-and wavelength-division multiplexed passive optical network (TWDM-PON) for next-generation PON stage 2 (NG-PON2). *Journal of Lightwave Technology*, 31(4), 587-593.
  43. Van, D., Pöhlmann, W., Galaro, J., Deppisch, B., Dugue, A., Lau, M.F., Farah, B., Pfeiffer, T. and Vetter, P., September 2013. System demonstration of a time and wavelength-set division multiplexing PON. In proceeding of the *Optical Communication (ECOC 2013), 39th European Conference and Exhibition on*, IET, 1-3.
  44. Lin, H., Liu, D., Luo, Y., Effenberger, F. and Cheng, N., November 2014. TWDM-PON: System, Standards, and Key Technologies. In proceeding of the *Asia Communications and Photonics Conference*, Optical Society of America, ATh2F-1.
  45. Armstrong, J., 2009. OFDM for optical communications. *Journal of lightwave technology*, 27(3), 189-204.
  46. Kitayama, K.I., Wang, X. and Wada, N., 2006. OCDMA over WDM PON- solution path to gigabit-symmetric FTTH. *Journal of Lightwave Technology*, 24(4), 1654-1662.
  47. Guo, Y., Zhu, S., Kuang, G., Yin, Y., Zhang, D. and Liu, X., 2015. Demonstration of a symmetric 40 Gbit/s TWDM-PON over 40 km passive reach using 10 G burst-mode DML and EDC for upstream transmission. *Journal of Optical Communications and Networking*, 7(3), A363-A371.

48. Nettet, D., 2015. NG-PON2 technology and standards. *Journal of Lightwave Technology*, 33(5), 1136-1143.
49. Luo, Y., Roberts, H., Grobe, K., Valvo, M., Nettet, D., Asaka, K., Rohde, H., Smith, J., Wey, J.S. and Effenberger, F., 2016. Physical layer aspects of NG-PON2 standards—Part 2: System design and technology feasibility. *Journal of Optical Communications and Networking*, 8(1), 43-52.
50. Luo, Y., Roberts, H., Grobe, K., Valvo, M., Nettet, D., Asaka, K., Rohde, H., Smith, J., Wey, J.S. and Effenberger, F., 2016. Physical layer aspects of NG-PON2 standards—Part 2: System design and technology feasibility. *Journal of Optical Communications and Networking*, 8(1), 43-52.
51. Murano, R. and Cahill, M.J., September 2012. Low cost tunable receivers for wavelength agile PONs. In proceeding of the *Optical Communications (ECOC), 2012 38th European Conference and Exhibition on*, IEEE, 1-3.
52. Li, Z., Yi, L. and Hu, W., March 2014. Comparison of downstream transmitters for high loss budget of long-reach 10G-PON. In proceeding of the *Optical Fiber Communications Conference and Exhibition (OFC), 2014*, IEEE, 1-3.
53. Kuchta, D.M., Huynh, T.N., Doany, F.E., Schares, L., Baks, C.W., Neumeyr, C., Daly, A., Kögel, B., Roskopf, J. and Ortsiefer, M., 2016. Error-free 56 Gb/s NRZ modulation of a 1530-nm VCSEL link. *Journal of Lightwave Technology*, 34(14), 3275-3282.
54. Zhang, H., Fu, S., Man, J., Chen, W., Song, X. and Zeng, L., March 2014. 30km downstream transmission using 4× 25Gb/s 4-PAM modulation with commercial 10Gbps TOSA and ROSA for 100Gb/s-PON. In proceeding of the *Optical Fiber Communications Conference and Exhibition (OFC), 2014*, IEEE, 1-3.
55. Van, D., Houtsma, V.E., Winzer, P. and Vetter, P., September 2012. 26-Gbps PON transmission over 40-km using duobinary detection with a low cost 7-GHz APD-based receiver. In proceeding of the *European Conference and Exhibition on Optical Communication*, Optical Society of America, Tu-3.
56. Houtsma, V. and van Veen, D., September 2015. Demonstration of symmetrical 25 Gbps TDM-PON with 31.5 dB optical power budget using only 10 Gbps optical components. In proceeding of the *Optical Communication (ECOC), 2015 European Conference on*, IEEE, 1-3.

57. Van, D., Houtsma, V., Gnauck, A. and Iannone, P., September 2014. 40-Gb/s TDM-PON over 42 km with 64-way power split using a binary direct detection receiver. In proceeding of the *Optical Communication (ECOC), 2014 European Conference on*, IEEE, 1-3.
58. Zhao, H., Hu, S., Zhao, J., Zhu, Y., Yu, Y. and Barry, L.P., 2015. Chirp-compensated DBR lasers for TWDM-PON applications. *IEEE Photonics Journal*, 7(1), 1-9.
59. Tian, D., Yuan, B., Ji, Y., Pak, Z.A., Lau, T., Li, Z. and Lu, C., 2012. Bidirectional hybrid OFDM-WDM-PON system for 40-Gb/s downlink and 10-Gb/s uplink transmission using RSOA demodulation. *IEEE Photonics Technology Letters*, 24(22), 2024-2026.
60. Yi, L., Li, Z., Dong, Y., Xiao, S., Chen, J. and Hu, W., 2012. Upstream capacity upgrade in TDM-PON using RSOA based tunable fiber ring laser. *Optics Express*, 20(9), 10416-10425.
61. Li, Z., Yi, L., Zhang, Y., Dong, Y., Xiao, S. and Hu, W., 2012. Compatible TDM/WDM PON using a single tunable optical filter for both downstream wavelength selection and upstream wavelength generation. *IEEE Photonics Technology Letters*, 24(10), 797-799.
62. Chow, C.W., Yeh, C.H., Xu, K., Sung, J.Y. and Tsang, H.K., 2013. TWDM-PON with signal remodulation and Rayleigh noise circumvention for NG-PON2. *IEEE Photonics Journal*, 5(6), 7902306-7902306.
63. Cheng, N. and Gao, J., September 2013. World's first demonstration of pluggable optical transceiver modules for flexible TWDM PONs. In proceeding of the *Optical Communication (ECOC 2013), 39th European Conference and Exhibition on*, IET, 1-3.
64. Yi, L., Li, Z., Dong, Y., Xiao, S. and Hu, W., July 2012. 80/10Gb/s downstream/upstream capacity multi-wavelength TDM-PON. In proceeding of the *Communication Systems, Networks & Digital Signal Processing (CSNDSP), 2012 8th International Symposium on*, IEEE, 1-4.
65. Wong, E., Mueller, M. and Amann, M.C., 2013. Colourless operation of short-cavity VCSELs in C-minus band for TWDM-PONs. *Electronics Letters*, 49(4), 282-284.

66. Wong, E., Mueller, M. and Amann, M.C., 2013. Characterization of energy-efficient and colorless ONUs for future TWDM-PONs. *Optics express*, 21(18), 20747-20761.
67. Lee, E.G., Lee, J.C., Mun, S.G., Jung, E.S., Lee, J.H. and Lee, S.S., September 2013. 16-channel tunable VCSEL array with 50-GHz channel spacing for TWDM-PON ONUs. In proceeding of the *Optical Communication (ECOC 2013), 39th European Conference and Exhibition on*, IET, 1-3.
68. Lin, B., Li, J., Luo, Y., Wan, Y., He, Y. and Chen, Z., 2014. Symmetric  $(4 \times 25)$ -Gb/s DSP-Enhanced TWDM-PON With DSB Modulation and RSOA. *IEEE Photonics Technology Letters*, 26(21), 2103-2106.
69. Ye, Z., Li, S., Cheng, N. and Liu, X., September 2015. Demonstration of high-performance cost-effective 100-Gb/s TWDM-PON using  $4 \times 25$ -Gb/s optical duobinary channels with 16-GHz APD and receiver-side post-equalization. In proceeding of the *Optical Communication (ECOC), 2015 European Conference on*. IEEE, 1-3.
70. Iannone, P.P. and Gnauck, A.H., 2016. Distributed Raman amplification in a  $8 \times 10$ -Gb/s, 40-km, 1: 128 TWDM PON. *Optics Express*, 24(22), 25084-25090.
71. Iannone, P., Gnauck, A.H., Straub, M., Hehmann, J., Jentsch, L., Pfeiffer, T. and Earnshaw, M., 2017. An  $8 \times 10$ -Gb/s 42-km High-Split TWDM PON Featuring Distributed Raman Amplification and a Remotely Powered Intelligent Splitter. *Journal of Lightwave Technology*, 35(7), 1328-1332.
72. Gnauck, A., Iannone, P., van Veen, D. and Houtsma, V., 2015.  $4 \times 40$ -Gb/s TWDM PON downstream transmission over 42 km and 64-way power split using optical duobinary signals and an APD-based receiver. *Optics Express*, 23(19), 24133-24139.
73. Cheng, N., Yan, X., Chand, N. and Effenberger, F., November 2013. 10 Gb/s upstream transmission in TWDM PON using duobinary and PAM-4 modulations with directly modulated tunable DBR laser. In proceeding of the *Asia Communications and Photonics Conference*, Optical Society of America, AT3E-4.

74. Guo, Y., Zhu, S., Kuang, G., Yin, Y., Zhang, D. and Liu, X., 2015. Demonstration of a symmetric 40 Gbit/s TWDM-PON over 40 km passive reach using 10 G burst-mode DML and EDC for upstream transmission. *Journal of Optical Communications and Networking*, 7(3), A363-A371.
75. Yi, L., Li, Z., Bi, M., He, H., Wei, W., Xiao, S. and Hu, W., December 2013. Experimental demonstrations of symmetric 40-Gb/s TWDM-PON. In proceeding of the *Information, Communications and Signal Processing (ICICS) 2013 9th International Conference on*, IEEE, 1-3.
76. Yi, L., Li, Z., Bi, M., Wei, W. and Hu, W., 2013. Symmetric 40-Gb/s TWDM-PON with 39-dB power budget. *IEEE Photonics Technology Letters*, 25(7), 644-647.
77. Bi, M., Xiao, S., He, H., Yi, L., Li, Z., Li, J., Yang, X. and Hu, W., 2013. Simultaneous DPSK demodulation and chirp management using delay interferometer in symmetric 40-Gb/s capability TWDM-PON system. *Optics Express*, 21(14), 16528-16535.
78. Bi, M., Xiao, S., Yi, L., He, H., Li, J., Yang, X. and Hu, W., 2014. Power budget improvement of symmetric 40-Gb/s DML-based TWDM-PON system. *Optics Express*, 22(6), 6925-6933.
79. Li, Z., Yi, L. and Hu, W., 2014. Symmetric 40-Gb/s TWDM-PON with 51-dB loss budget by using a single SOA as preamplifier, booster and format converter in ONU. *Optics Express*, 22(20), 24398-24404.
80. Li, Z., Yi, L., Wei, W., Bi, M., He, H., Xiao, S. and Hu, W., 2014. Symmetric 40-Gb/s, 100-km passive reach TWDM-PON with 53-dB loss budget. *Journal of Lightwave Technology*, 32(21), 3389-3396.
81. Zhou, Z., Bi, M., Xiao, S., Zhang, Y. and Hu, W., 2015. Experimental demonstration of symmetric 100-Gb/s DML-based TWDM-PON system. *IEEE Photonics Technology Letters*, 27(5), 470-473.
82. Li, Z., Yi, L., Ji, H. and Hu, W., 2016. 100-Gb/s TWDM-PON based on 10G optical devices. *Optics Express*, 24(12), 12941-12948.
83. Li, Z., Yi, L., Wang, X. and Hu, W., 2015. 28 Gb/s duobinary signal transmission over 40 km based on 10 GHz DML and PIN for 100 Gb/s PON. *Optics Express*, 23(16), 20249-20256.
84. Bonk, R., Schmuck, H., Poehlmann, W. and Pfeiffer, T., 2015. Beneficial OLT transmitter and receiver concepts for NG-PON2 using semiconductor



- optical amplifiers. *Journal of Optical Communications and Networking*, 7(3), A467-A473.
85. Chow, C.W., Yeh, C.H., Lo, S.M., Li, C. and Tsang, H.K., 2011. Long-reach radio-over-fiber signal distribution using single-sideband signal generated by a silicon-modulator. *Optics Express*, 19(12), 11312-11317.
  86. Su, H.S., Li, C.Y., Lu, H.H., Chang, C.H., Peng, P.C., Wu, P.Y. and Chen, H.W., 2011. RoF transport systems with OSNR enhanced multi-band optical carrier generator. *Optics Express*, 19(19), 18516-18522.
  87. Wang, J. and Petermann, K., 1992. Small signal analysis for dispersive optical fiber communication systems. *Journal of Lightwave Technology*, 10(1), 96-100.
  88. Cartledge, J.C., Jiang, Y., Karar, A.S., Harley, J. and Roberts, K., 2011. Arbitrary waveform generation for pre-compensation in optical fiber communication systems. *Optics Communications*, 284(15), 3711-3717.
  89. Che, D., Yuan, F. and Shieh, W., 2016. Towards high-order modulation using complex modulation of semiconductor lasers. *Optics Express*, 24(6), 6644-6649.
  90. Peucheret, C., 2009. Direct and external modulation of light. *Technical University of Denmark, Denmark*.
  91. Pérez, P., Valle, A., Noriega, I. and Pesquera, L., 2014. Measurement of the intrinsic parameters of single-mode VCSELs. *Journal of Lightwave Technology*, 32(8), 1601-1607.
  92. Shaddad, R.Q., Mohammad, A.B., Al-Gailani, S.A. and Al-Hetar, A.M., 2014. Optical frequency upconversion technique for transmission of wireless MIMO-type signals over optical fiber. *The Scientific World Journal*, 2014, 1-14.
  93. Fujiwara, M. and Koma, R., 2016. Long-reach and high-splitting-ratio WDM/TDM-PON systems using burst-mode automatic gain controlled SOAs. *Journal of Lightwave Technology*, 34(3), 901-909.
  94. Sun, C., Bae, S.H. and Kim, H., 2017. Transmission of 28-Gb/s duobinary and PAM-4 signals using DML for optical access network. *IEEE Photonics Technology Letters*, 29(1), 130-133.

95. Bae, S.H., Kim, H. and Chung, Y.C., 2016. Transmission of 51.56-Gb/s OOK signal using 1.55- $\mu\text{m}$  directly modulated laser and duobinary electrical equalizer. *Optics express*, 24(20), 22555-22562.
96. Zulkifli, N., Idrus, S.M., Supa'at, A.S.M. and Farabi, M.A., 2012. Network performance improvement of all-optical networks through an algorithmic based dispersion management technique. *Journal of Network and Systems Management*, 20(3), 401-416.
97. Mitić, D., Lebl, A. and Markov, Ž., 2012. Calculating the required number of bits in the function of confidence level and error probability estimation. *Serbian Journal of Electrical Engineering*, 9(3), 361-375.
98. M. R. Chomycz., Planning Fiber Optic Networks. New York- USA: The McGraw-Hill, 2009 (Chapter 4).
99. Asaka, K., Taguchi, K., Sakaue, Y., Suzuki, K.I., Kimura, S. and Otaka, A., September 2015. High output power OLT/ONU transceivers for 40 Gbit/s symmetric-rate NG-PON2 systems. In proceeding of the *Optical Communication (ECOC), 2015 European Conference on*, IEEE,1-3.
100. Araci, I.E., Vorbeck, S., Schneiders, M., Ansari, M.J., Peyghambarian, N. and Kueppers, F., 2005. System optimization and significant reach extension using alternating dispersion compensation for 160 Gbit/s transmission links. *Optics Express*, 13(17), 6336-6344.
101. Zimmerman, D.R. and Spiekman, L.H., 2004. Amplifiers for the masses: EDFA, EDWA, and SOA amplifiers for metro and access applications. *Journal of Lightwave Technology*, 22(1), 63-70.
102. Kim, H., 2010. 10-Gb/s operation of RSOA using a delay interferometer. *IEEE Photonics Technology Letters*, 22(18), 1379-1381.
103. Connelly, M.J., 2012. Reflective semiconductor optical amplifier pulse propagation model. *IEEE Photonics Technology Letters*, 24(2), 95-97.
104. Bjerkan, L., Royset, A., Hafskjaer, L. and Myhre, D., 1996. Measurement of laser parameters for simulation of high-speed fiberoptic systems. *Journal of Lightwave Technology*, 14(5), 839-850.
105. Presi, M., Chiuchiarelli, A., Corsini, R., Choudury, P., Bottoni, F., Giorgi, L. and Ciaramella, E., 2012. Enhanced 10 Gb/s operations of directly modulated reflective semiconductor optical amplifiers without electronic equalization. *Optics Express*, 20(26), B507-B512.

106. Al-Qazwini, Z. and Kim, H., 2012. Symmetric 10-Gb/s WDM-PON using directly modulated lasers for downlink and RSOAs for uplink. *Journal of Lightwave Technology*, 30(12), 1891-1899.
107. Li, J., Worms, K., Maestle, R., Hillerkuss, D., Freude, W. and Leuthold, J., 2011. Free-space optical delay interferometer with tunable delay and phase. *Optics express*, 19(12), 11654-11666.
108. Ghazisaidi, N., Maier, M. and Assi, C.M., 2009. Fiber-wireless (FiWi) access networks: A survey. *IEEE Communications Magazine*, 47(2), 160-167.
109. Chowdhury, P., Mukherjee, B., Sarkar, S., Kramer, G. and Dixit, S., 2009. Hybrid wireless-optical broadband access network (WOBAN): prototype development and research challenges. *IEEE Network*, 23(3), 41-48,.
110. Esmail, M.A. and Fathallah, H., December 2011. Fiber fault management and protection solution for ring-and-spur WDM/TDM long-reach PON. In proceeding of the *Global Telecommunications Conference (GLOBECOM 2011)*, IEEE, 1-5.
111. Effenberger, F.J., 2015. PON resilience. *Journal of Optical Communications and Networking*, 7(3), A547-A552.
112. Tomkos, I., Azodolmolky, S., Solé-Pareta, J., Careglio, D. and Palkopoulou, E., 2014. A tutorial on the flexible optical networking paradigm: State of the art, trends, and research challenges. *Proceedings of the IEEE*, 102(9), 1317-1337.
113. Cao, X., Yoshikane, N., Popescu, I., Tsuritani, T. and Morita, I., 2017. Software-defined optical networks and network abstraction with functional service design. *Journal of Optical Communications and Networking*, 9(4), C65-C75.
114. Thyagaturu, A.S., Mercian, A., McGarry, M.P., Reisslein, M. and Kellerer, W., 2016. Software defined optical networks (SDONs): A comprehensive survey. *IEEE Communications Surveys & Tutorials*, 18(4), 2738-2786.
115. Curri, V., Cantono, M. and Gaudino, R., 2017. Elastic all-optical networks: a new paradigm enabled by the physical layer. How to optimize network performances?. *Journal of Lightwave Technology*, 35(6), 1211-1221.
116. Gerstel, O., Jinno, M., Lord, A. and Yoo, S.B., 2012. Elastic optical networking: A new dawn for the optical layer? *IEEE Communications Magazine*, 50(2), C65- C75.

117. Napoli, A., Bohn, M., Rafique, D., Stavdas, A., Sambo, N., Potì, L., Noelle, M., Fischer, J.K., Riccardi, E., Pagano, A. and Di Giglio, A., 2015. Next generation elastic optical networks: The vision of the European research project IDEALIST. *IEEE Communications Magazine*, 53(2), 152-162.
118. Hillerkuss, D. and Leuthold, J., 2016. Software-defined transceivers in dynamic access networks. *Journal of Lightwave Technology*, 34(2), 792-797.
119. Dallaglio, M., Zami, T., Sambo, N., Giorgetti, A., Pagano, A., Riccardi, E. and Castoldi, P., 2016. Add and drop architectures for multi-carrier transponders in EONs *Journal of Optical Communications and Networking*, 8(7), A12-A22.
120. Klonidis, D., Cugini, F., Gerstel, O., Jinno, M., Lopez, V., Palkopoulou, E., Sekiya, M., Siracusa, D., Thouénon, G. and Betoule, C., 2015. Spectrally and spatially flexible optical network planning and operations. *IEEE Communications Magazine*, 53(2), 69-78.
121. Marom, D.M., Colbourne, P.D., D'errico, A., Fontaine, N.K., Ikuma, Y., Proietti, R., Zong, L., Rivas-Moscoso, J.M. and Tomkos, I., 2017. Survey of photonic switching architectures and technologies in support of spatially and spectrally flexible optical networking. *Journal of Optical Communications and Networking*, 9(1), 1-26.
122. Vasilyev, M., Tomkos, I., Mehendale, M., Rhee, J.K., Kobayakov, A., Ajgaonkar, M., Tsuda, S. and Sharma, M., 2003. Transparent Ultra-Long-Haul DWDM Networks with "Broadcast-and-Select" OADM/OXC Architecture. *Journal of Lightwave Technology*, 21(11), 2661– 2672.
123. Simmons, J.M. and Saleh, A.A., 2015. Wavelength-selective CDC ROADM designs using reduced-sized optical cross-connects. *IEEE Photonics Technology Letters*, 27(20), 2174-2177.
124. Tucker, R.S., 2011. Green optical communications—Part II: Energy limitations in networks. *IEEE Journal of Selected Topics in Quantum Electronics*, 17(2), 261-274.
125. Palkopoulou, E., Angelou, M., Klonidis, D., Christodoulopoulos, K., Klekamp, A., Buchali, F., Varvarigos, E. and Tomkos, I., 2012. Quantifying spectrum, cost, and energy efficiency in fixed-grid and flex-grid networks. *Journal of Optical Communications and Networking*, 4(11), B42-B51.

126. Lange, C., Kosiankowski, D., Weidmann, R. and Gladisch, A., 2011. Energy consumption of telecommunication networks and related improvement options. *IEEE Journal of selected topics in quantum electronics*, 17(2), 285-295.
127. Kim, G., Kim, S., Lee, D., Yoo, H. and Lim, H., 2014. Dual cyclic power saving technique for XG-PON. *Optics Express*, 22(105), A1310-A1327.
128. Shi, L., Mukherjee, B. and Lee, S.S., 2012. Energy-efficient PON with sleep-mode ONU: progress, challenges, and solutions. *IEEE Network*, 26(2) 36–41.
129. Kani, J.I., 2013. Power saving techniques and mechanisms for optical access networks systems. *Journal of Lightwave Technology*, 31(4), 563-570.
130. Han, M.S., Yoo, H. and Lee, D.S., 2013. Development of efficient dynamic bandwidth allocation algorithm for XGPON. *ETRI Journal*, 35(1), 18-26.
131. Dias, M.P.I. and Wong, E., 2013. Sleep/doze controlled dynamic bandwidth allocation algorithms for energy-efficient passive optical networks. *Optics Express*, 21(8), 9931-9946.
132. Winzer, P.J. and Neilson, D.T., 2017. From scaling disparities to integrated parallelism: A decathlon for a decade. *Journal of Lightwave Technology*, 35(5), 1099-1115.
133. Shariati, B., Rivas-Moscoso, J.M., Marom, D.M., Ben-Ezra, S., Klondis, D., Velasco, L. and Tomkos, I., 2017. Impact of spatial and spectral granularity on the performance of SDM networks based on spatial superchannel switching. *Journal of Lightwave Technology*, 35(13), 2559-2568.
134. Zhu, B., Taunay, T.F., Yan, M.F., Fini, J.M., Fishteyn, M., Monberg, E.M. and Dimarcello, F.V., 2010. Seven-core multicore fiber transmissions for passive optical network. *Optics Express*, 18(11), 11117-11122.