

PERFORMANCE OF FLOATING PILED RAFT WITH VARYING LENGTHS IN  
SOFT COMPRESSIBLE SUBSOIL

TAN YEAN CHIN

UNIVERSITI TEKNOLOGI MALAYSIA

PERFORMANCE OF FLOATING PILED RAFT WITH VARYING LENGTHS IN  
SOFT COMPRESSIBLE SUBSOIL

TAN YEAN CHIN

A dissertation submitted in fulfilment of the  
requirements for the award of the degree of  
Engineering Doctorate (*Technology and Construction Management*)

Faculty of Civil Engineering  
Universiti Teknologi Malaysia

JULY 2017

To my beloved parents and family

## ACKNOWLEDGEMENT

The author wishes to express his profound gratitude to his advisor Prof. Ir. Dr. Ramli bin Nazir for his enthusiastic guidance, constructive suggestions and constant encouragement throughout the course of this study and preparation of the thesis. The author is also indebted to co-advisor Prof. Ir. Dr. Khairul Anuar Kassim and industry advisor Dato' Ir. Dr. Gue See Sew, CEO of G&P Professionals Sdn Bhd for their helpful comments and guidance.

The author wishes to convey his sincere gratitude and love to his wife Mdm Lian Poh Hoon for her continuous encouragement to the author to complete his Doctorate of Engineering study which was a promise made by the author more than 15 years ago when persuading his wife to give up working to be full time house maker to take care of their two lovely sons, Tan Jun-Yan and Tan Jun-You, so that the author can focus on his work and study. Without the sacrifices and persistence of his wife to ensure the author fulfill his promise, this work would not have been possible.

Finally the author would like to express his gratitude and love to his parents, late Mr. Tan Eng Hean and Mdm Ch'ng Phaik Heoh for their good upbringing and they always have confidence in their son to achieve highest education possible. It is to them that this effort is humbly dedicated. The author owes his success in life to both of them.

## ABSTRACT

Conventional piled foundation usually provides adequate load carrying capacity to limit the settlement within allowable limits. However, in deep layer of soft compressible subsoil with settling platform, this foundation system faces numerous problems namely requiring very long piles, lower pile capacity due to downdrag forces, and hollow gap formed beneath the slab of piled structures when the earth platform settled causing services to break and poses health hazard. This research proposed an analysis and design methodology for an alternative foundation system of ‘floating’ piled raft (FPR) with same or varying pile lengths to resolve the problems stated above. The design objectives are to control differential settlement, angular distortion and bending moment rather than only limiting total settlement. The proposed analysis and design methodology bridges the research gaps of using piled raft in soft compressible subsoil. This incorporate long term settlement in the analysis to cater for piles of varying lengths and can be used by practicing engineers for design works. Parametric studies were carried out to verify the proposed analysis and design methodology through modelling of ‘floating’ piled raft with different numbers of piles, lengths configurations, spacing of piles and also different raft thickness. The vertically loaded pile rafts analysed are 3x3, 6x6 and 9x9 number of piles respectively with total combination of 108 cases that cover different pile lengths of same and varying lengths, different pile spacing and different raft thickness. The research findings showed that piled raft with combination of varying pile lengths is generally more effective in reducing differential settlement, ratio of  $(\Delta\rho/\rho_{\max})$ , bending moment of the raft and angular distortion ( $\beta$ ) compared to pile raft with similar pile length (even with longest piles). The findings from the parametric studies contributed to a better understanding on the performance and behaviour of ‘floating’ piled raft in soft compressible subsoil especially on the piled raft of varying piled lengths. The proposed analysis and design methodology in this research has also been successfully used to design ‘floating’ piled raft foundation system in deep and soft compressible subsoil to support low rise buildings of 2-storey to 5-storey that have been constructed and occupied for more than 10 years. This confirmed the benefits obtained from this research to have a reliable and efficient analysis and design methodology through better understanding of the performance and behaviour of ‘floating’ piled raft foundation with same or varying pile lengths.

## ABSTRAK

Asas cerucuk konvensional biasanya mempunyai keupayaan menanggung beban untuk menghadkan enapan pada had yang dibenarkan. Walaubagaimanapun, di dalam lapisan lembut yang dalam dengan pelantar yang mengenas, sistem asas ini menghadapi pelbagai masalah seperti memerlukan cerucuk yang panjang. Keupayaan cerucuk yang rendah akibat daya seret ke bawah dan ruang kosong terbentuk di bawah papak disokong oleh cerucuk apabila pelantar tanah mengenas menyebabkan laluan perkhidmatan pecah dan mengancam kesihatan. Hasil kajian mencadangkan analisis dan metodologi rekabentuk untuk sistem asas alternatif menggunakan asas rakit bercerucuk 'terapung' (FPR) samada dengan panjang cerucuk yang sama atau panjang cerucuk yang pelbagai bagi menyelesaikan masalah ini. Objektif rekabentuk adalah untuk mengawal perbezaan enapan, sudut herotan dan momen lentur berbanding hanya menghadkan jumlah enapan. Analisis dan metodologi rekabentuk ini menjadi hubungan bagi jurang dalam kajian penggunaan asas rakit bercerucuk dalam lapisan tanah lembut boleh mampat. Ini menggabungkan enapan jangka masa panjang di dalam analisis, mengambilkira cerucuk dengan panjang yang pelbagai dan boleh digunakan pengamal jurutera dalam kerja rekabentuk. Kajian parametrik bagi mengesahkan analisis dan rekabentuk ini melalui permodelan asas rakit cerucuk 'terapung' dengan bilangan cerucuk, konfigurasi panjang, jarak antara cerucuk dan ketebalan rakit yang berbeza-beza telah di laksanakan. Asas rakit bercerucuk dengan beban pugak yang dianalisis adalah 3x3, 6x6 dan 9x9 bilangan cerucuk dengan 108 jumlah kombinasi kes; merangkumi panjang cerucuk yang berbeza-beza samada dengan panjang cerucuk yang pelbagai atau sama, jarak antara cerucuk yang berbeza dan ketebalan rakit yang berbeza. Penemuan kajian menunjukkan asas rakit bercerucuk dengan kombinasi panjang cerucuk yang pelbagai secara amnya lebih efektif dalam mengurangkan bezaan enapan, nisbah ( $\Delta\rho/\rho_{\max}$ ), momen lentur rakit dan sudut herotan ( $\beta$ ) berbanding dengan rakit bercerucuk yang mempunyai panjang cerucuk yang sama walaupun dengan cerucuk yang paling panjang. Penemuan daripada kajian parametrik ini menyumbang kepada pemahaman lebih jelas tentang prestasi dan sifat rakit bercerucuk 'terapung' dalam tanah lembut terutamanya untuk rakit bercerucuk dengan pelbagai panjang. Cadangan analisis dan metodologi rekabentuk di dalam kajian ini telah digunakan dengan jayanya untuk merekabentuk sistem asas rakit bercerucuk dalam lapisan tanah lembut dan dalam bagi menampung beban bangunan setinggi 2 hingga 5 tingkat yang telah dibina dan diduduki lebih daripada 10 tahun. Ini telah mengesahkan manfaat yang diperolehi hasil daripada kajian ini iaitu untuk menambah baik metodologi analisis dan rekabentuk yang boleh dipercayai dan efisien melalui pemahaman terhadap prestasi serta sifat asas rakit bercerucuk 'terapung' dengan sama panjang atau pelbagai.

## TABLE OF CONTENTS

<b>CHAPTER</b>	<b>TITLE</b>	<b>PAGE</b>
	<b>DECLARATION</b>	ii
	<b>DEDICATION</b>	iii
	<b>ACKNOWLEDGEMENT</b>	iv
	<b>ABSTRACT</b>	v
	<b>ABSTRAK</b>	vi
	<b>TABLE OF CONTENTS</b>	vii
	<b>LIST OF TABLES</b>	xi
	<b>LIST OF FIGURES</b>	xiv
	<b>LIST OF SYMBOLS</b>	xx
	<b>LIST OF APPENDICES</b>	xxv
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Introduction	1
	1.2 Problem Statement	3
	1.3 Research Objectives	4
	1.4 Scope of Works	5
	1.5 Significant of Study	5
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>7</b>
	2.1 Introduction	7
	2.2 Analysis of Vertically Loaded Single Pile	8
	2.3 Vertically Loaded Pile Groups	10
	2.3.1 Equivalent Raft Method and Equivalent Pier Method	13
	2.3.1.1 The Equivalent Raft Method	13
	2.3.1.2 The Equivalent Pier Method	15

	2.3.1.3	Comparisons of Two Methods and Limitations	17
	2.3.2	Interaction Factor in Pile Group Analysis	18
	2.3.3	Non-Linearity in Pile Group Analysis	22
	2.3.4	Time-Dependent Settlement in Pile Group Analysis	23
	2.3.5	Computer Programmes for Pile Groups Analysis	24
2.4		Piled Raft	26
	2.4.1	Proportions of Load on Raft and Piles	29
	2.4.2	Design Philosophies for Piled Raft	30
	2.4.3	Method of Analysis for Piled Raft	34
	2.4.4	Piled Raft with Dissimilar Piles	36
2.5		Bearing Capacity of The Raft	36
2.6		Bearing Capacity of The Floating Piles	38
2.7		Soil Element Deformation from Raft Contact Pressure	40
2.8		Limiting Deformation for Framed Buildings and Reinforced Load Bearing Wall	41
2.9		Concluding Comments on Literature Survey and Bridging the Research Gap	43
<b>3</b>		<b>RESEARCH METHODOLOGY</b>	<b>45</b>
	3.1	Introduction	45
	3.2	Selection of Soil Parameters and Groundwater Conditions	45
	3.2.1	Subsurface Investigation and Laboratory Tests	45
	3.2.2	Subsoil Conditions and Modelling Parameters	49
	3.3	Methodology for Analysis and Design of ‘Floating’ Piled Raft (FPR) Foundation Sysem	53
	3.3.1	Methodology for Pile Group Analysis	54



3.3.2	Derivation of Stiffness Matrix Solution for Pile Group Analysis for Piles of Same or Varying Length	55
3.3.3	Methodology for Analysis of Raft Settlement	57
3.3.4	Methodology for Combining the Pile Group Analysis with Raft Settlement Analysis	57
3.3.5	Proposed Design Methodology for ‘Floating’ Piled Raft (FPR) Foundation System in Soft Compressible Subsoil	59
<b>4</b>	<b>MODELLING OF ‘FLOATING’ PILED RAFT</b>	<b>63</b>
4.1	Introduction	63
4.2	Modelling of ‘Floating’ Piled Raft with same and Varying Pile Lengths	63
4.3	Modelling of ‘Floating’ Piled Raft of Same Pile Lengths for 2-storey Terrace Houses	72
4.3.1	Loadings and Design Methodology for ‘Floating’ Piled Raft Foundation of same Pile Lengths for 2-Storey Houses	73
4.3.2	Analyses of 2-Storey Houses	75
4.4	Modelling of ‘Floating’ Piled Raft of Varying Pile Lengths for 5-storey Apartment	76
4.4.1	Loadings and Design Methodology for ‘Floating’ Piled Raft Foundation of Varying Pile Lengths	77
4.4.2	Analyses of 5-Storey Apartments	79
<b>5</b>	<b>RESULTS INTERPRETATION AND DISCUSSION</b>	<b>81</b>
5.1	Introduction	81
5.1.1	Results of Differential Settlement	82
5.1.2	Ratio of Differential Settlement over Largest Differential Settlement	89
5.1.3	Maximum Settlement	91

5.1.4	Ratio of Differential Settlement over Maximum Settlement	98
5.1.5	Load on Piles	107
5.1.6	Bending Moment of the Piled Raft	110
5.1.7	Settlement Profile and Angular Distortion of the Piled Raft	119
5.2	Discussion on the Case History of ‘Floating’ Piled Raft of Same Pile Lengths for 2-storey Terrace Houses	137
5.2.1	Settlement Monitoring Results and Discussions	138
5.3	Discussion on the Case History of ‘Floating’ Piled Raft of Varying Pile Lengths for 5-storey Apartment	141
5.4	Summary of Results Interpretation and Discussion	145
<b>6</b>	<b>CONCLUSIONS AND RECOMMENDATIONS</b>	<b>146</b>
6.1	Introduction	146
6.2	Use of ‘Floating’ Piled Raft Foundation System in Soft Compressible Subsoil for Low Rise Buildings	146
6.3	Developed on Analysis and Design Methodology for the ‘Floating’ Piled Raft Foundation System	147
6.4	Performance and Behaviour of ‘ Floating’ Piled Raft from 108 Cases Analysed	148
6.5	Conclusions	151
6.6	Recommendations for Future Research	152
	<b>REFERENCES</b>	<b>154</b>
	<b>APPENDICES A - C</b>	<b>165-242</b>

## LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Summary of limiting values of angular distortion ( $\beta$ ) for framed buildings and reinforced loadbearing walls	42
2.2	Bridging Research Gaps	44
3.1	Laboratory Tests	47
3.2	Subsoil parameters used in this research	53
4.1	Matrix showing the cases of analyses for 3x3, 6x6 and 9x9 piled raft	65
5.1	Differential settlement and percentage to the largest differential settlement value of same raft thickness and spacing of piles for 3x3 piled raft	84
5.2	Differential settlement and percentage to the largest differential settlement value of same raft thickness and spacing of piles for 6x6 piled raft	85
5.3	Differential settlement and percentage to the largest differential settlement value of same raft thickness and spacing of piles for 9x9 piled raft	86
5.4	Maximum settlement and percentage to the largest Maximum settlement value of same raft thickness and spacing of piles for 3x3 piled raft	95
5.5	Maximum settlement and percentage to the largest Maximum settlement value of same raft thickness and spacing of piles for 6x6 piled raft	96

5.6	Maximum settlement and percentage to the largest Maximum settlement value of same raft thickness and spacing of piles for 9x9 piled raft	97
5.7	Ratio of $(\Delta\rho/\rho_{\max})$ and percentage to the largest $(\Delta\rho/\rho_{\max})$ of same raft thickness and spacing of piles for 3x3 piled raft	99
5.8	Ratio of $(\Delta\rho/\rho_{\max})$ and percentage to the largest $(\Delta\rho/\rho_{\max})$ of same raft thickness and spacing of piles for 6x6 piled raft	100
5.9	Ratio of $(\Delta\rho/\rho_{\max})$ and percentage to the largest $(\Delta\rho/\rho_{\max})$ of same raft thickness and spacing of piles for 9x9 piled raft	101
5.10	Maximum bending moment and percentage to the largest maximum bending moment value of same raft thickness and spacing of piles for 3x3 piled raft	113
5.11	Maximum bending moment and percentage to the largest maximum bending moment value of same raft thickness and spacing of piles for 6x6 piled raft	114
5.12	Maximum bending moment and percentage to the largest maximum bending moment value of same raft thickness and spacing of piles for 9x9 piled raft	115
5.13	Angular distortion perpendicular across 3x3 piled raft and percentage to the largest angular distortion value of same raft thickness and spacing of piles	123
5.14	Angular distortion diagonally across 3x3 piled raft and percentage to the largest angular distortion value of same raft thickness and spacing of piles	124
5.15	Angular distortion perpendicular across 6x6 piled raft and percentage to the largest angular distortion value of same raft thickness and spacing of piles	129
5.16	Angular distortion diagonally across 6x6 piled raft and percentage to the largest angular distortion value of same raft thickness and spacing of piles	130

5.17	Angular distortion perpendicular across 9x9 piled raft and percentage to the largest angular distortion value of same raft thickness and spacing of piles	135
5.18	Angular distortion diagonally across 9x9 piled raft and percentage to the largest angular distortion value of same raft thickness and spacing of piles	136

## LIST OF FIGURES

<b>FIGURE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
1.1	Problems for buildings with piled to 'set' foundation on soft ground	3
2.1	Central piles to reduce differential settlement (from Randolph, 1994)	12
2.2	Load transfer to soil from pile groups (Tomlinson, 1986). (a) Group of piles supported mainly by skin friction. (b) Group of piles driven through weak clay to combined skin friction and end-bearing in stratum of dense granular soil. (c) Group of piles supported in end bearing on hard incompressible stratum	14
2.3	Concept of Equivalent Pier Method (from Randolph, 1994)	16
2.4	Piled Raft Foundation as a Composite Construction (Katzenbach, et al., 2000)	27
2.5	Foundation settlement as a function of piled raft coefficient (Katzenbach, et al., 2000)	28
2.6	Schematic Design Approach for Settlement Reducing Piles (from Randolph, 1994)	31
2.7	Load-settlement curves for piled rafts according to various design philosophies (from Poulos, 2001)	33
2.8	Numerical representation of piled raft foundation: (1) one dimensional pile element; (2) lumped soil response at each pile node - load-transfer spring; (3) two-dimensional plate-bending finite element raft mesh; (4) lumped soil response at each raft node – Giroud solution; (5) pile-soil-pile interaction effects calculated	

	between pairs of nodes – Mindlin’s equation; (6)	
	raft-soil-raft interaction; (7) pile-soil-raft interaction	35
2.9	Schematic showing the symbol used in Meyerhof bearing capacity equation	37
2.10	Adhesion factor ( $\alpha$ ) with undrained shear strength ( $s_u$ )	38
2.11	Angular distortion ( $\beta$ ) and tilt ( $\omega$ )	42
3.1	Location of Klang Clay (after Tan et. Al., 2004)	49
3.2	Geological map of the Site (after Tan et.al., 2004)	50
3.3	Basic Soil Properties of Klang Clay (after Tan et. al., 2004)	51
3.4	Compressibility Parameters for Klang Clay (after Tan et. al., 2004)	51
3.5	Undrained Shear Strength and Sensitivity for Klang Clay (after Tan et. al., 2004)	52
3.6	Flow Chart for Analysis and Design of ‘Floating’ Piled Raft	62
4.1a	3x3 piled raft	66
4.1b	3x3 piled raft	67
4.2a	6x6 piled raft	67
4.2b	6x6 piled raft	68
4.2c	6x6 piled raft	69
4.3a	9x9 piled raft	69
4.3b	9x9 piled raft	70
4.3c	9x9 piled raft	71
4.4	Typical 2-storey terrace houses constructed and occupied since year 2004	72
4.5	2-storey terrace houses foundation layout	74
4.6	Typical cross-section of strip-raft of 2-storey terrace houses	75
4.7	Effect of adjacent houses stress bulb influencing the settlement of terrace house analysed	76
4.8	Typical 5-storey apartment constructed and occupied	77
4.9	Typical cross-section of strip-raft of 5-storey apartment	78
4.10	Typical cross-section of strip-raft of 5-storey apartment	78
4.11	Site layout plan of the 5-storey apartment analysed and designed	79

4.12	Layout plan showing piles of varying lengths for 5-storey apartment and the locations of settlement markers	80
5.1	Differential settlement ( $\Delta\rho$ ) vs. spacing of piles (s) and thickness of raft (t) for 3x3 piled raft	82
5.2	Differential settlement( $\Delta\rho$ ) vs. spacing of piles (s) and thickness of raft (t) for 6x6 piled raft	83
5.3	Differential settlement ( $\Delta\rho$ ) vs. spacing of piles (s) and thickness of raft (t) for 9x9 piled raft	83
5.4	Ratio of differential settlement ( $\Delta\rho$ ) over maximum differential settlement ( $\Delta\rho_{\max}$ ) obtained from all the 3x3 piled raft analysed vs. ratio of pile spacing over raft thickness (s/t) for 3x3 piled raft	90
5.5	Ratio of differential settlement ( $\Delta\rho$ ) over maximum differential settlement ( $\Delta\rho_{\max}$ ) obtained from all the 6x6 piled raft analysed vs. ratio of pile spacing over raft thickness (s/t) for 6x6 piled raft	90
5.6	Ratio of differential settlement ( $\Delta\rho$ ) over maximum differential settlement ( $\Delta\rho_{\max}$ ) obtained from all the 9x9 piled raft analysed vs. ratio of pile spacing over raft thickness (s/t) for 9x9 piled raft	91
5.7	Maximum settlement ( $\rho_{\max}$ ) vs. spacing of piles (s) and thickness of raft (t) for 3x3 piled raft	93
5.8	Maximum settlement ( $\rho_{\max}$ ) vs. spacing of piles (s) and thickness of raft (t) for 6x6 piled raft	93
5.9	Maximum settlement ( $\rho_{\max}$ ) vs. spacing of piles (s) and thickness of raft (t) for 9x9 piled raft	94
5.10	Ratio of differential settlement ( $\Delta\rho$ ) over maximum settlement ( $\rho_{\max}$ ) for each case vs. spacing of piles (s) and thickness of raft (t) for 3x3 piled raft	103
5.11	Ratio of differential settlement ( $\Delta\rho$ ) over maximum settlement ( $\rho_{\max}$ ) for each case vs. spacing of piles (s) and thickness of raft (t) for 6x6 piled raft	104



5.12	Ratio of differential settlement ( $\Delta\rho$ ) over maximum settlement ( $\rho_{\max}$ ) for each case vs. spacing of piles (s) and thickness of raft (t) for 9x9 piled raft	104
5.13	Ratio of ( $\Delta\rho/\rho_{\max}$ ) vs. ratio of pile spacing over raft thickness (s/t) for 3x3 piled raft	105
5.14	Ratio of ( $\Delta\rho/\rho_{\max}$ ) vs. ratio of pile spacing over raft thickness (s/t) for 6x6 piled raft	106
5.15	Ratio of ( $\Delta\rho/\rho_{\max}$ ) vs. ratio of pile spacing over raft thickness (s/t) for 9x9 piled raft	106
5.16	Pile raft coefficient ( $\alpha_{pr}$ ) vs. spacing of piles (s) and thickness of raft (t) for 3x3 piled raft	108
5.17	Pile raft coefficient ( $\alpha_{pr}$ ) vs. spacing of piles (s) and thickness of raft (t) for 6x6 piled raft	108
5.18	Pile raft coefficient ( $\alpha_{pr}$ ) vs. spacing of piles (s) and thickness of raft (t) for 9x9 piled raft	109
5.19	Maximum bending moment ( $BM_{\max}$ ) of the raft vs. spacing of piles (s) and thickness of raft (t) for 3x3 piled raft	110
5.20	Maximum bending moment ( $BM_{\max}$ ) of the raft vs. spacing of piles (s) and thickness of raft (t) for 6x6 piled raft	111
5.21	Maximum bending moment ( $BM_{\max}$ ) of the raft vs. spacing of piles (s) and thickness of raft (t) for 9x9 piled raft	111
5.22	Ratio of ( $BM_{\max}/\rho_{\max}$ ) vs. spacing of piles (s) and thickness of raft (t) for 3x3 piled raft	117
5.23	Ratio of ( $BM_{\max}/\rho_{\max}$ ) vs. spacing of piles (s) and thickness of raft (t) for 6x6 piled raft	117
5.24	Ratio of ( $BM_{\max}/\rho_{\max}$ ) vs. spacing of piles (s) and thickness of raft (t) for 9x9 piled raft	118
5.25	Settlement profile of the pile points for raft thickness of 0.2m on 3x3 piled raft	119
5.26	Settlement profile of the pile points for raft thickness of 0.4m on 3x3 piled raft	120

5.27	Settlement profile of the pile points for raft thickness of 0.8m on 3x3 piled raft	120
5.28	Angular distortion ( $\beta$ in %) perpendicular across the 3x3 piled raft centre vs spacing of piles (s) and thickness of raft (t)	122
5.29	Angular distortion ( $\beta$ in %) diagonally across the 3x3 piled raft centre vs spacing of piles (s) and thickness of raft (t)	122
5.30	Settlement profile of the pile points for raft thickness of 0.2m on 6x6 piled raft	126
5.31	Settlement profile of the pile points for raft thickness of 0.4m on 6x6 piled raft	126
5.32	Settlement profile of the pile points for raft thickness of 0.8m on 6x6 piled raft	127
5.33	Angular distortion ( $\beta$ in %) perpendicular across the 6x6 piled raft centre vs. spacing of piles (s) and thickness of raft (t)	127
5.34	Angular distortion ( $\beta$ in %) diagonally across the 6x6 piled raft centre vs. spacing of piles (s) and thickness of raft (t)	128
5.35	Settlement profile of the pile points for raft thickness of 0.2m on 9x9 piled raft	132
5.36	Settlement profile of the pile points for raft thickness of 0.4m on 9x9 piled raft	132
5.37	Settlement profile of the pile points for raft thickness of 0.8m on 9x9 piled raft	133
5.38	Angular distortion ( $\beta$ in %) perpendicular across the 9x9 piled raft centre vs. spacing of piles (s) and thickness of raft (t)	133
5.39	Angular distortion ( $\beta$ in %) diagonally across the 9x9 piled raft centre vs. spacing of piles (s) and thickness of raft (t)	134

5.40	Designed settlement profile of the platform supporting the row of terrace houses analysed (after Tan et.al., 2005b)	138
5.41	Locations of settlement markers installed and monitored (after Tan et. al., 2005b)	139
5.42	Settlement monitoring results of Block 2 (after Tan et.al., 2005b)	140
5.43	Settlement monitoring results of Block 3 (after Tan et.al., 2005b)	140
5.44	Layout plan showing piles of varying lengths for 5-storey apartment and the locations of settlement markers (after Tan et.al., 2006)	142
5.45	Settlement monitoring results (after Tan et.al., 2006)	143
5.46	Plot of average total settlement and maximum differential Settlement monitored (after Tan et.al., 2006)	143
5.47	Profile of Measured Settlement vs Predicted Settlement (after Tan et.al., 2006)	144
5.48	Measured Settlement Contour (in mm) at Day 391 (after Tan et.al., 2006)	144

## LIST OF SYMBOLS

$w_s$	-	Pile displacement
$\tau_0$	-	Shear stress
$r_0$	-	Radius of the pile
$G$	-	Soil shear modulus
$r_m$	-	Maximum radius of influence of the pile
$\rho$	-	Measure of the vertical homogeneity
$\eta = r_b / r_0$	-	Ratio of under-ream for under-reamed piles
$\xi = G_l / G_b$	-	Ratio of end-bearing for end-bearing piles
$\rho = G_{ave} / G_l$	-	Variation of soil modulus with depth
$\lambda = E_p / G_l$	-	Pile-soil stiffness ratio
$\zeta = \ln(r_m / r_0)$	-	Measure of radius of influence of pile
$\mu L_p = \sqrt{(2 / \zeta \lambda)} (L_p / r_0)$	-	Measure of pile compressibility
$I$	-	Obtained from the product of a number of other Coefficients which reflects features
$q$	-	Average pressure applied to the raft
$I_\epsilon$	-	An influence factor of vertical strain
$h_i$	-	Thickness of $i^{\text{th}}$ layer of subsoil
$E_i$	-	Young's modulus of $i^{\text{th}}$ layer of subsoil
$F_D$	-	Correction factor from Fox (1948)
$d_{eq}$	-	Diameter of equivalent pier (m)
$A_g$	-	Plan area of the piled raft (m <sup>2</sup> )
$E_{eq}$	-	Young's modulus of equivalent pier (kN/m <sup>2</sup> )
$E_s$	-	Young's modulus of subsoil (kN/m <sup>2</sup> )
$E_p$	-	Young's modulus of piles (kN/m <sup>2</sup> )

$A_{tp}$	-	Total cross-sectional area of the piles in the group ( $m^2$ )
$A_g$	-	Plan area of the piled raft ( $m^2$ )
$R$	-	If smaller than 4, equivalent pier method is suitable. It is even better if the value is less than 2
$n$	-	Number of piles
$s$	-	Pile spacing (m)
$L_p$	-	Pile length (m)
$w_i$	-	Settlement of pile $i$ within a group of $n$ piles
$P_{av}$	-	Average load on a pile within the group
$S_I$	-	Settlement of a single pile under unit load (i.e., the pile flexibility)
$\alpha_{ij}$	-	Interaction factor for pile $i$ due to other pile ( $j$ ) within the group.
$S_{Ie}$	-	Elastic flexibility of the pile
$R_f$	-	Hyperbolic factor (taken as unity)
$P$	-	Load on pile $i$
$P_u$	-	Ultimate load capacity of pile $i$
$q$	-	Analysis exponent - 2 for incremental non-linear analysis - 1 for equivalent linear analysis
$s$	-	Centre to centre spacing between pile $i$ and $j$
$\rho$	-	Ratio of soil modulus at mid-length of pile to that at the level of the pile tip (1 for constant modulus and 0.5 for “Gibson” soil which has Young’s modulus linearly increasing with depth)
$\gamma$	-	$\ln(2r_m/d)$
$\Gamma$	-	$\ln(2r_{m2}/ds)$
$r_m$	-	$2.5(1-\nu)\rho L$
$L$	-	Pile length
$d$	-	Pile diameter

$\Lambda$	-	$L/d$
$k_1$ to $k_4$	-	Fitting parameters
$E_{sL}$	-	Soil modulus at mid-length of the pile
$E_b$	-	Modulus of bearing stratum below pile tip
$r_g$	-	A group distance defined by Randolph & Wroth (1979)
$w$	-	Vertical deflection
$r_m$	-	Limiting radius of influence of the pile
$l$	-	Pile length
$\nu$	-	Poisson ratio of the soil
$P_b$	-	Load acting on the pile base
$c$	-	$2/\pi$
$G_{1/2}$	-	Shear modulus of soil at pile mid-depth
$G_l$	-	Shear modulus of soil at pile base
$P_s$	-	Load acting on the pile shaft
$\alpha_v$	-	Interaction factor
$(\mu l)^2$	-	$(\frac{2}{\zeta \lambda})(\frac{l}{r_0})^2$
$\lambda$	-	$E_p/G_l$
$A_p$	-	Cross Section Area of the Pile
$\sigma'_0$	-	In-situ effective vertical stress
$\sigma'_c$	-	Pre-consolidation Pressure /Yield Stress
CR	-	Compression ratio = $\frac{C_c}{1+e_0}$
RR	-	Recompression ratio = $\frac{C_r}{1+e_0}$
$C_c$	-	Compression Index
$C_r$	-	Recompression Index
$H_i$	-	Initial thickness of incremental soil layer, $i$ of $n$ layers
$\sigma_0$	-	Foundation contact pressure
$I_q$	-	Factor of intensity of pressure

$L$	-	Length of area loaded
$B$	-	Width of area loaded
$Z$	-	Depth of soil layer of interest
$m$	-	$L/B$
$n$	-	$z/B$
$K_{\text{pile-total},q,i=0}$	-	Stiffness of pile support (unit in kN/m)
$P_{\text{pile},q,i=0}$	-	Axial point load acting pile (unit in kN)
$\delta_{\text{pile-total},q,i=0}$	-	Total combined settlement of the pile raft at each pile point location (unit in m)
$q$	-	Pile point reference number
$I$	-	Iteration number
$K_{\text{soil-total},r,i=0}$	-	Stiffness of soil support beneath each section of raft (unit in kPa/m)
$p_{\text{raft},r,i=0}$	-	Uniform load acting on each section of raft (unit in kPa)
$\delta_{\text{raft-total},r,i=0}$	-	Total combined settlement of the pile raft at the midpoint of each section of raft (unit in m)
$r$	-	Reference number for each section of raft
$E$	-	Young modulus of soil. $E \approx 200s_u$ to $400s_u$ for soft clay
$N_q$	-	$e^{\pi \tan \phi'} \tan^2(45 + \phi'/2)$
$N_c$	-	$(N_q - 1) \cot \phi'$
$N_\gamma$	-	$(N_q - 1) \tan(1.4 \phi')$
$s_c$	-	$1 + 0.2K_p(B/L)$ ; for any $\phi'$
$s_q = s_\gamma$	-	$1 + 0.1K_p(B/L)$ ; for $\phi' > 10^\circ$
$s_q = s_\gamma$	-	1 ; for $\phi' = 0^\circ$
$\alpha$	-	Adhesion factor
$s_u$	-	Undrained shear strength (in kPa)
$N_c$	-	Bearing capacity factor = 9
$Q_{\text{ag}}$	-	Allowable geotechnical capacity
$Q_{\text{su}}$	-	Ultimate shaft capacity = $\sum_i (f_{\text{su}} \times A_s)$
$i$	-	Number of soil layers

$Q_{bu}$	-	Ultimate base capacity = $f_{bu} A_b$
$f_s$	-	Unit shaft resistance for each layer of embedded soil
$f_b$	-	Unit base resistance for the bearing layer of soil
$A_s$	-	Pile shaft area
$A_b$	-	Pile base area
$F_s$	-	Partial Factor of Safety for Shaft Resistance of 'floating' pile as settlement reducer = 1.1 to 1.2
$F_b$	-	Partial Factor of Safety for Base Resistance of 'floating' pile as settlement reducer = 1.5 to 2.0
$F_g$	-	Global Factor of Safety for Total Resistance of 'floating' pile as settlement reducer = 1.2 to 1.5
$\alpha_{pr}$	-	Pile raft coefficient
$\sum R_{piles}$	-	Sum of piles resistance
$R_{total}$	-	Total imposed load



**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	Pile Group Analysis	165
B	Computer Coding for Pile Group Analysis	177
C	Ir. Tan Yean Chin Publications	242

## **CHAPTER 1**

### **INTRODUCTION**


#### **1.1 Introduction**

Conventional piled foundation, commonly designed and constructed in Malaysia, is usually designed for buildings/structures to provide adequate load carrying capacity, to limit the overall settlement and hence indirectly control differential settlement to within tolerable limits. Piles are often installed into competent stratum or to 'set' (terminate) in hard layer. Therefore to date, design methods commonly used by practicing engineers in Malaysia still concentrate on providing adequate axial capacity from the piles to carry all the structural loads without detailed evaluation of pile settlement. Usually, the estimation of settlement is considered as a secondary issue and sometimes ignored because of the nature of load transfer between pile and soil, particularly where shaft resistance provides a major component of the total pile capacity which will automatically lead to small acceptable settlement. However, this conventional design methodology faces numerous problems over the years when adopted in deep layer of soft compressible subsoil of alluvial and marine deposits. This type of geological formation is commonly found in majority of the areas along the coast of Peninsular Malaysia and also East Malaysia namely the infamous clay at Klang, Muar and Sibul. Neighbouring countries such as Thailand, Indonesia and Singapore also have similar alluvial or marine deposits.

As the country develops, good competent ground (e.g. hard residual soils) are becoming scarce and development especially for housing (especially for low and

medium cost houses and flats) and also for industrial usage (e.g. tanks farm, factory and plants) have to be constructed in the low lying or swampy areas with deep soft compressible subsoil. In these areas, hard competent stratum is sometime as deep as 40m to 60m therefore making conventional method requiring long slender piles. To make things worse, at these low lying areas (sometimes water logged) the earthworks platform for the buildings has to be raised by earth filling above the flood level. The weight of the earth fill on top of the soft compressible subsoil induces both primary and secondary consolidation settlement with time.

The conventional piled to 'set' design methodology only addresses the short-term problem associated with soft clay as the allowable pile capacity (allowable load to be imposed on the piles from the building) will be significantly reduced because the allowable geotechnical capacity has to be downgraded to cater for negative skin friction (down drag) induced by the settling soft compressible subsoil. This often reduces the cost-effectiveness of such 'conventional solution' as the pile capacity (both allowable geotechnical and structural capacity) has to be downgraded (reduced) thus requiring more piles or larger pile sizes for same loading compared to piles that are not experiencing down drag. Other than being uneconomical, conventional method of piled to 'set' also causes long term serviceability problems such as large abrupt differential settlement between the piled buildings/structures and the surrounding earth platform on compressible subsoil that is still undergoing settlement with time. The abrupt differential settlement with large enough magnitude causes problem such as breakages of water and sewerage pipes. The hollow gap formed beneath the building, due to larger settlement of the earth platform compared to the buildings supported by piles installed into competent stratum, becomes a health and safety hazard to the public as mosquitoes, rats, snakes and other animals can make this area their habitat as shown in Figure 1.1.

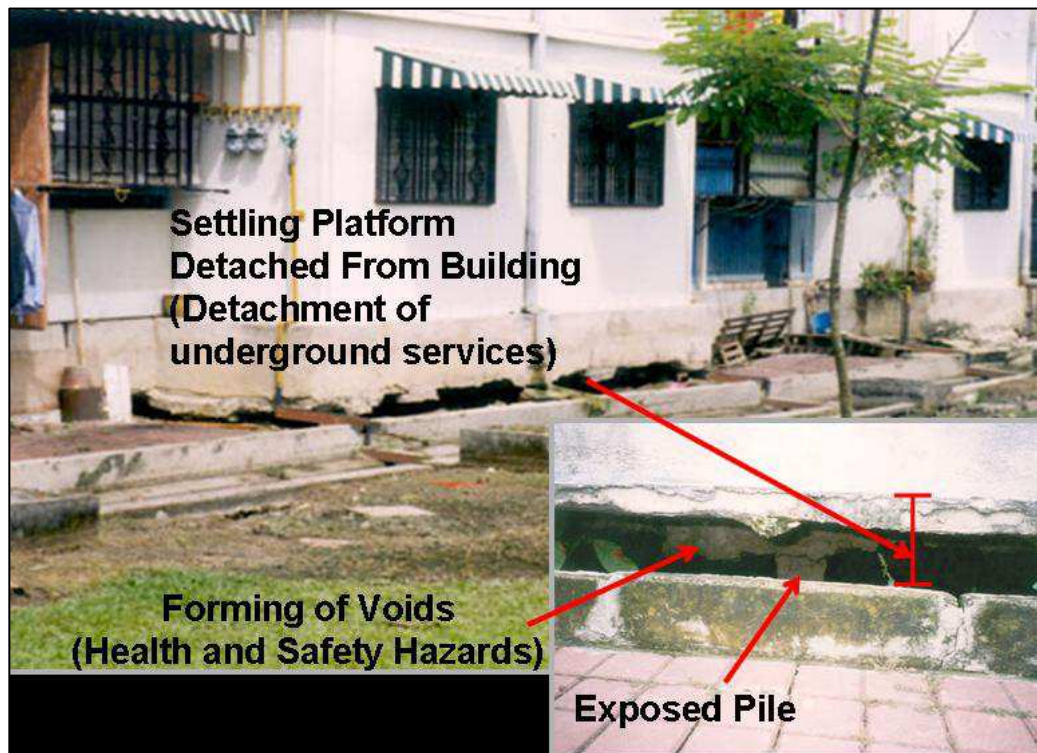

**Figure 1.1** Problems for buildings with piled to 'set' foundation on soft ground

## 1.2 Problem Statement

Being aware of all the problems associated with conventional method of piled to 'set' in deep layer of soft compressible subsoil, it is important to propose an alternative foundation method of 'floating' piled raft (FPR) foundation system that would eliminate all the problems stated above. In summary, the proposed foundation method shall be economical, technically suitable, safe and satisfy both ultimate and serviceability limit states of the buildings to be supported. This foundation system would benefit the construction industry in particular and the development of the country as a whole. However, in order to achieve this, the proposed foundation system shall have practical analysis and design methodology that practicing engineers in Malaysia would find it user friendly and not too difficult so that it can be widely used to carry out day-to-day analysis and design.

Therefore, when developing the analysis and design methodology for the proposed foundation system, it is necessary to make some practical simplifications

and realistic assumptions, but the proposed methodology shall not lose the correctness of the proposed method that can be calibrated by actual site measurements of the buildings constructed and performance of the actual buildings such as no architectural, structural or services damage. This is like carrying out very costly full-scale actual test to prove the usefulness and appropriateness of the proposed analysis and design methodology. Many researches may not have this luxury and opportunity as it would be very costly and time consuming. Fortunately, this is possible for this research as the researcher through his consulting firm was involved in the actual projects in Malaysia and Indonesia that adopted the researcher's proposed analysis and design methodology.

### **1.3 Research Objectives**

Although extensive research in piled raft has been carried out and published as presented in literature review, however, the following issues have not been fully addressed which will form the research objectives:-

- i. To look into the possibility and suitability of using 'floating' piled raft (FPR) foundation system in soft compressible subsoil for low rise buildings.
- ii. To develop an analysis and design methodology for an alternative foundation system of 'floating' piled raft foundation system of same or varying pile lengths that take into consideration of the long term settlement of the subsoil. The proposed analysis and design methodology should be able to be used by practicing engineers for day to day design works.
- iii. To solve long term serviceability problems of conventional piled to set foundation system in soft compressible subsoil by allowing 'floating' piled raft to settle together with the platform.
- iv. To understand the performance and behaviour of 'floating' piled raft in soft compressible subsoil especially on the piled raft with combination of varying piled lengths.

## 1.4 Scope of Works

The scope of works for this research are as follows:-

- i. For vertically loaded piled raft in soft compressible subsoil only.
- ii. Proposed analysis and design methodology can cater for piles of varying sizes, lengths and loads.
- iii. The piles shall be 'floating' piles which means the piles are not installed into hard stratum.
- iv. Terzaghi's consolidation theory is used for the evaluation of the magnitude of consolidation settlement.
- v. For parametric studies, the vertically loaded piled rafts analysed are 3x3, 6x6 and 9x9 number of piles respectively with total combination of 108 cases that cover different pile lengths, different pile spacing and different raft thickness.
- vi. Case studies on two completed projects designed using the proposed methodology and constructed:-
  - a) 2-storey terrace houses at Bandar Botanic , Klang
  - b) 5-storey medium rise apartment at Bandar Botanic, Klang

## 1.5 Significant of Study

This research was carried out to focus on the development of analysis and design methodology for the proposed alternative foundation system of 'floating' piled raft (FPR) foundation system of same or varying pile lengths. The design objectives are to control differential settlement, angular distortion and bending moment rather than only limiting total settlement. The estimations of differential settlement and angular distortion are the most critical issues in the design of large sized pile raft which the raft behaves as flexible raft, these movements are the main culprits causing a building to crack and lose its function and even collapse. Piles of varying lengths can be provided under the raft in order to limit settlements (both total and differential) to an acceptable level thus achieving the required angular distortion.

Based on the analysis and design methodology developed in this research, parametric studies were carried out to model the 'floating' pile raft (FPR) of different numbers of piles, lengths configurations, spacing of piles and also different raft thickness. The results obtained from these modelling will be presented and discussed in detailed to show the application of the proposed analysis and design methodology. The results also provide a better understanding on the performance and behaviour of 'floating' piled raft in soft compressible subsoil especially on the effectiveness of piled raft with combination of varying piled lengths to control differential settlement, angular distortion and bending moment. Finally, the analysis and design methodology developed can be used by practicing engineers for day to day design of piled raft in soft compressible subsoil which will help the development of the engineering practice in Malaysia.

## REFERENCES

- Anagnostopoulos, C. & Georgiadis, M. (1998). A simple analysis of piles in raft foundations. *Geotech. Eng.* **29**, No. 1, 71-83.
- Asaoko, A. (1978). Observational procedure of settlement prediction. *Soils and Foundations* 28(4):87-101
- Banerjee, P.K. and Davies, T.G. (1980). Analysis of some reported case histories of laterally loaded pile groups. *Proc. Num. Meths in Offshore Piling*, ICE, London, pp.83-90
- Banerjee, P.K. & Driscoll, R.M. (1976). Three-dimensional analysis of raked pile groups. *Proc. Instn. Civ. Engrs.*, 2(61): 653-671
- Basile, F. (1998). Non-linear analysis of vertically loaded pile groups. , *Proc. of 3rd Int. Geo. Seminar on Deep Foundations on Bored and Auger Piles*, Belgium, pp. 425-432.
- Bjerrum, L. (1963). Discussion. *Prof. Eur. Conf. SM &FE*, 2, pp.135.
- Booker, J.R. & Poulos, H.G. (1976). Analysis of creep settlement of pile foundations. *J. Geotech. Engng, Am. Soc. Civ. Engrs* 102, No. GT1, 1-14
- British Standard Institution. 1996. BS6399: Part 1: 1996: *Code of practice for dead and imposed loads*.



- Burland, J.B., Broms, B.B. & de Mello, V.F.B. (1977). Behaviour of foundations and structures. *State of the Art Review, Proc. IXth ICSMKFE, Tokyo, 2* : 495-546. Rotterdam : Balkema.
- Butterfield, R. & Banerjee, P.K. (1971). The elastic analysis of compressible piles and pile groups. *Géotechnique* 21, No. 1, 43-60.
- Chow, H.S.W. & Small, J.C. (2005). Behaviour of piled rafts with piles of different lengths and diameters under vertical loading. *ASCE geotechnical special publications (GSP) no. 132: ASCE Geo-Frontiers, Austin (TX); January 24–26*, pp. 841– 855.
- Chow, Y.K. & Teh, C.I. (1991). Pile-cap-pile group interaction in nonhomogeneous soil. *J. Geot. Eng. Div. Proc., ASCE* , Vol. 117, No. 11, pp. 1655-1668.
- Chow, Y.K. (1987). Iterative analysis of pile-soil-pile interaction. *Géotechnique* 37, No. 3, 321-333
- Chow, Y.K. (1987b). Three-Dimensional Analysis of Pile Groups. *J. Geot. Eng. Div. Proc., ASCE*, Vol. 113, No. 6, pp. 637-651.
- Chow, Y.K. (1986). Analysis of vertically loaded pile groups. *Int. Journal for Numerical and Analytical Methods in Geomechanics*, Vol. 10, 59-72
- Chow, Y.K. (1986b). Discrete element analysis of settlement of pile groups. *Computers Structs* 23, No. 1, 157-166
- Fleming, W.G.K., Weltman, A.J., Randolph, M.F. & Elson, W.K. (1992). *Piling engineering*, 2nd edn. Surrey University Press.
- Clancy, P. & Randolph, M.F. (1996). Simple design tools for piled raft foundations. *Géotechnique* 46, No. 2, 313-328.
- Clancy, P. & Randolph, M.F. (1993). Analysis and design of piled raft foundations. *Int. J. NAM Geomech.*

- Cooke, R.W. (1974). The settlement of Friction Pile Foundations. *Proc. Conference on tall buildings*, Kuala Lumpur.
- Costanzo, D. & Lancellotta, R. (1998). A note on pile interaction factors. *Soils and Foundations*, 39(4) : 251-253.
- Coyle, H.M. & Reese, L.C. (1966). Load transfer for axially loaded piles in clay. *ASCE Journal of Soil Mechanics and Foundation Division*, 92(SM2), pp.1-26.
- Davis, E. H. & Poulos, H.G. (1972). The analysis of pile raft systems. *Aus. Geomech. J.* **G2**, No.2, 21-27.
- Desai, C.S. (1974). Numerical design-analysis for piles in sand. *Journal of the Geotechnical Engineering Division, ASCE*, 100(6):613-635.
- de Sanctis, L. & Mandolini, A. (2006). Bearing capacity of piled rafts on soft clay soils. *J Geotech Geoenviron Eng ASCE*, 132(12):1600–10.
- Fleming, W.G.K., Weltman, A.J., Randolph, M.F. & Elson, W.K. (1992). *Piling engineering*, 2nd edn. Surrey University Press.
- Franke, E., Jutz, B. & El-Mossallamy, Y. (1994). *Measurements and numerical modelling of high-rise building foundations on Frankfurt Clay*, Geotechnical Special Publication 40, pp. 1325-1336. New York: American Society of Civil Engineers.
- Fox, L. (1948). The mean elastic settlement of a uniformly loaded area at a depth below the ground surface. *Proc. 2nd Int. Conf. Soil Mech. And Found. Eng.*, Vol. 1, 129.
- Griffiths, D.V., Clancy, P. & Randolph, M.F. (1991). Piled raft foundation analysis by finite elements. *Proc. 7<sup>th</sup> Int. Conf. Comput. Methods Adv. Geomech.*, Cairns **2**, 1153-1157.

- Golder, H.Q. & Osler, J.C. (1968). Settlement of a furnace foundation, Sorel, Quebec. *Can. Geot. Jnl.*, 5(1) : 46-56
- Guo, W.D. (2000). Visco-elastic load transfer models for axially loaded piles. *Int. Jnl. Num. Anal. Methods in Geomechs.*, 21: 135-163
- Guo, W.D. & Randolph, M.F. (1999). An efficient approach for settlement prediction of pile groups. *Geotechnique* 49, No. 2, 161-179
- Guo, W.D. & Randolph, M.F. (1997). Vertically loaded piles in non-homogeneous media. *Int. Jnl. Num. Anal. Methods in Geomechs.*, 21: 507-532.
- Gue, S.S. & Tan, Y.C. (2000), "Subsurface Investigation and Interpretation of Test Results for Foundation Design in Soft Clay", *Seminar on Ground Improvement – Soft Clay (SOGISC)*, UTM, Kuala Lumpur, 23 & 24 August, 2000.
- Hain, S.J. & Lee, I.K. (1978). The analysis of flexible raft-pile systems. *Géotechnique* **28**, No. 1, 65-83.
- Hansbo, S. (1993). Interaction problems related to the installation of pile groups. *Proc. of 2<sup>nd</sup> Int. Geot. Sem. on Deep Foundations on Bored and Auger Piles*, Ghent, pp. 59-66.
- Hansbo, S. and Kallstrom, R. (1983). A case study of two alternative foundation principles. *Vag-och Vattenbyggaren* 7-8 :23-27.
- Hansbo, S. and Jendeby, L. (1983). A case study of two alternative foundation principles : conventional friction piling and creep piling., *Vag-och Vattenbyggaren* 7-8 :29-31
- Hooper, J.A. (1974). *Review of behaviour of a piled-raft foundations*, Report No.83. London: CIRIA.

- Horikoshi, K. & Randolph, M.F. (1999). Estimation of overall settlement of piled rafts. *Soils and Foundations*, Vol.39, No.2, 59-68.
- Jardine, R.J., Potts, D., Fourie, A.B., & Burland, J.B. (1986). Studies of the influence of non-linear stress-strain characteristics in soil-structure interaction. *Géotechnique* 36, No. 3, pp.377-396
- Jendeby, L. (1986). *Friction piled foundations in soft clay. A study of load transfer nad settlement*. Department of Geotechnical Engineering, Chalmers Univ. of Technology, Gothenburg. Dissertation.
- Katzenbach, R., Arslan,U. & Moormann, Chr. (2000). Piled raft foundation projects in Germanay. *Design Applications of Raft Foundations*, Thomas Telford, pp. 323-392.
- Katzenbach, R., Arslan,U. & Moormann, Chr. (1998). Design and safety concept for piled raft foundations. *Proc. of 3rd Int. Geo. Seminar on Deep Foundations on Bored and Auger Piles*, Belgium, pp. 439-448.
- Klar, A., Vorster, T.E. B., Soga, K., and Mair, R.J. (2007). Elastoplastic solution for pile group settlement analysis in multilayered soils. *J. Geotech. Geoenviron. Eng., ASCE* 133(7), pp.782-792.
- Kraft, L.M., Ray, R.P. & Kagawa, T. (1981). Theoretical  $t$ - $z$  curves. *J. Geot. Eng. Div. Proc., ASCE* 107 (GT11), pp. 1543-1561.
- Kuwabara, R. (1989). An elastic analysis for piled raft foundations in a homogeneous soil. *Soils Found.* 28, No. 1, 82-92.
- Kuwabara, F. (1991). Settlement behaviour of non-linear soil around single piles subjected to vertical loads, *Soils and Foundations*, Vol.31, No.1, pp.39-36.

- Lee, J., Park, D & Choi, K (2014). Analysis of load sharing behavior for piled rafts using normalized load response model. *Computer and Geotechnics* 57, pp.65-74.
- Lee, I.K. (1993). Analysis and performance of raft and raft-pile foundations in a homogeneous soil. *Proc. 3<sup>rd</sup> Int. Conf. Case Hist. in Geotech. Engng, St Louis* (also Research Report R133, ADFA, University of New South Wales, Australia).
- Leung, Y.K., Klar, A. & Soga, K. (2010). Theoretical study on pile length optimisation of pile groups and piled rafts. *J Geotech Geoenviron Eng ASCE*, 136(2), pp.319-330.
- Liang, F.Y., Chen, L.Z. & Han, J. (2009). Integral equation method for analysis of piled rafts with dissimilar piles under vertical loading. *Comput Geotech* 36(3), pp.419-426.
- Liew,S.S., Gue,S.S., and Tan,Y.C. (2002). Design and instrumentation results of a reinforcement concrete piled raft supporting 2500-ton oil storage tank on very soft alluvium deposits. *The ninth international conference on piling and deepfoundations, Nice (France)*, pp. 263–269.
- Mandolini, A, Russo, G & Viggiani, C. (2005). Pile foundations : Experimental investigations, analysis and design, *Plenary Sessions, Proc. 16th Int. Conf. Soil Mechs. and Geot.l Eng.(16IGSMGE), Osaka, Japan*, 1, pp. 177-216.
- Mandolini, A. and Viggiani, C. (1997). Settlement of piled foundations, *Géotechnique* 47, No. 4, pp. 791-816.
- Meyerhof, G.G. (1956). Discussion paper by Skempton et al. ‘Settlement analysis of six structures in Chicago and London’. *Proc. ICE*, 5, No. 1, pp. 170
- Mindlin, R.D. (1936). Force at a point in the interior of a semi-infinite solid. *Physic* 7, pp. 195-202.

- Mylonakis, G. & Gazetas, G. (1998). Settlement and additional internal forces of grouped piles in layered soil. *Géotechnique* 48, No. 1, pp.55-72.
- O'Neill, M.W., Caputo, V., De Cock, F., Hartikainen, J., and Mets, M. (1996). Case histories of pile supported raft. *Rep. for ISSMFE TC18*, Univ. of Houston, Houston.
- O'Neill, M.W., Ghazzaly, O.I. & Ha, H.B. (1979). Assessment of hybrid model for pile groups, *Transportation Research Record*, Washington D.C., 773, pp.36-43.
- O'Neill, M.W., Ghazzaly, O.I. & Ha, H.B. (1977). Analysis of three-dimensional pile groups with nonlinear soil response and pile-soil-pile interaction, *Proc. Of 9th Offshore Technology Conf.*, 2, pp.245-256.
- Ottaviani, M. (1975). Three dimensional finite element analysis of vertically loaded pile groups. *Géotechnique* 25, No. 2, pp. 159-174.
- Peaker, K.R. (1984). Lakeview tower : a case history of foundation failure. *Proc. Int. Conf. on Case histories in Geot. Eng.*, Ed. S. Prakash, Univ. of Missouri Rolla, pp. 7-13.
- Phung, D.L. (1993). *Footings With settlement-reducing piles in non-cohesive soil*. Department of Geotechnical Engineering, Chalmers Univ. of Technology, Gothenburg. Dissertation.
- Polshin, D.E., & Tokar, R.A. (1957). Maximum allowable non-uniform settlement of structures, *Proc. 4th Int. Conf. SM &FE*, 1, pp.402.
- Poulos, H.G., Carter, J.P. and Small, J.C. (2001). Foundations and retaining structures – Research and Practice, *Proc. 15<sup>th</sup> ICSMFE*, Istanbul, Vol.4, pp.2561-2606.
- Poulos, H.G. (2001). Piled raft foundations : design and applications. *Géotechnique*, 51, No.2, pp. 95-113.

- Poulos, H.G., (2000). Foundation settlement analysis – Practice versus Research, The 8th Spencer J. Buchanan Lecture.
- Poulos, H.G. (1994). An approximate numerical analysis of pile-raft interaction, *Int. Journal for Numerical and Analytical methods in Geomechanics*, Vol.18, pp.73-92.
- Poulos, H.G. (1993). Settlement prediction for bored pile groups, *Proc. of 2nd Int. Geot. Sem. on Deep Foundations on Bored and Auger Piles*, Ghent, pp.103-117.
- Poulos, H.G. (1991). In *Computer methods and advances in geomechanics* (eds Beer *et al.*), pp. 183-191. Rotterdam : Balkema.
- Poulos, H.G. (1989). Pile behaviour: theory and application. *Géotechnique* 39, No. 3, pp. 365-415.
- Poulos, H.G. (1980) *User's guide to program DEFPIG – Deformation Analysis of Pile Groups*. School of Civil Engineering, University of Sidney.
- Poulos, H.G. & Davis, E.H. (1980). *Pile foundation analysis and design*. John Wiley and Sons, New York
- Poulos, H.G. (1968). Analysis of the settlement of pile groups. *Géotechnique*, 18, pp. 449-471
- Randolph, M.F. (1994). Design Methods for Pile Groups and Piled Rafts. *SOA Report, 13th ICSMFE, New Delhi, 5* : pp.61-82.
- Randolph, M.F. & Clancy, P. (1993). Efficient design of piled rafts. *Proc. of 2nd Int. Geot. Sem. on Deep Foundations on Bored and Auger Piles*, Ghent, pp.119-130.
- Randolph, M.F. (1987). *PIGLET, a computer program for the analysis and design of pile groups*. Report GEO 87036, Perth, University of Western Australia.

- Randolph, M.F. (1983). Design of piled raft foundations. *Proc. of the Int. Symp. on recent developments in laboratory and field tests and analysis of geotechnical problems*, Bangkok, pp. 525-537.
- Randolph, M.F. & Wroth, C.P. (1979). An analysis of the vertical deformation of pile groups. *Géotechnique* 29, No. 4, pp. 423-439.
- Randolph, M.F. & Wroth, C.P. (1978). Analysis of deformation of vertically loaded piles, *J. Geot. Eng. Div., ASCE* 104, No. 12, pp. 1465-1488.
- Reul, O. & Randolph, M.F. (2004). Design strategies for piled rafts subjected to nonuniform vertical loading. *J Geotech Geoenviron Eng ASCE* 130(1), pp.1-13.
- Reul, O. & Randolph, M.F. (2003). Piled rafts in overconsolidated clay : comparison of *in situ* measurements and numerical analysis. *Géotechnique*, **53**, No. 3, pp. 301-315.
- Russo, G. (1998). Numerical analysis of piled rafts, *Int. Journal for Numerical and Analytical methods in Geomechanics*, Vol.22, No.6, pp.477-508.
- Russo, G. & Viggiani, C. (1998). Factors controlling soil-structure interaction for piled rafts. *Darmstadt Geotechnics* (Darmstadt University of Technology), No. 4, pp. 297-322.
- Sharnouby, B.E. & Novak, M. (1990). Stiffness constants and interaction factors for vertical response of pile groups. *Canadian Geotechnical Journal* 27, pp.813-822.
- Sinha, J. (1997). *Piled raft foundations subjected to swelling and shrinking soils*. PhD Thesis, Univ. of Sydney, Australia.
- Skempton, A.W., & MacDonald, D.H. (1956). Allowable settlement of buildings. *Proc. ICE*, part 3, 5, pp.727.



- Small, J.C. & Liu H.L.S. (2008). Time-settlement behaviour of piled raft foundations using infinite elements. *Comput Geotech* 35(2), pp.187–195.
- Ta, L.D. and Small, J.C. (1996). Analysis of piled raft systems in layered soils. *Int. Journal for Numerical and Analytical methods in Geomechanics*, Vol.20, pp.57-72.
- Tan, Y.C., Chen, C.S. & Liew, S.S. (1998). Load transfer behaviour of cast-in-place bored piles in Tropical Residual Soils of Malaysia. *Proc. of 13th Southeast Asian Geotechnical Conf.*, Taipei, pp.563-571
- Tan, Y.C., Cheah, S.W. & Taha, M.R. (2006). Methodology for Design of Piled Raft for Five-Storeys Buildings on Very Soft Clay, *Proc. GeoShanghai International Conference 2006, Shanghai, China*.
- Tan, Y.C., Chow, C.M., & Gue, S.S. (2005a). Piled raft with different pile length for medium-rise buildings on very soft clay. *Proc., 16<sup>th</sup> Int. Conf. Soil Mechanics and Geotechnical Engineering*, Balkema, Rotterdam, The Netherlands, pp.2045–2048.
- Tan, Y.C., Chow, C.M., & Gue, S.S. (2005b). A Design Approach for Piled Raft with Short Piles for Low-Rise Buildings on very Soft Clay, *Journal of the Southeast Asian Geotechnical Society*, Vol. 36, No.1, pp.85-90 (Tan Swan Beng Award Nominees).
- Tan, Y.C., Gue, S.S., Ng, H.B. & Lee, P. T., (2004), Some geotechnical properties of Klang Clay, *Proc. Malaysian Geotechnical Conference*, Malaysia, 16<sup>th</sup> – 18<sup>th</sup> March 2004.
- Tan, Y.C., Gue, S.S., Ng, H.B. & Lee, P.T. (2003), Design Parameters of Klang Clay, Malaysia, *Proc. 12<sup>th</sup> Asian Regional Conference on Soil Mechanics and Geotechnical Engineering*, Singapore, 4th – 8th August, 2003.

- Terzaghi, K. (1955). Evaluation of coefficients of subgrade reaction. *Geotechnique* 5(4): 297-326
- Timoshenko, S.P. & Goodier, J.N. (1970) *Theory of Elasticity*, 3<sup>rd</sup> Ed., McGraw-Hill Book Co., Inc., New York.
- Tomlinson, M.J. (1986). *Foundation design and construction*. 5th Ed., Harlow. Longman.
- Viggiani, C. (1998). Pile groups and piled rafts behaviour. In *Deep foundations on bored and auger piles* (eds van Impe & Haegman), pp. 77-90. Rotterdam: Balkema.
- Vijayvergiya, V.N. (1977). Load-settlement characteristics of piles, *Proc. of Port'77 Conf.*, Long Beach, California, pp.269-284.
- Wong, S.C. & Poulos, H.G. (2005). Approximate pile-to-pile interaction factors between two dissimilar piles. *Comput Geotech* 32(8), pp.613-618.
- Yamashita, K. Yamada, T. and Kakurai, M. (1998). Simplified method for analysing piled raft foundations, *Proc. of 3<sup>rd</sup> Int. Geo. Seminar on Deep Foundations on Bored and Auger Piles*, Belgium, pp. 457-464.
- Zhuang, G.M., Lee, I.K. & Zhao, X.H. (1991). Interactive analysis of behaviour of raft-pile foundations. *Proc. Geo-Coast '91, Yokohama* 2, 759-764.