

FLOOD RISK ASSESSMENT: A REVIEW OF FLOOD DAMAGE ESTIMATION MODEL FOR MALAYSIA

Noor Suraya Romali^{a,b}, Zulkifli Yusop^{a,c*}, Muhammad Sulaiman^b, Zulhilmi Ismail^a

^aFaculty of Civil Engineering, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

^bFaculty of Civil Engineering and Earth Resources, Universiti Malaysia Pahang, 26300 Gambang, Malaysia

^cCentre for Environmental Sustainability and Water Security, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

Article history

Received

3 August 2017

Received in revised form

19 October 2017

Accepted


15 January 2018

Published online

1 April 2018

*Corresponding author
zulyusop@utm.my

Graphical abstract

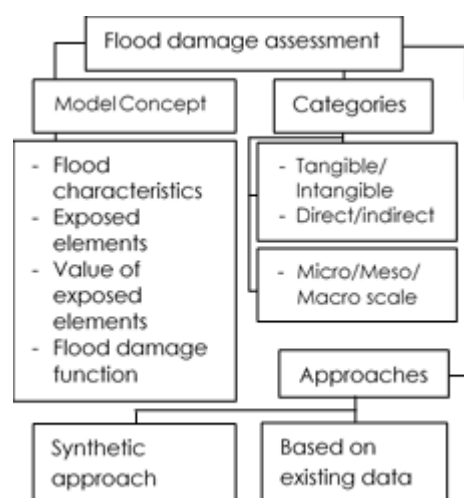

Abstract

Flood damage assessment is important in flood risk management for the assessment of flood vulnerability, development of flood risk map and flood management financial appraisal. In Malaysia, there is a lack of studies on flood damages estimation. In addition, the needed data for the assessment of flood damages is scarce. This review identified the approaches and problems in flood damage assessment. For Malaysia, the combination of four elements namely; flood characteristics (flood depth and flood duration), characteristic of exposed elements, value of exposed element and flood damage function curve are recommended. The scarcity of data for developing flood damage curve could partly be overcome by applying synthetic method to generate additional data from the existing flood damage data.

Keywords: Flood risk assessment, flood damage assessment, flood damage function curve, synthetic method, developing country

Abstrak

Anggaran kerosakan akibat banjir adalah penting dalam pengurusan risiko banjir, iaitu bagi tujuan mengukur tahap keterdedahan terhadap banjir, pembangunan peta risiko banjir dan penilaian peruntukan pengurusan banjir. Di Malaysia, kajian penganggaran kerosakan akibat banjir adalah sangat sedikit. Selain itu, data yang diperlukan untuk menilai kerosakan banjir juga sangat terhad. Manuskrip ini mengenalpasti pendekatan dan masalah dalam melakukan penganggaran kerosakan akibat banjir. Berdasarkan penelitian yang dibuat, disyorkan bahawa gabungan empat unsur iaitu; ciri-ciri banjir (aras banjir dan tempoh banjir), ciri-ciri dan nilai elemen terdedah kepada banjir, dan lengkung kerosakan banjir digunakan dalam permodelan anggaran kerosakan banjir untuk kajian kes di Malaysia. Keterbatasan data untuk membina lengkung kerosakan banjir boleh dikurangkan dengan penjana data secara sintetik dari data sedia ada.

Kata kunci: Penilaian risiko banjir, anggaran kerosakan banjir, lengkung kerosakan banjir, kaedah sintetik, negara membangun

© 2018 Penerbit UTM Press. All rights reserved

1.0 INTRODUCTION

Flood is one of natural disasters that causes great harm to human being, causing major damage to properties and impact severely on socio-economic activities [3]. Even worse, flood may also lead to losses of human life and decreases the quality of human health [4]. It is believed that flood disaster had caused about 100,000 deaths and affected 1.4 billion people worldwide during the end of 20th century [4]. In Malaysia, flood occurs frequently with average annual physical damage of 915 million and affecting almost 29,800 km² area and 4.82 million people [5, 6]. The figures tend to increase nowadays as the occurrence of large floods is expected to increase periodically [1] as the result of the climate change phenomenon [2]. Unless sustainable flood management plan is in place, flood will affect more population and at greater socio-economic and environmental losses [7, 8]. Furthermore, more flood events tend to occur abruptly due widespread land developments and more intense rainfall [9]. In an attempts to deal with this problems, various efforts have been done by engineers, researchers and policy makers to minimize the risk of flooding i.e. by constructing flood mitigation structures such as detention dam, dyke, and levees [10]. On the other hand, the implementation of non-structural measures such as flood mapping, flood modeling and flood forecasting are equally important flood mitigation options [11].

In recent years, a risk-based flood mitigation concept has received more attention compared to the conventional flood control approach that give much focus on structural flood mitigation measures [12, 13, 14]. For example, in the end of 2007, countries in Europe had adopted a flood risk management concept that led to a requirement for each member country to carry out flood hazard and risk map to support their flood risk management plans [15]. In Malaysia, the management and implementation of flood control measure is under the jurisdiction of the Department of Irrigation and Drainage (DID). In the current practice, the mitigation works put a lot of emphasis on structural measures [16], as compared to non-structural measures [17]. The laws and regulations regarding the flood management in Malaysia is inadequate [18] especially in the management of flood risk where the approach is still new and lack of legislative framework [9].

Flood damage assessment is crucial in flood risk management and is an important element for the flood risk vulnerability assessment i.e. in the development of flood risk mapping, risk analysis comparison and financial appraisals for budget allocation during and after flood disaster [11] and also in cost benefit analysis (CBA) such as in financial judgement for flood mitigation measures [19, 20]. CBA is a useful decision making tool in choosing the appropriate flood control options and to evaluate the effectiveness of the selected options [15]. Flood

damage estimation is also crucial in insurance sector, in order to estimate potential losses and insurance pricing [12]. Flood characteristics, such as the expected water level for the respective annual recurrence interval (ARI) and flood damage function curve are the elements in flood damage estimates that are needed for flood insurance pricing [21].

Quite huge body of literatures have been published on flood risk and damage estimation [e.g. 14, 19, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33]. However, most of the works are from developed countries and still very few from developing countries including Malaysia. To date, the published information on this subject are those by Muradi and Abdullah [34], Tam *et al.* [35], Ahamad [36], and KTA Tenaga Sdn Bhd [37]. Unfortunately, most of the studies have adopted methodologies from developed countries which have limited applicability in the Malaysian context [38].

Among challenges in conducting flood damage assessment studies in a developing country are the scarcity of flood damage data and limited access to related information [39, 40]. For a developing country like Malaysia which is still at the early stage of adopting the flood risk management practice, having a flood damage assessment framework that reflects her own scenario of flood and socio-economic conditions is crucial for a better flood management system. This manuscript presents a general overview on the following issues; types of flood damages, elements considered in the flood damage estimation approaches, methodology adopted, and problems in the assessment of flood damages. The focus is limited to tangible direct flood damage assessment. At the end, a recommendation for the development of flood damage estimation model for Malaysia is proposed.

2.0 FLOOD RISK ASSESSMENT

Flood risk basically revolved around two main elements; hazard and vulnerability [14, 15, 29, 41]. The risk is generally defined as the probability of a flood event to occur (hazard) and the potential of flooding impacts to the community and assets (vulnerability) [41, 43]. In economic circumstances, expected annual damage is commonly used to represent flood risk [14] which can be obtained by the multiplication of flood hazard (probability of an event) with the flood vulnerability (flood damage) [12, 15, 44].

The flood extent and magnitude are the flood variables that are usually used for the assessment of hazard, whereas the vulnerability part assesses the potential consequences of the flooding to the exposed elements such as properties, human beings, goods, and environment [15, 42, 45]. The vulnerability assessment is normally associated with the assessment of property damages [41].

According to Apel *et al.* [46] in their attempt to develop a probabilistic modelling system for the assessment of flood risks in river Rhine, Germany, hazard alone is not enough for developing a flood defence system. Hence, a more comprehensive risk-based design that takes into consideration the flood hazard and the consequences of flooding is preferred. Besides hazard and vulnerability, another element that has been given attention in the recent risk assessment measures is exposure. The term exposure refers to “the presence of people, livelihoods, environmental services and resources, infrastructure or economic, social or cultural assets in places that could be adversely affected” [47]. De Moel and Aerts [13] and Gain *et al.* [47] in their flood risk assessment study in Netherlands and the city of Dhaka respectively, considered the elements of hazard, exposure and vulnerability, where the combination of these provides a better estimate of expected damages related to flood risk.

3.0 FLOOD DAMAGE ESTIMATION MODEL

3.1 Classification of Flood Damages

Flood damages can be generally divided into two main types; tangible and intangible damages [26, 32, 48]. Tangible damage is the damage that can be measured directly in monetary term [23] while intangible damage is not. Intangible damage such as losses of ecosystem functions is difficult to translate because the monetary value is not readily assessed [11]. Flood damages can also be experienced in a direct or indirect way [45]. Hence, the tangible and intangible damage can be further divided into two sub types, i.e. direct and indirect damage. Direct damages are the damage that occurred due to the physical contact of flood water with humans, property or any other asset [12], such as building and inventory items [48]. The indirect damage is the damage that is induced by the flood impacts and occurs in space and time, outside the flooded area [12]. Some illustrations of indirect damage are the interruption of traffic flows, income loss, and losses due to business shut down [48]. More examples of different types of damage are listed in Table 1.

In addition, flood damages can be classified into three levels; micro-scale, meso-scale, and macro-scale (Table 2). The classification into micro-, meso- and macro-scale is related to the spatial extent of damage assessment [12], the size of study area and differentiation of land use categories [31, 49, 50].

In general, flood damage can be estimated based on land use as the degree of damages varies with different types of land use, though the flood characteristics, such as flood depth and peak flow are the same [48]. Based on this, damage can be categorized into residential, commercial, industrial, agricultural and infrastructure. Meanwhile, different economic sectors may contribute to different levels

of flood damage due to different characteristics concerning assets and susceptibility [12]. Hence the assessment of flood damage can also be classified according to different types of business/company, private households and infrastructure [12].

Table 1 Types of flood damages (adapted from [12, 26])

	Tangible	Intangible
Direct	Building and contents damage, infrastructure damage (e.g. roads), agricultural soil erosion, harvest destruction; livestock damage, evacuation and rescue measures, business interruption, clean-up costs, land and environment recovery.	Loss of life, injuries, psychological distress, cultural heritage damage, negative effects on ecosystems.
Indirect	Public services interruption (e.g. communication system), induced production losses to companies outside the flooded area (e.g. suppliers of flooded companies), traffic disruption cost, tax revenue loss due to migration of companies in the aftermath of flood, business interruption.	Trauma, loss of trust in authorities and health and psychological damage.

Table 2 Classes of flood damages (adapted from [12, 31])

Micro-scale	- Single exposed elements assessment - Local studies analysis (use a per building approach)
Meso-scale	- Spatial aggregations assessment - Regional studies analysis (consider aggregated land use units)
Macro-scale	- Large-scale spatial units assessment - National and/or international studies analysis

3.2 The Flood Damage Assessment Concept

Flood damage assessment is generally based on two approaches. In the first approach, flood damage is evaluated from existing flood damage data base, collected from interview survey or from secondary sources such as local authorities, newspaper, and internet [e.g. 51, 52]. The second approach of damage estimation uses model that relates the flood damages with other related factors such as economic, the nature of damage, and flood variables [19, 26, 48]. Penning-Rowsell and Chatterton [22], Smith [53] and UNSW [54] are examples of studies that had successfully established detailed methodologies of tangible flood damage estimation in the United Kingdom and Australia respectively [26].

Although various different approaches had been used to estimate flood damages, the estimation concept is basically the same, which consider the economic value of the element at risk, together with the hydrological characteristics [49, 13]. In summary, the necessary elements are flood hazard (hydrological characteristics), exposure, value of elements at risk, and the susceptibility of the elements at risk to particular hydrologic conditions which can be represented by a flood damage function curve. The combination of these four elements are needed in the development of flood risk/damage assessment works.

In evaluating the adopted approaches and elements considered in flood damage estimation model, a total of 25 articles were reviewed and summarized in Table 3. The selection of the articles was limited to ISI and Scopus indexed journals. Out of 25 articles reviewed, 71% are from developed countries especially Netherlands, Japan, and Italy. It was found that 83.3% of the studies employed the similar concept outlined by Meyer and Messner [49] and De Moel and Aerts [13], where the combination of flood hazard, exposure, value of elements at risk, and flood damage function curve were applied. For example, Ward *et al.* [14] used the combination of flood hazard, characteristics and the value of exposed assets, and information about the susceptibility of exposed assets to a particular hazard to estimate expected annual damage in their study. In addition, the damage estimates consider the same elements, although the components, methods and techniques used are difference. For example, in flood hazard analysis, some studies applied hydrologic-hydraulic modeling [e.g. 19, 55] while other studies obtain flood characteristics information from secondary data [e.g. 29, 56, 32].

In summary, the elaborated concept had been successfully used by many researchers to assess flood damage in various countries, either in developed or developing countries.

3.3 Hydrological Characteristics

Flood depth and flood extent are two variables needed in the estimation of flood damages [13, 19]. These can be obtained from a probabilistic or deterministic analysis in a flood hazard model [57]. Thus far, numerous flood models have been used in flood damage estimation studies to provide the total extend of flooded area and to identify the spatial distribution of flood depth [19].

Delft Hydraulics Institute has developed a flood hazard assessment model (FHAM) to quantify the consequences of flooding, which focus on the socio-economic impact [55]. Within the flood hazard assessment model, a flood model is used to calculate the extent of flooding while a damage assessment model calculates the expected yearly damage. The GIS based flood model is a one-dimensional hydraulic model of a river. The calculated flood

depths serve as the input to the damage assessment model.

Dutta *et al.* [26] developed a physically based distributed hydrologic model to simulate flood inundation parameters as part of their flood loss estimation model. The hydrologic model [53] considers five major processes of hydrologic cycle, which are interception and evapotranspiration, river flow, overland flow, unsaturated zone flow and saturated zone flow. The model introduced by Dutta *et al.* [26] is an integrated model combining a flood inundation simulation and a generalized loss estimation model.

Oliveri and Santoro [19] applied a numerical model that was previously developed by Oliveri *et al.* [59] which used the Saint Venant equation to assess the inundation depth for their flood damage estimation study in the city of Palermo, Italy. The 1D De Saint Venant's equations in conservation law form that was solved by a parabolic approximation for each channel was used in their study. In the model, the urban area was approximated with a network of rectangular channels, representing the streets. The flood simulation provides spatial distribution of the maximum water depths for 50, 100, 300, 500 and 1000 year return periods by interpolating the corresponding maximum water depths using the geostatistical Kriging method.

Ward *et al.* [14] applied a raster based model, Floodscanner to derive inundation maps of the Meuse in Dutch Limburg. The model was developed using zero-dimensioning planar-based approach. The water level at each river grid-cell for different discharges were estimated using a stage-discharge relationship. A planar surface representing the water level per grid-cell was created when the water levels at each river grid-cell are assigned to the nearest non-river grid-cells. The inundation depth is the difference between the cell values of water level and elevation. The outputs from Floodscanner i.e inundation parameters, together with land use map were subsequently used as inputs into the Damagescanner to generate flood damage estimates. Damagescanner is a flood damage model originally developed by De Bruijn [60] and used by De Moel *et al.* [61] to assess the uncertainty and sensitivity of coastal flood damage estimation.

In another study by Lekuthai and Vongviseeomjai [48], the MIKE-11 hydrodynamic model was used to generate flood characteristics for estimating damage. The model produced flood depth and duration for every cell, while the flood depth and duration for all areas were derived from topographical map. The values of flood depth and duration were applied in the damage curve equation by Kanchanarat [62]. The damage is then calculated using the direct damage equation proposed by Lekuthai and Vongviseeomjai [48]. Vonizaki *et al.* [33] applied similar flood modeling method using MIKE FLOOD that consists of one-dimensional hydraulic model MIKE 11 and two-dimensional MIKE 21 model. These models were

applied to estimate losses during the Koiliaris basin 2003 flash flood for agricultural category.

Table 3 Summary of adopted approaches and elements considered in flood damage assessment

Authors	Exposed elements (Damage category)	Approach					
		Direct estimation		Values of exposed element	Flood damage estimation model		
		Secondary data	Interview Survey		Flood parameters		
				Hydrologic- hydraulic modeling	Secondary data	Flood damage function	
[14]	Residential, commercial, infrastructural, mines/construction, recreation, nature, arable, nature			X	X		X
[19]	Urban			X	X		X
[26]	Urban, rural, infrastructure			X	X		X
[27]	Land use, infrastructure, households, companies, others			X	X		X
[28]	Building (Direct damage)			X	X		X
[29]	Commercial			X		X	X
[32]	Commercial, residential, public building, cultural and historical building			X		X	X
[33]	Agricultural			X	X		X
[34]	Agricultural			X	X		
[35]	Physical element			X	X		X
[36]	Agricultural, residential, industrial			X	X		X
[37]	Urban and rural (agriculture)			X	X		X
[39]	Residential		X	X			X
[48]	Residential, commercial, agricultural, industrial			X	X		X
[51]	Agriculture		X				
[52]	Residential	X					
[55]	Public authorities, private persons, industry, agriculture			X	X		X
[56]	Agricultural, residential, golf courses, traffic zone			X		X	X
[57]	Residential, agricultural, commercial, industrial			X	X		X
[66]	Residential, infrastructure (road), agricultural (winter wheat), industrial			X	X		X
[69]	Agricultural, residential			X	X		X
[45]				X	X		X
[67]	Residential, agricultural, industrial			X	X		X
[71]	Residential, public utility, industrial, agricultural			X	X		X
[72]	Coastal area			X	X		

3.4 Flood Damage Function Curve

The relationship between flood damage to flood parameters in flood damage assessment can be presented by a flood damage function curve. The level of flood damage is influenced by hydrological factors such as flood depth, flood duration, velocity, and frequency of flooding [12, 26]. Thieken *et al.* [63] affirmed that for the case of building and its contents, the rate of damage are also influenced by contamination, along with flood depth and flood duration. Besides hydrological factors, the severity of flood damages is also caused by other factors such as during which time of the year the flooding occur, warning time, sediment load of floodwaters, type of buildings, family income, and the preparedness level before the disaster [3].

Flood depth is the most commonly used parameters in flood damage function curve. According to Notaro *et al.* [8], inundation depth is considered as the principle factor for assessing direct tangible damages. Shaw *et al.* [64] also found flood depth as the major variable in the flood damage function, while Chang *et al.* [3] suggested that the flood depth alone is sufficient for flood damage estimation without considering other factors. The use of flood depth – damage curve has been explored by many researchers all over the world [e.g. 3, 14, 19, 23, 25, 26, 27, 28, 30, 31, 55, 65, 66, 67, 68].

The flood depth–damage curve can be represented in the form of depth–damage or depth–percent damage curve [23]. In depth–damage approach, the depth–damage relationships are developed directly from historical data while depth–percent damage curve is determined as percentages of damage to the total value of damaged property according to the corresponding flood depth. To obtain the depth–damage relationship, the percentages of damage value obtained from the depth–percent damage curve is multiplied with a replacement property value. In this way, for a similar site, a depth–percent damage function can be applied to any flood condition and not restricted to any fixed time [19, 23, 73]. Compared to depth–percent damage approach, a depth–damage curve is costlier and time consuming to prepare especially in getting reliable data. Furthermore, the useful life of the relationship is short as the type of curve is normally developed separately for many types of structures [23].

Flood damage function curve can be developed either based on damage data of historical floods or from hypothetical analysis known as synthetic stage–damage function. The latter approach is based on land cover, land use patterns, type of assets, and information from questionnaire survey [26]. In developed countries, the development of flood damage function curve is normally based on historical data [e.g. 26, 27, 56, 67, 69]. Dutta *et al.* [29] developed a flood stage–damage curve for urban and rural categories using the averaged and normalized damaged data published by the

Japanese Ministry of Construction. The stage–damage functions by Jonkman *et al.* [27] were established based on empirical flood damage data from the historical events such as the 1953 catastrophic flood in Netherlands, local flooding in the river Meuse in 1993, in addition to information from literature and expert judgment.

Meanwhile, in the countries with limited flood damage data, synthetic approach can be used. There are two types of synthetic flood damage curves, i.e. either based on the existing historical databases, or using data based on interview surveys [22], as illustrated in Figure 1. Vonazaki *et al.* [33] applied a weighted Monte Carlo simulation to construct synthetic flow velocity–flood depth–crop damage curves. The loss information was collected from questionnaire survey involving practising and research agronomists. Logistic regression analysis was used to develop synthetic flow velocity–flood depth–crop damage surface for the selected crops in the study.

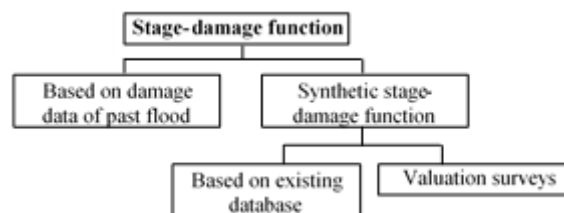


Figure 1 Flood damage function curve approach [73]

4.0 FUTURE DIRECTIONS FOR MALAYSIA

In producing a flood damage estimation model that is applicable to a developing country, the general methodologies from previous studies [e.g. 13, 19, 26, 31, 49] can be adopted. The estimation of flood damages may consider the elements of flood characteristics, characteristic of exposed element, value of exposed element and the relationship of flood damages with the respective flood parameters (flood damage function curve). Flood damage function curve is a combination of exposed property and the flood influencing factors, as predictors of event damages from which average annual damage can be calculated [25].

The available literatures on flood damage estimation in Malaysia (such as [35], [34], [36]) considered the four elements suggested i.e. flood characteristics, characteristic of exposed element, value of exposed element and flood damage function curve. However, the damage function used is adopted from other countries such as United State, Netherland and Australia. The study by Muhadi and Abdullah [34] for agricultural area does not apply flood damage curve. The flood damages were estimated from Fresh Fruit Bunch (FFB) price data from the Malaysian Palm Oil Board (MPOB) and vegetables and fruit price data from Department of Agricultural (DOA). For future flood damage

estimation works in Malaysia, it is suggested that a local flood damage function curve be developed to ensure the reliability of damage estimates and to reflect Malaysian own flood scenario.

The scarcity of flood damage data and information are major obstacles faced in conducting flood damages assessment studies [39], especially for developing countries. In Malaysia, the historical flood damage data is not well documented and not easily accessible. The damage data for certain flood event can be obtained from the respective District Office in the forms of replacement cost or compensation from the government. However, the available damage data are not suitable enough for flood damage assessment studies as they are too general and incomplete.

Hence for Malaysia case study, synthetic method is suggested due to scarce or incomplete data. Through synthetic approach, additional data can be generated from the primary data [25]. For this purpose, cross-sectional method can be used whereby the damage data is gathered by observing many subjects at the same point of time, without concerning the differences in time. Cross-sectional studies are done using questionnaires [70]. As suggested by McBean *et al.* [24] and Suriya *et al.* [39], interview survey questionnaire should be designed as a closed end type where the respondents can answer in a single word, in a short phrase or multiple choices. Merz *et al.* [12] recommended that in synthetic approach, the damage data may be collected via what-if-questions. What-if analysis measures the value of expected damage for a certain flood situation.

5.0 CONCLUSION

In summary, this paper has reviewed the various concepts used for the flood risk and damages assessment. The assessment of flood damages is based on two general approaches; 1) from existing data base, by carrying out interview survey or from secondary sources such as local authorities, newspaper and internet, 2) modeling approach that relates the damages with other related factors such as economic variables, and the nature of damage. In the modeling approach, the estimation of flood damages considered the elements of flood characteristics, characteristics of the exposed element, value of exposed element and the relationship between flood damages to the respective flood parameters (represented as flood damage function curve). Flood damage function curve is the key element in the assessment of flood damages. It can be constructed either based on historical damage data or by using synthetic method.

A development of a local flood damage function curve is suggested. For a developing country like Malaysia which has limited historical data, the

synthetic and cross sectional data collection could provide a reliable option for the construction of flood stage-damage function curve.

Acknowledgement

The authors are grateful to Universiti Malaysia Pahang and Universiti Teknologi Malaysia for the support and encouragement. This study was funded through research grant Institut Inovasi Strategik Johor (IISJ) vot 15H00.

References

- [1] Li, Q., Zhou, J., Liu, D., and Jiang, X. 2012. Research on Flood Risk Analysis and Evaluation Method Based on Variable Fuzzy Sets and Information Diffusion. *Safety Science*. 50(5): 1275-1283. <http://doi.org/10.1016/j.ssci.2012.01.007>.
- [2] Ren, M., Wang, B., Liang, Q., and Fu, G. 2010. Classified Real-Time Flood Forecasting by Coupling Fuzzy Clustering and Neural Network. *International Journal of Sediment Research*. 25(2): 134-148. [http://doi.org/10.1016/S1001-6279\(10\)60033-9](http://doi.org/10.1016/S1001-6279(10)60033-9).
- [3] Chang, L., Lin, C., and Su, M. 2008. Application of Geographic Weighted Regression to Establish Flood-Damage Functions Reflecting Spatial Variation. *Water SA*. 34(2): 209-216.
- [4] Jonkman, S. N. 2005. Global Perspectives on Loss of Human Life Caused by Floods. *Natural Hazards*. 34(2): 151-175. <http://doi.org/10.1007/s11069-004-8891-3>.
- [5] Asian Reduction Disaster Centre. 2011. Country Report of Malaysia.
- [6] D/iya, S. G., BarzaniGasim, M., Toriman, M. E., and Abdullahi, M. G. 2014. FLOODS IN MALAYSIA: Historical Reviews, Causes, Effects and Mitigations Approach. *International Journal of Interdisciplinary Research and Innovations*. 2(4): 59-65.
- [7] Kourgialas, N. N., and Karatzas, G. P. 2013. A Hydro-Economic Modelling Framework for Flood Damage Estimation and the Role of Riparian Vegetation. *Hydrological Processes*. 27(4): 515-531. <http://doi.org/10.1002/hyp.9256>.
- [8] Notaro, V., De Marchis, M., Fontanazza, C. M., La Loggia, G., Puleo, V., and Freni, G. 2014. The Effect of Damage Functions on Urban Flood Damage Appraisal. *Procedia Engineering*. 70: 1251-1260. <http://doi.org/10.1016/j.proeng.2014.02.138>.
- [9] Elias, Z., Hamin, Z., and Othman, M. B. 2013. Sustainable Management of Flood Risks in Malaysia: Some Lessons from the Legislation in England and Wales. *Procedia - Social and Behavioral Sciences*. 105: 491-497. <http://doi.org/10.1016/j.sbspro.2013.11.052>.
- [10] Heidari, A. 2009. Structural Master Plan of Flood Mitigation Measures. *Natural Hazards and Earth System Science*. 9(11): 61-75. <http://doi.org/10.5194/nhess-9-61-2009>.
- [11] Sindhu, K. and Durga Rao, K.H.V. 2016. Hydrological and Hydrodynamic Modeling for Flood Damage Mitigation in Brahmani-Baitarani River Basin, India. *Geocarto International*. 6049(May): 1-13. <http://doi.org/10.1080/10106049.2016.1178818>.
- [12] Merz, B., Kreibich, H., Schwarze, R., and Thielen, A. 2010. Review Article "Assessment of Economic Flood Damage." *Natural Hazards and Earth System Science*, 10(8): 1697-1724. <http://doi.org/10.5194/nhess-10-1697-2010>.
- [13] De Moel, H., and Aerts, J. C. J. H. 2011. Effect of Uncertainty in Land Use, Damage Models and Inundation Depth on Flood Damage Estimates. *Natural Hazards*.

- 58(1): 407-425. <http://doi.org/10.1007/s11069-010-9675-6>.
- [14] Ward, P. J., Moel, H. De, and Aerts, J. C. J. H. 2011a. How Are Flood Risk Estimates Affected by the Choice of Return-Periods? *Natural Hazards and Earth System Sciences*. 3181-3195. <http://doi.org/10.5194/nhess-11-3181-2011>.
- [15] De Moel, H., Van Alphen, J., and Aerts, J. C. J. H. 2009. Flood Maps in Europe - Methods, Availability and Use. *Natural Hazards and Earth System Science*. 9(2): 289-301. <http://doi.org/10.5194/nhess-9-289-2009>.
- [16] Chan, N. W. 2012. Impacts of Disasters and Disasters Risk Management In Malaysia: The Case of Floods. Economic and Welfare Impacts of Disasters in East Asia and Policy Responses. (December): 503-551. <http://doi.org/10.1007/978-4-431-55022-8>.
- [17] Liu, P. S., and Chan N. W. 2003. The Malaysian Flood Hazard Management Program. *International Journal of Emergency Management*. 1(3): 205-214. <https://doi.org/10.1504/IJEM.2003.003303>.
- [18] Chan, N. W. 2007. Institutional arrangements for Flood Hazard Management in Malaysia: An Evaluation Using the Criteria Approach. *Disasters*. 21(3): 206-222.
- [19] Oliveri, E., and Santoro, M. 2000. Estimation of Urban Structural Flood Damages: The Case Study of Palermo. *Urban Water 2*. 2(2000): 223-234.
- [20] Jonkman, S. N., Brinkhuis-Jak, M., and Kok, M. 2004. Cost Benefit Analysis and Flood Damage Mitigation in the Netherlands. *Heron*. 49(1): 95-111.
- [21] Andrews, T., Billen, G., Kim, H., Lui, A., Pollack, C., Simpson, L., Smith, D., Underhill, S., and Whittle, D. 2008. The Insurance of Flood Risks. In *Institute of Australia 16th General Insurance Seminar*. 9-12 November 2008, Coolool, Australia.
- [22] Penning-Rowsell and Chatterton. 1979. *The Benefits of Flood Alleviation: A Manual of Assessment Techniques*. Gower Technical Press, UK.
- [23] Appelbaum, S. J. 1985. Determination of Urban Flood Damages. *Water Resources Planning Management*. 269-283.
- [24] Mcbean, B. E. A., Gorrie, J., Fortin, M., Ding, J., and Mouton, R. 1989. Flood Depth-Damage Curves by Interview Survey. *Journal of Water Resources Planning and Management*. 114(6): 613-634.
- [25] Smith, D. 1981. Assessment of Urban Flood Damage. In *Proceedings of Flood Plain Management Conference*. Australian Water Council, Canberra, Australia. 145-180.
- [26] Dutta, D., Herath, S., and Musiaka, K. 2003. A Mathematical Model for Flood Loss Estimation. *Journal of Hydrology*. 277(1-2): 24-49. [http://doi.org/10.1016/S0022-1694\(03\)00084-2](http://doi.org/10.1016/S0022-1694(03)00084-2).
- [27] Jonkman, S. N., Bo, M., Kok, M., and Bernardini, P. 2008. Integrated Hydrodynamic and Economic Modelling of Flood Damage in the Netherlands. *Ecological Economics*. 66 (2008): 77-90. <http://doi.org/10.1016/j.ecolecon.2007.12.022>.
- [28] Luino, F., Cirio, C. G., Biddoccu, M., Agangi, A., Giulietto, W., Godone, F., and Nigrelli, G. 2009. Application of a Model to the Evaluation of Flood Damage. *Geoinformatica*. 13(3): 339-353. <http://doi.org/10.1007/s10707-008-0070-3>.
- [29] Kreibich, H., Seifert, I., Merz, B., and Thieken, A. H. 2010. Development of FLEMOcs – a New Model for the Estimation of Flood Losses in the Commercial Sector. *Hydrological Sciences Journal*. 55(8): 1302-1314. <http://doi.org/10.1080/02626667.2010.529815>.
- [30] Yu, J. J., Qin, X. S., and Larsen, O. 2013. Joint Monte Carlo and Possibilistic Simulation for Flood Damage Assessment. *Stoch Environ Res Risk Assess*. 27: 725-735. <http://doi.org/10.1007/s00477-012-0635-4>.
- [31] Pistrika, A., Tsakiris, G., and Nalbantis, I. 2014. Flood Depth-Damage Functions for Built Environment. *Environ. Process*. 1: 553-572. <http://doi.org/10.1007/s40710-014-0038-2>.
- [32] Velasco, M., Cabello, À., and Russo, B. 2015. Flood Damage Assessment in Urban Areas . Application to the Raval District of Barcelona using Synthetic Depth Damage Curves. *Urban Water Journal*. (May 2015): 37–41. <http://doi.org/10.1080/1573062X.2014.994005>.
- [33] Vozinaki, A. E. K., Karatzas, G. P., Sibetheros, I. A., and Varouchakis, E. A. 2015. An Agricultural Flash Flood Loss Estimation Methodology: The Case Study of the Koiliaris Basin (Greece), February 2003 flood. *Natural Hazards*. 79(2): 899–920. <http://doi.org/10.1007/s11069-015-1882-8>.
- [34] Muradi, N. A. and Abdullah A. F. 2015. Flood Damage Assessment in Agricultural Area in Selangor River Basin. *Jurnal Teknologi*. 76(15): 111-117.
- [35] Tam, T. H., Ibrahim, A. L., Rahman, M. Z. A. and Mazura, Z. 2014. Flood Loss Assessment in Kota Tinggi. IOP Conf. Series: *Earth and Environmental Science*. 18(2014): 012120. doi:10.1088/1755-1315/18/1/012120.
- [36] Ahamad, M. S., Ali, R., Zakaria, N. A., Ab. Ghani, A., and Chang, C. K. 2011. Flood Loss Assessment of the 2003 Muda River Flood. *3rd International Conference on Managing Rivers in the 21st Century: Sustainable Solutions for Global Crisis of Flooding, Pollution and Water Scarcity*. 601-606.
- [37] KTA Tenaga Sdn. Bhd. 2003. Flood Damage Assessment of 26 April 2001 Flooding Affecting the Klang Valley and the Preparation of Generalised Procedures and Guidelines for Assessment of Flood Damages. Final Report. Malaysia.
- [38] Lee, W. K., and Mohamad, I. N. 2013. Flood Economy Appraisal: An Overview of the Malaysian Scenario. Springerlink, 29-34. *Proceeding of the International Civil and Infrastructure Engineering Conference 2013*, Part III. 263-274, 2014.
- [39] Suriya, S., Mudgal, B. V., and Nelliya, P. 2012. Flood Damage Assessment of an Urban Area In Chennai, India, Part I: Methodology. *Natural Hazards*. 62(2): 149-167. <http://doi.org/10.1007/s11069-011-9985-3>.
- [40] Okazumi, T. 2014. Uncertainty Estimation and Reduction Measures in the Process of Flood Risk Assessment with Limited Information. Master dissertation. Faculty of the Graduate School of Kyoto University.
- [41] Apel, H., Thieken, a. H., Merz, B., and Blöschl, G. 2004. Flood Risk Assessment and Associated Uncertainty. *Natural Hazards and Earth System Science*. 4(2): 295-308. <http://doi.org/10.5194/nhess-4-295-2004>.
- [42] Apel, H., Merz, B., and Thieken, A. H. 2008. Quantification of Uncertainties in Flood Risk Assessments. *International Journal of River Basin Management*. 6(2): 149-162. <http://doi.org/10.1080/15715124.2008.9635344>.
- [43] Hudson, P., Botzen, W. J. W., Kreibich, H., Bubeck, P., and Aerts, J. C. J. H. 2014. Evaluating the Effectiveness of Flood Damage Mitigation Measures by the Application of Propensity Score Matching. *Natural Hazards and Earth System Sciences Discussions*. 2: 1731-1747. <http://doi.org/10.5194/nhessd-2-681-2014>.
- [44] Okazawa, Y., Yeh, P. J., Kanoe, S., and Oki, T. 2011. Development of a Global Flood Risk Index Based on Natural and Socio-Economic Factors. *Hydrological Sciences Journal*. (August 2011): 37–41. <http://doi.org/10.1080/02626667.2011.583249>.
- [45] Eleuterio, J. 2012. Flood Risk Analysis: Impact of Uncertainty in Hazard Modelling and Vulnerability Assessments. PhD thesis. University of Strasbourg, France.
- [46] Apel, H., Thieken, A. H., Merz, B., and Blöschl, G. 2006. A Probabilistic Modelling System for Assessing Flood Risks. *Natural Hazards*. 38(1-2): 79-100. <http://doi.org/10.1007/s11069-005-8603-7>.
- [47] Gain, A. K., Mojtahed, V., Biscaro, C., Balbi, S., and Giupponi, C. 2015. An Integrated Approach of Flood Risk Assessment in the Eastern Part of Dhaka City. *Natural Hazards*. 79(3): 1499-1530. <http://doi.org/10.1007/s11069-015-1911-7>.
- [48] Lekuthai, A., and Vongvisessomjai, S. 2001. Intangible Flood Damage Quantification. *Water Resources Management*. 15: 343-362.
- [49] Meyer, V., and Messner, F. 2005. National Flood Damage Evaluation Methods - A Review of Applied Methods in Negland, the Netherlands, the Czech Republic and

- Germany. FLOODsite, (November).
- [50] Messner, F., Penning-rowsell, E., Green, C., Tunstall, S., Veen, A. Van Der, Tapsell, S., and Haase, D. 2007. Evaluating Flood Damages: Guidance and Recommendations on Principles and Methods. FLOODsite Project Deliverable D9.1. Wallingford, UK: Floodsite Consortium.
- [51] Cressman, D. R., Fortin, M. H. P., Hensel, M. J., Brubacher, P. H., and McBride, R. A. 1988. Estimation of Cropland Damages Caused by Overland Flooding, Two Case Studies. *Canadian Water Resources Journal*. 13(3): 15–25. <http://doi.org/10.4296/cwrj1303015>.
- [52] Shrubsole, D., Kreuzwiser, R., Mitchell, B., Dickinson, T., and Joy, D. 1993. the History of Flood Damages in Ontario. *Canadian Water Resources Journal*. 18(2): 133-143. <http://doi.org/10.4296/cwrj1802133>.
- [53] Smith, D. 1981. Assessment of Urban Flood Damage. In *Proceedings of Flood Plain Management Conference*, Australian Water Council, Canberra, Australia. 145-180.
- [54] UNSW. 1981. Evaluation Methodology of Flood Damage in Australia, Technical Project Report.
- [55] Jonge, T. D. E., Kok, M., & Hogeweg, M. 1996. Modelling Floods and Damage Assessment Using GIS. *Application of Geographic Information Systems in Hydrology and Water Resources Management. Proceedings of the Vienna Conference*. 299-306. IAHS Publ, no. 235.
- [56] Tezuka, S., Takiguchi, H., Kazama, S., Sato, A., Kawagoe, S., and Sarukkalige, R. 2014. Estimation of the Effects of Climate Change on Flood-Triggered Economic Losses in Japan. *International Journal of Disaster Risk Reduction*. 9 (2014): 58-67.
- [57] McGrath, H., Stefanakis, E., and Nastev, M. 2015. Sensitivity Analysis of Flood Damage Estimates: A Case Study in Fredericton, New Brunswick. *International Journal of Disaster Risk Reduction*. 14: 1-9. <http://doi.org/10.1016/j.ijdr.2015.09.003>.
- [58] Dutta, D., Herath, S., and Musiakke, K. 2000. Flood Inundation Simulation in a River Basin Using a Physically Based Distributed Hydrologic Model. *Hydrological Processes*. 14: 497-519, 7-22.
- [59] Oliveri, E., Tucciarelli, T., and La Loggia, G. 1996. Un Modello Per La Simulazione Di Inondazioni In Ambiente Urbano: Applicazione All'alluvione Di Palermo Nel 1931. *L'Energia Elettrica*. 73(3): 191-199.
- [60] De Bruijn, K. M. 2006. Bepalen van schade ten gevolge van overstromingen voor verschillende scenario's en bij verschillende beleidsopties, WL. Delft Hydraulics, Delft, The Netherlands (in Dutch).
- [61] De Moel, H., Asselman, N. E. M., and Aerts, J. C. J. H. 2012. Uncertainty and Sensitivity Analysis of Coastal Flood Damage Estimates in the West of The Netherlands. *Natural Hazards and Earth System Science*. 12(4): 1045-1058. <http://doi.org/10.5194/nhess-12-1045-2012>.
- [62] Kanchanarat, S. 1989. Estimation of Flood Damage Function for Bangkok and Vicinity. Asian Institute of Technology, Bangkok, Thailand.
- [63] Thielen, A. H., Müller, M., Kreibich, H., and Merz, B. 2005. Flood Damage and Influencing Factors: New Insights From The August 2002 Flood In Germany. *Water Resources Research*. 41(12): 1-16. <http://doi.org/10.1029/2005WR004177>.
- [64] Shaw, D. G., Huang, H. and Ho, M. 2005. Modeling Flood Loss and Risk Perception: The Case of Typhoon Nari In Taipei. *Proc. 5th Annu. IIASA-DPRI Meeting on Integrated Disaster Risk Management: Innovations in Science and Policy*. Beijing, China.
- [65] Tang, J. C. S., Vongvisessomjai, S., and Sahasakmontri, K. 1992. Estimation of Flood Damage Cost for Bangkok. *Water Resources Management*. 6(1): 47-56. <http://doi.org/10.1007/BF00872187>.
- [66] Van der Sande, C. J., de Jong, S. M., and De Roo, A. P. J. 2003. A Segmentation and Classification Approach of IKONOS-2 Imagery for Land Cover Mapping to Assist Flood Risk and Flood Damage Assessment. *International Journal of Applied Earth Observation and Geoinformation*. 4(3): 217-229. [http://doi.org/10.1016/S0303-2434\(03\)00003-5](http://doi.org/10.1016/S0303-2434(03)00003-5).
- [67] Yi, C., Lee, J., and Shim, M. 2010. GIS-Based Distributed Technique for Assessing Economic Loss from Flood Damage: Pre-Feasibility Study for the Anyang Stream Basin in Korea. *Natural Hazards*. 55: 251-272. <http://doi.org/10.1007/s11069-010-9524-7>.
- [68] Kim, S. H., Lee, B. S., Chung, C. H., & Hak, J. 2014. Development of Depth-Damage Function by Investigating Flooded Area with Focusing on Building Damage. *Journal of Korea Water Resources Association*. 47(8): 717-728.
- [69] Kazama, S., Sato, A., and Kawagoe, S. 2009. Evaluating the Cost of Flood Damage Based on Changes in Extreme Rainfall In Japan. *Sustainability Science*. 4: 61-69.
- [70] Mann, C. 2003. Observational Research Methods. Research Design II: Cohort, Cross Sectional and Case-Control Studies. *Emergency Medicine Journal*. 20: 54-60. <http://doi.org/10.1136/emj.20.1.54>.
- [71] Qi, H., and Altinakar, M. S. 2011. Simulation-Based Decision Support System for Flood Sensing and Census Block Information. *Natural Hazards*. 59: 1125-1143. <http://doi.org/10.1007/s11069-011-9822-8>.
- [72] Ward, P. J., Marfai, M. A., Yulianto, F., Hizbaron, D. R., and Aerts, J. C. J. H. 2011b. Coastal Inundation and Damage Exposure Estimation: A Case Study for Jakarta. *Natural Hazards*. 56: 899-916. <http://doi.org/10.1007/s11069-010-9599-1>.
- [73] Romali, N.S., Sulaiman, M., Yusop, Z., and Ismail, Z. 2014. Flood Damage Assessment: A Review of Flood Stage-Damage Function Curve. S. H. Abu Bakar et al. (Eds.). *ISFRAM 2014*, Springer Science+Business Media Singapore 2015. DOI 10.1007/978-981-287-365-1_13.