

STEADY AND UNSTEADY ALIGNED MAGNETOHYDRODYNAMICS  
FREE CONVECTION FLOWS OF MAGNETIC AND NON MAGNETIC  
NANOFLUIDS ALONG A WEDGE, VERTICAL AND INCLINED PLATES

MOHD RIJAL ILIAS

Faculty of Science  
Universiti Teknologi Malaysia

STEADY AND UNSTEADY ALIGNED MAGNETOHYDRODYNAMICS  
FREE CONVECTION FLOWS OF MAGNETIC AND NON MAGNETIC  
NANOFLUIDS ALONG A WEDGE, VERTICAL AND INCLINED PLATES

MOHD RIJAL ILIAS

A thesis submitted in fulfilment of the  
requirements for the award of the degree of  
Doctor of Philosophy

Faculty of Science  
Universiti Teknologi Malaysia

APRIL 2018

*To my family*

*Without whose loving support  
this thesis could not have been written*

## ACKNOWLEDGEMENT

In the name of Allah, the Almighty who give us the enlightenment, the truth, the knowledge and with regards to Prophet Muhammad S.A.W. for guiding us to the straight path. I thank to Allah for giving me courage and patience to carry out this research.

In realizing my target to complete this thesis, I have encountered many problems and tough times. Firstly, I would like to express my gratitude to Assoc. Prof. Dr. Sharidan bin Shafie as my supervisor who has provided me with his guidance and knowledge for me to use as tips to get the research done smoothly. Without his efforts it is not possible for me to complete this difficult task.

Many thanks are also due to the academic and support staffs at Department of Mathematical Sciences, Universiti Teknologi Malaysia (UTM) who made my journey in UTM an enjoyable and memorable one. I am also grateful for the technical and administrative assistance from the Faculty of Science, UTM. My special thank to Universiti Teknologi MARA (UiTM) and Kementerian Pendidikan Tinggi Malaysia for granting me ample opportunity to conduct this study and the financial support throughout the course.

## ABSTRACT

Nanofluids are a new type of heat transfer fluid engineered by uniform and stable suspension of nanometer sized particles into liquids. The heat transfer in nanofluids is important especially in the context of chemical engineering, aerospace engineering and industrial manufacturing processes. The reason is that, nanofluids were found to transfer heat more efficiently than the conventional fluids. Therefore, nanofluids research could lead to a major breakthrough in developing next generation coolants for numerous engineering applications. Due to this reason, several flow problems related to heat transfer over vertical flat plate, inclined plate and wedge were studied in this thesis. The main purpose of this study was to investigate the characteristics of two dimensional flow and surface heat transfer for two cases which are steady and unsteady convection flows. Nanofluids with two different base fluids (water and kerosene) containing magnetic and non magnetic nanoparticles were considered. The effect of magnetohydrodynamics (MHD) on the flow and heat transfer was also studied. The study starts with the formulation of the mathematical models that governed the fluid flow and heat transfer. Next, the governing nonlinear equations in the form of partial differential equations were reduced into ordinary differential equations using appropriate similarity transformation. The resulting systems of ordinary differential equations were then solved numerically using Keller box method. The numerical values of the skin friction coefficient, the local Nusselt number which represents the heat transfer rate at the surface as well as the velocity and temperature profiles were obtained for various values of the magnetic field inclination angle, magnetic interaction, plate inclination angle, nanoparticles volume fraction, wedge angle, moving wedge, unsteadiness, Grashof number and thermal buoyancy. All results obtained, were displayed graphically in addition to tabular form. The comparisons of results with previous studies were made to validate the results. For both steady and unsteady problems, it is found that magnetic field inclination angle can be used as controlling factor for certain situation because it enhances the skin friction and heat transfer rate. The plate inclination angle parameter and nanoparticles volume fraction parameter have tendency to increase momentum and thermal boundary layers thickness. For unsteady problems, it is observed that the unsteadiness parameter has significant effect on the nanofluids motion and heat transfer characteristic.

## ABSTRAK

Nanobendalir adalah sejenis bendalir pemindahan haba baharu yang direka bentuk oleh zarah berukuran nanometer yang seragam dan ampaiian stabil yang di masukkan ke dalam cecair. Pemindahan haba dalam nanobendalir adalah penting terutamanya dalam konteks kejuruteraan kimia, kejuruteraan aeroangkasa dan proses pembuatan industri. Ini adalah kerana, nanobendalir didapati memindahkan haba dengan lebih cekap berbanding dengan bendalir konvensional. Oleh itu, penyelidikan berkenaan nanobendalir boleh membawa kepada penemuan baharu dalam proses penyejukan untuk pelbagai aplikasi kejuruteraan. Disebabkan oleh faktor ini, beberapa masalah aliran berkaitan dengan pemindahan haba ke atas plat rata menegak, plat cenderung dan baji dikaji dalam tesis ini. Tujuan utama kajian ini adalah untuk menyiasat ciri aliran dua matra dan pemindahan haba permukaan bagi dua kes aliran iaitu aliran olakan mantap dan tidak mantap. Nanobendalir yang terdiri daripada dua bendalir asas yang berlainan (air dan minyak tanah) yang mengandungi zarah nano bermagnet dan tidak bermagnet dipertimbangkan. Kesan hidrodinamik magnet (MHD) ke atas aliran dan pemindahan haba juga dikaji. Kajian ini dimulakan dengan memformulasi model-model matematik yang mengawal aliran dan pemindahan haba. Seterusnya, persamaan menakluk tak linear dalam bentuk persamaan pembezaan separa diturunkan kepada persamaan pembezaan biasa menggunakan penjelmaan keserupaan yang bersesuaian. Sistem persamaan pembezaan biasa yang terhasil kemudiannya diselesaikan secara berangka menggunakan kaedah kotak Keller. Nilai berangka bagi pekali geseran kulit, nombor Nusselt setempat yang mewakili kadar pemindahan haba pada permukaan, serta profil halaju dan suhu diperolehi untuk pelbagai nilai sudut kecenderungan medan magnet, interaksi medan magnetik, sudut kecenderungan plat, pecahan isipadu zarah nano, sudut baji, pergerakan baji, ketidakstabilan, nombor Grashof dan keapungan haba. Semua keputusan yang diperolehi dipersembahkan secara graf dan dalam bentuk jadual. Perbandingan keputusan dengan kajian terdahulu dibuat untuk mengesahkan keputusan yang diperolehi. Bagi kedua-dua masalah aliran mantap dan tidak mantap, didapati bahawa sudut kecenderungan medan magnet boleh digunakan sebagai faktor pengawal pada keadaan tertentu kerana ia meningkatkan geseran kulit dan kadar pemindahan haba. Parameter sudut kecenderungan plat dan parameter pecahan isipadu zarah nano mempunyai kecenderungan untuk meningkatkan ketebalan lapisan sempadan momentum dan terma. Untuk masalah aliran tidak mantap, diperhatikan bahawa parameter ketidakstabilan mempunyai kesan yang signifikan terhadap gerakan bendalir nano dan ciri pemindahan haba.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	<b>DECLARATION</b>	<b>ii</b>
	<b>DEDICATION</b>	<b>iii</b>
	<b>ACKNOWLEDGEMENT</b>	<b>iv</b>
	<b>ABSTRACT</b>	<b>v</b>
	<b>ABSTRAK</b>	<b>vi</b>
	<b>TABLE OF CONTENTS</b>	<b>vii</b>
	<b>LIST OF TABLES</b>	<b>xi</b>
	<b>LIST OF FIGURES</b>	<b>xiv</b>
	<b>LIST OF MATTERS</b>	<b>xix</b>
	<b>LIST OF SYMBOLS</b>	<b>xx</b>
	<b>LIST OF APPENDICES</b>	<b>xxiv</b>
<b>1</b>	<b>INTRODUCTION</b>	<b>1</b>
	1.1 Introduction	1
	1.2 Research Background	1
	1.3 Problem Statement	5
	1.4 Research Objectives	7
	1.5 Scope of Research	8
	1.6 Significance of Reserach	11
	1.7 Thesis Organization	11
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>13</b>
	2.1 Introduction	13

2.2	Steady and Unsteady of Free Convection Flows along a Vertical Flat Plate	13
2.3	Steady and Unsteady of Free Convection Flows along an Inclined Plate	18
2.4	Steady and Unsteady of Free Convection Flows along a Wedge	23
<b>3</b>	<b>DERIVATION OF THE GOVERNING EQUATIONS</b>	<b>27</b>
3.1	Introduction	27
3.2	Continuity Equation	27
3.3	Momentum Equation	28
3.3.1	Volume Forces	34
3.3.2	Boundary Layer Equation for Momentum Equation	36
3.3.3	Boussinesq's Approximation	41
3.4	Energy Equation	45
3.4.1	Boundary Layer Equation for Energy Equation	47
3.5	Physical Properties of the Nanofluids	48
3.5.1	Density	49
3.5.2	Specific Heat Capacity	49
3.5.3	Thermal Expansion Coefficient	50
3.5.4	Dynamic Viscosity	50
3.5.5	Thermal Conductivity	51
3.6	Summary	52
<b>4</b>	<b>STEADY ALIGNED MHD FREE CONVECTION FLOW OF MAGNETIC AND NON MAGNETIC NANOFLUIDS ALONG A VERTICAL FLAT PLATE</b>	<b>56</b>
4.1	Introduction	56
4.2	Formulation of Problem	56
4.3	Similarity Transformation	58
4.4	Numerical Solution	61
4.4.1	Finite Difference Scheme	62



	4.4.2	Newton's Method	65
	4.4.3	Block Elimination Method	66
	4.5	Numerical Approach	70
	4.6	Results and Discussion	72
	4.7	Summary	83
<b>5</b>		<b>STEADY ALIGNED MHD FREE CONVECTION FLOW OF MAGNETIC AND NON MAGNETIC NANOFLUIDS ALONG AN INCLINED PLATE</b>	<b>85</b>
	5.1	Introduction	85
	5.2	Formulation of Problem	85
	5.3	Similarity Transformation	87
	5.4	Results and Discussion	88
	5.5	Summary	100
<b>6</b>		<b>STEADY ALIGNED MHD FREE CONVECTION FLOW OF MAGNETIC AND NON MAGNETIC NANOFLUIDS ALONG A STATIC AND MOVING WEDGE</b>	<b>102</b>
	6.1	Introduction	102
	6.2	Formulation of Problem	103
	6.3	Similarity Transformation	104
	6.4	Results and Discussion	106
	6.5	Summary	119
<b>7</b>		<b>UNSTEADY ALIGNED MHD FREE CONVECTION FLOW OF MAGNETIC AND NON MAGNETIC NANOFLUIDS ALONG A VERTICAL FLAT PLATE WITH LEADING EDGE ACCRETION</b>	<b>121</b>
	7.1	Introduction	121
	7.2	Formulation of Problem	122
	7.3	Similarity Transformation	123
	7.4	Results and Discussion	125
	7.5	Summary	138

<b>8</b>	<b>UNSTEADY ALIGNED MHD FREE CONVECTION FLOW OF MAGNETIC AND NON MAGNETIC NANOFUIDS ALONG AN INCLINED PLATE WITH LEADING EDGE ACCRETION</b>	<b>139</b>
8.1	Introduction	139
8.2	Formulation of Problem	140
8.3	Similarity Transformation	141
8.4	Results and Discussion	142
8.5	Summary	154
<b>9</b>	<b>UNSTEADY ALIGNED MHD FREE CONVECTION FLOW OF MAGNETIC AND NON MAGNETIC NANOFUIDS ALONG A WEDGE</b>	<b>155</b>
9.1	Introduction	155
9.2	Formulation of Problem	155
9.3	Similarity Transformation	157
9.4	Results and Discussion	159
9.5	Summary	172
<b>10</b>	<b>CONCLUSION</b>	<b>174</b>
10.1	Introduction	174
10.2	Summary of the Thesis	174
10.3	Suggestion and Recommendation	178
	<b>REFERENCES</b>	<b>181</b>
	Appendices A – B	194 - 225

## LIST OF TABLES

TABLE NO.	TITLE	PAGE
3.1	Order of magnitude analysis for $x$ – momentum equation	38
3.2	Order of magnitude analysis for $y$ – momentum equation	39
3.3	Order of magnitude analysis for energy equation	48
4.1	Thermophysical properties of base fluids and nanoparticles	72
4.2	A comparison of local skin friction for $Pr = 6.2, Gr = 0, M = 0$ and $\alpha = 90^\circ$	73
4.3	Variation in local skin friction for magnetic and non magnetic nanofluids at different dimensionless parameters	81
4.4	Variation in local Nusselt number for magnetic and non magnetic nanofluids at different dimensionless parameters	83
5.1	Comparison of local skin friction for different values of volume fraction of nanoparticles for $Gr = 0, \alpha = 90^\circ, \gamma = 0^\circ$ and $M = 0$	89
5.2	Variation in local skin friction for magnetic and non magnetic nanofluids at different dimensionless parameters	98
5.3	Variation in local Nusselt number for magnetic and non magnetic nanofluid at different dimensionless parameters	99
6.1	Comparison of local skin friction for various $m$ values, when $Pr = 6.2, M = 0, \alpha = 0^\circ, \lambda = 1, \lambda_r = 0$ and $\phi = 0$ (pure fluid)	107
6.2	Comparison of local Nusselt number for different values of $m$ when $Pr = 6, M = 0, \alpha = 0^\circ, \lambda = 1, \lambda_r = 0$ and $\phi = 0$ (pure fluid)	108
6.3	Variation in local skin friction for magnetic and non magnetic nanofluids at different dimensionless parameters	116

6.4	Percentage increase of local skin friction for magnetic and non magnetic nanofluids at different dimensionless parameters	117
6.5	Variation in local Nusselt number for magnetic and non magnetic nanofluids at different dimensionless parameters	118
6.6	Percentage increase of local Nusselt number for magnetic and non magnetic nanofluids at different dimensionless parameters	119
7.1	Comparison of $-\theta(0)$ values for different values of Pr when $\omega = \frac{\pi}{2}$ , $Gr = 0$ , $M = 0$ , $\alpha = 0^\circ$ and $\phi = 0$ (pure fluid)	127
7.2	Comparison of $f''(0)$ values for different values of $\omega$ when $Gr = 0$ , $M = 0$ and $\alpha = 0^\circ$	127
7.3	Variation in local skin friction for magnetic and non magnetic nanofluids at different parameters	136
7.4	Variation in local Nusselt number for magnetic and non magnetic nanofluids at different parameters	137
8.1	Comparison of $-\theta(0)$ values for different values of Pr when $\omega = \frac{\pi}{2}$ , $Gr = 0$ , $\gamma = 0^\circ$ , $M = 0$ , $\alpha = 0^\circ$ and $\phi = 0$ (pure fluid)	143
8.2	Comparison of $f''(0)$ values for different values of $\omega$ when $Gr = 0$ , $\gamma = 0^\circ$ , $M = 0$ , and $\alpha = 0^\circ$	143
8.3	Variation in local skin friction for magnetic and non magnetic nanofluids at different dimensionless parameters	152
8.4	Variation in Nusselt number for magnetic and non magnetic nanofluids at different dimensionless parameters	153
9.1	Comparison of the present numerical results with Falken-Skan boundary layer equation when $Pr = 6.2$ , $\alpha = 90^\circ$ , $M = 0$ , $\beta_1 = 0$ , $\lambda_T = 0$ , $K = 0$ and $\phi = 0$ (pure fluid)	160
9.2	Comparison of $f''(0)$ values for various $m$ values, when $Pr = 6.2$ , $\alpha = 90^\circ$ , $M = 0$ , $\lambda_T = 0$ , $K = 0$ and $\phi = 0$ (pure fluid)	160
9.3	Variation in skin friction coefficient for magnetic and non magnetic nanofluids at different dimensionless parameters	170
9.4	Variation in Nusselt number for magnetic and non magnetic nanofluids at different dimensionless parameters	171

10.1	Parameters involved in six main problems	175
10.2	Velocity profiles of magnetic nanofluids for parameters $\alpha, M, Gr, \phi, \gamma, \beta_1, \lambda_T, K, \lambda$ and $\omega$	177
10.3	Temperature profiles of magnetic nanofluids for parameters $\alpha, M, Gr, \phi, \gamma, \beta_1, \lambda_T, K, \lambda$ and $\omega$	177
10.4	Skin Friction of magnetic and non magnetic nanofluids for parameters $\alpha, M, Gr, \phi, \gamma, \beta_1, \lambda_T, K, \lambda$ and $\omega$	179
10.5	Nusselt number of magnetic and non magnetic nanofluids for parameters $\alpha, M, Gr, \phi, \gamma, \beta_1, \lambda_T, K, \lambda$ and $\omega$	180

## LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Scope of research	9
1.2	Research framework	10
3.1	Normal and shear stress components	30
3.2	Flow over a slender body for momentum boundary layer	37
3.3	Flow over a slender body for thermal boundary layer	47
4.1	Physical model and coordinates system	57
4.2	Net rectangle for difference approximations	63
4.3	Flow diagram for the Keller box method	71
4.4	Effect of magnetic field inclination angle parameter $\alpha$ on the velocity profiles for $M = 2$ , $\phi = 0.05$ and $Gr = 1$	73
4.5	Effect of magnetic field inclination angle parameter $\alpha$ on the temperature profiles for $M = 2$ , $\phi = 0.05$ and $Gr = 1$	74
4.6	Effect of magnetic interaction parameter $M$ on the velocity profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ and $Gr = 1$	75
4.7	Effect of magnetic interaction parameter $M$ on the temperature profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ and $Gr = 1$	76
4.8	Effect of nanoparticles volume fraction $\phi$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ and $Gr = 1$	76
4.9	Effect of nanoparticles volume fraction $\phi$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ and $Gr = 1$	77
4.10	Effect of Grashof Number $Gr$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ and $\phi = 0.05$	79

4.11	Effect of Grashof Number $Gr$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ and $\phi = 0.05$	80
5.1	Physical model and coordinates system	86
5.2	Effect of magnetic field inclination angle parameter $\alpha$ on the velocity profiles for $M = 2$ , $\phi = 0.05$ , $Gr = 1$ and $\gamma = 45^\circ$	90
5.3	Effect of magnetic field inclination angle parameter $\alpha$ on the temperature profiles for $M = 2$ , $\phi = 0.05$ , $Gr = 1$ and $\gamma = 45^\circ$	90
5.4	Effect of magnetic interaction parameter $M$ on the velocity profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ , $Gr = 1$ and $\gamma = 45^\circ$	92
5.5	Effect of magnetic interaction parameter $M$ on the temperature profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ , $Gr = 1$ and $\gamma = 45^\circ$	92
5.6	Effect of angle of plate inclination angle $\gamma$ on the velocity profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ , $M = 2$ and $Gr = 1$	93
5.7	Effect of plate inclination angle, $\gamma$ on the temperature profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ , $M = 2$ and $Gr = 1$	94
5.8	Effect of volume fraction $\phi$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $Gr = 1$	95
5.9	Effect of volume fraction $\phi$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $Gr = 1$	95
5.10	Effect of Grashof number $Gr$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $\phi = 0.05$	96
5.11	Effect of Grashof number $Gr$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $\phi = 0.05$	96
6.1	Physical flow model and coordinates system	103
6.2	Effect of magnetic field inclination angle parameter $\alpha$ on the velocity profiles for $M = 2$ , $\beta_1 = 0.33$ , $\lambda_r = 1.5$ and $\phi = 0.05$	109
6.3	Effect of magnetic field inclination angle parameter $\alpha$ on the temperature profiles for $M = 2$ , $\beta_1 = 0.33$ , $\lambda_r = 1.5$ and $\phi = 0.05$	109
6.4	Effect of magnetic field interaction parameter $M$ on the velocity profiles for $\alpha = 90^\circ$ , $\beta_1 = 0.33$ , $\lambda_r = 1.5$ and $\phi = 0.05$	110
6.5	Effect of magnetic field interaction parameter $M$ on the	

	temperature profiles for $\alpha = 90^\circ$ , $\beta_1 = 0.33$ , $\lambda_T = 1.5$ and $\phi = 0.05$	110
6.6	Effect of wedge angle parameter $\beta_1$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\lambda_T = 1.5$ and $\phi = 0.05$	112
6.7	Effect of wedge angle parameter $\beta_1$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\lambda_T = 1.5$ and $\phi = 0.05$	112
6.8	Effect of thermal buoyancy parameter $\lambda_T$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ and $\phi = 0.05$	113
6.9	Effect of thermal buoyancy parameter $\lambda_T$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ and $\phi = 0.05$	114
6.10	Effect of nanoparticles volume fraction parameter $\phi$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ and $\lambda_T = 1.5$	115
6.11	Effect of nanoparticles volume fraction parameter $\phi$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ and $\lambda_T = 1.5$	115
7.1	Effect of magnetic field inclination angle parameter $\alpha$ on the velocity profiles for $M = 2$ , $\phi = 0.05$ and $Gr = 1$	128
7.2	Effect of magnetic field inclination angle parameter $\alpha$ on the temperature profiles for $M = 2$ , $\phi = 0.05$ and $Gr = 1$	129
7.3	Effect of magnetic interaction parameter $M$ on the velocity profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ and $Gr = 1$	131
7.4	Effect of magnetic interaction parameter $M$ on the temperature profiles for $\alpha = 90^\circ$ , $\phi = 0.05$ and $Gr = 1$	131
7.5	Effect of nanoparticles volume fraction $\phi$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ and $Gr = 1$	132
7.6	Effect of nanoparticles volume fraction $\phi$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ and $Gr = 1$	132
7.7	Effect of Grashof number $Gr$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ and $\phi = 0.05$	133
7.8	Effect of Grashof number $Gr$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ and $\phi = 0.05$	134
8.1	Effect of magnetic field inclination angle parameter $\alpha$ on the	



	velocity profiles for $M = 2$ , $\gamma = 45^\circ$ , $\phi = 0.05$ and $Gr = 1$	144
8.2	Effect of magnetic field inclination angle parameter $\alpha$ on the temperature profiles for $M = 2$ , $\gamma = 45^\circ$ , $\phi = 0.05$ and $Gr = 1$	145
8.3	Effect of magnetic interaction parameter $M$ on the velocity profiles for $\alpha = 90^\circ$ , $\gamma = 45^\circ$ , $\phi = 0.05$ and $Gr = 1$	146
8.4	Effect of magnetic interaction parameter $M$ on the temperature profiles for $\alpha = 90^\circ$ , $\gamma = 45^\circ$ , $\phi = 0.05$ and $Gr = 1$	146
8.5	Effect of plate inclination angle parameter $\gamma$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\phi = 0.05$ and $Gr = 1$	147
8.6	Effect of plate inclination angle parameter $\gamma$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\phi = 0.05$ and $Gr = 1$	148
8.7	Effect of nanoparticles volume fraction $\phi$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $Gr = 1$	148
8.8	Effect of nanoparticles volume fraction $\phi$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $Gr = 1$	149
8.9	Effect of Grashof number parameter $Gr$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $\phi = 0.05$	149
8.10	Effect of local Grashof number parameter $Gr$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\gamma = 45^\circ$ and $\phi = 0.05$	150
9.1	Effect of magnetic field inclination angle parameter $\alpha$ on the velocity profiles for $M = 2$ , $\beta_1 = 0.33$ , $\lambda_r = 1.5$ , $\phi = 0.05$ and $K = 0.5$	161
9.2	Effect of magnetic field inclination angle parameter $\alpha$ on the temperature profiles for $M = 2$ , $\beta_1 = 0.33$ , $\lambda_r = 1.5$ , $\phi = 0.05$ and $K = 0.5$	162
9.3	Effect of magnetic field interaction parameter $M$ on the velocity profiles for $\alpha = 90^\circ$ , $\beta_1 = 0.33$ , $\lambda_r = 1.5$ , $\phi = 0.05$ and $K = 0.5$	162
9.4	Effect of magnetic field interaction parameter $M$ on the temperature profiles fo $\alpha = 90^\circ$ , $\beta_1 = 0.33$ , $\lambda_r = 1.5$ , $\phi = 0.05$ and $K = 0.5$	163
9.5	Effect of wedge angle parameter $\beta_1$ on the velocity	

	profiles for $\alpha = 90^\circ$ , $M = 2$ , $\lambda_T = 1.5$ , $\phi = 0.05$ and $K = 0.5$	163
9.6	Effect of wedge angle parameter $\beta_1$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\lambda_T = 1.5$ , $\phi = 0.05$ and $K = 0.5$	165
9.7	Effect of thermal buoyancy parameter $\lambda_T$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ , $\phi = 0.05$ and $K = 0.5$	165
9.8	Effect of thermal buoyancy parameter $\lambda_T$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ , $\phi = 0.05$ and $K = 0.5$	166
9.9	Effect of nanoparticles volume fraction parameter $\phi$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ , $\lambda_T = 1.5$ and $K = 0.5$	167
9.10	Effect of nanoparticles volume fraction parameter $\phi$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ , $\lambda_T = 1.5$ and $K = 0.5$	168
9.11	Effect of unsteadiness parameter $K$ on the velocity profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ , $\lambda_T = 1.5$ and $\phi = 0.05$	168
9.12	Effect of unsteadiness parameter $K$ on the temperature profiles for $\alpha = 90^\circ$ , $M = 2$ , $\beta_1 = 0.33$ , $\lambda_T = 1.5$ and $\phi = 0.05$	169

**LIST OF MATTERS**

$\text{Al}_2\text{O}_3$	-	Alumina Oxide
Ag	-	Silver
$\text{Fe}_3\text{O}_4$	-	Magnetite
$\text{TiO}_2$	-	Titatium dioxide
Cu	-	Copper
Co	-	Cobalt
Ni	-	Nickel
Mn-Zn	-	Manganese-zinc ferrite

## LIST OF SYMBOLS

### Roman Letters

$A_b$	-	Rate of change of energy inside fluid element
$\mathbf{a}$	-	Acceleration of the element
$B_b$	-	Total heat flux into the fluid element
$\mathbf{B}_0$	-	Applied magnetic field
$B_0$	-	Magnitude of applied magnetic field
$\mathbf{B}$	-	Total magnetic field
$C_b$	-	The rate work done on element by the force
$C_f$	-	The skin friction coefficient at the surface
$c_p$	-	Heat capacity of base fluids
$(c_p)_s$	-	Heat capacity of solid nanoparticles
$(c_p)_{nf}$	-	Heat capacity of nanofluids
$\mathbf{D}$	-	Rate of strain tensor
$\frac{d}{dt}$	-	Material time derivative
$\mathbf{E}$	-	Total electric field
$\mathbf{F}$	-	Net force on the fluid element
$\mathbf{F}_b$	-	Volume forces
$F_x$	-	Volume forces in the $x$ -coordinate
$F_y$	-	Volume forces in the $y$ -coordinate
$F_z$	-	Volume forces in the $z$ -coordinate
$Gr$	-	Grashof Number
$Gr_x$	-	Local Grashof Number

$g$	-	Gravitational acceleration
$\mathbf{I}$	-	Identity tensor
$\mathbf{i}$	-	Cartesian unit vector in the $x$ –direction
$\mathbf{J}$	-	Current density
$\mathbf{J} \times \mathbf{B}$	-	Lorentz force
$\mathbf{j}$	-	Cartesian unit vector in the $y$ –direction
$K$	-	Unsteadiness parameter
$L$	-	Characteristic Length
$\mathbf{k}$	-	Cartesian unit vector in the $z$ –direction
$k$	-	Thermal conductivity
$k_p$	-	Thermal conductivity of solid nanoparticles
$k_f$	-	Thermal conductivity of base fluids
$k_{nf}$	-	Thermal conductivity of nanofluids
$M$	-	Magnetic interaction parameter
$m_0$	-	Mass of the element
$Nu$	-	Nusselt number
$Pr$	-	Prandtl number
$p$	-	Pressure
$q_w$	-	Surface heat flux
$Re$	-	Reynold’s number
$\mathbf{T}$	-	Cauchy stress tensor
$T$	-	Temperature
$T_w$	-	Temperature at the surface
$T_\infty$	-	Temperature at the free stream
$t$	-	Time
$U, U_\infty, u_e$	-	Velocity in free stream
$u_w$	-	Velocity at wedge surface
$u$	-	Velocity in $x$ –direction
$\mathbf{V}$	-	Velocity vector field
$V$	-	Magnitude of velocity
$V_0$	-	Volume

$v$	-	Velocity in $y$ –direction
$w$	-	Velocity in $z$ –direction
$y$	-	Dimensionless coordinate axis normal to the plate

### Greek Letters

$\alpha$	-	Magnetic field inclination angle
$\delta$	-	Boundary layer thickness
$\delta_t$	-	Thermal boundary layer thickness
$\delta_1$	-	Time dependent length scale
$\gamma$	-	Plate inclination angle
$\Omega$	-	Total wedge angle
$\rho$	-	Density
$\rho_p$	-	Density of solid nanoparticles
$\rho_f$	-	Density of base fluids
$\rho_{nf}$	-	Density of nanofluids
$\rho_\infty$	-	Density of fluids at free stream
$\beta_p$	-	Volumetric coefficient of thermal expansion of solid nanoparticles
$\beta, \beta_f$	-	Volumetric coefficient of thermal expansion of base fluids
$\beta_{nf}$	-	Volumetric coefficient of thermal expansion of nanofluids
$\beta_1$	-	Hartree pressure gradient
$\mu$	-	Dynamic viscosity of fluids
$\mu_f$	-	Dynamic viscosity of base fluids
$\mu_{nf}$	-	Dynamic viscosity of nanofluids
$\lambda$	-	Moving wedge parameter
$\lambda_T$	-	Thermal buoyancy parameter
$\phi$	-	Nanoparticles volume fraction
$\nu_f$	-	Kinematic viscosity of fluids
$\psi$	-	Stream function
$\omega$	-	Unsteady parameter for leading edge accretion

$\tau$	-	Anisotropic viscous stress
$\tau_1$	-	Dimensionless time variable
$\tau_w$	-	Wall shear stress
$\tau_{ij}$	-	Shear stress
$\sigma$	-	Electrical conductivity

**LIST OF APPENDICES**

<b>APPENDIX</b>	<b>TITLE</b>	<b>PAGE</b>
A	The Derivation of Governing Equations of Fluid Dynamics	194
B	FOTRAN Program to Solve Problem in Chapter 4	211
C	Publications and Conferences	224



## **CHAPTER 1**

### **INTRODUCTION**

#### **1.1 Introduction**

In this chapter, the strength of this thesis is explained concisely. The background of the research is presented in Section 1.2. The problem statements as well as objective and scope of the research are given in Section 1.3, 1.4 and 1.5 respectively. Consequently, the significance of the research is presented in Section 1.6. Lastly, Section 1.7 gives the outline of the whole thesis.

#### **1.2 Research Background**

Fluid dynamics refers to the science involving the movement of fluids and gases, forces causing such movements and the interactions between the solids and fluids. This field of study is an important component of engineering science and technology and is used in our daily lives. Fluid dynamics, in some way, affect different areas like transportation, energy, defence, environment, manufacturing, medicine, etc (Anderson and Wendt, 1995). Furthermore, an advanced knowledge of this field is very useful for predicting weather, aerodynamic behaviour of the moving vehicles, movement of the biological fluids within the body, cooling pattern of the electronic components, and performance of the micro fluidic devices (Anderson and Wendt, 1995). Because of the massive complexity of this subject and its various

applications, it is viewed as very challenging and exciting. Need for a better understanding of this subject has led to its development and has also brought about the development of the related fields like numerical computing, applied mathematics and the experimental techniques. The field of fluid dynamics is based on the Navier-Stokes equations, which could be used along with the other transport equations for concentration, energy or magnetic fields. Owing to their nonlinear nature, exact solutions are rare and many scenarios have to depend on the approximate computational or analytical solutions. This has led to the development of novel diagnostic techniques for the experimental and computational processes, which helped the scientists in their exploration of the complexities in this field (Kays *et al.*, 2005).

Since the humans discovered fire, they have been very fascinated with energy and heat. Also, after the industrial revolution, the mathematicians and scientists became very interested in predicting and modelling heat transfer. Many studies, involved in converting the energy and heat into power (led to the inventions like combustion and steam engines), highlighted the manner in which heat transfer occurred between the mediums and stated that this technique was important for energy conservation and for developing effective processes and devices (Kays *et al.*, 2005). Heat transfer takes place in three ways such as conduction, radiation and convection. Conduction refers to the direct heat transfer between the adjacent particles and occurs at the microscopic level. Radiation refers to the energy or heat transfer directly through the electromagnetic waves. On the other hand, convection is defined as the heat flow through the gases or liquids along with the mass flow. Hence, this heat transfer process occurs on a larger scale. Out of the three heat transfer processes, convection is very difficult to model as it requires a thorough understanding of the flow process of the fluids.

Convection is further divided into three different types such as forced, free and mixed convections. When the motion of the fluids is induced by external resources like blowers, fluid machinery pumps or vehicle motion, it is known as the forced convection and this process is called as the forced convection flow. When the fluid motion is induced by the body forces like centrifugal or gravitational forces, it is called as the natural or free convection. Furthermore, a mixed convection flow

takes place when the forced and free convection mechanisms occur simultaneously and bring about a significant heat transfer (Kays *et al.*, 2005).

The free convection process has garnered a lot of interest from the researchers as it occurs in nature and can be successfully used in several engineering applications. In nature, the convection heat transfer takes place when air rises above the hot land or water surfaces and is an important feature of the weather systems. Convection helps in the formation of the sea winds, oceanic currents and the rise of the plume of hot air from the fires. In the case of engineering applications, convection occurs in the microstructure configuration when the molten metals are cooled and also takes place when the fluid flows around the solar ponds and covered heat-dissipation fins. One of the most common industrial applications of the convection process is the cooling of the free air without using fans. This occurs at a smaller scale (computer chips) or in the larger scale process equipment (Bejan, 2013).

Several of the industries have expressed a need for better fluids which allow efficient heat transfer. However, the inherent poor thermal conductivity of a majority of the convection fluids has also fundamentally limited their heat transfer. Hence, a lot of research is being conducted for improving the fundamental limit (Bejan, 2013). One of the conventional methods for improving heat transfer in the thermal systems involves increasing the heat transfer surface areas of the cooling devices along with their flow velocity or dispersing the solid particles in the heat transfer fluids. Maxwell (1873) proposed the idea of suspending solid particles in the conventional heat transfer fluids for enhancing their thermal conductivity. Maxwell dispersed micrometre or millimetre-sized particles in the base liquids and improved their thermo-physical properties. However, this led to many problems like abrasion, sedimentation, clogged microchannels and a high pressure drop which prevented the use of the microparticle slurries as the heat transfer fluids. Thus, the use of the millimetre or micrometre-size particle suspension in the various heat transfer application was rejected. This idea was re-investigated after more than a century by Masuda *et al.* (1993) and Arnold Grimm *et al.* (2012). However, they also faced the problem of the sedimentation of solid particles.

In one study, Choi and Eastman (1995) used the nanoparticles suspension in the conventional base fluids. They observed a stable solution with no dispersed particles and were able to overcome a majority of the above-mentioned problems. This solution was called as the 'Nanofluids'. Their experiments showed that the addition of the nanoparticles in the conventional base fluids improved its thermal conductivity. Additionally, this method was preferable than the micrometre-size particle addition, due to valid scientific observations like (i) Long suspension times (better stability), (ii) Larger surface area or volume ratio (1000 times larger), (iii) Low clogging or erosion, (iv) Low requirement for the pumping power, (v) Decrease in the inventory of the heat transfer fluid and (vi) Better energy saving. The novel properties displayed by the nanofluids help in their heat transfer-related applications. They help in more effective heat transfer than the conventional base fluids. Hence, when they are used for improving the performance and the design of the thermal management systems, they offer many benefits, like better reliability, a decrease in the cooling system sizes, a lesser requirement of the pumping power, high fuel and energy efficiency and low pollution (Sheikholeslami and Ganji, 2014). Also, the nanofluids show a significant effect in cooling the high-heat-flux systems and devices used in many industrial, consumer or defence industries.

The field of magnetohydrodynamics (MHD) involving fluid mechanics includes the phenomena resulting from applying a magnetic field to an electrically conducting fluid. In recent years, the research around the field of MHD has developed quickly (Davidson, 2001). In an electrically conducting fluid, many applications have been derived through the study of flow and heat transfer when a magnetic field is applied past a heated surface. Some of these applications include manufacturing processes such as nuclear reactor, cooling down metallic plate and extrusion of polymers (Davidson, 2001). In electrically conducting fluid, the MHD flow can also control the heat transfer rate at the surface, which results in achieving the desired cooling effect. Although advanced nanofluids like Carbon Nanotubes(CNT)–water diamond–water are available, they are too expensive for practical uses. Thus, economically cheaper nanofluids were considered, which also offered better heat transfer improvements. Ferrofluids are basically magnetic nanofluids that are normally stable liquids comprising dispersed colloidal magnetic nanoparticles like cobalt (Co), Magnetite ( $\text{Fe}_3\text{O}_4$ ) and nickel (Ni). Unlike

conventional non magnetic nanofluids, ferrofluids provide various advantages when employed as heat transfer media for example, (i) the solute nanoparticles' properties such as thermal conductivity and viscosity can be modified by using external magnetic field to achieve a specific design requirements, (ii) the thermomagnetic convection in a ferrofluids can be controlled and enhanced by employing the external magnetic field, and (iii) the size and cost of components can be decreased by applying ferrofluids in heat transfer devices. In this context, few researchers (Sheikholeslami and Ganji (2014), Sheikholeslami and Gorji (2014)) have confirmed that ferrofluids gives excellent heat transfer improvements.

In this day and age, different geometries also improve the thermal conductivity process. Many studies have investigated and proposed novel techniques for improving the heat transfer (Bejan, 2013). Also, researchers have investigated the role played by the variation in the device geometry on the heat transfer rate. Several numerical and experimental studies were published which determined the effects of the separation flow on the heat transfer performance, based on the configurations and the boundary conditions. Based on the above discussion, clearly, very few studies have investigated the heat transfer of the aligned MHD magnetic and non magnetic nanofluids flowing over the flat or inclined plates and wedges. More investigation needs to be carried out by varying the magnetic nanoparticles, geometries and the conventional base fluids to determine their effects on the velocity, heat transfer as well as skin friction and Nusselt number.

### **1.3 Problem Statement**

Fluid heating and cooling holds lot of significance in several sectors, including manufacturing, power, electronics and transportation. Effectual ways of cooling are extremely essential for cooling any high-energy apparatus. The usual heat transfer fluids like ethylene glycol, water and engine oil have inadequate or substandard heat transfer competences because of their limited heat transfer attributes. On the other hand, metals demonstrate thermal conductivities almost thrice more compared to such fluids. Thus, it is obvious that a blend of the two

substances is sought to create a heat transfer medium which performs like a fluid but exhibits a thermal conductivity like that of a metal. As mentioned earlier, nanofluids can overcome these issues. It is a fluid which comprises tiny volumetric amounts of nanometre-sized particles known as nanoparticles. It is basically engineered colloidal suspensions of nanoparticles within a base fluid. The nanoparticles utilised in nanofluids are mostly formulated from oxides, metals, carbides or CNTs.

Nanofluids are often a topic of research due to their heat transfer attributes. These nanofluids improve convective properties as well as thermal conductivity over the base fluid's properties. Normally, the heat transfer coefficient improves by almost 40% and thermal conductivity improvements have been found in the range of 15 to 40% over the base fluid (Yu *et al.*, 2008). Such levels of increase in thermal conductivity cannot be completely attributed to the added nanoparticles' higher thermal conductivity. Attribution behind performance enhancements must have come from other mechanisms as well. Besides, there are many potential applications that use the interaction between nanofluids and the magnetic field to address issues such as liquid sodium that results in cooling of nuclear reactors and induction flow meter that relies on the potential difference in the fluid, which is in the direction perpendicular to the magnetic field and to the motion. Therefore, this study has explored the following research questions:

1. How is the mathematical model of the steady and unsteady aligned MHD free convection boundary layer flows over three different geometries which are a flat plate, an inclined plate and a wedge formulated?
2. How do the mathematical models describing the nature of steady and unsteady aligned MHD free convection boundary layer flows over three different geometries which are a flat plate, an inclined plate and a wedge?
3. How does the presence of magnetic and non magnetic nanoparticles in the base fluid together with aligned MHD and other parameters affect the fluid motion, heat transfer, skin friction and Nusselt number?

## 1.4 Research Objectives

This study numerically investigates the steady and unsteady of aligned MHD free convection of boundary layer flows of magnetic and non magnetic nanofluids over a flat plate, an inclined plate and a wedge. This includes the constitution of suitable mathematics models by formulating the appropriate governing equations with some physical conditions and solving the resulting governing equations numerically. The specific objectives of this research are the following:

1. To derive the mathematical models of the problems which consist of continuity, momentum and energy equations.
2. To carry out mathematical formulation and simplification.
3. To solve the dimensionless governing equations numerically by using Keller box method.
4. To develop computational algorithm for solving the problem.
5. To obtain the numerical results of velocity and temperature profiles as well as skin friction and Nusselt number for each of the problem.
6. To analyse the results obtained graphically and tabulated for different physical condition namely magnetic field inclination angle parameter, magnetic interaction parameter, plate inclination angle parameter, nanoparticles volume fraction parameter, wedge angle parameter, moving wedge parameter, unsteadiness parameter, Grashof number and thermal buoyancy parameter.


## 1.5 Scope of Research

This thesis is focused on the steady and unsteady aligned MHD free convection flows, incompressible and two dimensional laminar boundary layer flow of magnetic and non magnetic nanofluids past along three geometries such as wedge, vertical an inclined plates. The constant wall temperature and no slip velocity condition are considered. Nanoparticles are suspended inside regular fluids where water and kerosene are chosen for this purpose. The selected nanoparticles are magnetic nanoparticles ( $\text{Fe}_3\text{O}_4$ ) and non magnetic nanoparticles (alumina oxide ( $\text{Al}_2\text{O}_3$ )) (Sheikholeslami and Ganji, 2014, Sheikholeslami and Gorji, 2014). The base fluids and the selected nanoparticles are assumed to be in thermal equilibrium. By following Tiwari and Das (2007), several nanofluids models are derived. Bearing this scope in mind and apart from Chapters 1, 2 and 3, the following problems have been considered in Chapters 4, 5, 6, 7, 8 and 9 of the thesis.


1. Steady aligned MHD free convection flow of magnetic and non magnetic nanofluids along a vertical flat plate.
2. Steady aligned MHD free convection flow of magnetic and non magnetic nanofluids along an inclined plate.
3. Steady aligned MHD free convection flow of magnetic and non magnetic nanofluids along a static and moving wedge.
4. Unsteady aligned MHD free convection flow of magnetic and non magnetic nanofluids along a vertical flat plate with leading edge accretion.
5. Unsteady aligned MHD free convection flow of magnetic and non magnetic nanofluids along an inclined plate with leading edge accretion.
6. Unsteady aligned MHD free convection flow of magnetic and non magnetic nanofluids along a wedge.



The problems are formulated and transformed using similarity transformation and solved numerically by Keller box method with the help of FOTRAN software. The scope and research framework of this study are shown in Figures 1.1 and 1.2 respectively.

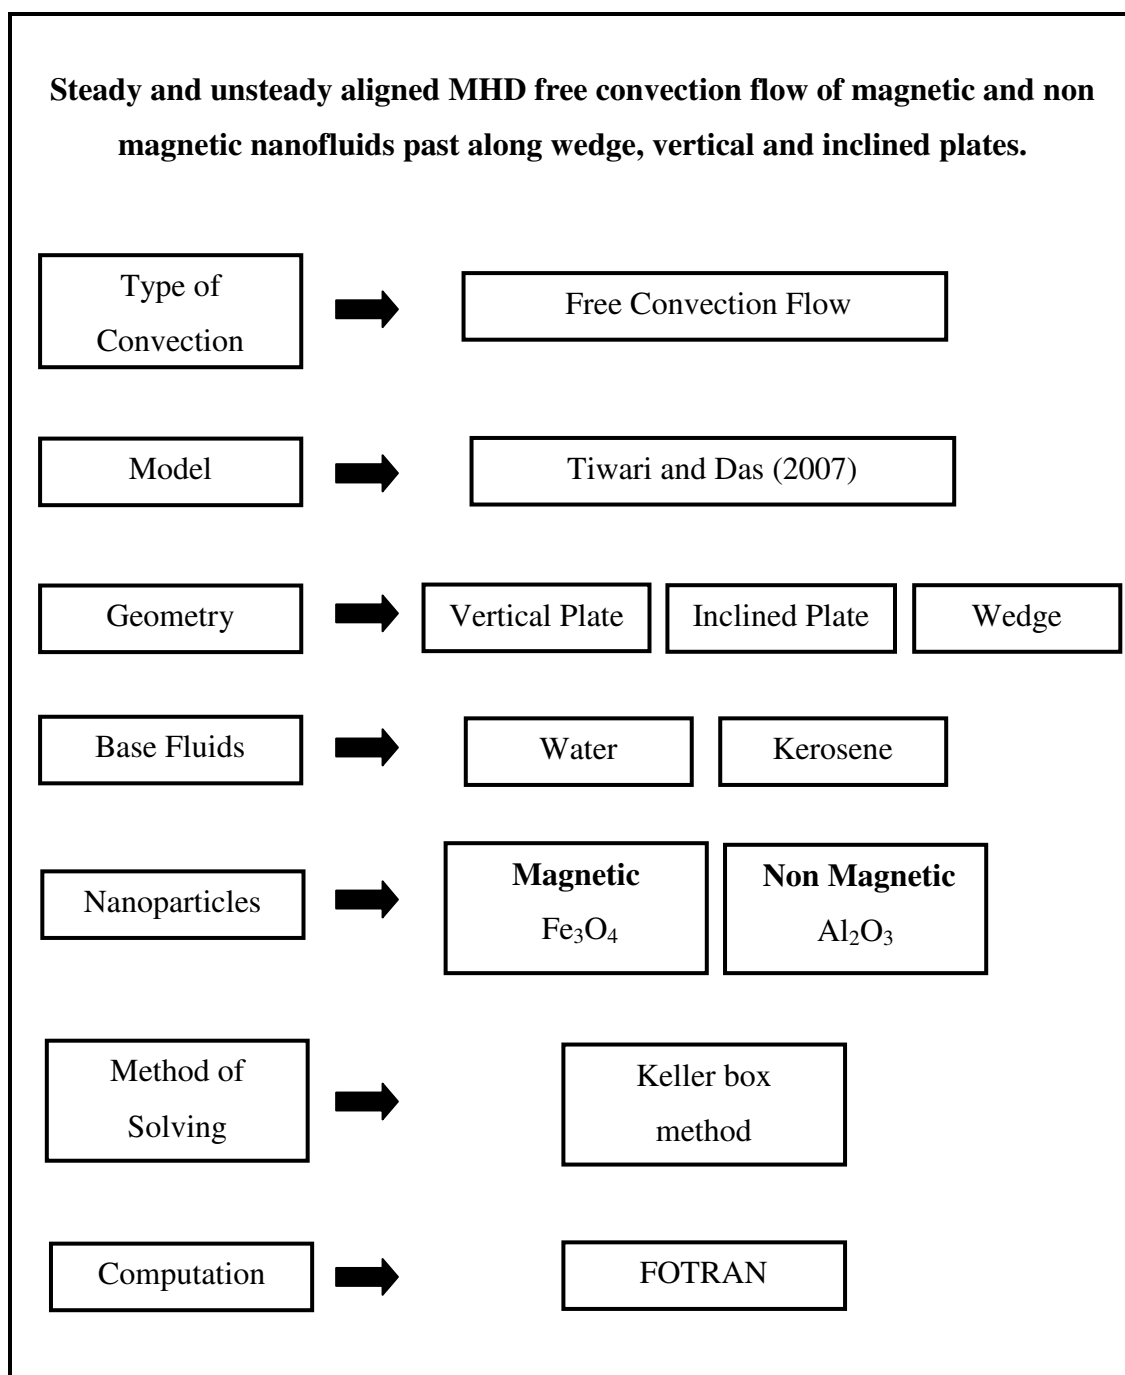

**Figure 1.1** Scope of research

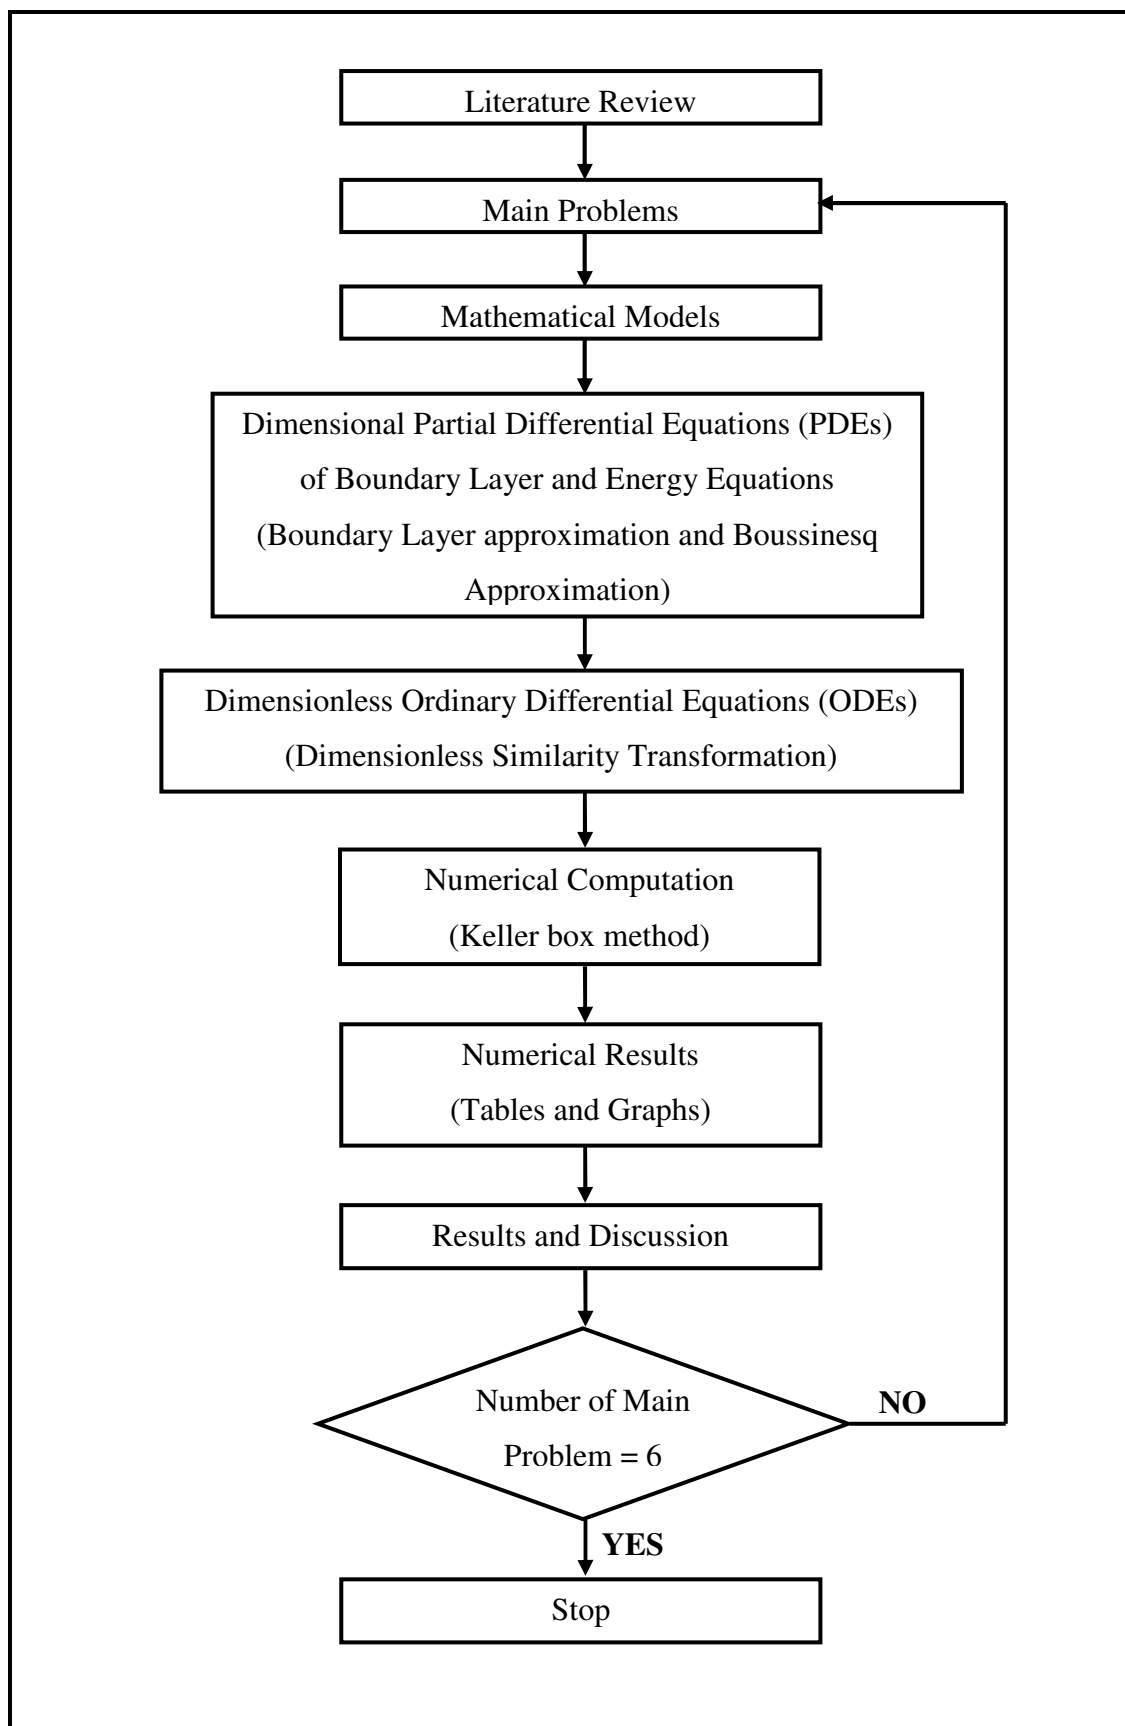

**Figure 1.2** Research framework

## **1.6 Significance of Research**

Cooling is essential for maintaining the stability and the performance of many devices like power electronics, computers, car engines and the high-power lasers or x-rays. Thermal conductivity is an important process in many of the consumer and industrial processes. However, the inherent poor thermal conductivity of the conventional base fluids fundamentally limits their heat transfer process and they are unable to satisfy the current industrial and technological demands (Sheikholeslami and Ganji, 2014). Hence the significance of this thesis are:

1. To develop a theory of magnetic and non magnetic nanofluids and explain how nanoparticles change the thermal properties of magnetic and non magnetic nanofluids and present different effects and conditions that provide the best option needed in the flow and heat transfer characteristics.
2. The results obtained from this research enable to enhance knowledge of the steady and unsteady aligned MHD free convection flow and heat transfer past along a vertical flat plate, an inclined plate and a wedge.
3. The results obtained can be used as bases for complex flow problems frequently occurring in engineering and applied sciences. This idea can be extend for other fluids.

## **1.7 Thesis Organization**

This thesis consists of ten chapters in which Chapter 1 consist of the introduction of the research, Chapter 2 discusses on the literature review, Chapter 3 deliberated the derivation of the governing equations which represent the problem, Chapters 4 to 9 represent six research problems of this study and lastly, Chapter 10 represents the main conclusion of the overall problems.

Chapter 1 which represents introductory part of the main research contains the background of research, problem statement of research, objective of research, scope of research and significance of research. Then, in Chapter 2, previous research work regarding the research area concerning the proposed problems is reviewed and discussed.

In Chapter 3, the derivation of the basic governing equations for nanofluids are discussed in detail. Further, the formulation of the main problem which involves the derivation of the volume forces, Boussinesq and boundary layer approximations are employed.

Chapters 4 to 6 present the problem on the effect of steady aligned MHD on free convection flow of magnetic and non magnetic nanofluids past along a vertical flat plate, an inclined plate and a wedge. The nonlinear PDEs that govern the problem are transformed into nonlinear ODEs by using similarity transformation. Physical quantities are also included in this chapter to analyze. The full numerical processes of Keller box method is also explained in Chapter 4.

Further, Chapters 7 to 9 discuss the unsteady problem on the effect of aligned MHD on free convection flow of magnetic and non magnetic nanofluids past along a vertical flat plate, an inclined plate and a wedge. For vertical and inclined plate the effect of leading edge accretion is highlighted.

In each chapter, the content begins with the introduction, followed by mathematical formulation continued with solution procedures and will end up with the details on results and discussion.

Finally in Chapter 10, concluding remarks of the thesis, proposed future work and implications are presented. At the end, all the references used in this thesis are listed in the references.

## REFERENCES

- Abrashev, M.V., Merodiiska, T., Gelev, C., Vandenberghe, R.E., Marova-Deneva, I. and Nedkov, I. (2010). Raman spectroscopy investigation of magnetite nano particles in ferrofluids. *Journal of Magnetism and Magnetic Materials*. 322:1904-1911.
- Ackroyd, J. A. D. (1976). Laminar natural convection boundary layers on near-horizontal plates. *In Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences*. The Royal Society. 249-274.
- Ahmad, K., Hanouf, Z. and Ishak, A. (2017). MHD Casson nanofluid flow past a wedge with Newtonian heating. *The European Physical Journal Plus*. 132(2): 87.
- Ahmad, R. and Khan, W. A. (2013). Effect of viscous dissipation and internal heat generation/absorption on heat transfer flow over a moving wedge with convective boundary condition. *Heat Transfer—Asian Research*. 42(7): 589-602.
- Ahmad, S., Rohni, A. M. and Pop, I. (2011). Blasius and Sakiadis problems in nanofluids. *Acta Mechanica*. 218(3-4): 195-204.
- Ahmed, N. (2012). Soret and radiation effects on transient MHD free convection from an impulsively started infinite vertical plate. *Journal of heat transfer*. 134(6).
- Ahmed, N., Sarma, D. and Deka, H. (2012). MHD Mixed Convection and Mass Transfer from an Infinite Vertical Porous Plate with Chemical Reaction in Presence of a Heat Source. *Applied Mathematical Sciences*. 6(21): 1011 -1020.
- Akhavan, O., Ghaderi, E. and Akhavan, A. (2012). Size-dependent genotoxicity of graphene nanoplatelets in human stem cells. *Biomaterials*. 33(32): 8017-8025.
- Akhavan-Behabadi, M. A., Pakdaman, M. F. and Ghazvini, M. (2012). Experimental investigation on the convective heat transfer of nanofluid flow inside vertical

- helically coiled tubes under uniform wall temperature condition. *International Communications in Heat and Mass Transfer*. 39(4): 556-564.
- Alam, M. S. and Hossain, S. C. (2013). A new similarity approach for an unsteady two-dimensional forced convective flow of a micropolar fluid along a wedge. *Journal of Applied Mathematics and Mechanics*. 9: 75-89.
- Alam, M. S., Rahman, M. M. and Sattar, M. A. (2006). MHD free convective heat and mass transfer flow past an inclined surface with heat generation. *Thammasat International Journal of Science and Technology*. 11(4): 1-8.
- Alam, M. S., Rahman, M. M. and Sattar, M. A. (2009). On the effectiveness of viscous dissipation and Joule heating on steady Magnetohydrodynamic heat and mass transfer flow over an inclined radiate isothermal permeable surface in the presence of thermophoresis. *Communications in Nonlinear Science and Numerical Simulation*. 14(5): 2132-2143.
- Aldoss, T. K., Ali, Y. D. and Al-Nimr, M. A. (1996). MHD Mixed Convection From a Horizontal Circular Cylinder. *Numerical Heat Transfer*. 30(4): 379–396.
- Aminfar, H., Mohammadpourfard, M. and Zonouzi, S. A. (2013). Numerical study of the ferrofluid flow and heat transfer through a rectangular duct in the presence of a non-uniform transverse magnetic field. *Journal of Magnetism and Magnetic materials*. 327: 31-42.
- Anderson, J. D. and Wendt, J. (1995). *Computational fluid dynamics*. New York: McGraw-Hill.
- Arnold, F., Pirjola, L., Rönkkö, T., Reichl, U., Schlager, H., Lahde, T., ... and Keskinen, J. (2012). First online measurements of sulfuric acid gas in modern heavy-duty diesel engine exhaust: implications for nanoparticle formation. *Environmental Science and Technology*. 46(20): 11227-11234.
- Arulmurugan, R., Jeyadevan, B., Vaidyanathan, G., Ayari, M., Paul-Boncour, V., Lamloumi, J., ... and Guillot, M. (2005). Magnetic properties and morphology of block copolymer-cobalt oxide nano-composites. *Journal of Magnetism and Magnetic Materials*. 288: 495-498.
- Aydın, O. and Kaya, A. (2009). MHD mixed convection of a viscous dissipating fluid about a permeable vertical flat plate. *Applied Mathematical Modelling*. 33(11): 4086-4096.

- Balla, C. S., Kishan, N., Gorla, R. S. and Gireesha, B. J. 2017. MHD boundary layer flow and heat transfer in an inclined porous square cavity filled with nanofluids. *Ain Shams Engineering Journal*. 8(2): 237-254.
- Bejan, A. (2013). *Convection heat transfer*. (4<sup>th</sup> ed.). New Jersey: John Wiley & Sons, Inc..
- Blasius, H. (1908). The Boundary Layers in Fluids with Little Friction. *Zentralblatt Mathematics Physics*. 56:1.
- Boussinesq J. (1897). Theory of the whirling and turbulent flow of liquids. Gauthier-Villars Paris
- Boussinesq J. (1903). The Analytical Theory of Heat. Gauthier-Villars.
- Brinkman, H. C. (1952). The viscosity of concentrated suspensions and solutions. *The Journal of Chemical Physics*. 20(4): 571-571.
- Cebeci, T. and Bradshaw, P. (1984). *Momentum Transfer in Boundary Layers*. New York: McGraw-Hill.
- Chakraborty, T., Das, K. and Kundu, P. K. (2017). Ag-water nanofluid flow over an inclined porous plate embedded in a non-Darcy porous medium due to solar radiation. *Journal of Mechanical Science and Technology*. 31(5): 2443-2449.
- Chamkha, A. J., Mujtaba, M., Quadri, A. and Issa, C. (2003). Thermal radiation effects on MHD forced convection flow adjacent to a non-isothermal wedge in the presence of a heat source or sink. *Heat and Mass Transfer*. 39(4): 305-312.
- Choi, S.U.S. (1995). Enhancing thermal conductivity of fluids with nanoparticles. *Developments Applications of Non-Newtonian Flows*. 231: 99–105.
- Colla, L., Fedele, L., Scattolini, M. and Bobbo, S. (2012). Water-based Fe<sub>2</sub>O<sub>3</sub> nanofluid characterization: thermal conductivity and viscosity measurements and correlation. *Advances in Mechanical Engineering*. 4.
- Cowling, T. G. (1976). *Magnetohydrodynamics*. Bristol, Adam Hilger, Ltd., 1976. 145 p.
- Cowling, T.G. (1976). *Magnetohydrodynamics*. Bristol: Adam Hilger.
- Cramer K.R. and Pai S.I. (1973). *Magnetofluid Dynamics for Engineers and Applied Physicists*. New York: McGraw-Hill.
- Das, S. K., Putra, N., Thiesen, P. and Roetzel, W. (2003). Temperature dependence of thermal conductivity enhancement for nanofluids. *Journal of heat transfer*. 125(4): 567-574.
- Davidson, P. A. (2001). *An introduction to MHD*. Cambridge University Press.

- Eastman, J. A., Phillpot, S. R., Choi, S. U. S. And Keblinski, P. (2004). Thermal transport in nanofluids. *Annual Review Material Research*. 34: 219-246.
- Einstein, A. (1906). A new determination of molecular dimensions. *Annual Physics*. 19(2): 289-306.
- Eswara, A. T. (2012). Unsteady MHD Laminar Momentum Boundary Layer over a Flat Plate with Leading Edge Accretion (Ablation). *International Journal of Mathematics and Scientific Computing*. 2(2): 10-12
- Falkneb, V. M. and Skan, S. W. (1931). Solutions of the boundary-layer equations. *The London, Edinburgh and Dublin Philosophical Magazine and Journal of Science*. 12(80): 865-896.
- Fang, T. (2008). A note on the unsteady boundary layers over a flat plate. *International Journal of Non-Linear Mechanics*. 43(9): 1007-1011.
- Felicia, L. J. and Philip, J. (2015). Effect of hydrophilic silica nanoparticles on the magnetorheological properties of ferrofluids: A study using opto-magnetorheometer. *Langmuir*. 31(11): 3343-3353.
- Ganapathirao, M., Ravindran, R. and Momoniat, E. (2015). Effects of chemical reaction, heat and mass transfer on an unsteady mixed convection boundary layer flow over a wedge with heat generation/absorption in the presence of suction or injection. *Heat and Mass Transfer*. 51(2): 289-300.
- Garg, V. K. and Jayaraj, S. (1988). Thermophoresis of aerosol particles in laminar flow over inclined plates. *International journal of heat and mass transfer*. 31(4): 875-890.
- Ghasemi, K., and Siavashi, M. (2017). MHD nanofluid free convection and entropy generation in porous enclosures with different conductivity ratios. *Journal of Magnetism and Magnetic Materials*. 442: 474-490.
- Haile, E. and Shankar, B. (2015). A steady MHD boundary-layer flow of water-based nanofluids over a moving permeable flat plate. *International Journal of Mathematics Research*. 4(1): 27-41.
- Hamad, M. A. A., Pop, I. and Ismail, A. M. (2011). Magnetic field effects on free convection flow of a nanofluid past a vertical semi-infinite flat plate. *Nonlinear Analysis: Real World Applications*. 12(3): 1338-1346.
- Hartree, D. R. (1937). *On an equation occurring in Falkner and Skan's approximate treatment of the equations of the boundary layer*. In *Mathematical Proceedings of the Cambridge Philosophical Society*. Cambridge University Press.



- Hasan, M. M. and Eichhorn, R. (1979). Local nonsimilarity solution of free convection flow and heat transfer from an inclined isothermal plate. *Journal of Heat Transfer*. 101(4): 642-647.
- He, Y., Men, Y., Zhao, Y., Lu, H. and Ding, Y. (2009). Numerical investigation into the convective heat transfer of TiO<sub>2</sub> nanofluids flowing through a straight tube under the laminar flow conditions. *Applied Thermal Engineering*. 29(10): 1965-1972.
- Helmy, K. A. (1995). MHD boundary layer equations for power-law fluids with variable electric conductivity. *Meccanica*. 30(2): 187-200.
- Ho, C. J., Liu, W. K., Chang, Y. S. and Lin, C. C. (2010). Natural convection heat transfer of alumina-water nanofluid in vertical square enclosures: an experimental study. *International Journal of Thermal Sciences*. 49(8): 1345-1353.
- Hossain, M. A., Alim, M. A. and Rees, D. A. S. (1998). Effect of thermal radiation on natural convection over cylinders of elliptic cross section. *Acta Mechanica*. 129(3-4): 177-186.
- Hossain, M. A., Alim, M. A. and Rees, D. A. S. (1999). The effect of radiation on free convection from a porous vertical plate. *International Journal of Heat and Mass Transfer*. 42(1): 181-191.
- Ishak, A., Nazar, R. and Pop, I. (2007). Falkner-Skan equation for flow past a moving wedge with suction or injection. *Journal of Applied Mathematics and Computing*. 25(1): 67-83.
- Ishak, A., Nazar, R. and Pop, I. (2009). MHD boundary-layer flow of a micropolar fluid past a wedge with constant wall heat flux. *Communications in Nonlinear Science and Numerical Simulation*. 14(1): 109-118.
- Islam, M., Akter, F. and Islam, A. (2015). Mass Transfer Flow through an Inclined Plate with Porous Medium. *American Journal of Applied Mathematics*. 3(5): 215-220.
- Jones, D. R. (1973). Free convection from a semi-infinite flat plate inclined at a small angle to the horizontal. *The Quarterly Journal of Mechanics and Applied Mathematics*. 26(1): 77-98.
- Jothimani, S. and Devi, S. A. (2000). Oblique magnetic field effects over stability in superposed viscous ferrofluids. *Journal of Magnetism and Magnetic materials*. 222(1): 1-7.

- Jue, T. C. (2006). Analysis of combined thermal and magnetic convection ferrofluid flow in a cavity. *International communications in heat and mass transfer*. 33(7): 846-852.
- Kafoussias, N. G. and Nanousis, N. D. (1997). Magnetohydrodynamic laminar boundary-layer flow over a wedge with suction or injection. *Canadian Journal of Physics*. 75(10): 733-745.
- Kasmani, R. M., Sivasankaran, S., Bhuvanewari, M. and Siri, Z. (2016). Effect of Chemical Reaction on Convective Heat Transfer of Boundary Layer Flow in Nanofluid over a Wedge with Heat Generation/Absorption and Suction. *Journal of Applied Fluid Mechanics*. 9(1).
- Kays, W. M., Crawford, M.E. and Weigand, B. (2005). *Convective heat and mass transfer*.(4<sup>th</sup> ed.). New Jersey: McGraw-Hill.
- Keller, H. B. and Cebeci, T. (1972). Accurate numerical methods for boundary-layer flows. II: two-dimensional turbulent flows. *AIAA J*. 10(9): 1193-1199.
- Kelleher, M. and Yang, K. T. (1972). A Görtler-Type Series for Laminar Free Convection along a Non-Isothermal Vertical Plate. *The Quarterly Journal of Mechanics and Applied Mathematics*. 25(4): 447-457.
- Khan, M. S., Karim, I., Islam, M. S. and Wahiduzzaman, M. (2014). MHD boundary layer radiative, heat generating and chemical reacting flow past a wedge moving in a nanofluid. *Nano convergence*. 1(1): 20.
- Khan, W. A. and Aziz, A. (2011). Natural convection flow of a nanofluid over a vertical plate with uniform surface heat flux. *International Journal of Thermal Sciences*. 50(7): 1207-1214.
- Khan, W. A., Khan, Z. H. and Haq, R. U. (2015). Flow and heat transfer of ferrofluids over a flat plate with uniform heat flux. *The European Physical journal plus*. 130(4): 86.
- Khan, W. A., Makinde, O. D. and Khan, Z. H. (2014). MHD boundary layer flow of a nanofluid containing gyrotactic microorganisms past a vertical plate with Navier slip. *International Journal of Heat and Mass Transfer*. 74: 285-291.
- Khanafer, K., Vafai, K. and Lightstone, M. (2003). Buoyancy-driven heat transfer enhancement in a two-dimensional enclosure utilizing nanofluids. *International journal of heat and mass transfer*. 46(19): 3639-3653.

- Kierkus, W. T. (1968). An analysis of laminar free convection flow and heat transfer about an inclined isothermal plate. *International Journal of Heat and Mass Transfer*. 11(2): 253-252.
- Kim, D., Kwon, Y., Cho, Y., Li, C., Cheong, S., Hwang, Y., ... and Moon, S. (2009). Convective heat transfer characteristics of nanofluids under laminar and turbulent flow conditions. *Current Applied Physics*. 9(2): 119-123.
- Koh, J. C. Y. and Hartnett, J. P. (1961). Skin friction and heat transfer for incompressible laminar flow over porous wedges with suction and variable wall temperature. *International Journal of Heat and Mass Transfer*. 2(3): 185-198.
- Komori, K., Kito, S., Nakamura, T., Inaguma, Y. and Inagaki, T. (2001). Fluid flow and heat transfer in the transition process of natural convection over an inclined plate. *Heat Transfer—Asian Research*. 30(8): 648-659.
- Kumari, M., Takhar, H. S. and Nath, G. (2001). Mixed convection flow over a vertical wedge embedded in a highly porous medium. *Heat and Mass Transfer*. 37(2): 139-146.
- Kuznetsov, A. V. and Nield, D. A. (2010). Natural convective boundary-layer flow of a nanofluid past a vertical plate. *International Journal of Thermal Sciences*. 49(2): 243-247.
- Lee, J. B. and Lock, G. S. H. (1972). Instability in Boundary-Layer Free Convection Along an Inclined Plate. *Trans. Canadian Society for Mechanical Engineering*. 1: 197-203.
- Lin, H.T. and Lin, H.K. (1987). Similarity solutions for laminar forced convection heat transfer from wedges to fluids of any Prandtl number. *International Journal Heat Mass Transfer*. 30: 1111–1118
- Makinde, O. D. (2011). Similarity solution for natural convection from a moving vertical plate with internal heat generation and a convective boundary condition. *Thermal Science*. 15(1): 137-143.
- Makinde, O. D., Khan, W. A. and Khan, Z. H. (2013). Buoyancy effects on MHD stagnation point flow and heat transfer of a nanofluid past a convectively heated stretching/shrinking sheet. *International Journal of Heat and Mass Transfer*. 62: 526-533.
- Mansour, M. A., Bakier, A. Y. and Bakeir, M. A. Y. (2013). MHD Natural convection in the localized heat sources of an inclined trapezoidal Nanofluid-filled enclosure. *Am. J. Eng.* 2: 140-161.

- Masuda, H., Ebata, A. and Teramae, K. (1993). Alteration of thermal conductivity and viscosity of liquid by dispersing ultra-fine particles.
- Maxwell, J.C. (1983). *A Treatise on Electricity and Magnetism*. Oxford : Clarendon Press.
- McCroskey, W. J. (1977). Some current research in unsteady fluid dynamics. *ASME Journal of Fluids Engineering*. 99(1): 8-39.
- Michiyoshi, I. (1964). Heat transfer from an inclined thin flat plate by natural convection. *Bulletin of JSME*. 7(28): 745-750.
- Miller, R. M. and Gebhart, B. (1978). An experimental study of the natural convection flow over a heated ridge in air. *International Journal of Heat and Mass Transfer*. 21(9): 1229-1239.
- Mojumder S, Saha S, Saha S and Mamun MAH. (2014). Effect of Magnetic Field on Natural Convection in a C-shaped Cavity Filled with Ferrofluid. *Procedia Engineering*.105(1): 96–104.
- Motsumi, T. G. and Makinde, O. D. (2012). Effects of thermal radiation and viscous dissipation on boundary layer flow of nanofluids over a permeable moving flat plate. *Physica Scripta*. 86(4).
- Murali, G., Paul, A. and Babu, N. (2015). Numerical study of chemical reaction effects on unsteady MHD fluid flow past an infinite vertical plate embedded in a porous medium with variable suction. *Journal of Mathematical Analysis and Applications*. 3(2): 179-192.
- Mutuku, W. N. and Makinde, O. D. (2014). Hydromagnetic bioconvection of nanofluid over a permeable vertical plate due to gyrotactic microorganisms. *Computers and Fluids*. 95: 88-97.
- Naramgari, S., Vangala, S. and Penem, M. (2014). Aligned Magnetic Field, Radiation, and Rotation Effects on Unsteady Hydromagnetic Free Convection Flow Past an Impulsively Moving Vertical Plate in a Porous Medium. *International journal of engineering mathematics*.
- Ostrach, S. (1953). New aspects of natural convection heat transfer. *Trans. Am. Soc. Mec. Engrs*. 75: 1287-1290.
- Pak, B. C. and Cho, Y. I. (1998). Hydrodynamic and heat transfer study of dispersed fluids with submicron metallic oxide particles. *Experimental Heat Transfer an International Journal*. 11(2): 151-170.

- Papanastasiou, T., Georgiou, G. and Alexandrou, A. N. (1999). *Viscous fluid flow*. CRC Press.
- Pera, L. and Gebhart, B. (1973). Natural convection boundary layer flow over horizontal and slightly inclined surfaces. *International Journal of Heat and Mass Transfer*. 16(6): 71137-81146.
- Pickover, C. (2008). *Archimedes to Hawking: laws of science and the great minds behind them*. Oxford University Press.
- Pohlhausen, E. (1921). The heat exchange between solids and liquids with less friction and less heat conduction. *ZAMM Journal of Applied Mathematics and Mechanics*. 1(2): 115-121.
- Pragya and Vasanthakumari, R. (2016). Boundary layer flow of silver and titaniumoxide nanofluids over vertical stretching sheet. *International Journal of Heat and Technology*. 34(3): 371-376.
- Prandtl, L. (1904). On fluid motions with very small friction. *Verhldg*. 3: 484-91.
- Prasad, P. D., Varma, S. V. K. and Kumar, R. K. (2017). MHD Free Convection and Heat Transfer Enhancement of Nanofluids Through a Porous Medium in the Presence of Variable Heat Flux. *Journal of Nanofluids*. 6(3): 496-504.
- Qasim, M., Khan, Z. H., Khan, W. A. and Shah, I. A. (2014). MHD boundary layer slip flow and heat transfer of ferrofluid along a stretching cylinder with prescribed heat flux. *PloS one*. 9(1).
- Qiang, L. and Yimin, X. (2002). Convective heat transfer performances of fluids with nanoparticles. *Heat Transfer*. 1: 483-488.
- Rahman, M. M. and Sattar, M. A. (2014). Nonlinear forced convective hydromagnetic flow of unsteady biomagnetic fluid over a wedge with convective surface condition. *Chaos, Complexity and Leadership*. 2012. Springer, Dordrecht, 423-452.
- Rajagopal, K. R., Gupta, A. S. and Na, T. Y. (1983). A note on the Falkner-Skan flows of a non-Newtonian fluid. *International Journal of Non-Linear Mechanics*. 18(4): 313-320.
- Raju, C. S. K., Jayachandrababu, M., Sandeep, N., Sugunamma, V. and Ramana Reddy, J. V. (2015). Radiation and Soret effects of MHD nanofluid flow over a moving vertical moving plate in porous medium. *Chemical and Process Engineering Research*. 30: 9-23.

- Raju, C. S. K. and Sandeep, N. (2016). A comparative study on heat and mass transfer of the Blasius and Falkner-Skan flow of a bio-convective Casson fluid past a wedge. *The European Physical Journal Plus*. 131(11): 405.
- Rehman, A. U., Mehmood, R. and Nadeem, S. (2017). Entropy analysis of radioactive rotating nanofluid with thermal slip. *Applied Thermal Engineering*. 112: 832-840.
- Rich, B. R. (1953). An investigation of heat transfer from an inclined flat plate in free convection. *Trans. ASME*. 75: 489-499.
- Sandeep, N. and Sugunamma, V. (2013). Effect of inclined magnetic field on unsteady free convective flow of dissipative fluid past a vertical plate. *World Applied Sciences Journal*. 22(7): 975-984.
- Sandeep, N., Raju, C. S. K., Sulochana, C. and Sugunamma, V. (2015). Effects of aligned magnetic field and radiation on the flow of ferrofluids over a flat plate with non-uniform heat source/sink. *International Journal of Science and Engineering*, 8(2), 151-158.
- Sattar, M. A. (2011). A local similarity transformation for the unsteady two-dimensional hydrodynamic boundary layer equations of a flow past a wedge. *International Journal Applied Mathematics and Mechanical*. 7(1): 15-28.
- Schlichting, H., Gersten, K., Krause, E. and Oertel, H. (1955). *Boundary-layer theory*. New York. McGraw-hill.
- Schroeder, D. V. (2000). *An introduction to thermal physics*. Addison Wesley. New York.
- Sheikholeslami, M. and Ganji, D. D. (2014). Ferrohydrodynamic and magnetohydrodynamic effects on ferrofluid flow and convective heat transfer. *Energy*. 75: 400-410.
- Sheikholeslami, M. and Gorji-Bandpy, M. (2014). Free convection of ferrofluid in a cavity heated from below in the presence of an external magnetic field. *Powder Technology*. 256: 490-498.
- Sheikholeslami M, Ganji D,D. and Rashidi M,M. (2015) Ferrofluid flow and heat transfer in a semi annulus enclosure in the presence of magnetic source considering thermal radiation. *Journal of Taiwan Institute of Chemical Engineering*. 47: 6–17.
- Shercliff, J. A. (1965). *Textbook of magnetohydrodynamics*. Edinburgh:Pergamon Press.

- Sheremet, M. A., Oztop, H. F. and Pop, I. (2016). MHD natural convection in an inclined wavy cavity with corner heater filled with a nanofluid. *Journal of Magnetism and Magnetic Materials*. 416: 37-47.
- Sheri, S. R., and Thumma, T. (2016). Numerical study of heat transfer enhancement in MHD free convection flow over vertical plate utilizing nanofluids. *Ain Shams Engineering Journal*.
- Siddiqua, S., Asghar, S. and Hossain, M. A. (2010). Natural convection flow over an inclined flat plate with internal heat generation and variable viscosity. *Mathematical and Computer Modelling*. 52(9): 1739-1751.
- Singh, P. and Kumar, M. (2015). Mass transfer in MHD flow of alumina water nanofluid over a flat plate under slip conditions. *Alexandria Engineering Journal*. 54(3): 383-387.
- Sivasankaran, S., Sivasankaran, S., Niranjana, H., Niranjana, H., Bhuvaneshwari, M. and Bhuvaneshwari, M. (2017). Chemical reaction, radiation and slip effects on MHD mixed convection stagnation-point flow in a porous medium with convective boundary condition. *International Journal of Numerical Methods for Heat & Fluid Flow*. 27(2): 454-470.
- Sparrow, E. M. (1955). Laminar free convection on a vertical plate with prescribed nonuniform wall heat flux or prescribed nonuniform wall temperature. *National Advisory Committee for Aeronautics*. 1-34.
- Sparrow, E. M. and Gregg, J. L. (1956). Laminar free convection from a vertical plate with uniform surface heat flux. *Trans. ASME*. 78(1): 435-440.
- Sparrow, E. M. and Gregg, J. L. (1958). The variable fluid-property problem in free convection. *Trans. ASME*. 80(4): 879-886.
- Srikanth, D. G., Gorthi, R. S. and Srinivas, D. G. (2016). The Convective Heat and Mass Transfer of Nano-Fluid Past a Permeable Inclined Oscillating Flat Plate. *International Journal of Multidisciplinary Research and Modern Education*. 2(2): 10-20.
- Stewartson, K. (1960). The theory of unsteady laminar boundary layers. *Advances in Applied Mechanics*. 6: 1-37.
- Sulochan, C., Kishore Kumar, M. K. and Sandeep, N. (2015). Radiation and chemical reaction effects on MHD thermosolutal nanofluid flow over a vertical plate in porous medium. *Chemical and Process Engineering Research*. 34: 28-37.

- Tabassum, R., Mehmood, R. and Akbar, N. S. (2017). Magnetite micropolar nanofluid non aligned MHD flow with mixed convection. *The European Physical Journal Plus*, 132(6), 275.
- Tiwari, R. K. and Das, M. K. (2007). Heat transfer augmentation in a two-sided lid-driven differentially heated square cavity utilizing nanofluids. *International Journal of Heat and Mass Transfer*. 50(9): 2002-2018.
- Todd, L. (1997). A family of laminar boundary layers along a semi-infinite flat plate. *Fluid dynamics research*. 19(4): 235-249.
- Turkyilmazoglu, M. (2012). Exact analytical solutions for heat and mass transfer of MHD slip flow in nanofluids. *Chemical Engineering Science*. 84: 182-187.
- Uddin, Z. and Kumar, M. (2010). Unsteady free convection in a fluid past an inclined plate immersed in a porous medium. *Computer Model New Tech*. 14(3): 41-47.
- Ullah, I., Shafie, S., Makinde, O. D. and Khan, I. (2017). Unsteady MHD Falkner-Skan flow of Casson nanofluid with generative/destructive chemical reaction. *Chemical Engineering Science*. 172: 694-706.
- Van Gorder, R. A. and Vajravelu, K. (2009). Unsteady boundary layers: convective heat transfer over a vertical flat plate. *The ANZIAM Journal*. 50(4): 541-549.
- Vemula, R., Debnath, L., and Chakrala, S. (2017). Unsteady MHD Free Convection Flow of Nanofluid Past an Accelerated Vertical Plate with Variable Temperature and Thermal Radiation. *International Journal of Applied and Computational Mathematics*. 3(2): 1271-1287.
- Vliet, G. C. (1969). Natural convection local heat transfer on constant-heat-flux inclined surfaces. *ASME*.
- Watanabe, T. (1990). Thermal boundary layers over a wedge with uniform suction or injection in forced flow. *Acta Mechanica*. 83(3-4): 119-126.
- Watanabe, T. (1991). Forced and free mixed convection boundary layer flow with uniform suction or injection on a vertical flat plate. *Acta Mechanica*. 89(1-4): 123-132.
- Wen, D. and Ding, Y. (2004). Experimental investigation into convective heat transfer of nanofluids at the entrance region under laminar flow conditions. *International journal of heat and mass transfer*. 47(24): 5181-5188.
- White, F. M. and Corfield, I. (2006). *Viscous fluid flow*. (3<sup>rd</sup> ed.). Boston: McGraw-Hill Higher Education.



- Xu, H. and Pop, I. (2008). Homotopy analysis of unsteady boundary layer flow started impulsively from rest along a symmetric wedge. *Journal of Applied Mathematics and Mechanics*. 88(6): 507-514.
- Xuan, Y., Li, Q. and Ye, M. (2007). Investigations of convective heat transfer in ferrofluid microflows using lattice-Boltzmann approach. *International Journal of Thermal Sciences*. 46(2): 105-111.
- Yacob, N. A., Ishak, A. and Pop, I. (2011). Falkner–Skan problem for a static or moving wedge in nanofluids. *International Journal of Thermal Sciences*. 50(2): 133-139.
- Yang, J., Jeng, D. R. and De Witt, K. J. (1982). Laminar free convection from a vertical plate with nonuniform surface conditions. *Numerical Heat Transfer*. 5(2): 165-184.
- Yang, K. T. (1960). Possible similarity solutions for laminar free convection on vertical plates and cylinders. *Journal of Applied Mechanics*. 27(2): 230-236.
- Yang, Y., Zhang, Z. G., Grulke, E. A. anderson, W. B. and Wu, G. (2005). Heat transfer properties of nanoparticle-in-fluid dispersions (nanofluids) in laminar flow. *International Journal of Heat and Mass Transfer*. 48(6): 1107-1116.
- Yih, K. A. (1999). MHD forced convection flow adjacent to a non-isothermal wedge. *International Communications in Heat and Mass Transfer*. 26(6): 819-827.
- Yirga, Y. and Tesfay, D. (2015). Heat and Mass Transfer in MHD Flow of Nanofluids through a Porous Media Due to a Permeable Stretching Sheet with Viscous Dissipation and Chemical Reaction Effects. *International Journal Mechanics*. 9: 674-681.
- You, X., Xu, H. and Pop, I. (2010). Homotopy analysis of unsteady heat transfer started impulsively from rest along a symmetric wedge. *International Communications in Heat and Mass Transfer*. 37(1): 47-51.
- Yu, W., France, D. M., Routbort, J. L. and Choi, S. U. (2008). Review and comparison of nanofluid thermal conductivity and heat transfer enhancements. *Heat Transfer Engineering*. 29(5): 432-460.