

THE DURABILITY PROPERTIES OF HIGH VOLUME OIL PALM BIOMASS
WASTE MORTAR

NOR HASANAH BINTI ABDUL SHUKOR LIM

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Civil Engineering)

Faculty of Civil Engineering
Universiti Teknologi Malaysia

MAY 2016

DEDICATION

*Praise be to Allah s.w.t, the Lord of the Worlds
All glory and honor to Him*

I dedicate this work
to my beloved families especially my late mom, dad, mother and father in law.

I wish to express my sincere and profound gratitude to my beloved husband,
Mostafa Samadi for his continuing assistance, the encouragement,
guidance, critics and understanding throughout the
period of my studies. The trust, patience, great insight, modesty and friendly
personality demonstrated by him have always been my source of inspiration.

And also to all who supported me by Doa and work. Thank you for everything.

May Allah bless you. Amin

ACKNOWLEDGEMENT

Praise Be To Allah S.W.T, the Lord of the World

In preparing this thesis, I was in contact with many people, researchers, academicians, and practitioners. They have contributed towards my understanding and thoughts. In particular, I wish to express my sincere appreciation to my thesis supervisors, Prof. Ir. Dr. Mohd Warid Hussin, Assoc. Prof. Dr. Abdul Rahman Mohd Sam and Assoc. Prof. Mohamed A. Ismail for encouragement, guidance, critics and friendship. Without their continued support and interest, this thesis would not have been the same as presented here.

I am thankful to Materials and Structures laboratory, Faculty of Civil Engineering, Universiti Teknologi Malaysia (UTM) and Sustainable Building Materials and Construction lab, Hanyang University, Ansan, Korea for providing the facilities for my research. My thanks also go to Technicians and staff for their assistance in this research. The financial supports using Grant No. 03H36 from Research Management Centre (RMC), UTM, Grant No. 00C91 from Innovation and Commercialisation Centre (ICC), UTM and MyBrain 15, MyPhD from Ministry of Higher Education (MOHE) is sincerely appreciated.

My sincere appreciation also extends to all my colleagues and others who have provided assistance at various occasions. Their views and tips are useful indeed. I am grateful to all my family members.

To all of you, thank you for everything.

ABSTRACT

Research works on the use of pozzolanic waste materials have continued to gain attention worldwide in an attempt to reduce the environmental problem due to carbon dioxide emission from cement manufacturing process. Nowadays, biomass wastes from oil palm industry are abundantly available in many parts of the world. In relation to that an increase in the production of oil palm will create a major disposal problem of the wastes. It is estimated that for every tonne of oil processed, nearly five tonnes of agricultural waste known as biomass are generated including Palm Oil Fuel Ash (POFA), Oil Palm Kernel Shell (OPKS) and Oil Palm Fibre (OPF). This research therefore, focuses on investigating the effects of nano POFA as cement replacement, OPKS as fine aggregates replacement and OPF as tensile strength enhancement on the properties and performance of biomass mortar. The size of the POFA used had been successfully reduced from micromolecular to the nano-size range by ball milling and the LOI was reduced during treatment process. Various tests were carried out to determine the characteristics of materials including X-ray fluorescence, transmission electron microscopy, sieve analysis and balling effect. The effects of biomass waste on fresh and hardened properties of mortar such as hydration temperature, compressive strength, splitting tensile strength, flexural strength, modulus of elasticity, water absorption, total porosity, chloride penetration, acid resistance, sulphate resistance, dry-wet cycle test and ultrasonic pulse velocity were also investigated. Furthermore, various techniques including X-ray diffraction, scanning electron microscopy, thermo gravimetric analysis and fourier transform infrared spectroscopy analysis were used to study the microstructure of the biomass mortar. The results show that the use of 80% nano size POFA has reduced the hydration temperature by 30% and produced higher compressive strength at the age of 28 days by 32% compared to normal mortar. In addition, the compressive strength of the 80% nano POFA mortar at 365 days was 25% higher than its 28 days strength, while the mortar density and porosity was reduced by 50% and 51%, respectively. Thus, grinding the raw POFA to a nano size particle has significantly improved the reactivity of the ash. The inclusion of high volume nano POFA and OPKS reduces the density of mortar due to the low density of the materials itself. The experimental results also showed that the durability and microstructural characteristics of the biomass mortar were significantly improved and better than control mortar. The inclusion of 0.7 % OPF was found to increase the splitting tensile strength and flexural strength up to 69 % and 65 %, respectively, as compared to normal mortar. The overall results revealed that biomass waste with some treatment can be used to produce mortar that is sustainable, higher strength and good durability.

ABSTRAK

Kajian tentang penggunaan bahan pozolana semakin mendapat perhatian di seluruh dunia dalam usaha mengurangkan masalah alam sekitar disebabkan pembebasan gas karbon dioksida dari proses pembuatan simen. Pada masa ini terdapat banyak bahan buangan dari industri kelapa sawit di beberapa tempat di dunia. Sehubungan dengan itu peningkatan pengeluaran minyak kelapa sawit akan menyebabkan masalah pembuangan sisa yang terhasil. Dianggarkan setiap satu tan minyak kelapa sawit akan menghasilkan lebih kurang lima tan bahan buangan pertanian yang dinamakan biomas termasuk abu kelapa sawit (POFA), tempurung kelapa sawit (OPKS) dan serat kelapa sawit (OPF). Oleh itu, kajian ini tertumpu kepada kesan POFA bersaiz nano sebagai pengganti simen, OPKS sebagai pengganti pasir dan OPF sebagai pemangkin kekuatan tegangan terhadap sifat-sifat dan prestasi biomas mortar. Saiz POFA yang digunakan telah berjaya dikurangkan daripada mikro molekul kepada saiz nano dengan menggunakan bola pengisar dan LOI telah dikurangkan semasa proses rawatan. Pelbagai ujian telah dijalankan untuk menentukan ciri-ciri bahan termasuk *X-ray Fluorescent*, *transmission electron microscopy*, analisis ayak dan kesan *balling*. Kesan penggunaan sisa biomas ke atas sifat segar dan keras mortar seperti suhu penghidratan, kekuatan mampatan, kekuatan tegangan, kekuatan lenturan, modulus keanjalan, penyerapan air, jumlah keliangan, penembusan ion klorida, rintangan asid, rintangan sulfat, ujian kitaran kering-basah dan halaju denyutan ultrasonik telah dikaji. Disamping itu, pelbagai teknik, termasuk *X-ray diffraction*, *scanning electron microscopy*, ujian *thermo gravimetric* dan ujian *fourier transform infrared spectroscopy* telah digunakan untuk mengkaji mikrostruktur mortar biomas. Keputusan kajian menunjukkan penggunaan 80% nano POFA telah mengurangkan suhu penghidratan sebanyak 30% dan menghasilkan kekuatan mampatan yang lebih tinggi pada umur 28 hari sebanyak 32% berbanding mortar biasa. Hasil kajian juga menunjukkan kekuatan mampatan untuk 80% nano POFA mortar pada umur 365 hari adalah 25% lebih tinggi daripada kekuatan 28 hari manakala ketumpatan dan keporosan berkurangan masing-masing sebanyak 50% dan 51%. Pengisaran abu mentah POFA kepada saiz zarah nano didapati telah meningkatkan kereaktifannya. Penggunaan isipadu nano POFA yang tinggi dan OPKS telah mengurangkan ketumpatan mortar disebabkan oleh ketumpatan rendah bahan itu sendiri. Keputusan kajian juga menunjukkan ciri-ciri ketahanan dan mikrostruktur mortar biomas telah meningkat dengan ketara. Penggunaan OPF sebanyak 0.7% didapati telah meningkatkan kekuatan tegangan dan kekuatan lenturan masing-masing sehingga 69% dan 65% berbanding dengan mortar biasa. Keputusan keseluruhan menunjukkan bahawa sisa biomas yang telah dirawat boleh digunakan untuk menghasilkan mortar yang mampan, berkekuatan tinggi dan mempunyai ketahanan yang baik.

TABLE OF CONTENT

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xiv
	LIST OF FIGURES	xvi
	LIST OF ABBREVIATIONS	xxiii
	LIST OF SYMBOLS	xxv
	LIST OF APPENDICES	xxvi
1	INTRODUCTION	1
	1.1 Introduction	1
	1.2 Research Background	3
	1.3 Problem Statement	5
	1.4 Aim and Objectives	6
	1.5 Research Questions	7
	1.6 Scope of the Research	8
	1.7 Significance of Study	10
	1.8 Thesis Organization	11
2	LITERATURE REVIEW	13
	2.1 Introduction	13

2.2	Portland Cement	14
2.2.1	Cement Hydration	16
2.3	Oil Palm Biomass Waste	17
2.3.1	Palm Oil Fuel Ash (POFA)	19
2.3.1.1	POFA as Pozzolanic Materials	19
2.3.1.2	Fineness	20
2.3.1.3	Physical Properties	22
2.3.1.4	Chemical Properties	22
2.3.2	Oil Palm Kernel Shell	24
2.3.2.1	Physical Properties	24
2.3.3	Oil Palm Fibre	25
2.3.3.1	Chemical Properties	26
2.3.3.2	Physical Properties	27
2.4	Fresh State Properties	27
2.4.1	Workability	28
2.4.2	Setting Time	29
2.4.3	Hydration Temperature	30
2.5	Hardened State Properties	31
2.5.1	Density	31
2.5.2	Compressive Strength	32
2.5.3	Tensile Strength	36
2.5.4	Flexural Strength	37
2.5.5	Drying Shrinkage	38
2.5.6	Water Absorption	40
2.6	Durability	41
2.6.1	Chloride Ion Penetration	42
2.6.2	Resistance to Sulphate Attack	43
2.6.3	Resistance to Acid Attack	45
2.7	Summary of Research Gap	46
3	RESEARCH METHODOLOGY	49
3.1	Introduction	49
3.2	Characterization of Materials	52

3.2.1	Ordinary Portland Cement	52
3.2.2	Palm Oil Fuel Ash (POFA)	52
3.2.3	Oil Palm Kernel Shell (OPKS)	55
3.3.4	Sand	56
3.3.5	Oil Palm Fibre (OPF)	56
3.3.6	Superplasticizer	57
3.3.7	Water	57
3.3	Mix Design Method	58
3.4	Mixing Process	59
3.5	Preparation of Mortars	59
3.6	Test Methods	60
3.6.1	Test on Characterization of Materials	60
3.6.1.1	Composite Density Determination	60
3.6.1.2	Transmission Electron Microscopy (TEM)	61
3.6.1.3	X-ray Fluorescence Spectrometer	62
3.6.1.4	Sieve Analysis Test	63
3.6.2	Test on Fresh State Properties of Mortar	64
3.6.2.1	Flow test	64
3.6.2.2	Hydration Temperature Test	65
3.6.2.3	Setting Time Test	67
3.6.3	Test on Hardened State Properties of Mortar	67
3.6.3.1	Strength Activity Index	67
3.6.3.2	Compressive strength test	68
3.6.3.3	Splitting Tensile Strength Test	68
3.6.3.4	Flexural Strength Test	69
3.6.3.5	Ultrasonic Pulse Velocity Test	69
3.6.3.6	Modulus of Elasticity Test	70
3.6.3.7	Drying Shrinkage	72
3.6.3.8	Water Absorption	74

3.6.3.9	Total Porosity	74
3.6.3.10	Acid Resistance Test	76
3.6.3.11	Sulphate Resistance Test	77
3.6.3.12	Chloride Ion Penetration Test	78
3.6.3.13	Dry-Wet Cycle Test	78
3.6.4	Test on Microstructure	79
3.6.4.1	Scanning Electron Microscopy	79
3.6.4.2	X-ray Diffraction	80
3.6.4.3	Thermo Gravimetric Analysis	82
3.6.4.4	Fourier Transform Infrared Spectroscopy	83
4	CHARACTERIZATION OF MATERIALS AND MIX DESIGN	84
4.1	Introduction	84
4.2	Characteristics of Ash	85
4.2.1	Physical Properties	85
4.2.2	Chemical Properties	88
4.2.3	Morphology and Microstructure of Ash	89
4.2.3.1	Scanning Electron Microscopy (SEM)	89
4.2.3.2	Thermo Gravimetric Analysis (TGA)	91
4.2.3.3	X-ray Diffraction (XRD)	92
4.2.3.4	Fourier Transform Infrared Spectroscopy (FTIR)	94
4.3	Characteristics of Fine Aggregates	95
4.3.1	Physical Properties	96
4.3.2	Grading of Fine Aggregates	97
4.4	Characteristics of Fibre	98
4.4.1	Physical Properties	98
4.4.2	Chemical Properties	99
4.5	Mix Design	100

4.5.1	Effect of POFA Fineness	100
4.5.1.1	Compressive Strength	100
4.5.1.2	Morphology	102
4.5.1.3	X-ray Diffraction Analysis	104
4.5.1.4	Thermo Gravimetric Analysis	105
4.5.2	Percentage of NPOFA (Mix 1)	108
4.5.3	Percentage of OPKS (Mix 2)	112
4.5.4	Percentage of OPF (Mix 3)	115
4.6	Summary	116

5	FRESH AND HARDENED STATE PROPERTIES OF BIOMASS MORTAR	118
5.1	Introduction	118
5.2	Fresh State Properties	119
5.2.1	Flow Test	119
5.2.2	Setting Time Test	123
5.2.3	Hydration Temperature Test	125
5.2.3.1	Effect of POFA Fineness	125
5.2.3.2	Effect of Percentage of NPOFA Replacement	127
5.3	Hardened State Properties	129
5.3.1	Density	129
5.3.2	Compressive Strength	132
5.3.3	Splitting Tensile Strength	134
5.3.4	Flexural Strength Test	136
5.3.5	Ultrasonic Pulse Velocity	139
5.3.6	Modulus of Elasticity	143
5.3.7	Drying Shrinkage	144
5.3.8	Water Absorption	148
5.3.7.1	Effect of Ash Replacement	148
5.3.7.2	Effect of Fine Aggregates Replacement	150
5.3.7.3	Relationship between Water	

	Absorption and Compressive Strength	151
5.3.9	Strength Development	152
5.3.9.1	Effect of High Volume Ash Replacement	152
5.3.9.2	Comparison between OPC and Biomass Mortars	154
5.3.9.3	Morphology	155
5.3.9.4	XRD Analysis	160
5.3.9.5	TGA Analysis	163
5.3.10	Total porosity	165
5.4	Summary	169
6	DURABILITY OF BIOMASS MORTAR	171
6.1	Introduction	171
6.2	Chloride Penetration Test	172
6.2.1	Visual Appearance	172
6.2.2	Mass Change	173
6.2.3	Microstructure Analysis	175
6.3	Resistance to Acid Attack	178
6.3.1	Visual Appearance	178
6.3.2	Mass Change	179
6.3.3	Residual Compressive Strength	180
6.3.4	Microstructure Analysis	183
6.4	Resistance to Sulphate Attack	187
6.4.1	Visual Appearance	187
6.4.2	Mass Change	189
6.4.3	Residual Compressive Strength	190
6.4.4	Microstructure Analysis	192
6.5	Dry-Wet Cycle	197
6.5.1	UPV Test	197
6.5.2	Mass Change	199
6.5.3	Residual Compressive Strength	200

6.6	Summary	201
7	CONCLUSIONS AND RECOMMENDATIONS	203
7.1	Introduction	203
7.2	Conclusions	203
7.2.1	Characterization of Materials	204
7.2.2	Mortar Mix Design	204
7.2.3	Fresh State Properties	205
7.2.4	Hardened State Properties	206
7.2.5	Durability	208
7.2.6	Microstructure	209
7.3	Contribution of This Research Work	210
7.4	Recommendations	211
	REFERENCES	212
	Appendices A - B	227 - 233

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Typical chemical composition of Portland cement (Neville, 2011)	15
2.2	Compound composition of OPC (Neville, 2011)	15
2.3	Chemical composition of POFA from previous researchers	23
2.4	Physical properties of oil palm fibre reported by previous researchers	27
2.5	Densities of oil palm kernel shell concrete reported by researchers	32
2.6	Summary of researches on Oil Palm Waste	47
3.1	Classification of the quality of concrete on the basis of Pulse velocity (Neville, 2011)	70
3.2	Dry-wet cycles	79
4.1	Physical properties of ash	86
4.2	Chemical composition of ash	89
4.3	Physical properties of fine aggregates	96
4.4	Physical properties of OPF	98
4.5	Chemical composition of treated and untreated fibre	99
4.6	Summary of TGA and DTA results	108
4.7	Mix design for mortar mixes	116
5.1	The hydration temperature of OPC, GPOFA and NPOFA mortars	126
5.2	The hydration temperature of NPOFA mortar	128
5.3	Compressive strength of mortar mixes	133

5.4	Summary of TGA and DTA analysis	165
-----	---------------------------------	-----

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Proposed scope of research	9
1.2	Significance of using oil palm biomass waste	11
2.1	Oil Palm Biomass Waste	14
2.2	C ₃ S hydration in 28 days (Kurtis, 2007)	17
2.3	Potential availability of dry weight from Oil Palm Biomass (Mt=Million tonnes) (Ng <i>et al.</i> , 2011)	18
2.4	Effect of fineness on compressive strength (Awal, 1998)	21
2.5	SEM image of unground and ground POFA (Jaturapitakkul <i>et al.</i> , 2007)	22
2.6	OPKS with different sizes (Alengaram <i>et al.</i> , 2010b)	25
2.7	Oil palm fibres from oil palm tree (Khalil <i>et al.</i> , 2012)	26
2.8	Adiabatic temperature during hydration concrete containing POFA (Awal and Hussin, 2011)	31
2.9	Effect of ground POFA (Tangchirapat <i>et al.</i> , 2009)	33
2.10	Influence of ultrafine POFA in concrete (Johari <i>et al.</i> , 2012)	34
2.11	Crack path in OPKS concrete (Teo <i>et al.</i> , 2006)	35
2.12	Drying shrinkage of high strength concrete (Tangchirapat <i>et al.</i> , 2009)	39
2.13	Water absorption by unground POFA concrete (Tay and Show, 1995)	40
2.14	Microstructure of outer surface of OPKS (Alengaram <i>et al.</i> , 2011b)	41

2.15	Depth of chloride ion in concrete (Awal and Hussin, 1999)	43
2.16	Effect of POFA fineness in expansion of concrete after exposure to sulphate solution (Jaturapitakkul <i>et al.</i> , 2007)	44
2.17	Visual appearance of OPC and POFA concretes (Alsubari <i>et al.</i> , 2015)	45
3.1	Experimental programme of the research work	50
3.2	Production of POFA in oil palm mill	53
3.3	Treatment of POFA in laboratory	54
3.4	Waste OPKS in landfill	55
3.5	Shape and size measurement of OPKS used	56
3.6	OPF in the factory and OPF used after treatment	57
3.7	TEM machine used to determine the NPOFA size	61
3.8	XRF testing machine and automatic sample changing system	62
3.9	Wet sieving process	64
3.10	Process to determine the flow of mortar	65
3.11	Test equipment for measuring hydration temperature	66
3.12	Procedure for modulus of elasticity test	71
3.13	Sample preparation for drying shrinkage test	73
3.14	Equipment used to determine total porosity of mortar	76
3.15	Process to determine the morphology of mortar	80
3.16	Process for XRD test	81
3.17	The procedure for TGA and DTA test	82
3.18	The procedure for FTIR test	83
4.1	POFA colour before and after treatment	86
4.2	Strength activity index of GPOFA and NPOFA	87
4.3	Diameter of NPOFA using TEM method	88
4.4	SEM image for OPC (Magnification 1.0 k)	90
4.5	SEM image for GPOFA (Magnification 1.0 k)	90
4.6	SEM image for NPOFA (Magnification 1.0 k)	91
4.7	TGA and DTA analysis of POFA	92

4.8	X-ray diffraction for OPC	93
4.9	X-ray diffraction of GPOFA	93
4.10	X-ray diffraction of NPOFA	94
4.11	FTIR spectra of NPOFA and GPOFA.	95
4.12	Sieve analysis for fine aggregates	97
4.13	Effect of ash fineness on compressive strength	101
4.14	SEM images of GPOFA and NPOFA mortars at 28 days curing	102
4.15	SEM image of NPOFA mortar	103
4.16	EDX of calcium hydroxide crystal	104
4.17	XRD analysis of GPOFA, NPOFA and OPC mortars at 28 days	105
4.18	TGA and DTA analysis of GPOFA mortar	107
4.19	TGA and DTA analysis of NPOFA mortar	107
4.20	Effect of percentage NPOFA on compressive strength	109
4.21	SEM and EDX image of ettringite crystal at early age	110
4.22	XRD analysis of OPC and NPOFA mortars	111
4.23	Compressive strength of NPOFA replacement level for 28 days	112
4.24	Effect of OPKS on compressive strength of mortar	113
4.25	Failure of OPKS mortar after compression test	114
4.26	Relationship between compressive strength and density	114
4.27	Effect of OPF percentage in biomass mortar	115
5.1	Effect of POFA fineness on the flow of mortar	120
5.2	Flow of mortar with different level of NPOFA replacement	121
5.3	Effect of OPF addition of flow of biomass mortar	122
5.4	Fresh mortar mix showing 0.9% fibre volume and balling effect	122
5.5	Comparison flow between OPC and biomass mortars	123
5.6	Effect of fineness of POFA on setting time	124

5.7	Effect of NPOFA replacement level on setting time	125
5.8	The development of hydration temperature of GPOFA, NPOFA and OPC mortars	127
5.9	The development of hydration temperature at different percentage of NPOFA replacement	128
5.10	Effect of NPOFA content on density of mortar	130
5.11	Effect of OPKS replacement on density of mortar	131
5.12	Effect of OPF addition on density of mortar	131
5.13	Relationship between compressive strength and density of biomass mortar	132
5.14	Splitting tensile strength of biomass mortar with different percentage of OPF	134
5.15	Relationship between compressive strength and splitting tensile strength of biomass mortar	135
5.16	Failure pattern of mortar after splitting tensile strength test	136
5.17	Flexural strength of biomass mortar with different percentage of OPF	137
5.18	Failure pattern of mortar after flexural strength test	137
5.19	Relationship between compressive strength and flexural strength of biomass mortar	138
5.20	Uniform distribution of OPF	139
5.21	Effect of POFA fineness on UPV	140
5.22	Effect of high volume NPOFA replacement in mortar	141
5.23	UPV analysis of OPC and biomass mortars	142
5.24	Relationship between compressive strength and UPV value of biomass mortar	142
5.25	Modulus of elasticity of various mortar	143
5.26	Relationship between compressive strength and modulus of elasticity of biomass mortar	144
5.27	Drying shrinkage of different POFA fineness	145
5.28	Morphology of GPOFA mortar	146
5.29	Drying shrinkage of percentage NPOFA replacement	147

5.30	Drying shrinkage of OPC and biomass mortars	148
5.31	Water absorption of mortar with different percentage of NPOFA	150
5.32	Water absorption of mortar with different percentage of OPKS	151
5.33	Relationships between water absorption and compressive strength of biomass mortar	152
5.34	Strength development for high volume NPOFA mortar	153
5.35	Strength development of OPC and biomass mortars	154
5.36	SEM image of biomass mortar at 3 days water curing	156
5.37	SEM image of biomass mortar at 28 days water curing	156
5.38	SEM image of biomass mortar at 1 year water curing	157
5.39	SEM and EDX image on the NPOFA reaction	158
5.40	C-S-H gel in crystal shape in NPOFA mortar	159
5.41	EDX analysis on the C-S-H gel	159
5.42	XRD analysis of biomass mortar at 1 month curing	161
5.43	XRD analysis of biomass mortar at 1 year curing	161
5.44	Peak intensity of C-S-H gel in biomass mortar	162
5.45	Peak intensity of $\text{Ca}(\text{OH})_2$ in biomass mortar	162
5.46	TGA and DTA analysis of biomass mortar at 1 month curing	164
5.47	TGA and DTA analysis of biomass mortar at 1 year curing	164
5.48	Total porosity of NPOFA replacement mortar	166
5.49	Total porosity of OPC and biomass mortars	167
5.50	Relationship between compressive strength and porosity of biomass mortar	168
5.51	SEM image of biomass mortar at different ages of water curing	169
6.1	Appearance of mortars exposed to NaCl for 18 months	172
6.2	Mass change of OPC and biomass mortars in NaCl	174

6.3	Mortars sprayed with 0.1 silver nitrate	174
6.4	SEM and EDX images of OPC mortar in NaCl	175
6.5	SEM and EDX images of biomass mortar in NaCl	176
6.6	XRD pattern for OPC mortar sample after 18 months immersion	177
6.7	XRD pattern for biomass mortar sample after 18 months immersion	177
6.8	Appearance of mortars exposed to H ₂ SO ₄ for 18 months	179
6.9	Mass change of OPC and biomass mortars in H ₂ SO ₄	180
6.10	Residual compressive strength of OPC and biomass mortars in H ₂ SO ₄	182
6.11	Relationship between compressive strength and immersion period	182
6.12	SEM and EDX images of OPC mortar in H ₂ SO ₄	183
6.13	SEM and EDX images of biomass mortar in H ₂ SO ₄	184
6.14	XRD pattern for OPC mortar sample after 18 months immersion	185
6.15	XRD pattern for biomass mortar sample after 18 months immersion	185
6.16	FTIR spectra of OPC mortar sample after 18 months immersion	186
6.17	FTIR spectra of biomass mortar sample after 18 months immersion	187
6.18	Appearance of mortars exposed to Na ₂ SO ₄ for 18 months	188
6.19	Mass change of OPC and biomass mortars in Na ₂ SO ₄	189
6.20	Residual compressive strength of OPC and biomass mortars in Na ₂ SO ₄	191
6.21	Relationship between compressive strength and immersion period	191
6.22	SEM and EDX images of OPC mortar in Na ₂ SO ₄	192
6.23	SEM and EDX images of biomass mortar in Na ₂ SO ₄	193

6.24	XRD pattern for OPC mortar sample after 18 months immersion	194
6.25	XRD pattern for biomass mortar sample after 18 months immersion	194
6.26	SEM and EDX images of thaumasite produce in sulphate attack	195
6.27	FTIR spectra of OPC mortar sample after 18 months immersion	196
6.28	FTIR spectra of biomass mortar sample after 18 months immersion	196
6.29	UPV travel time vs. cyclic	198
6.30	UPV analysis on OPC and biomass mortars under dry-wet cycle	199
6.31	Mass change of OPC and biomass mortars under dry-wet cycle	200
6.32	Residual compressive strength of mortars after dry-wet cycle	201

LIST OF ABBREVIATIONS

ACI	-	American Concrete Institution
AI	-	Activity Index
ASTM	-	American Society for Testing and Materials
BS	-	British Standard
C-S-H	-	Calcium Silicate Hydrate
C ₂ S	-	Dicalcium Silicate
C ₃ A	-	Tricalcium Aluminate
C ₃ S	-	Tricalcium Silicate
Ca	-	Calcium
CaCO ₃	-	Calcium Carbonate
CaO	-	Calcium Oxide
Ca(OH) ₂	-	Calcium Hydroxide
CO ₂	-	Carbon Dioxide
DTA	-	Differential Thermal Analysis
E	-	Ettringite
EDX	-	Energy Dispersive X-ray
FTIR	-	Fourier Transform Infrared Spectroscopy
G	-	Gypsum
GGBFS	-	Ground Granulated Blast Furnace Slag
GPOFA	-	Ground Palm Oil Fuel Ash
H ₂ SO ₄	-	Sulphuric Acid
K ₂ O	-	Potassium
LOI	-	Loss of Ignition
LVDT	-	Linear Variable Differential Transducer
MK	-	Metakaolin

NaCl	-	Sodium Chloride
Na ₂ SO ₄	-	Sodium Sulphate
NPOFA	-	Nano Palm Oil Fuel Ash
OPC	-	Ordinary Portland Cement
OPF	-	Oil Palm Fibre
OPKS	-	Oil Palm Kernel Shell
PFA	-	Pulverized Fuel Ash
POFA	-	Palm Oil Fuel Ash
Q	-	Quartz
RHA	-	Rice Husk Ash
SiO ₂	-	Silica
SIRIM	-	Standards and Industrial Research Institute of Malaysia
SEM	-	Scanning Electron Microscopy
SF	-	Silica Fume
TEM	-	Transmission Electron Microscopy
TGA	-	Thermo Gravimetric Analysis
UTM	-	Universiti Teknologi Malaysia
UPV	-	Ultrasonic Pulse Velocity
XRD	-	X-ray Diffraction
XRF	-	X-ray Fluorescence Spectrometer

LIST OF SYMBOLS

A	-	Surface area
d	-	Diameter of specimen
E_c	-	Modulus of elasticity
ϵ_L	-	Longitudinal strain
ϵ_T	-	Transverse strain
$\epsilon(t)$	-	Shrinkage strain at time
f_c	-	Compressive strength
f_{sp}	-	Tensile strength
f_r	-	Flexural strength
L	-	Length of specimen
L_t	-	Distance between transducers
m	-	Mass of composites
P	-	Ultimate compression load
T	-	Effective transit time
V	-	Volume of composites
v	-	Pulse velocity
W_a	-	Percentage of water absorption
W_d	-	Weight of dry specimen
W_w	-	Weight of wet specimen
W_{ssd}	-	Weight of saturated specimen in air
W_{sw}	-	Weight of specimen in water

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	List of publications	227
B	FTIR results	231

CHAPTER 1

INTRODUCTION

1.1 Introduction

Nowadays, concrete has become predominant building material in the construction industry due to its excellent mechanical and physical properties when properly designed and manufactured. More than 10 billion tonnes of concrete is produced annually. As it has been estimated that by the year 2050, the rate of world's population will increase from 1.5 to 9 billions, thus, this will increase the demand for housing as well as the concrete materials which are estimated to be 18 billions tonnes by 2050 (Meyer, 2009). However, with the large quantities of concrete being produced, there are consequences that will affect the environment. It has been found that approximately one tonne of carbon dioxide (CO₂) is released with every one tonne of cement produced. Overall, around 5% of total CO₂ emission all over the world contributes by the cement manufacturing industry (Worrell *et al.*, 2001). Due to the implementation of the Kyoto protocol in February 2005, countries all over the world have to reduce their green house gases emissions. Therefore, the major challenges are to reduce the CO₂ emissions from the cement manufacturing industries.

Previously, researchers have focused on finding materials that have similar properties as cement but more sustainable and affordable. Since cement is the major building material, finding an affordable cost substitution material is a necessity to reduce the overall cost. The need towards sustainability and sustainable environment has made the use of pozzolanic material in construction popular. Within these few years, natural and industrial wastes have been used as construction materials namely, pulverized fuel ash (PFA), ceramic tile waste, ground granulated blast furnace slag (GGBFS), metakaolin (MK), silica fume (SF), palm oil fuel ash (POFA) and rice husk ash (RHA). Their usage as construction materials have achieved appreciable level since they offer advantages in terms of strength and durability (Meyer, 2009; Samadi *et al.*, 2015; Ismail *et al.*, 2013; Ramadhansyah *et al.*, 2012; Bamaga *et al.*, 2013). In addition, these pozzolanic materials also have been proven to improve the properties of concrete and reduce the hydration temperature and hence make the massive construction easier to construct.

Palm oil fuel ash is generally known as one of the pozzolanic material from natural waste. By 2014, Malaysia has recorded a staggering 5.39 million hectares of oil palm plantations, an increase of 11.0% from the previous 4.85 million hectares in 2010 (MPOB, 2015). Malaysia is the second largest producer of crude palm oil in the world, consequently producing a large amount of oil palm waste. It is estimated that “the total potential palm biomass from 4.69 million hectares of oil palm planted area in Malaysia in 2009 is 77.24 million tonnes per year comprising of 13.0 million tonnes of oil palm trunks, 47.7 million tonnes of oil palm fronds, 6.7 million tonnes of empty fruit bunches, 4.0 million tonnes of palm kernel shell and 7.1 million tonnes of mesocarp fibre (all dry weight)” (Ng *et al.*, 2011; Zwart, 2013).

These wastes are usually used as fuel in oil palm mill to generate electricity and produced approximately 5% another solid waste namely, POFA (Tay and Show, 1995). In Malaysia alone, about 3 million tonnes of ashes are generated annually. Even though the wastes have been used for another purpose, there is still left and dumped in open field creating an environmental hazard. Therefore, the utilization of

oil palm biomass waste presents an opportunity to make the industry more environmentally safe and sustainable.

1.2 Research Background

The global need for the preservation of natural resources, reduction of CO₂ emission, durability and sustainability of concrete structure have all heightened the search for alternative cementitious materials. POFA is the source of silicate that produced after the combustion of oil palm fibre, shell and mesocarp as fuel to generate electricity (Khalil *et al.*, 2013). POFA as one of the cementitious materials has been widely used in Malaysia since 1990. However, the results showed very low pozzolanic properties and used until 10% replacement (Tay, 1990). It was then continued by Awal and Hussin, (1997) who reported that the development and application of palm oil fuel ash in concrete enabled the replacement of OPC up to 40% without any adverse effect on the strength of concrete. It was a significant development.

Later other researchers also reported that ground POFA can be used successfully as a supplementary cementitious material in concrete due to its good pozzolanic properties (Chandara *et al.*, 2010; Kroehong *et al.*, 2011b; Tangchirapat *et al.*, 2012). The results showed that with the replacement of 5 to 40% POFA with 45 µm size, the compressive strength decreased at the early age but increased after the age of 28 days. However, mortar containing POFA showed better performance in terms of the durability and fire resistance (Jaturapitakkul *et al.*, 2007; Abdullah and Hussin, 2010; Tangchirapat *et al.*, 2012).

Recently, high volume ground POFA (70%) have been studied by Awal and Shehu, (2014) where the results showed similar properties of strength gained at later

ages, but lower than OPC mortar. The treated POFA was then studied by Johari *et al.*, (2012) to improve the material properties. A 60% ultrafine size ($<1 \mu\text{m}$) POFA replacement shows better strength than normal concrete at later age. Furthermore, the hydration rates for micro size POFA have been studied and the results showed that POFA concrete with or without high volume reduced the hydration temperature (Awal and Hussin, 2011; Mehmannaavaz *et al.*, 2014). This result proved that POFA can be improved and used in high volume provided it is treated well. Even though many studies have been done by other researchers about the partial replacement of cement by POFA, but there is still high amount of ash abundant in the landfills which lead to environmental problems. Therefore, further research on the other possible application of the waste is highly required.

Annually, about 4 million tonnes of Oil Palm Kernel Shell (OPKS) are produced in Malaysia (Mannan and Ganapathy, 2002). During the past 26 years, many researchers focused on the utilization of OPKS as lightweight aggregates to minimize the harmful effect of this waste on the environment (Basri *et al.*, 1999; Okpala, 1990; Mannan and Ganapathy, 2001a; Shafigh *et al.*, 2011a). The results revealed that OPKS can be used for natural aggregates replacement to produce structural concrete with density of 20 to 25% lower than normal concrete. The mechanical and structural properties of OPKS concrete have been compared with normal weight concrete by many researchers proving the effectiveness of OPKS as coarse aggregate replacement. Generally, the compressive strength of OPKS concrete in the range of 13 to 22 MPa was reported by many researchers (Teo *et al.*, 2007; Alengaram *et al.*, 2011b; Alengaram *et al.*, 2013b).

The use of OPKS in concrete resulted in low workability due to the existence of numerous pores in the OPKS surface which are responsible for high water absorption in the range of 14 to 33% (Alengaram *et al.*, 2013b). The effectiveness of crushed OPKS with smaller size of 2.36 to 10 mm as coarse aggregates in concrete also have been reported by Alengaram *et al.*, (2010b) where crushed OPKS with smaller size showed better performance compared with normal size. The crushed OPKS showed lower strength loss of approximately 6 to 11% compared with normal

size OPKS (Shafiqh *et al.*, 2012). However, there is still lack of information on the use of OPKS as fine aggregates replacement. It is believed that by using waste OPKS as fine aggregates replacement can help to preserve the natural resources.

It was reported that the oil palm industry must dispose about 1.1 tonnes of OPF per every tonne of oil produced (Karina *et al.*, 2008). Evidently, the use of natural fibre as filler in cement matrix offers several advantages over conventional inorganic fillers in terms of their lower cost, lower density and environmentally beneficial (Shinoj *et al.*, 2011). OPF is hard and tough and its porous surface morphology is useful for better mechanical interlocking with cement matrix bonding. The use of fibres is to control plastic shrinkage and drying shrinkage cracking. Another function of OPF is to lower the permeability of concrete and thus reduce bleeding. Without the fibre, the concrete manifests certain characteristics where it is relatively strong in compression but weak in tension and brittle in nature. The weakness in tension can be overcome by the use of conventional steel reinforcement and to some extent by the inclusion of a sufficient volume of certain types of fibre.

1.3 Problem Statement

The rapid developments in the construction industry in Malaysia have led to huge demand for Portland cement and natural aggregates for construction. However, the use of these materials not only poses environmental risks but depletes the natural resources as well. Therefore, this study was undertaken to find a way to reduce the use of Portland cement and natural aggregates by replacing them with high volume oil palm biomass waste namely POFA, OPKS and OPF. Furthermore, the brittle characteristic of concrete or mortar requires another material to be added to increase the performance life of concrete. Increasing the use of waste materials reduces the use of cement and natural aggregates automatically. Malaysia produces large

amount of oil palm biomass waste which is locally available in large quantities. Hence the use of this waste would solve the problem of disposal effectively.

Oil palm biomass waste is a recommended material to be used in order to reduce the CO₂ emission and to recycle the waste materials for saving the environment. Despite the application of POFA as a pozzolanic material in mortar up to 30% as cement replacement, the problem of ash disposal still present as large amount of the ash remains unutilized. Therefore, by replacing cement with high volume nano POFA will improve the strength and durability characteristic of mortar. On the other hand, the addition of OPKS will reduce the density of high filler loading mortar while the addition of OPF solves the issues of brittle characteristic of mortar. In order to completely evaluate the potential of oil palm biomass wastes for new applications, a comprehensive and detailed study of fundamental properties is truly necessary.

1.4 Aim and Objectives

The main aim of this research is to use biomass waste including POFA as cement replacement, OPKS as fine aggregates replacement and OPF as strength enhancement. Hence the measurable objectives of this study were as follows:

- i) To characterize the properties of biomass waste from oil palm industries including POFA, OPKS and OPF.
- ii) To determine the appropriate mix proportions and its effect on fresh and hardened state properties of biomass mortar.
- iii) To examine the effects of biomass waste on strength and mechanical properties of biomass mortar.

- iv) To evaluate the durability performance of biomass mortar especially in aggressive environments.
- v) To study the microstructural characterization of biomass mortar in relation to strength and durability performance.

1.5 Research Questions

The research work conducted sought to address the following questions:

- i) Can nano size POFA with high volume improve the performance of mortar in terms of the strength and durability?
- ii) Does OPKS help to reduce the density of mortar without much effect on the strength performance?
- iii) Can OPF enhance the splitting tensile strength and flexural strength of the biomass mortar?
- iv) What is the effect of microstructure, chemical composition and physical characteristic of NPOFA, OPKS and OPF on the fresh and hardened state properties of mortar?

1.6 Scope of the Research

The research utilizes high volume oil palm biomass waste where the nano POFA as the base material for cement replacement, OPKS as fine aggregates replacement to reduce the density and OPF addition to enhance the flexural and tensile strength in biomass mortar as shown in Figure 1.1. The waste materials were obtained from only one source of Oil Palm Factory, which is situated in Kahang, Johor. As far as possible, the technology and the equipment currently used to manufacture OPC mortar were used to make the biomass mortar. The POFA used had undergone treatment and used in nano size. Replacement levels of NPOFA were 20, 40, 60, 80 and 100% from the weight of cement content. The fine aggregates were then replaced in the percentage of 25, 50, 75 and 100% with OPKS in the size of 300 μm to 2.36 mm. Finally, the OPF added in the range of 0.3 to 0.9%. A substantial number of intensive investigations and analysis were executed as mention in the following paragraphs. These investigations are a representative of the research scope and are limited only to mortar application.

The first phase of the experimental study was based on the preparation and testing of the physical properties, chemical composition and microstructural analysis of materials including POFA, OPKS and OPF. This include the visual analysis, pozzolanic activity index, 45 μm wet sieve, morphology, composite density and particle size using Transmission Electron Microscopy (TEM). It also deals with the determination of chemical composition by using X-Ray Fluorescence (XRF), the determination of the degree of amorphous by using X-Ray Diffraction (XRD) and the degree of weight loss under specific temperature using Thermo Gravimetric Analysis (TGA).

The second phase deals with the mix design and proportioning of the ash replacement level, fine aggregates replacement level and percentage of fibre added. The water binder ratio was fixed at 0.4 and the binder to fine aggregates used was 1:3

ratios. The appropriate mix designs that were close in agreement to the target strength of 30 MPa at 28 days were selected as compared with normal mortar.

The third phase comprised of evaluating fresh and hardened state properties of mortar. The mortar properties included the workability of fresh mortar, setting time, hydration temperature, compressive strength, flexural strength, splitting tensile strength, porosity, water absorption, modulus of elasticity, drying shrinkage and durability in aggressive environment such as chloride penetration, acid attack, sulphate resistance and dry-wet cycles.

The fourth phase deals with the microstructural analysis of mortar paste in relation to strength and durability by using SEM, EDX, XRD, TGA, DTA and FTIR.

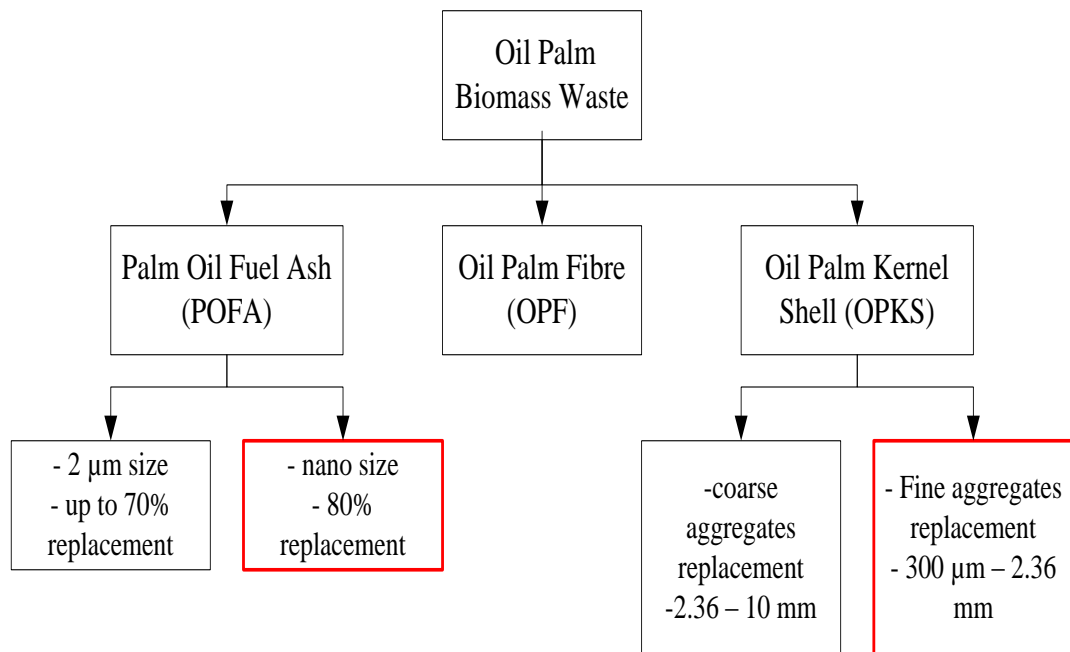


Figure 1.1 Proposed scope of research

1.7 Significance of Study

Since biomass mortar consumed high volume oil palm biomass waste along with the use of high volume NPOFA, OPKS and OPF, a substantial amount of waste generated from oil palm mills thus was diverted from landfill. Replacing high amount of cement is regarded as a move toward low-carbon footprint. Furthermore, replacing an appropriate amount of waste meant the mechanical, deformation and durability properties of biomass mortar could be greatly improved. The significance of using high volume oil palm biomass waste is shown in Figure 1.2.

The use of treated NPOFA, OPKS and OPF in high volume would increase more crystalline formation even at early age since the materials give better performance between reactive silica and cement hydration products. Thus, the porosity and cracks in the mortar will be reduced and the durability performance of mortar will be improved. In addition, with the enhancement of durability performance, the service life of mortar can be extended and cost of maintenance will be reduced. Moreover, immense environmental concerns such as air and water pollution, saving energy, saving natural resources etc. could be possible. Finally, the use of oil palm biomass waste for the production of biomass mortar will open up new research opportunities in the area of concrete technology.

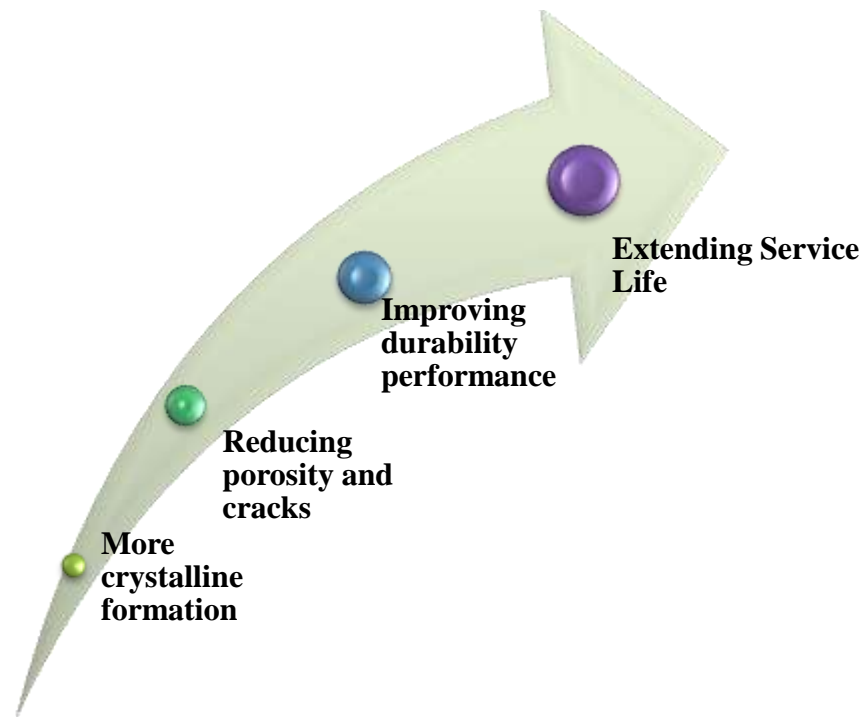


Figure 1.2 Significance of using oil palm biomass waste

1.8 Thesis Organization

The thesis was prepared according to the UTM thesis manual, 2015. Thus, the thesis was designed to consist of seven chapters.

Chapter 1: Provides an introduction of the research, overview about the background of the study to address the problem statement, highlight the aim and objectives of the study and the research methodology. The scope of the study is also clearly mentioned in this chapter as well as the significance of research was also highlighted in this chapter.

Chapter 2: Discusses the relevant and critical review of literature related to the area of research and previous studies that have been conducted by other researchers.

REFERENCES

- Aziz, F. N. A., Bida, S. M., Nasir, N. A. M. and Jaafar, M. S. (2014). Mechanical properties of lightweight mortar modified with oil palm fruit fibre and tire crumb. *Construction and Building Materials*. 73, 544–550.
- Abdullah, K. and Hussin, M. W. (2010). Fire resistance properties of palm oil fuel ash cement based aerated concrete. *Concrete Research Letters*. 1(3), 107–114.
- Abdullah, K., Hussin, M. W., Zakaria, F. R. and Muhamad, Z. A. H., (2006). POFA : A potential partial cement replacement material in aerated concrete. In *Proceedings of the 6th Asia-Pacific Structural Engineering and Construction Conference (APSEC 2006)*. 5-6 September. Kuala Lumpur, 132-140.
- Abdullah, R. (2003). Short-term and long-term projection of malaysian palm oil production. *Oil Palm Industry Economic Journal*. 3(1), 32–36.
- ACI Committee 222R (2001). Protection of metals in concrete against corrosion. American Concrete Institute; 2001.
- Ahmad, M. H. and Noor, N. M. (2011). Chemical attack of Malaysian pozzolans concrete. *Journal of Science and Technology*. 1(1), 11–24.
- Ahmad, Z., Ibrahim, A. and Tahir, P. M. D. (2010). Drying shrinkage characteristics of concrete reinforced with oil palm trunk fiber. *International Journal of Engineering Science and Technology*. 2(5), 2010, 699-708.
- Aldahdooh, M. A. A., Muhamad, B. N. and Johari, M. A. M. (2014). Influence of palm oil fuel ash on ultimate flexural and uniaxial tensile strength of green ultra-high performance fiber reinforced cementitious composites. *Materials and Design*. 54, 694–701.
- Alengaram, U. J., Mahmud, H. and Jumaat, M. Z. (2010a). Development of lightweight concrete using industrial waste material, palm kernel shell as lightweight aggregate and its properties. *2nd International Conference on*

- Chemical, Biological and Environmental Engineering (ICBEE 2010)*. 2-4 November. Cairo, 277–281.
- Alengaram, U. J., Jumaat, M. Z., Mahmud, H. and Fayyadh, M. M. (2011a). Shear behaviour of reinforced palm kernel shell concrete beams. *Construction and Building Materials*. 25(6), 2918–2927.
- Alengaram, U. J., Mahmud, H. and Jumaat, M. Z. (2011b). Enhancement and prediction of modulus of elasticity of palm kernel shell concrete. *Materials and Design*. 32(4), 2143–2148.
- Alengaram, U. J., Mahmud, H., Jumaat, M. Z. and Shirazi, S. M. (2010b). Effect of aggregate size and proportion on strength properties of palm kernel shell concrete. *International Journal of the Physical Sciences*. 5(12), 1848–1856.
- Alengaram, U. J., Muhit, B. A., Jumaat, M. Z. and Jing, M. L. Y. (2013a). A comparison of the thermal conductivity of oil palm shell foamed concrete with conventional materials. *Materials and Design*. 51, 522–529.
- Alengaram, U. J., Muhit, B. A. A., and Jumaat, M. Z. (2013b). Utilization of oil palm kernel shell as lightweight aggregate in concrete – A review. *Construction and Building Materials*. 38, 161–172.
- Ali M., (2012). Natural fibres as construction materials. *Journal of Civil Engineering and Construction Technology*. 3(3), 80–89.
- Alsubari, B., Shafigh, P. and Jumaat, M. (2015). Development of self-consolidating high strength concrete incorporating treated palm oil fuel ash. *Materials*. 8, 2154–2173.
- Altwair, N. M., Azmi, M., Johari, M., Fuad, S. and Hashim, S. (2011). Strength activity index and microstructural characteristics of treated palm oil fuel ash. *International Journal of Civil & Environmental Engineering IJCEE-IJENS*. 11(5), 100–107.
- Altwair, N. M., Megat Johari, M. A. and Hashim, S. F. (2012). Flexural performance of green engineered cementitious composites containing high volume of palm oil fuel ash. *Construction and Building Materials*. 37, 518–525.
- Ariffin, N. F. (2012). *Durability of geopolymer mortars using agro-industrial waste*. Thesis, Universiti Teknologi Malaysia.
- Asasutjarit, C., Charoenvai, S., Hirunlabh, J. and Khedari, J. (2009). Materials and mechanical properties of pretreated coir-based green composites. *Composites Part B: Engineering*. 40(7), 633–637.

- ASTM C33 (2013). Standard specification for concrete aggregates. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C109 (2013). Standard test method for compressive strength of hydraulic cement mortars. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C114 (2015). Standard test methods for chemical analysis of hydraulic cement. *Annual Book of ASTM Standards, American Society for Testing.*
- ASTM C136 (2014). Standard test method for sieve analysis of fine and coarse aggregates. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C150 (2015). Standard specification for portland cement. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C191 (2013). Standard test methods for time of setting of hydraulic cement by vicat needle. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C230 (2014). Standard specification for flow table for use in tests of hydraulic cement. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C267 (2012). Standard test methods for chemical resistance of mortars, grouts, and monolithic surfacings and polymer concretes. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C311 (2013). Standard test methods for sampling and testing fly ash or natural pozzolans for use in portland-cement. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C325 (2014). Standard guide for wet sieve analysis of ceramic whiteware clays. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C348 (2014). Standard test method for flexural strength of hydraulic-cement mortars. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C469 (2014). Standard test method for static modulus of elasticity and poisson's ratio of concrete in compression. *Annual Book of ASTM Standards, American Society for Testing and Materials.*
- ASTM C496 (2011). Standard test method for splitting tensile strength of cylindrical

- concrete specimens' specifications. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- ASTM C596 (2009). Standard test method for drying shrinkage of mortar containing hydraulic cement. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- ASTM C597 (2009). Standard test method for pulse velocity through concrete. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- ASTM C618 (2015). Standard specification for coal fly ash and raw or calcined natural pozzolan for use in concrete. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- ASTM C1202 (2012). Electrical indication of concrete's ability to resist chloride ion penetration. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- ASTM D1895 (2010). Standard test methods for apparent density, bulk factor, and pourability of plastic materials. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- ASTM D3039 (2014). Standard test method for tensile properties of polymer matrix composite materials. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- ASTM E2456 (2012). Standard terminology relating to nanotechnology. *Annual Book of ASTM Standards, American Society for Testing and Materials*.
- Awal, A. S. M. A. (1998). *A study of strength and durability performances of concrete containing palm oil fuel ash*. Ph.D. Thesis, Universiti Teknologi Malaysia.
- Awal, A. S. M. A. and Hussin, M. W. (1997). The effectiveness of palm oil fuel ash in preventing expansion due to alkali-silica reaction. *Cement and Concrete Composites*. 19(4), 367–372.
- Awal, A. S. M. A. and Hussin, M. W. (1999). Durability of high performance concrete containing palm oil fuel ash. *Durability of Building Materials and Components*. Rotterdam, Netherlands. 465–474.
- Awal, A. S. M. A. and Hussin, M. W. (2009). Strength, modulus of elasticity and shrinkage behaviour of POFA concrete. *Malaysian Journal of Civil Engineering*. 21(2),125-134.
- Awal, A. S. M. A. and Hussin, M. W. (2011). Effect of palm oil fuel ash in

- controlling heat of hydration of concrete. *Procedia Engineering*. 14, 2650–2657.
- Awal, A. S. M. A. and Nguong, S. K. (2010). A short-term investigation on high volume palm oil fuel ash (POFA) concrete. *In 35th conference on our world in concrete & structures*. 25-27 August 2010. Singapore, 1-8.
- Awal, A. S. M. A. and Shehu, I. A. (2011). Properties of concrete containing high volume palm oil fuel ash: a short-term investigation, *Malaysian Journal of Civil Engineering*. 23(2), 54–66.
- Awal, A. S. M. A. and Shehu, I. A. (2013). Evaluation of heat of hydration of concrete containing high volume palm oil fuel ash. *Fuel*. 105, 728–731.
- Awal, A. S. M. A. and Shehu, I. A. (2014). Deformation Characteristics of Concrete Containing High Volume Palm Oil Fuel Ash. *Applied Mechanics and Materials*. 534, 9–15.
- Awal, A. S. M. A. and Shehu, I. A. (2015). Performance evaluation of concrete containing high volume palm oil fuel ash exposed to elevated temperature. *Construction and Building Materials*. 76, 214–220.
- Awalludin, M. F., Sulaiman, O., Hashim, R. and Nadhari, W. N. A. W. (2015). An overview of the oil palm industry in Malaysia and its waste utilization through thermochemical conversion, specifically via liquefaction. *Renewable and Sustainable Energy Reviews*. 50, 1469–1484.
- Bamaga, S. O., Hussin, M. W. and Ismail, M. A. (2013). Palm Oil Fuel Ash: Promising supplementary cementing materials. *KSCE Journal of Civil Engineering*. 17(7), 1708–1713.
- Basri, H. B., Mannan, M. A. and Zain, M. F. M. (1999). Concrete using waste oil palm shells as aggregate. *Cement and Concrete Research*. 29, 619–622.
- British Standard Institution (2010). *Specification for mortar for masonry. Rendering and plastering mortar*. BS EN 998-1:2010.
- British Standard Institution (2011). *Testing concrete. Method for determination of water absorption*. BS 1881-122:2011.
- Budiea, A., Hussin, M. W., Muthusamy, K. and Ismail, M. E. (2010). Performance of high strength POFA concrete in acidic environment. *Concrete Research Letters*. 1(1), 14–18.
- Chandara, C., Mohd Azizli, K. A., Ahmad, Z. A., Saiyid Hashim, S. F. and Sakai, E. (2012). Heat of hydration of blended cement containing treated ground palm oil

- fuel ash. *Construction and Building Materials*. 27, 78–81.
- Chandara, C., Sakai, E., Azizli, K. A., Ahmad, Z. A. and Hashim, S. F. (2010). The effect of unburned carbon in palm oil fuel ash on fluidity of cement pastes containing superplasticizer. *Construction and Building Materials*. 24, 1590–1593.
- Chew, T. L. and Bhatia, S. (2008). Catalytic processes towards the production of biofuels in a palm oil and oil palm biomass-based biorefinery. *Bioresource Technology*. 99, 7911–7922.
- Chindaprasirt, P., Homwuttiwong, S. and Sirivivatnanon, V. (2004). Influence of fly ash fineness on strength, drying shrinkage and sulfate resistance of blended cement mortar. *Cement and Concrete Research*. 34, 1087–1092.
- Chindaprasirt, P., Rukzon, S. and Sirivivatnanon, V. (2008a). Resistance to chloride penetration of blended Portland cement mortar containing palm oil fuel ash, rice husk ash and fly ash. *Construction and Building Materials*. 22, 932–938.
- Chindaprasirt, P., Rukzon, S. and Sirivivatnanon, V. (2008b). Effect of carbon dioxide on chloride penetration and chloride ion diffusion coefficient of blended Portland cement mortar. *Construction and Building Materials*. 22, 1701–1707.
- Cizer, O., Campforts, J., Balen, K. V., Elsen, J. and Gemert, D. V. (2006). Hardening of calcium hydroxide and calcium silicate binders due to hydration and carbonation. *Brittle Matrix Composites*. 8, 589–599.
- Cohen, M. D. and Richards, C. W. (1982). Effects of the particle sizes of expansive clinker on strength-expansion characteristics of type K expansive cements. *Cement and Concrete Research*. 12(6), 717–725.
- Cyr, M., Lawrence, P. and Ringot, E. (2005). Mineral admixtures in mortars Quantification of the physical effects of inert materials on short-term hydration. *Cement and Concrete Research*. 35, 719–730.
- Cyr, M., Lawrence, P. and Ringot, E. (2006). Efficiency of mineral admixtures in mortars: Quantification of the physical and chemical effects of fine admixtures in relation with compressive strength. *Cement and Concrete Research*. 36, 264–277.
- Dawood, E. T. and Ramli, M. (2011). Properties of high strength flowable mortar reinforced with different fibers. *Concrete Research Letters*. 2(4), 315–325.
- Dawood, E. T. and Ramli, M. (2012). Properties of High-Strength Flowable Mortar Reinforced with Palm Fibers. *ISRN Civil Engineering*, 2012, 1–5.

- Demirboga, R., Turkmen, I. and Karakoc, M. B. (2004). Relationship between ultrasonic velocity and compressive strength for high volume mineral-admixed concrete. *Cement and Concrete Research*. 34(12), 2329-2336.
- Pradeep, P. and Dhas, E. R. (2015). Characterization of chemical and physical properties of palm fibers. *Advances in Materials Science and Engineering: An International Journal (MSEJ)*, 2(4), 1–6.
- Dorez, G., Ferry, L., Sonnier, R., Taguet, A. and Lopez, C. J. M. (2014). Effect of cellulose, hemicellulose and lignin contents on pyrolysis and combustion of natural fibers. *Journal of Analytical and Applied Pyrolysis*. 107, 323–331.
- Faruk, O., Bledzki, A. K., Fink, H. P. and Sain, M. (2012). Biocomposites reinforced with natural fibers: 2000-2010. *Progress in Polymer Science*. 37, 1552–1596.
- Farzadnia, N., Noorvand, H., Yasin, A. M. and Aziz, F. N. A. (2015). The effect of nano silica on short term drying shrinkage of POFA cement mortars. *Construction and Building Materials*. 95, 636–646.
- Hartshorn, S. A., Sharp, J. H. and Swamy, R. N. (2002). The thaumasite form of sulfate attack in Portland-limestone cement mortars stored in magnesium sulfate solution. *Cement and Concrete Composites*. 24, 351–359.
- Hashim, H. (2008). *The effect of palm oil fiber on concrete properties*, Thesis, Universiti Teknologi Malaysia.
- Hassan, I. O. (2015). *Self consolidating high performance palm oil fuel ash and pulverised burnt clay blended concrete*. Ph.D. Thesis, Universiti Teknologi Malaysia.
- Hassan, I. O., Ismail, M., Forouzani, P., Majid, Z. A. and Mirza, J. (2014). Flow characteristics of ternary blended self-consolidating cement mortars incorporating palm oil fuel ash and pulverised burnt clay. *Construction and Building Materials*. 64, 253–260.
- Hassan, I. O., Ismail, M., Noruzman, A. H., Yusuf, T. O., Mehmannaavaz, T. and Usman, J. (2013). Characterization of some key industrial waste products for sustainable concrete production. *Advanced Materials Research*. 690-693, 1091–1094.
- Hill, J., Byars, E. A., Sharp, J. H., Lynsdale, C. J., Cripps, J. C. and Zhou, Q. (2003). An experimental study of combined acid and sulfate attack of concrete. *Cement and Concrete Composites*. 25, 997–1003.
- Hussin, M. W., Ismail, M. A., Budiea, A. and Muthusamy, K. (2009). Durability of

- high strength concrete containing palm oil fuel ash of different fineness. *Malaysian Journal of Civil Engineering*. 21(2), 180–194.
- Ismail, M., Yusuf, T. O., Noruzman, A. H. and Hassan, I. O. (2013). Early strength characteristics of palm oil fuel ash and metakaolin blended geopolymer mortar. *Advanced Materials Research*. 690-693, 1045–1048.
- Itim, A., Ezziane, K. and Kadri, E. H. (2011). Compressive strength and shrinkage of mortar containing various amounts of mineral additions. *Construction and Building Materials*. 25, 3603–3609.
- Jaturapitakkul, C., Kiattikomol, K., Songpiriyakij, S. and Ash, F. (1999). A study of strength activity index of ground coarse fly ash with portland cement. *Science Asia*. 25, 223–229.
- Jaturapitakkul, C., Kiattikomol, K., Tangchirapat, W. and Saeting, T. (2007). Evaluation of the sulfate resistance of concrete containing palm oil fuel ash. *Construction and Building Materials*. 21, 1399–1405.
- Johari, M. A. M., Zeyad, A. M., Bunnori, N. M. and Ariffin, K. S. (2012). Engineering and transport properties of high-strength green concrete containing high volume of ultrafine palm oil fuel ash. *Construction and Building Materials*. 30, 281–288.
- Kalam, A., Sahari, B. B., Khalid, Y. A. and Wong, S. V. (2005). Fatigue behaviour of oil palm fruit bunch fibre/epoxy and carbon fibre/epoxy composites. *Composite Structures*, 71(1), 34–44.
- Karim, M., Hossain, M., Khan, M., Zain, M., Jamil, M. and Lai, F. (2014). On the utilization of pozzolanic wastes as an alternative resource of cement. *Materials*. 7, 7809–7827.
- Karim, R., Zain, M. F. M., Jamil, M. and Islam, N. (2011). Strength of concrete as influenced by palm oil fuel ash. *Australian Journal of Basic and Applied Sciences*. 5(5), 990–997.
- Karina, M., Onggo, H., Abdullah, A. H. D. and Syampurwadi, A. (2008). Effect of oil palm empty fruit bunch fiber on the physical and mechanical properties of fiber glass reinforced polyester resin. *Journal of Biology and Science*. 8, 101–106.
- Khalil, H. P. S. A., Issam, A. M., Shakri, M. T. A., Suriani, R. and Awang, A. Y. (2007). Conventional agro-composites from chemically modified fibres, 26, 315–323.

- Khalil, H. P. S. A., Fizree, H. M., Bhat, A. H., Jawaid, M. and Abdullah, C. K. (2013). Development and characterization of epoxy nanocomposites based on nano-structured oil palm ash. *Composites Part B: Engineering*. 53, 324–333.
- Khalil, H. P. S. A., Fazita, M. R. N., Bhat, A. H., Jawaid, M. and Fuad, N. A. N. (2010). Development and material properties of new hybrid plywood from oil palm biomass. *Materials & Design*. 31, 417–424.
- Khalil, H. P. S. A., Jawaid, M., Hassan, A., Paridah, M. T. and Zaidon, A. (2012). Oil palm biomass fibres and recent advancement in oil palm biomass fibres based hybrid biocomposites. *Composites and Their Applications*. 187–220.
- Kurtis, K. (2007). *Portland cement hydration*. School of Civil Engineering Georgia Institute of Technology Atlanta, Georgia.
- Kong, S. H., Loh, S. K., Bachmann, R. T., Rahim, S. A. and Salimon, J. (2014). Biochar from oil palm biomass: A review of its potential and challenges. *Renewable and Sustainable Energy Reviews*. 39, 729–739.
- Kroehong, W., Chindaprasirt, P., Jaturapitakkul, C. and Sinsiri, T. (2011a). Effect of palm oil fuel ash fineness on microstructure of blended cement paste. *Construction and Building Materials*. 25, 4095–4104.
- Kroehong, W., Sinsiri, T. and Jaturapitakkul, C. (2011b). Effect of palm oil fuel ash fineness on packing effect and pozzolanic reaction of blended cement paste. *Procedia Engineering*. 14, 361–369.
- Lee, C. L., Huang, R., Lin, W. T. and Weng, T. L. (2012). Establishment of the durability indices for cement-based composite containing supplementary cementitious materials. *Materials Design*. 37, 28–39.
- Lertwattanakul, P. and Suntijitto, A. (2015). Properties of natural fiber cement materials containing coconut coir and oil palm fibers for residential building applications. *Construction and Building Materials*. 94, 664–669.
- Li, Z., Wang, X. and Wang, L. (2006). Properties of hemp fiber reinforced concrete composites. *Composite. A Applied. Science Manufacturing*, 37(3), 497–505.
- Liew, S. C (2008). *Characterization of Natural Fiber Polymer Composites for Structural Application*. Thesis, Universiti Teknologi Malaysia.
- Mahmud, H., Jumaat, M. Z. and Alengaram, U. J. (2009). Influence of sand/cement ratio on mechanical properties of palm kernel shell concrete. *Journal of Applied Sciences*. 9(9), 1764–1769.
- Majid, A. (2012). Natural fibres as construction materials. *Journal of Civil*

- Engineering and Construction Technology*, 3(3), 80–89.
- Mannan, M. A. and Ganapathy, C. (2001a). Long-term strengths of concrete with oil palm shell as coarse aggregate. *Cement and Concrete Research*. 31, 1319–1321.
- Mannan, M. A. and Ganapathy, C. (2001b). Mix design for oil palm shell concrete. *Cement and Concrete Research*. 31, 1323–1325.
- Mannan, M. A. and Ganapathy, C. (2002). Engineering properties of concrete with oil palm shell as coarse aggregate. *Construction and Building Materials*. 16(1), 29–34.
- Mannan, M. A. and Ganapathy, C. (2004). Concrete from an agricultural waste-oil palm shell (OPS). *Building and Environment*. 39(4), 441–448.
- Mehmannavaz, T., Ismail, M., Sumadi, R. S., Bhutta, M. A. R., Samadi, M. and Sajjadi, S. M. (2014). Binary effect of fly ash and palm oil fuel ash on heat of hydration aerated concrete. *The Scientific World Journal*. 461241.
- Meyer, C. (2009). The greening of the concrete industry. *Cement and Concrete Composites*. 31, 601–605.
- Malaysian Palm Oil Board, (MPOB) (2015, December 1). *Economic and industry development division. Oil Palm Planted Area*. Available at: (<http://bepi.mpob.gov.my/index.php/statistics/area.html>).
- Mujah, D. (2015). Compressive strength and chloride resistance of grout containing ground palm oil fuel ash. *Journal of Cleaner Production*. 112, 712–722.
- Muthusamy, K., Zamri, N., Zubir, M. A., Kusbiantoro, A. and Ahmad, S. W. (2015). Effect of mixing ingredient on compressive strength of oil palm shell lightweight aggregate concrete containing palm oil fuel ash. *Procedia Engineering*. 125, 804–810.
- Neville, A. M. (2011). *Properties of Concrete* (Fifth Edition). Harlow, England: Pearson Education Limited.
- Ng, F. Y., Yew, F. K., Basiron, Y. and Sundram, K. (2011). A renewable future driven with malaysian palm oil-based green technology. *Journal of Oil Palm and the Environment*. 2, 1–7.
- Nonat, A. (2004). The structure and stoichiometry of C-S-H. *Cement and Concrete Research*. 34, 1521–1528.
- Okafor, F. O. (1988). Palm kernel shell as a lightweight aggregate for concrete. *Cement and Concrete Research*. 18(6), 901–910.
- Okpala, D. C. (1990). Palm kernel shell as a lightweight aggregate in concrete.

- Building and Environment*. 25(4), 291–296.
- Olalekan, M. Y., Johari, M. A. M., Arifin, Z. and Maslehuddin, M. (2014). Evolution of alkaline activated ground blast furnace slag – ultrafine palm oil fuel ash based concrete. *Journal of Materials and Design*. 63, 710-718.
- Olanipekun, E. A., Olusola, K. O. and Ata, O. (2006). A comparative study of concrete properties using coconut shell and palm kernel shell as coarse aggregates. *Building and Environment*. 41, 297–301.
- Olaoye, R. A., Oluremi, J. R. and Ajamu, S. O. (2013). The use of fibre waste as complement in concrete for a sustainable environment. *Innovative Systems Design and Engineering*. 4(9), 91–98.
- Ozerkan, N. G., Ahsan, B., Mansour, S. and Iyengar, S. R. (2014). Mechanical performance and durability of treated palm fiber reinforced mortars. *International Journal of Sustainable Built Environment*. 2, 131–142.
- Rahman, M. M. and Bassuoni, M. T. (2014). Thaumaside sulfate attack on concrete: Mechanisms, influential factors and mitigation. *Construction and Building Materials*. 73, 652–662.
- Ramadhansyah, P. J., Mahyun, A. W., Salwa, M. Z. M., Bakar, B. H. A., Johari, M. A. M. and Ibrahim, M. H. (2012). Thermal analysis and pozzolanic index of rice husk ash at different grinding time. *Procedia Engineering*. 50, 101–109.
- Ramli, M., Kwan, W. H., and Abas, N. F. (2013). Strength and durability of coconut-fiber-reinforced concrete in aggressive environments. *Construction and Building Materials*. 38, 554–566.
- Rao, K. M. M. and Rao, K. M. (2007). Extraction and tensile properties of natural fibers: vakka, date and bamboo. *Composite Structure*, 77(3), 288–295.
- Safiuddin, M., Salam, A. and Jumaat, M. Z. (2011). Utilization of palm oil fuel ash in concrete : A review. *Journal of Civil Engineering and Management*. 17(2), 234-247.
- Salam, M. A., Safiuddin, M. and Jumaat, M. Z. (2013). Microstructure of self-consolidating high strength concrete incorporating palm oil fuel. *Physical Review and Research International*. 3(4), 674–687.
- Salihuddin, R. S. (1993). *Relationships between engineering properties and microstructural characteristics of mortar containing agricultural ash*. PhD. Thesis (Structural and Material). Universiti Teknologi Malaysia.
- Samadi, M., Hussin, M. W., Lee, H. S., Sam, A. R. M., Ismail, M. A., Lim, N. H. A.

- S., Ariffin, N. F. and Khalid, N. H. A. (2015). Properties of mortar containing ceramic powder waste as cement replacement. *Jurnal Teknologi*. 12(77), 93–97.
- Sata, V., Jaturapitakkul, C. and Kiattikomol, K. (2004). Utilization of palm oil fuel ash in high-strength concrete. *Journal of Materials in Civil Engineering*. 16(6), 623–628.
- Sata, V., Jaturapitakkul, C. and Kiattikomol, K. (2007). Influence of pozzolan from various by-product materials on mechanical properties of high-strength concrete. *Construction and Building Materials*. 21, 1589–1598.
- Shafigh, P., Ghafari, H., Mahmud, H. and Jumaat, M. Z. (2014). A comparison study of the mechanical properties and drying shrinkage of oil palm shell and expanded clay lightweight aggregate concretes. *Materials and Design*. 60, 320–327.
- Shafigh, P., Jumaat, M. Z., Mahmud, H. and Alengaram, U. J. (2011c). A new method of producing high strength oil palm shell lightweight concrete. *Materials and Design*. 32, 4839–4843.
- Shafigh, P., Jumaat, M. Z., Mahmud, H. and Hamid, N. A. A. (2012). Lightweight concrete made from crushed oil palm shell: Tensile strength and effect of initial curing on compressive strength. *Construction and Building Materials*. 27, 252–258.
- Shafigh, P., Jumaat, M. Z. and Mahmud, H. (2011a). Oil palm shell as a lightweight aggregate for production high strength lightweight concrete. *Construction and Building Materials*. 25, 1848–1853.
- Shafigh, P., Mahmud, H. and Jumaat, M. Z. (2011b). Effect of steel fiber on the mechanical properties of oil palm shell lightweight concrete. *Materials and Design*. 32, 3926–3932.
- Shinoj, S., Visvanathan, R., Panigrahi, S. and Kochubabu, M. (2011). Oil palm fiber (OPF) and its composites: A review. *Industrial Crops and Products*. 33, 7–22.
- Sinsiri, T., Kroehong, W., Jaturapitakkul, C. and Chindapasirt, P. (2012). Assessing the effect of biomass ashes with different finenesses on the compressive strength of blended cement paste. *Materials and Design*. 42, 424–433.
- Sivaraja, M., Kandasamy, Velmani, N. and Pillai, M. S. (2010). Study on durability of natural fibre concrete composites using mechanical strength and microstructural properties. *Bulletin of Materials Science*. 33(6), 719–729.
- Skoblinskaya, N. N. and Krasilnikov, K. G. (1975). Changes in crystal structure of

- ettringite on dehydration. 2. *Cement and Concrete Research*. 5(5), 419–432.
- Smadi, M. and Migdady, E. (1991). Properties of high strength tuff lightweight aggregate concrete. *Cement and Concrete Composites*. 13(2), 129–135.
- Sobolev, K., Sanchez, F. and Flores, I. (2012). The use of nanoparticles admixtures to improve the performance of concrete. *In 12th International Conference on Recent Advances in Concrete Technology and Sustainability Issues*. Vol. 2, 455–469.
- Sreekala, M. S., Kumaran, M. G., Joseph, S., Jacob, M. and Thomas, S. (2000). Oil palm fibre reinforced phenol formaldehyde composites: influence of fibre surface modifications on the mechanical performance. *Applied Composite Materials*, 7(5-6), 295–329.
- Sun, J. X., Sun, X. F., Zhao, H. and Sun, R. C. (2004). Isolation and characterization of cellulose from sugarcane bagasse. *Polymer Degradation and Stability*. 84, 331–339.
- Tangchirapat, W. and Jaturapitakkul, C. (2010). Strength, drying shrinkage, and water permeability of concrete incorporating ground palm oil fuel ash. *Cement and Concrete Composites*. 32, 767–774.
- Tangchirapat, W., Jaturapitakkul, C. and Chindaprasirt, P. (2009). Use of palm oil fuel ash as a supplementary cementitious material for producing high-strength concrete. *Construction and Building Materials*. 23, 2641–2646.
- Tangchirapat, W., Khamklai, S. and Jaturapitakkul, C. (2012). Use of ground palm oil fuel ash to improve strength, sulfate resistance, and water permeability of concrete containing high amount of recycled concrete aggregates. *Materials and Design*. 41, 150–157.
- Tangchirapat, W., Saeting, T., Jaturapitakkul, C., Kiattikomol, K. and Siripanichgorn, A. (2007). Use of waste ash from palm oil industry in concrete. *Waste Management*. 27(1), 81–88.
- Tangpagasit, J., Cheerarot, R., Jaturapitakkul, C. and Kiattikomol, K. (2005). Packing effect and pozzolanic reaction of fly ash in mortar. *Cement and Concrete Research*. 35, 1145–1151.
- Tanyildizi, H. (2016). The investigation of microstructure and strength properties of lightweight mortar containing mineral admixtures exposed to sulfate attack. *Measurement*. 77, 143–154.
- Tay, J. H. (1990). Ash from oil palm waste as concrete material. *Journal of Materials*

- in Civil Engineering*. 2(2), 94–105.
- Tay, J. and Show, K. (1995). Use of ash derived from oil-palm waste incineration as a cement replacement material. *Resources, Conservation and Recycling*. 13, 27–36.
- Teo, D. C. L., Mannan, M. A. and Kurian, V. J. (2006). Structural concrete using oil palm shell (OPS) as lightweight aggregate. *Turkish Journal of Engineering and Environment Science*. 30, 251–257.
- Teo, D. C. L., Mannan, M. A., Kurian, V. J. and Ganapathy, C. (2007). Lightweight concrete made from oil palm shell (OPS): Structural bond and durability properties. *Building and Environment*. 42, 2614–2621.
- Torres, S. M., Sharp, J. H., Swamy, R. N., Lynsdale, C. J. and Huntley, S. A. (2003). Long term durability of Portland-limestone cement mortars exposed to magnesium sulfate attack. *Cement and Concrete Composites*. 25, 947–954.
- Umar, M. S., Jennings, P. and Urmee, T. (2013). Strengthening the palm oil biomass Renewable Energy industry in Malaysia. *Renewable Energy*. 60, 107–115.
- Vedalakshmi, R., Raj, A. S., Srinivasan, S. and Babu, K. G. (2003). Quantification of hydrated cement products of blended cements in low and medium strength concrete using TG and DTA technique. *Thermochimica Acta*, 407, 49–60.
- Wang, X. Y. and Lee, H. S. (2010). Modeling the hydration of concrete incorporating fly ash or slag. *Cement and Concrete Research*. 40, 984–996.
- Worrell, E., Price, L., Martin, N., Hendriks, C. and Meida, L. O. (2001). Carbon dioxide emissions from the global cement industry. *Annual Review of Energy and the Environment*. 26, 303–329.
- Xu, A. and Sarkar, L. S. (1994). Microstructural development in high-volume fly-ash cement system. *Journal of Materials in Civil Engineering*. 49, 117–136.
- Yousif, B. F. and Tayeb, N. S. M. (2007). The effect of oil palm fibers as reinforcement on tribological performance of polyester composite. *Surface Review and Letters*. 14(6), 1095–1102.
- Zeyad, A. M., Johari, M. A. M., Bunnori, N. M., Ariffin, K. S. and Altwair, N. M. (2012). Characteristics of treated palm oil fuel ash and its effects on properties of high strength concrete. *Advanced Materials Research*. 626, 152–156.
- Zivica, V. and Bajza, A. (2001). Acidic attack of cement based materials - a review. Part 1. Principle of acidic attack. *Construction and Building Materials*. 15, 331–340.

Zwart, R. (2013). Opportunities and challenges in the development of a viable Malaysian palm oil biomass industry. *Journal of Oil Palm and the Environment*, 4, 41–46.