

MODELLING AND CONTROL OF A TWO-LINK FLEXIBLE MANIPULATOR
USING FINITE ELEMENT MODAL ANALYSIS

MOSTAFA SAYAHKARAJY

A thesis submitted in fulfilment of the
requirements for award of the degree of
Doctor of Philosophy (Electrical Engineering)

Faculty of Electrical Engineering
Universiti Teknologi Malaysia

SEPTEMBER 2014

Specially dedicated to:

My kind parents for their patience, support, and motivation.

ACKNOWLEDGEMENT

First and foremost, I would like to appreciate my supervisor Dr. Zaharuddin Mohamed for his valuable suggestions, guidance, patience, encouragement and continuous support throughout this research. Without his suggestions and ideas, this thesis would not have been as in the present form.

Secondly, I would like to thank to my co-supervisors Dr. Abdul Rashid Husain and Dr. Zool Hilmi Ismail for contributing their time and knowledge throughout this study. I am especially grateful to my experienced and knowledgeable examiners, Associate Professor Dr. Yahaya bin Md. Sam and Professor Rini Akmeliawati, for their peer review of the thesis and their valuable comments that substantially improved the quality of this work.

This study has been partially supported by different sources from UTM. I appreciate the supports of Centre for Artificial Intelligence and Robotics CAIRO, the school of graduate studies, SPS, and the current supports of Dr. Ahmand Athif Mohd Faudzi. My thanks are also extended to all staffs of Faculty of Electrical Engineering, especially all the lecturers I attended their classes.

To me, a PhD study meant achieving a technical specialty on, and gaining insight into the problem of motion and vibration control and simulation, especially for Finite Element models of large or flexible robots. This study provided a fulfilling experience for me, and it was not possible without all the help.

ABSTRACT

This thesis focuses on Finite Element (FE) modeling and robust control of a two-link flexible manipulator based on a high resolution FE model and the system vibration modes. A new FE model is derived using Euler-Bernoulli beam elements, and the model is validated using commercial software Abaqus CAE. The frequency and time domain analysis reveal that the response of the FE model substantially varies with changing the number of elements, unless a high number of elements (100 elements in this work) is used. The gap between the complexity of the high order FE model capable of predicting dynamics of the multibody system, and suitability of the model for controller design is bridged by designing control schemes based on the reduced order models obtained using modal truncation/ H_∞ techniques. Two reduced order multi-input multi-output modal control algorithms composed of a robust feedback controller along with a feed-forward compensator are designed. The first controller, Inversion-based Two Mode Controller (ITMC), is designed using a mixed-sensitivity H_∞ synthesis and a modal inversion-based compensator. The second controller, Shaping Two-Mode Controller (STMC), is designed with H_∞ loop-shaping using the modal characteristics of the system. Stability robustness against unmodelled dynamics due to the model reduction is shown using the small gain theorem. Performance of the feedback controllers are compared with Linear Quadratic Gaussian designs and are shown to have better tracking characteristics. Effectiveness of the control schemes is shown by simulation of rest-to-rest maneuver of the manipulator to a set of desired points in the joint space. The ITMC is shown to have more precise tracking performance, while STMC has higher control over vibration of the tip, at the expense of more tracking errors.

ABSTRAK

Tesis ini memfokuskan kepada pemodelan unsur terhingga (FE) dan kawalan tegap untuk pengolah fleksibel dua lengan berdasarkan model FE dengan resolusi tinggi dan mod getaran sistem. Model FE baru dihasilkan menggunakan unsur rasuk Euler-Bernoulli dan model ini disahkan menggunakan perisian komersial Abaqus CAE. Analisa domain frekuensi dan masa menunjukkan sambutan model FE sangat bergantung kepada bilangan unsur, melainkan bilangan unsur yang sangat tinggi digunakan (100 unsur dalam penyelidikan ini). Jurang di antara kerumitan model FE tertib tinggi yang diperlukan untuk meramal tingkah laku dinamik sistem berbilang jasad dan kesesuaian model untuk rekabentuk pengawal dihubungkan melalui rekabentuk sistem kawalan berasaskan model tertib kurang menggunakan kaedah pemangkasan mod/ H_∞ . Dua algoritma pengawal berbilang-masukan berbilang-keluaran tertib kurang telah direkabentuk terdiri daripada pengawal suapbalik tegap dan pemampas suap-hadapan. Pengawal pertama, ITMC, telah direkabentuk menggunakan kaedah kepekaan-bercampur H_∞ dan pemampas mod songsangan. Manakala pengawal kedua, STMC direkabentuk dengan pembentuk-gelung H_∞ menggunakan ciri-ciri mod sistem. Ketegapan sistem terhadap ciri-ciri dinamik yang tidak dimodelkan disebabkan oleh peringkasan model ditunjukkan menggunakan teorem gandaan kecil. Prestasi pengawal ini dibandingkan dengan rekabentuk Gaussian Kuasadua Lelurus dan telah menunjukkan hasil penjejakan yang lebih baik. Keberkesanan sistem-sistem pengawal ditunjukkan melalui simulasi pergerakan pengolah ke beberapa lokasi yang dikehendaki. ITMC telah menunjukkan prestasi penjejakan yang lebih tepat manakala STMC mempunyai prestasi kawalan getaran yang lebih baik dengan ralat penjejakan besar.

CHAPTER 1

INTRODUCTION

1.1 Background and Motivation

Flexible manipulators are commonly known as a class of robotic arms that are designed with long and slender links in order to reduce their weight. As a more technical definition, ‘flexible manipulator’ commonly addresses a manipulator that its first structural natural frequencies are excited severely in its operating speeds. This can happen due to either high acceleration motions, or low stiffness of the structure of the robot. Examples include space manipulators (Sabatini *et al.*, 2012), such as the shuttle remote manipulator Canadarm (Skaar and Ruoff, 1994), and high-speed industrial manipulators. The structural flexibility is caused by elastic deflections of the links and/or joints. When the elastic deflections of the links of a manipulator are considered, the robot is known as a Flexible Link Manipulator (FLM). In the theory of elasticity, a flexible link is an infinite dimensional continuous system. For controller design and simulation, generally, a finite-dimensional (spatially discrete) model of such systems is required.

A widely used method for discretization of the governing equations of the FLMS is the Assumed Mode Method (AMM). In AMM (Book *et al.*, 1975; Yu and Elbestawi, 1995), vibrational behavior of each link is assumed to be similar to the first vibration mode(s) of the link as a separate beam under some assumed Boundary Conditions (BC). The problem with the AMM, in particular in the case of multi-link manipulators, is that the vibration modes of a beam are very sensitive to the changes

in the BCs (See for example Ata *et al.* (2012)). Therefore, describing the BCs of a moving link by classic BCs such as clamped, free, or carrying a mass/inertia can be a source of error. An alternative method that can provide a finite dimension model of a flexible multibody system is the method of Finite Elements (FE). The FE analysis has been used for open-loop or closed-loop simulation of the FLMS by many researchers. Tokhi *et al.* (2001) presented FE modelling of a single link flexible manipulator (SLFM).

Beside the modelling complexities, concurrent vibration and motion control of FLMS has been an interesting and active area in vibration control (Shaheed and Tokhi, 2013; Kumar, 2013; Yin *et al.* 2013). Various uncertainties and complexities of the system have been targeted in various studies. One of the most considered uncertainties in a flexible manipulator is the payload variation as such manipulators are normally expected to handle different payloads in remote fields (Sąsiadek, 2013).

In this work, an FE model is developed using the Euler-Bernoulli beam element and lumped mass model with arbitrary number of elements. The governing equations of motion are derived using the energy equations. Then an analysis of the FE model with different number of elements is presented to find out the necessary, sufficient, or optimum required mesh resolution (number of elements). It will be shown that independency of the model to the number of elements will be achieved only when the number of elements is chosen sufficiently high (here around 50 elements for each link). The high-order FE model is then verified using numerical measurements and commercial FE software. In order to prepare the model for a model based control algorithm, the FE model is approximated to a low-order system by employing modal decomposition and model reduction. In this manner, the resultant dynamic equations preserve the precision of a finely meshed FE model in low frequencies of interest or bandwidth of the system, while the order of the system is not too big for control algorithms. Based on the reduced model, a Multi-Input Multi-Output (MIMO) feedback control is designed that is shown to be robust against the uncertainty of truncated high frequency modes. Finally, a multi-stage rest-to-rest control algorithm based on the feedback controller and a feed-forward

controller is simulated on the high-order system which drives the manipulator to desired postures through a smooth trajectory.

1.2 Problem Statement

The demand for reliable lightweight and high-speed manipulators, for space or industrial applications, has attracted many researchers to develop dynamic models and control methods for manipulators with elastic behavior. A planar Two-Link Flexible Manipulator (TLFM) is the most fundamental and, practically, common case of multi-link flexible-link manipulators. Flexible-link manipulators are continuous (infinite dimensional) systems, which need to be approximated as finite dimensional models. The everlasting demand for reducing the weight or increasing the speed of manipulators is associated with increasing the flexibility of the links of the robots. To fulfill this demand, continuous research is necessary in order to develop more accurate models (*e.g.* with more modes), and to design more advanced control algorithms, for TLFMs.

Due to natural complexities of flexible multibody systems, the dynamics and control of a TLFM is yet an open problem. The modeling methods developed up to now, generally sacrifice a degree of accuracy to get a low-order model that is manageable for controller design. In particular, in the FE models a low number of elements have been used for discretization of flexible links. If each link is modeled with one element, the FE and AMM will be essentially equivalent; except for the shape function that is ‘presumed’ for describing bending of the links. When multiple elements are used, the shape function approximation rules only inside the elements and the bending curve (*i.e.* the system vibration modes) can be measured based on position of the nodes. However, with multiple elements FE results in high-order models. The literature on FLMs show that AMM has been more of interest, because the assumed modes selected based on the BCs will be better approximations than the shape functions used in a single element.

To keep the advantages of a high-resolution FE model in model-based control design, a compromise between the order and resolution of the model is necessary. By using a model order reduction, the flexible links can be modeled with high number of elements. Then, to fully use the advantages of such elaborate modelling technique, employing advanced MIMO robust control techniques, as well as classic methods of maneuver control of manipulators is indispensable.

1.3 Objectives of the Research

This research aims at developing a high-order FE model of TLFMs and designing model-based control for maneuvering the system. The main objectives are as follows:

- To develop a multi-element FE model of a TLFM, free of the assumptions of component modes analysis and the floating frame of references. Validation of the model is performed with the commercial FE software Abaqus CAE.
- To measure the system vibration modes of the TLFM, and implement modal decomposition in order to reduce order of the model.
- To design a MIMO feedback controller for rest-to-rest maneuvers of the manipulator in free joint space. The controller needs to be robust to unmodelled dynamics resulted from the model order reduction.

1.4 Scope of the Research

The scope of this research comprises a theoretical study of reduced-order modeling and control of a TLFM, as well as simulation studies using MATLAB, as the main platform. Abaqus CAE is used for validation of the eigenproblem. In this

work, some idealizations are adopted to focus on effects of flexibility of the links (flexibility of the joints is not considered in this research). Modeling of a two-link manipulator with small elastic deflections using Euler-Bernoulli beam element is considered. The motion and vibration of the manipulator are in the horizontal plane. The joints are actuated by external torque and are without gear box, friction, and joint flexibility. Damping is considered by adding modal damping terms.

The controller is designed based on the reduced-order model, and closed-loop simulation is performed using the high-order model as the plant. The feedback controller is designed using some MIMO H_∞ minimizing methods. To ensure robustness, firstly, the normalized coprime stability margin is considered in the controller design stage, and secondly, the small-gain theorem is checked for the specific uncertainty that is the unmodelled dynamics or the truncated modes in the model order reduction.

The overall control system is to drive the system to a typical set of point and stabilize the manipulator at the destination. The bandwidth is considered to be 0 to 50 Hz (vibrations of higher frequencies are ignorable). Performance of the controller will be compared with a Linear Quadratic Gaussian (LQG) design. In each stage of the rest-to-rest motion, the angular motion of the joints are supposed to be small (say less than 1 rad). For large motions, the controller can be equipped with adaptation algorithms, which is out of the scope of this research.

1.5 Research Methodology

In this section, an overview of the research methodology is presented. To introduce the readers who may not be familiar with the subjects, an overall road map is given. Figure 1.1 illustrates the flowchart of the project methodology. The research was started with reviewing the literature to figure out the research direction. Then, dynamic equations of the system are derived using analytical and numerical

methods, and are simulated using MATLAB. The dynamic modelling starts with physical modelling and discretization of the links using arbitrary number of beam elements (FE discretization). The Lagrange's equations are used, then, to derive the dynamic equations. For convergence analysis, the time and frequency responses of the FE model are measured for the FE model with different mesh sizes. In parallel to the measurements, a model of the TLFM is made in Abaqus CAE. The measured model is compared and validated to the results of the Abaqus CAE. The verified model is named high-order FE model as any order reduction (including decreasing number of elements) has not been applied.

In the next step, the mode shapes of the system are measured and a model order reduction procedure based on the measured modes is employed. The reduced models prepared with different orders are verified with the original FE model. The model based control designs, then, will be based on the reduced order systems.

The control design starts with feedback control design and synthesis. The control design and simulation is performed in MATLAB. After verification of the robustness of the feedback loop, the control system is augmented with feed-forward compensators. Finally, the controllers are evaluated in rest-to-rest maneuvers to arbitrary points. The evaluation will be in terms of parameterization of trajectory error and vibration of the tip (end-effector).

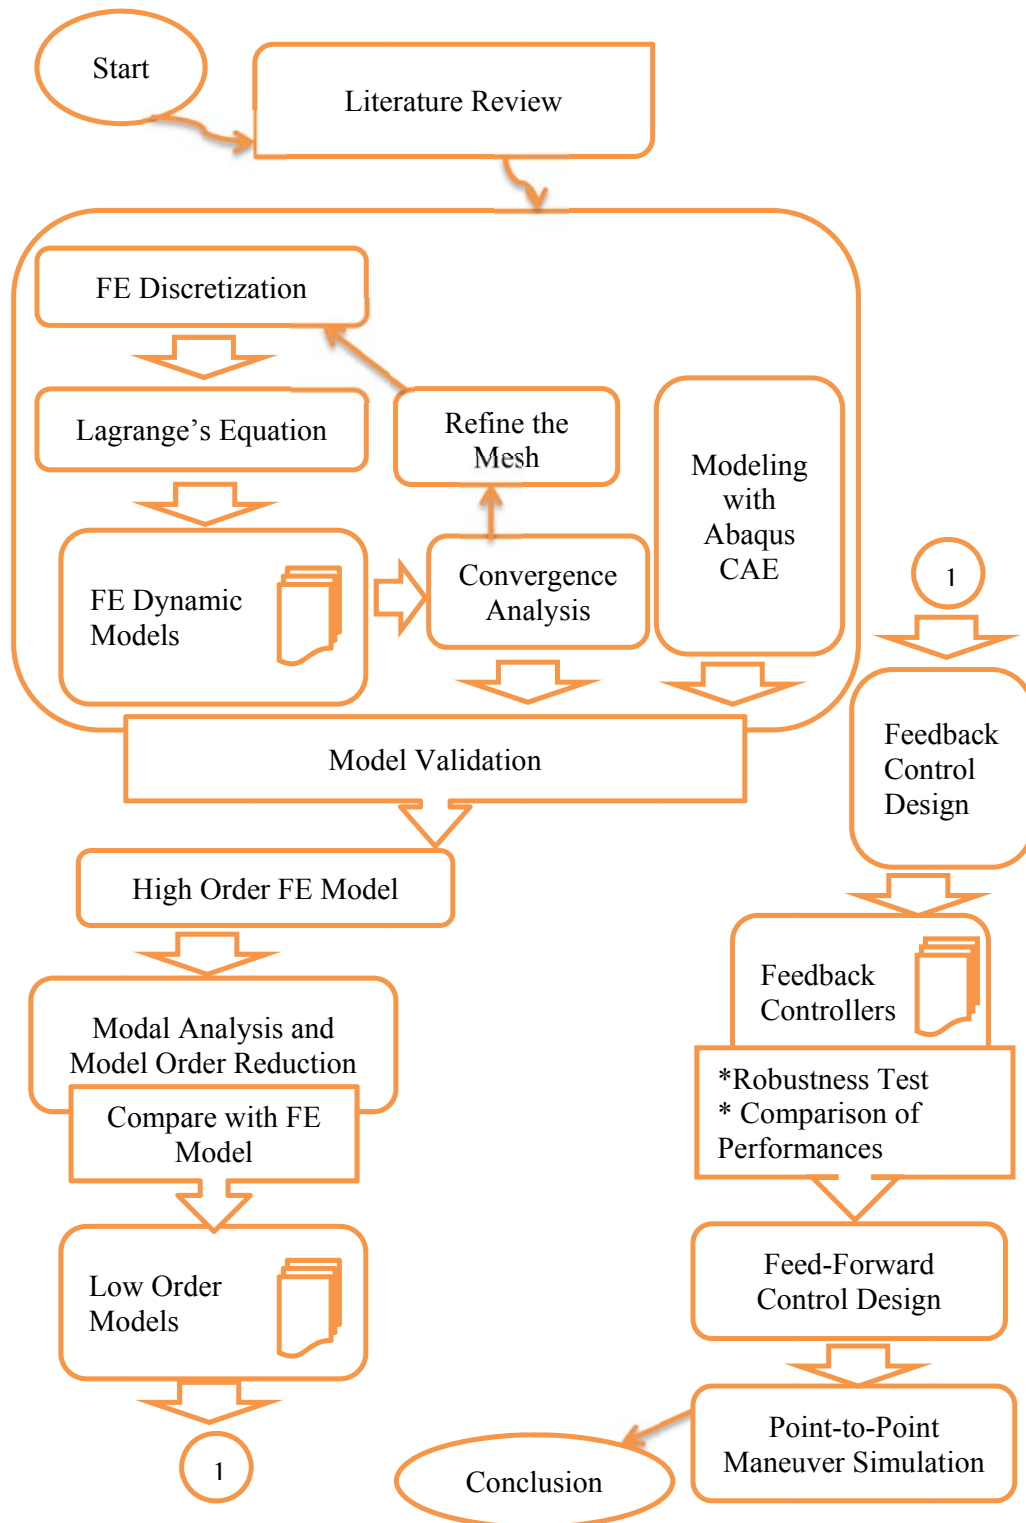


Figure 1.1 Flowchart of the research methodology

1.6 Thesis Contribution

A brief outline of the main contributions of this research is given in this section as follows:

- 1) An accurate FE model with a high resolution mesh of beam elements was developed for the TLFM. The number of required elements for discretization of the model was discussed based on convergence of frequency and time domain responses so that the FE model can predict the first modes monotonously when the number of elements is increased (considering system matrices of order lower than 200 to avoid measurement complexity of large scale matrices (Cullum, 2002))
- 2) The vibration modes of the system were measured. The modes were used for modal decomposition of the model, and measuring reduced-order model that perfectly matches with the high-order FE model in terms of the input-output characteristics.
- 3) Based on the modal decomposition, two modal control algorithms (named ITMC and STMC, in this work) were developed for multi-stage rest-to-rest maneuver of the manipulator. A method was proposed for reshaping the loop transfer matrix (loop-shaping control) for concurrent motion and vibration control of the flexible manipulator. Robustness of the feedback controlled system against unmodelled dynamics was shown using the small gain theorem. Performance of the controllers was evaluated by comparing time responses of the controlled system with the simulation results of some LQG control designs. The ITMC is suggested for the tasks requiring more precise tracking performance, and STMC for higher control on vibration at the expense of more tracking error.

REFERENCES

- Aarts RGKM and Jonker JB. (2002). Dynamic Simulation of Planar Flexible Link Manipulators using Adaptive Modal Integration. *Multibody System Dynamics* 7: 31-50.
- Abe A. (2009). Trajectory Planning for Residual Vibration Suppression of a Two-Link Rigid-Flexible Manipulator Considering Large Deformation. *Mechanism and Machine Theory* 44: 1627-1639.
- Ahmad MA, Mohamed Z and Hambali N. (2008). Dynamic Modelling of a Two-link Flexible Manipulator System Incorporating Payload. *IEEE Conference on Industrial Electronics and Applications*. 96-101.
- Alam MS and Tokhi MO. (2008). Hybrid Fuzzy Logic Control with Genetic Optimisation for a Single-Link Flexible Manipulator. *Eng. Appl. Artif. Intell.* 21: 858-873.
- Anderson BDO and Moore JB. (2007). *Optimal Control: Linear Quadratic Methods*: Dover Publications Inc.
- Apkarian P and Adams RJ. (1998). Advanced Gain-Scheduling Techniques for Uncertain Systems. *IEEE Transactions on Control Systems Technology* 6 (1): 21-32.
- Armstrong ES. (1993). Robust Controller Design for Flexible Structures using Normalized Coprime Factor Plant Descriptions. *NASA TP 3325*.
- Ata AA, Fares WF and Sa'adeh MY. (2012). Dynamic Analysis of a Two-link Flexible Manipulator Subject to Different Sets of Conditions. *Procedia Engineering* 41: 1253-1260.
- Banavar RN and Dominic P. (1995). An LQG/ H_∞ Controller for a Flexible Manipulator. *IEEE Transactions on Control Systems Technology* 3: 409-416.

- Bayo E, Papadopoulos P, Stubbe J and Serna MA. (1989). Inverse Dynamics and Kinematics of Multi- Link Elastic Robots: An Iterative Frequency Domain Approach. *The International Journal of Robotics Research* 8: 49-62.
- Benosman M and Le Vey G. (2001). Model Inversion for a Particular Class of Nonlinear Non-minimum Phase Systems: An Application to the Two-Link Flexible Manipulator. *Proceedings of the IEEE Conference on Decision and Control*. 1174-1180 vol.1172.
- Benosman M, Le Vey G, Lanari L and De Luca A. (2004). Rest-to-Rest Motion for Planar Multi-Link Flexible Manipulator Through Backward Recursion. *Dyn. Sys., Meas., Control*. 126(1): 115-123.
- Benosman M and Vey GL. (2004). Control of Flexible Manipulators: A Survey. *Robotica* 22: 533-545.
- Bernstein DS and Haddad MM. (1989). LQG Control with an H_∞ Performance Bound: A Riccati Equation Approach. *IEEE Transactions on Automatic Control* 34: 293-305.
- Book WJ. (1984). Recursive Lagrangian Dynamics of Flexible Manipulator Arms. *The International Journal of Robotics Research* 3: 87-101.
- Book WJ, Maizza-Neto O and Whitney DE. (1975). Feedback Control of Two Beam, Two Joint Systems with Distributed Flexibility. *Journal of Dynamic Systems, Measurement, and Control* 97: 424-431.
- Brandt A. (2010). *Noise and Vibration Analysis: Signal Analysis and Experimental Procedures*: John Wiley & Sons, Ltd.
- Cannon DW, Magee DP, Book WJ and Lew JY. (1996). Experimental Study on Micro/Macro Manipulator Vibration Control. *Proceedings of IEEE International Conference on Robotics and Automation*. 2549-2554 vol.2543.
- Cetinkunt S and Book WJ. (1989). Symbolic Modelling and Dynamic Simulation of Robotic Manipulators with Compliant Links and Joints. *Robotics and Computer-Integrated Manufacturing* 5: 301-310.
- Chatterjee A, Chatterjee R, Matsuno F and Endo T. (2008). Augmented Stable Fuzzy Control for Flexible Robotic Arm Using LMI Approach and Neuro-Fuzzy State Space Modelling. *IEEE Transactions on Industrial Electronics* 55: 1256-1270.
- Chaudhuri B, Pal BC, Zolotas AC, Jaimoukha IM and Green TC. (2003). Mixed-Sensitivity Approach to H_∞ Control of Power System Oscillations employing

- Multiple FACTS Devices. *IEEE Transactions on Power Systems* 18: 1149-1156.
- Chen W. (2001). Dynamic Modelling of Multi-Link Flexible Robotic Manipulators. *Computers and Structures* 79: 183-195.
- Chilali M and Gahinet P. (1996). H_∞ Design with Pole Placement Constraints: an LMI Approach. *IEEE Transactions on Automatic Control* 41: 358-367.
- Choi BO and Krishnamurthy K. (1994). Unconstrained and Constrained Motion Control of a Planar Two-Link Structurally Flexible Robotic Manipulator. *Journal of Robotic Systems* 11: 557-571.
- Cole MOT and Wongratanaphisan T. (2013). A Direct Method of Adaptive FIR Input Shaping for Motion Control With Zero Residual Vibration. *IEEE/ASME Transactions on Mechatronics* 18: 316-327.
- Cullum JKWRA. (2002). Lanczos algorithms for large symmetric eigenvalue computations. Vol. I, Vol. I, Philadelphia: Society for Industrial and Applied Mathematics.
- Daafouz J, Garcia G and Bernussou J. (1998). Robust Control of a Flexible Robot Arm using the Quadratic D-stability Approach. *IEEE Transactions on Control Systems Technology* 6: 524-533.
- Dai X, Sun L and Cai H. (2004). On Singular Perturbation Based Inverse Dynamics Control for a Two-Link Flexible Manipulator. In: Tarn T-J, Zhou C and Chen S-B (eds) *Robotic Welding, Intelligence and Automation*. Springer Berlin Heidelberg, 276-280.
- Damaren CJ. (1995). Passivity Analysis for Flexible Multilink Space Manipulators. *Journal of Guidance, Control, and Dynamics* 18: 272-279.
- De Luca A, Lanari L and Ulivi G. (1991). End-effector Trajectory Tracking in Flexible Arms: Comparison of Approaches Based on Regulation Theory, Advanced Robot Control. In: Canudas de Wit C (ed). Springer Berlin / Heidelberg, 190-206.
- Desoer CA. (2012). *Feedback Systems: Input-output Properties*: Elsevier Science.
- di Castri C and Messina A. (2010). Matrix formulations for solving the configuration-dependent eigenvalue problem of a two-link flexible manipulator. *IEEE 19th International Workshop on Robotics in Alpe-Adria-Danube Region (RAAD)*. 225-230.

- Diaz IM, Pereira E, Feliu V and Cela JLL. (2010). Concurrent Design of Multimode Input Shapers and Link Dynamics for Flexible Manipulators. *IEEE/ASME Transactions on Mechatronics* 15: 646-651.
- Doyle J, Francis B and Tannenbaum A. (1990). *Feedback Control Theory*: Macmillan Publishing Co.
- Dwivedy SK and Eberhard P. (2006). Dynamic Analysis of Flexible Manipulators, A Literature Review. *Mechanism and Machine Theory* 41: 749-777.
- Etxebarria A, Sanz A and Lizarraga I. (2005). Control of a Lightweight Flexible Robotic Arm Using Sliding Modes. *International Journal of Advanced Robotic Systems* 2: 103-110.
- Ewins DJ. (2000). *Modal testing: theory, practice, and application*: Research Studies Press.
- Fang LY, Shabana AA and Agrawal OP. (1987). Application of Perturbation Techniques to Flexible Multibody System Dynamics. *Computers and Structures* 27: 631-637.
- Feliu V, Pereira E and Díaz IM. (2014). Passivity-based Control of Single-Link Flexible Manipulators using a Linear Strain Feedback. *Mechanism and Machine Theory* 71: 191-208.
- Forbes JR and Damaren CJ. (2010). Design of Gain-Scheduled Strictly Positive Real Controllers Using Numerical Optimization for Flexible Robotic Systems. *Transactions of the ASME J. Dyn. Sys., Meas., Control* 132: 034503-034501-034507.
- Forbes JR and Damaren CJ. (2012). Single-Link Flexible Manipulator Control Accommodating Passivity Violations: Theory and Experiments. *IEEE Transactions on Control Systems Technology* 20: 652-662.
- Fresonke DA, Hernandez E and Tesar D. (1988). Deflection Prediction for Serial Manipulators. *Proceedings of IEEE International Conference on Robotics and Automation*. 482-487 vol.481.
- García-Benitez E, Yurkovich S and Passino K. (1993). Rule-based Supervisory Control of a Two-Link Flexible Manipulator. *Journal of Intelligent and Robotic Systems* 7: 195-213.
- Gérardin M and Cardona A. (2001). *Flexible multibody dynamics: a finite element approach*: John Wiley.

- Glover K and McFarlane D. (1989). Robust Stabilization of Normalized Coprime Factor Plant Descriptions with H_∞ -bounded Uncertainty. *IEEE Transactions on Automatic Control* 34: 821-830.
- Gough BM. (2010). *Historical Dictionary of Canada*: Scarecrow Press.
- Green M and Limebeer DJ. (2012). *Linear robust control*: Courier Publications.
- Green A and Sasiadek JZ. (2004). Dynamics and Trajectory Tracking Control of a Two-Link Robot Manipulator. *Journal of Vibration and Control* 10: 1415-1440.
- Gu D-W, Petkov PH and Konstantinov MM. (2005). *Robust Control Design with MATLAB®*: Springer Verlag.
- Guo X-G, Yang G-H and Che W-W. (2013). Insensitive Dynamic Output Feedback Control with Mixed- H_∞ norm Sensitivity Minimization. *Journal of the Franklin Institute* 350: 72-91.
- Gurses K, Buckman BJ and Park EJ. (2007). Vibration Control of a Flexible Link Manipulator Using an Array of Fiber-Optic Curvature Sensors and Piezoelectric Actuators. *ASME Conference Proceedings 2007*: 417-423.
- Hillsley KL and Yurkovich S. (1993). Vibration Control of a Two-Link Flexible Robot Arm. *Dynamics and Control* 3: 261-280.
- Hisseine D and Lohmann B. (2001). Robust Control for a Flexible-Link Manipulator using Sliding Mode Techniques and Nonlinear H_∞ Control Design Methods. *Proceedings of IEEE International Conference on Robotics and Automation*. 3865-3870 vol.3864.
- Huston R. (1980). Flexibility Effects in Multibody System Dynamics. *Mechanics Research Communications* 7: 261-268.
- Jiang X, Konno A and Uchiyama M. (2011). Wrist Camera-Based Vibration Suppression Control for a Flexible Manipulator. *Advanced Robotics* 25: 805-823.
- Jiang Z-H. (2005). Impedance Control of Flexible Robot Arms with Parametric Uncertainties. *Journal of Intelligent and Robotic Systems* 42: 113-133.
- Jingjun Z, Lili H, Ercheng W and Ruizhen G. (2009). Robust Active Vibration Control of Flexible Structures Based on H_∞ Control Theorem. *International Workshop on Intelligent Systems and Applications*. 1-6.

- Jnifene A and Fahim A. (1998). Endpoint Control of a Two-Link Flexible Manipulator. *Journal of Vibration and Control* 4: 747-766.
- Jonker JB and Aarts RGKM. (2001). A Perturbation Method for Dynamic Analysis and Simulation of Flexible Manipulators. *Multibody System Dynamics* 6: 245-266.
- Karkoub M, Balas G, Tamma K and Donath M. (2000). Robust Control of Flexible Manipulators via μ -synthesis. *Control Engineering Practice* 8: 725-734.
- Karkoub M, Tamma K and Balas G. (1999). Robust Control of Two-Link Flexible Manipulators Using the μ -Synthesis Technique *Journal of Vibration and Control* 5: 559-576.
- Khalil HK. (2002). *Nonlinear Systems*: Prentice Hall PTR.
- Khargonekar PP and Rotea MA. (1991). Mixed H_2/H_∞ Control: A Convex Optimization Approach. *IEEE Transactions on Automatic Control* 36: 824-837.
- Khorrami F, Jain S and Tzes A. (1995). Experimental Results on Adaptive Nonlinear Control and Input Preshaping for Multi-Link Flexible Manipulators. *Automatica* 31: 83-97.
- Khosrowjerdi MJ, Nikoukhah R and Safari-Shad N. (2004). A Mixed H_2/H_∞ Approach to Simultaneous Fault Detection and Control. *Automatica* 40: 261-267.
- Konno A, Deman L and Uchiyama M. (2002). A Singularly Perturbed Method for Pole Assignment Control of a Flexible Manipulator. *Robotica* 20: 637-651.
- Konno A and Uchiyama M. (1995). Vibration Suppression Control of Spatial Flexible Manipulators. *Control Engineering Practice* 3: 1315-1321.
- Kröger T. (2010). *On-Line Trajectory Generation in Robotic Systems: Basic Concepts for Instantaneous Reactions to Unforeseen (Sensor) Events*: Springer.
- Kurz T, Eberhard P, Henninger C and Schiehlen W. (2010). From Neweul to Neweul-M²: symbolical equations of motion for multibody system analysis and synthesis. *Multibody System Dynamics* 24: 25-41.
- Lee JD and Ben-Li W. (1988). Dynamic Equations for a Two-Link Flexible Robot Arm. *Computers and Structures* 29: 469-477.

- Lee S-H and Lee C-W. (2002). Hybrid Control Scheme for Robust Tracking of Two-Link Flexible Manipulator. *Journal of Intelligent and Robotic Systems* 34: 431-452.
- Li Y, Liu G, Hong T and Liu K. (2005). Robust Control of a Two-Link Flexible Manipulator with Quasi-Static Deflection Compensation Using Neural Networks. *Journal of Intelligent and Robotic Systems* 44: 263-276.
- Lingbo Z, Fuchun S and Zengqi S. (2006). Cloud Model-based Controller Design for Flexible-Link Manipulators. *IEEE Conference on Robotics, Automation and Mechatronics*. 1-5.
- Maciejowski JM. (1989). *Multivariable feedback design*: Addison-Wesley.
- Magee DP and Book WJ. (1994). Filtering Schilling Manipulator Commands to Prevent Flexible Structure Vibration. *American Control Conference*. 2538-2542 vol.2533.
- Magee DP and Book WJ. (1995). Filtering Micro-Manipulator Wrist Commands to Prevent Flexible Base Motion. *Proceedings of the American Control Conference*. 924-928 vol.921.
- Mahmood IA, Moheimani SOR and Bhikkaji B. (2008). Precise Tip Positioning of a Flexible Manipulator Using Resonant Control. *IEEE/ASME Transactions on Mechatronics* 13: 180-186.
- Martins JM, Mohamed Z, Tokhi MO, Sa da Costa J and Botto MA. (2003). Approaches for Dynamic Modelling of Flexible Manipulator Systems. *IEE Proceedings of Control Theory and Applications* 150: 401-411.
- McFarlane D and Glover K. (1992). A Loop-Shaping Design Procedure using H_∞ Synthesis. *IEEE Transactions on Automatic Control* 37: 759-769.
- Milford RI and Asokanthan SF. (1995). Identification and Gain Scheduled Vibration Control of an Experimental Two-Link Flexible Manipulator. *Proceedings of the American Control Conference* 3326-3328.
- Ming-Tzu H and Chia-Yi L. (2003). PID Vontroller Design for Robust Performance. *IEEE Transactions on Automatic Control* 48: 1404-1409.
- Ming-Tzu H and Yi-Wei T. (2005). PID Controller Design for a Flexible-Link Manipulator. *IEEE Conference on Decision and Control, and European Control Conference*. 6841-6846.

- Mohamed, Z., Khairudin, M., Husain, A. & Subudhi, B. (2014). Linear matrix inequality-based robust proportional derivative control of a two-link flexible manipulator. *Journal of Vibration and Control*.
- Mohamed Z and Tokhi MO. (2004). Command Shaping Techniques for Vibration Control of a Flexible Robot Manipulator. *Mechatronics* 14: 69-90.
- Moudgal VG, Kwong WA, Passino KM and Yurkovich S. (1995). Fuzzy Learning Control for a Flexible-Link Robot. *IEEE Transactions on Fuzzy Systems* 3: 199-210.
- Moudgal VG, Passino KM and Yurkovich S. (1994). Rule-Based Control for a Flexible-Link Robot. *IEEE Transactions on Control Systems Technology* 2: 392-405.
- Nicosia S, Valigi P and Zaccarian L. (1996). Dynamic Modelling of a Two Link Flexible Robot and Experimental Validation. *Proceedings of IEEE International Conference on Robotics and Automation*. 1953-1958 vol.1953.
- Oakley CM and Cannon RH. (1989). End-Point Control of a Two-Link Manipulator with a Very Flexible Forearm: Issues and Experiments. *American Control Conference*. 1381-1389.
- Ohishi K, Miyazaki M, Fujita M and Ogino Y. (1992). Force Control without Force Sensor based on Mixed Sensitivity H_∞ Design Method. *IEEE International Conference on Robotics and Automation*. 1356-1361 vol.1352.
- Ower J and de Vegte J. (1987). Classical Control Design for a Flexible Manipulator: Modelling and Control System Design. *IEEE Journal of Robotics and Automation* 3: 485-489.
- Pereira E, Aphale SS, Feliu V and Moheimani SOR. (2011). Integral Resonant Control for Vibration Damping and Precise Tip-Positioning of a Single-Link Flexible Manipulator. *IEEE/ASME Transactions on Mechatronics* 16: 232-240.
- Pereira E, Trapero JR, Díaz IM and Feliu V. (2012). Adaptive Input Shaping for Single-Link Flexible Manipulators using an Algebraic Identification. *Control Engineering Practice* 20: 138-147.
- Phan V, Goo N and Park H. (2009). Vibration Suppression of a Flexible Robot Manipulator with a Lightweight Piezo-Composite Actuator. *International Journal of Control, Automation and Systems* 7: 243-251.

- Qiu, Z.-c., Han, J.-d., and Liu, J.-g. (2013a). Experiments on fuzzy sliding mode variable structure control for vibration suppression of a rotating flexible beam. *Journal of Vibration and Control*.
- Qiu Z-c, Wang B, Zhang X-m and Han J-d. (2013b). Direct Adaptive Fuzzy Control of a Translating Piezoelectric Flexible Manipulator Driven by a Pneumatic Rodless Cylinder. *Mechanical Systems and Signal Processing* 36: 290-316.
- Raouf F, Mohamad S and Maarouf S. (2013). Workspace Tracking Control of Two-Flexible-Link Manipulator Using Distributed Control Strategy. *Journal of Control Science and Engineering* 2013: 17.
- Rappole BW, Singer NC and Seering WP. (1993). Input Shaping With Negative Sequences for Reducing Vibrations in Flexible Structures. *American Control Conference*. 2695-2699.
- Reis JCP and Sá da Costa J. (2012). Motion planning and actuator specialization in the control of active-flexible link robots. *Journal of Sound and Vibration* 331: 3255-3270.
- Rubinstein D, Galili N and Libai A. (1994). Fully Inverse Dynamics of Very Flexible Beam using a Finite Element Approach and Lagrange Formulation. *Computers and Structures* 53: 1073-1084.
- Sabatini M, Gasbarri P, Monti R and Palmerini GB. (2012). Vibration Control of a Flexible Space Manipulator during On Orbit Operations. *Acta Astronautica* 73: 109-121.
- Safonov MG, Chiang RY and Flashner H. (1988). H_∞ Robust Control Synthesis for a Large Space Structure. *American Control Conference*. 2038-2045.
- Saśiadek J. (2013). Space Robotics and its Challenges. In: Saśiadek J (ed) *Aerospace Robotics*. Springer Berlin Heidelberg, 1-8.
- Sayahkarajy M and Mohamed Z. (2014). Mixed Sensitivity H_2/H_∞ Control of a Flexible-Link Robotic Arm. *International Journal of Mechanical & Mechatronics Engineering* 14.
- Scherer C. (1995). Mixed H_2/H_∞ Control. *Trends in Control: A European Perspective*: 173–216.
- Schiehlen W. (2012). *Multibody Systems Handbook*: Springer London, Limited.
- Shabana AA. (2005). *Dynamics of multibody systems*, New York, NY [u.a.]: Cambridge Univ. Press.

- Sharma S, Sutton R and Tokhi M. (2014). Local Model and Controller Network Design for a Single-Link Flexible Manipulator. *Journal of Intelligent & Robotic Systems* 74: 605-623.
- Sheng L, Demin S, Yong W and Jingyu Y. (2004). Active Vibration Control of a Flexible Plate Structure based on H_∞ Mixed Sensitivity. *World Congress on Intelligent Control and Automation*. 778-782 Vol.771.
- Shi ZX, Fung EHK and Li YC. (1999). Dynamic Modelling of a Rigid-Flexible Manipulator for Constrained Motion Task Control. *Applied Mathematical Modelling* 23: 509-525.
- Siciliano B, Sciavicco L, Oriolo G and Villani L. (2010). *Robotics: Modelling, Planning and Control*: Springer.
- Skogestad, S. and Postlethwaite, I., *Multivariable feedback control: analysis and design*: John Wiley, 2005.
- Singer NC and Seering WP. (1990). Preshaping Command Inputs to Reduce System Vibration. *Journal of Dynamic Systems, Measurement, and Control* 112: 76-82.
- Singhose W. (2009). Command Shaping for Flexible Systems: A Review of the First 50 Years. *International Journal of Precision Engineering and Manufacturing* 10: 153-168.
- Skaar SB and Ruoff CF. (1994). *Teleoperation and Robotics in Space*: American Institute of Aeronautics and Astronautics, Inc.
- Spong MW. (2008). *Robot Dynamics And Control*: Wiley India Pvt. Limited.
- Spong MW, Hutchinson S and Vidyasagar M. (2005). *Robot Modelling and Control*: Wiley.
- Spong MW, Hutchinson S and Vidyasagar M. (2012). *Robot Modelling and Control*: John Wiley & Sons, Limited.
- Subudhi B and Morris AS. (2002). Dynamic Modelling, Simulation and Control of a Manipulator with Flexible Links and Joints. *Robotics and Autonomous Systems* 41: 257-270.
- Supriyono H and Tokhi MO. (2012). Parametric Modelling Approach using Bacterial Foraging Algorithms for Modelling of Flexible Manipulator systems. *Engineering Applications of Artificial Intelligence* 25: 898-916.
- Sutton RP, Halikias GD, Plummer AR and Wilson DA. (1999). Modelling and H_∞ Control of a Single-Link Flexible Manipulator. *Proceedings of the Institution*

of *Mechanical Engineers, Part I: Journal of Systems and Control Engineering* 213: 85-104.

- Talebi HA, Khorasani K and Patel RV. (1999). Experimental Results on Tracking Control of a Flexible-Link Manipulator: A New Output Re-definition Approach. *Proceedings of IEEE International Conference on Robotics and Automation*. 1090-1095 vol.1092.
- Theodore RJ and Ghosal A. (1995). Comparison of the Assumed Modes and Finite Element Models for Flexible Multilink Manipulators. *The International Journal of Robotics Research* 14: 91-111.
- Theodore RJ and Ghosal A. (2003). Robust Control of Multilink Flexible Manipulators. *Mechanism and Machine Theory* 38: 367-377.
- Toker O and Ozbay H. (1995). H_∞ Optimal and Suboptimal Controllers for Infinite Dimensional SISO Plants. *IEEE Transactions on Automatic Control* 40: 751-755.
- Tokhi MO, Mohamed Z and Azad AKM. (1997). Finite Difference and Finite Element Approaches to Dynamic Modelling of a Flexible Manipulator. *Proceedings of the Institution of Mechanical Engineers, Part I: Journal of Systems and Control Engineering* 211: 145-156.
- Tokhi MO, Mohamed Z and Shaheed MH. (2001). Dynamic Characterisation of a Flexible Manipulator System. *Robotica* 19: 571-580.
- Torfs DE, Vuerinckx R, Swevers J and Schoukens J. (1998). Comparison of two Feedforward Design Methods Aiming at Accurate Trajectory Tracking of the End-Point of a Flexible Robot Arm. *IEEE Transactions on Control Systems Technology* 6: 2-14.
- Tosunoglu S, Lin S-H and Tesar D. (1992). Accessibility and Controllability of Flexible Robotic Manipulators. *Journal of Dynamic Systems, Measurement, and Control* 114: 50-58.
- Usono PB, Nadira R and Mahil SS. (1986). A Finite Element/Lagrange Approach to Modelling Lightweight Flexible Manipulators. *Journal of Dynamic Systems, Measurement, and Control* 108: 198-205.
- Wang D, Lu Y, Liu Y and Li X. (1996). Dynamic Model and Tip Trajectory Tracking Control for a Two-Link Flexible Robotic Manipulator. *IEEE International Conference on Systems, Man, and Cybernetics*. 1020-1024 vol.1022.

- Winfrey RC. (1971). Elastic Link Mechanism Dynamics. *Journal of Engineering for Industry* 93: 268-272.
- Xu B, Fujimoto K and Hayakawa Y. (2004). Control of Two-Link Flexible Manipulators via Generalized Canonical Transformation. *IEEE Conference on Robotics, Automation and Mechatronics*. 107-112 vol.101.
- Yang GB and Donath M. (1988). Dynamic Model of a One-Link Robot Manipulator with both Structural and Joint Flexibility. *Proceedings of IEEE International Conference on Robotics and Automation*. 476-481 vol.471.
- Yi P, Yuan R-B, Long W and Ba S-n. (2012). Research for the Clamping Force Control of Pneumatic Manipulator based on the Mixed Sensitivity Method. *Procedia Engineering* 31: 1225-1233.
- Yin H, Kobayashi Y, Xu J and Huang F. (2013). Theoretical and experimental investigation on decomposed dynamic control for a flexible manipulator based on nonlinearity. *Journal of Vibration and Control*: 1077546312474945.
- Yu S and Elbestawi MA. (1995). Modelling and Dynamic Analysis of a Two-Link Manipulator with both Joint and Link Flexibilities. *Journal of Sound and Vibration* 179: 839-854.
- Zames G. (1966). On the Input-Output Stability of Time-Varying Nonlinear Feedback Systems. Part one: Conditions Derived Using Concepts of Loop gain, conicity, and positivity. *IEEE Transactions on Automatic Control* 11: 228-238.
- Zidong W, Hanqing Z, Ho DWC and Unbehauen H. (2002). Multiobjective Control of a Four-Link Flexible Manipulator: A Robust H_∞ Approach. *IEEE Transactions on Control Systems Technology* 10: 866-875.