

NATURAL VENTILATION PERFORMANCE OF AIR WELLED SINGLE
STOREY TERRACE HOUSE

LENG PAU CHUNG

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Architecture)

Faculty of Built Environment
Universiti Teknologi Malaysia

JANUARY 2017

I dedicate this Thesis to God Almighty, who has been my eternal rock and source of refuge. The thesis is also dedicated to my country – Malaysia, and UTM, as well as my beloved family for being great pillars of support.

ACKNOWLEDGEMENT

This thesis was made possible with blessings and continuous support from people around me. My deepest gratitude goes to my main thesis supervisor Prof Dr. Mohd Hamdan bin Haji Ahmad for his valuable and close supervision, guidance, supports, motivation, inspirations and encouragements. Other than that, I sincerely thank to my co-supervisor Associate Professor Dr Dilshan Remaz Ossen for giving me invaluable advice, knowledge, supports and encouragements throughout the years. Not to forget about my mentor Associate Professor Dr Syed Ahmad Iskandar Syed Ariffin in giving me vast of learning experiences, motivation, encouragement as well as useful comments throughout the years.

I extend my sincerest gratitude to My Brain Scholarship by Ministry of Higher Education (MOHE), Universiti Teknologi Malaysia (UTM) as well as Institut Sultan Iskandar (ISI) for giving me the chances to further my study in doctoral degree and financial supports enabled me to complete my studies. In particular, I would like to thank all of the staff at Faculty of Built Environment, UTM and ISI for kindly supports and assistance.

My sincere gratitude also goes to those who have provided assistance in many ways at various occasions: Prof. Dr Raja Nafida, Assoc. Prof. Dr Gurupiah Mursib, Prof Mahbob Salim, Associate Prof Dr Tetsu Kubota, Dr. Doris Hooi Chyee Toe, Dr. Lim Yaik Wah, Dr. Malsiah Hamid, Dr Eka Sediadi, Dr. Norazam Othman, Madam Lily Ting, Madam Low Yun Ho, Dr. Mohamad Baharvand, Dr. Lim Yong Long, Dr. Hazrina Haja, Dr. Yakubu Dodo, Dr Khairul Anwar bin Mohamed Khaidzir, Puan Halimah Yahya, Ar. Hong Lim Foo, Ar Liaw Kok Chuan, Ar. Khairil Mohammad Halim, Ar. Samsiah Abdullah, Dr. Sarajul Fikri Mohamed, Dr Saidin Misnan, Dr. Fadhlina Ahmad, Assoc.Prof. Dr Ismail Said, Ms Ku Yee Kee, Dr Zamani Ahmad, Dr Irina Safitri Zen, Prof Jamaliah Idris, Dr. Malsiah Hamid, Puan Shahilah Hamdan, Puan Zubaidah Abdul Ghani, Ar. Lau Mingi, Ar. Tang Suche and other mentors from different major and different institutions.

Other than that, I would like to express my gratitude to my dear family members, and relatives for their patience, sacrifices, understanding, constant concern, moral supports and prayers throughout my study. I would like to thank all my friends, coursemates, peers, and colleagues: Tim Bong Ted Shoon, Farhana binti Mohd Razif, Liew Wai Loan, Dr. Melissa Chong, Dr. Ewen Choon, Cindy Lee, Sheاون Chen Lee, Ooi Hong Giap, Tiffany Song, Tammy Teo, Terry Chong, Kho Hiap Yee, Lau Meng Lin, Dr. Chai Siaw Ling, Dr. Lee Nian Yan, Dr. Eedzah, Fang Pei Fen, Low Weng Suan, Pei Yee Lau, Jennifer Sim, Chia Woan Jiun, Yeo Sze Siew, Fazilah Ali, Nooraishikin Minhat, Norhayati Ramli, Subaidah Mahmee, Norlaily Ab Rahim, Mohd Nor'alfathu Norjan, Sunarsih, Hamiza Ahmad Tajuddin, vanessa Lungan Lai, Faizal Salleh, Zurie Ismail, Nurzaimah Rusly, Mahanim Makhrojiti, Azura Talib, Mohd Azuan Zakaria, Scott Joseph, and many more for their constant concern and moral supports.

Finally, I would like to thank The Creator of the Universe for giving me patience, courage to overcome fears and challenges, strength. Mercy, guidance and blessings to face all challenges in life and complete this study successfully.

ABSTRACT

Terraced housing in Malaysia hardly provides its occupants with thermal comfort. More often than not, the occupants need to rely on mechanical cooling, which contributes to outdoor heat dissipation that leads to urban heat island effect. Alternatively, encouraging natural ventilation can eliminate heat from indoor environment. Unfortunately, with static outdoor air condition and lack of windows at terraced houses, the conventional ventilation technique does not work well, even for houses with an air well. Hence, this research investigates ways to maximize natural ventilation in terraced housing by exploring the air well and louvre's passive design. By adopting an existing single storey house with air well in Kuching, Sarawak, the existing indoor environmental conditions and thermal performance was monitored using scientific equipment, namely HOBO U12 air temperature and air humidity, HOBO U12 anemometer and Delta Ohm HD32.3 Wet Bulb Globe Temperature meter for six-month duration. The collected data was used as background study and benchmark for simulation. In this case, a simulation software – DesignBuilder® was utilised. The field study illustrated that there is a need to improve indoor thermal environment. Thus, the study further proposed improvement strategies to the existing case study house. The proposition is to turn the existing air well into solar chimney to take advantages of constant and available solar radiation for stack ventilation. The study also considers the effect of louvre windows to further accelerate the wind movement. The results suggest that the enhanced air well with proposed louvres were able to improve the indoor room air velocity and reduce air temperature. The enhanced air well with 3.5m height, 1.0m air gap width, 2.0m length with 45° tilted room opening louvres with 167mm slate gap were able to induce higher air velocity. During the highest air temperature hour, the indoor air velocity in existing test room increased from 0.02m/s in the existing condition to the range of 0.15 to 0.40m/s in the hottest month while during the lowest temperature month, the air velocity could be increased to the range of 0.25 to 0.53m/s. Installation of louvres at test room with solar chimney increases the percentage average air velocity of 16.5% and reduce percentage average air temperature to 1.1% compared to test room with solar chimney only. For indoor room temperature, the greatest mean air temperature could be reduced by up to 1.8°C compared to the outdoor air temperature during the hottest day. The findings revealed that the proposed air well and louvres could enhance the thermal and ventilation performance under Malaysia tropical climate.

ABSTRAK

Rumah teres di Malaysia mengalami masalah keselesaan terma. Keadaan udara statik dalam rumah teres menyebabkan suhu udara dalaman meningkat. Dengan itu, penghuni perlu bergantung kepada penyejukan mekanikal untuk memberi keselesaan terma tetapi menyumbang kepada kesan pulau haba. Sebagai alternatif, penggunaan strategi pengudaraan semulajadi untuk menyingkirkan haba dalam perumahan adalah digalakkan. Disebabkan oleh keadaan udara statik di persekitaran luar, teknik pengudaraan konvensional tidak berkesan bagi bilik yang berventilasi tunggal walaupun wujudnya cerobong udara. Keadaan terma dalaman dan keselesaan terma telah dipantau dengan perakam suhu dan kelembapan udara HOBO U12, anemometer HOBO U12, Delta Ohm HD32.3 meter selama enam bulan di rumah kajian di Kuching, Sarawak. Keputusan kajian tapak menggambarkan keselesaan terma adalah penting untuk dalaman bangunan. Oleh itu, kajian ini mencadangkan strategi penambahbaikan ke atas rumah kajian bercerobong udara yang sedia ada kepada cerobong solar dengan memanfaatkan tenaga suria untuk mewujudkan kesan timbunan ventilasi. Kajian ini juga menilai kesan ram tingkap untuk mempercepatkan pergerakan angin. Selain itu, perisian simulasi komputer DesignBuilder® telah digunakan untuk mengkaji usul dan menilai beberapa pembolehubah reka bentuk berkenaan dengan cerobong solar dan reka bentuk tingkap ram. Keputusan menunjukkan bahawa pengudaraan dalaman dipertingkatkan dengan berkesan dengan cadangan pemasangan tingkap ram yang dapat meningkatkan halaju udara dalaman. Versi cerobong solar cadangan berukuran tinggi 3.5m, lebar 1.0 m, panjang 2.0m dan slat ram berjuring 167mm berkecondongan 45° dapat meningkatkan halaju udara dalam keadaan udara luar statik. Pada hari panas, halaju udara dalaman dipertingkatkan daripada 0.02m/s dalam keadaan normal kepada 0.15 hingga 0.40m/s manakala pada bulan yang bercuaca sejuk, halaju udara boleh dipertingkatkan kepada 0.25 hingga 0.53m /s. Pemasangan ram di bilik kajian dengan cerobong solar meningkatkan peratusan purata halaju udara sebanyak 16.5% dan mengurangkan peratusan purata suhu udara 1.1% berbanding dengan bilik ujian dengan cerobong solar sahaja. Untuk bilik tertutup, suhu udara minimum tertinggi dapat dikurangkan sebanyak 1.8 °C berbanding suhu luaran pada siang hari terpanas. Penemuan kajian ini menunjukkan bahawa pengudaraan dalaman dapat dipertingkatkan dengan gabungan ram dan cerobong solar. Model tersebut dapat meningkatkan prestasi terma dan pengudaraan dalam iklim tropika Malaysia.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xix
	LIST OF FIGURES	xxii
	LIST OF SYMBOLS	xxxv
	LIST OF ABBREVIATIONS	xxxvii
	LIST OF APPENDICES	xxxix
1	INTRODUCTION	1
	1.1 Introduction	1
	1.2 Problem Statements	1
	1.3 Research Statements	2
	1.4 Research Objectives	5
	1.5 Research Questions	6
	1.6 Scope of Research and limitation of Study	6
	1.7 Significance of Study	7
	1.8 Research Hypothesis	8
	1.9 Thesis Organisation	9

2	TROPICAL CLIMATE IN MALAYSIA CONTEXT COMFORT CONDITION	11
2.1	Introduction- The climate condition of Malaysia	11
2.1.1	Climatic condition of major cities in Malaysia	12
2.1.2	Wind climate condition	14
2.1.2.1	Terrain	15
2.1.2.2	Vegetation and urban proximity conditions	19
2.1.3	Solar radiation	21
2.1.3.1	Solar intensity	21
2.1.3.2	Solar position	22
2.1.3.3	Solar geometry	22
2.1.3.4	Solar times	23
2.1.3.5	Sky conditions	23
2.1.4	Air temperature and relative humidity	23
2.2	Climate condition of Malaysia	24
2.2.1	Wind condition	24
2.2.2	Solar radiation	26
2.2.3	Air temperature and relative humidity	27
2.3	Analysis of climatic data at Kuching, Sarawak, East Malaysia	29
2.3.1	Wind climate	30
2.3.2	Solar radiation	32
2.3.3	Air temperature and relative humidity data analysis	34
2.4	Thermal comfort	35
2.4.1	Definition of thermal comfort	37
2.4.2	Thermal comfort parameters	38
2.4.3	Thermal comfort approaches	40
2.4.3.1	Heat-balance approach	40
2.4.3.2	Adaptive approach	44
2.4.3.3	ASHRAE Standard 55-2004 and Thermal comfort model	45

2.5	Background study of thermal comfort in tropical hot-humid climate	47
2.6	Background study of thermal comfort in Malaysia tropics context	53
2.7	Types of thermal comfort index	58
2.7.1	Standard effective temperature (SET)	58
2.7.2	Effective Temperature (ET)	59
2.7.3	Corrected Effective Temperature (CET)	59
2.7.4	Operative Temperature (OT)	60
2.7.5	Mean Radiant Temperature (MRT)	61
2.8	Ventilation of comfort zone in Malaysia based on case study (Kuching meteorological data set)	62
2.9	Summary	66
3	NATURAL VENTILATION AND SOLAR CHIMNEY	68
3.1	Introduction	68
3.1.1	Sustainable Building Criteria and Natural Ventilation	70
3.1.2	Thermal comfort and natural ventilation	71
3.2	Natural ventilated building in Malaysia context	72
3.2.1	Mechanism driving forces of natural ventilation	73
3.2.1.1	Wind-driven natural ventilation	74
3.2.1.2	Buoyancy-driven (temperature differences) natural ventilation	77
3.2.2	Strategies and techniques in natural ventilation	77
3.2.2.1	Single sided ventilation	78
3.2.2.2	Cross ventilation	80
3.2.2.3	Stack ventilation	82
3.2.3	Review related to natural ventilation study on Malaysia terrace houses	84
3.2.3.1	Terrace house in Malaysia	84
3.2.3.1.1	The urbanisation factor	85
3.2.3.1.2	Background study of terraced house in Malaysia	88

	3.2.3.1.3	Classification of typical house plan in Malaysia	91
	3.2.3.1.4	Layout and fenestration study of terrace housing in Malaysia	92
	3.2.3.1.5	Common terrace housing materials in Malaysia	95
	3.2.3.1.6	Building regulation and standard	96
	3.2.3.1.7	Topography and terrain aspect	98
	3.2.3.1.8	Ventilation strategy	100
3.3		Solar chimney	101
	3.3.1	The brief history of solar chimney	102
	3.3.2	Solar chimney ventilation	103
	3.3.3	Recent research on solar chimney	106
	3.3.4	Generic forms of solar chimney	110
	3.3.4.1	Vertical solar chimney	113
	3.3.4.2	Roof solar chimney	115
	3.3.4.3	Wall solar chimney	117
	3.3.4.4	Integrated solar chimney	120
	3.3.5	Important parameters in solar chimney study	122
	3.3.5.1	Solar chimney height	122
	3.3.5.2	Solar chimney width gap	124
	3.3.5.3	Solar chimney material	125
	3.3.5.4	Solar chimney openings	126
	3.3.5.5	Solar chimney thickness	127
	3.3.6	Advantages and disadvantages of solar chimney	128
	3.3.7	Limitation of solar chimney	129
	3.3.8	Problems facing by solar chimney design in hot humid climate	130
	3.3.9	Examples of solar chimney building	131
	3.3.9.1	BCA Academy Building, Singapore	131

3.3.9.2	Solar chimney house in Penang, Malaysia	132
3.3.9.3	Solar chimney house in Malang, Indonesia	134
3.4	Louvres and natural ventilation	136
3.4.1	Type of louvres	137
3.4.1.1	Exterior Louvres	138
3.4.1.2	Interior Louvres	139
3.4.2	Previous research on air flow via louvres	140
3.5	Summary	142
4	RESEARCH METHODOLOGY	145
4.1	Introduction	145
4.2	Need of the experiment	146
4.3	Study methods of natural ventilation	148
4.3.1	Small-scale experimental model	148
4.3.2	Full-scale experimental model	149
4.3.3	Analytical study model	151
4.3.4	Empirical model	152
4.3.5	Multizone model	153
4.3.6	Zonal Model	154
4.3.7	Building simulation- Computational Fluid Dynamic (CFD) analytical model	155
4.3.7.1	Computational Fluid Dynamic (CFD) as methodology for natural ventilation study	156
4.3.7.2	Application of CFD in solar chimney thermal performance study	158
4.4	Selected software	161
4.4.1	Building Simulation (BS) Programme	164
4.4.1.1	EnergyPlus	164
4.4.1.2	Verification and validation of DesignBuilder	170
4.4.2	Software Validation and Field Measurement Setup	174
4.4.2.1	Field Measurement Setup for Validation	174

	4.4.2.2 CFD setup for validation	176
	4.4.2.3 CFD grid quality	177
	4.4.3 Results and discussion of validation	179
4.5	DesignBuilder modelling and calculations of simulation	183
	4.5.2 Limitation of DesignBuilder	185
	4.5.3 Model specifications	186
	4.5.3.1 Model geometry	186
	4.5.3.2 Field measurement	188
	4.5.3.3 Simulation modelling parameters	193
	4.5.3.4 Weather data	194
	4.5.3.5 Parameters in experiments – analysis of 10 years weather data in Kuching	194
	4.5.3.6 Parameters in experiments – comparison of the weather data year 2012 and 2013	197
	4.5.3.7 Boundary condition for optimisation of solar chimney	199
4.6	Development of solar chimney and window louvres model – simulations and parameters optimisation	206
4.7	Limitation of research	207
4.8	Summary	208
5	RESULTS, ANALYSIS AND RESEARCH FINDINGS: FIELD MEASUREMENT	210
	5.1 Introductions	210
	5.2 Performance of typical single storey terrace house in Malaysia: Field measurement at case study house in Kuching, Sarawak.	210
	5.2.1 Comparative study of field measurement and meteorological data (Outdoor air temperature)	211
	5.2.2 Selected hot days (10-24 June 2014)	213
	5.2.3 Selected cold days (11-24 Jan 2014)	215
	5.2.4 Selected normal days (31 Jan- 13 Feb)	218
	5.2.5 Field study results: outdoor climate	221
	5.2.5.1 Daily max	221
	5.2.5.1.1 Air temperature	221

	5.2.5.1.2	Solar radiation	222
	5.2.5.1.3	Wind velocity	224
	5.2.5.1.4	Relative humidity	225
	5.2.5.2	Daily Mean	227
	5.2.5.2.1	Air temperature	227
	5.2.5.2.2	Relative humidity	228
	5.2.5.2.3	Wind velocity and wind direction	229
	5.2.5.2.4	Solar radiation	231
5.2.6		Field study results: comparative study of min, mean and max of thermal performance between air well, test room and outdoor climate condition	232
	5.2.6.1	Comparison of daily max air temperature and relative humidity for outdoor, test room and air well from 3 Jan to 29 June	233
	5.2.6.2	Comparison of daily mean air temperature and relative humidity for outdoor, test room and air well from 3 Jan to 29 June	235
	5.2.6.3	Comparison between max, mean and min for air temperature, relative humidity and air velocity	237
5.2.7		Comparative study of mean and max temperature difference between air well, test room and outdoor for selected period and selected day.	240
	5.2.7.1	Max and mean air temperature and relative humidity for selected hot days' period (10 June to 24 June) and selected hot day (19 June 2014)	240
	5.2.7.2	Max and mean air temperature and relative humidity for selected cold days' period (11 Jan to 24 Jan) and selected cold day (24 Jan 2014)	244
	5.2.7.3	Max and mean air temperature and relative humidity for selected normal days' period (31 Jan to 13 Feb) and selected normal day (2 Feb 2014)	248

5.2.8	Performance evaluation of mean daily radiant mean temperature, predicted mean vote (PMV) and predicted percentage of dissatisfaction (PPD) of the test room	251
5.2.8.1	PMV and PPD for selected hot, cold and normal day	255
5.2.9	Thermal Performance of Existing Single Storey Terraced House in Malaysia Context	257
5.2.10	Summary and highlight for improvement for current thermal performance of typical single storey terrace house	260
6	EXPLORATION OF CONFIGURATION FOR SOLAR CHIMNEY AND LOUVRES GEOMETRY IN SELECTED CLIMATIC CONDITION	261
6.1	Introduction	261
6.2	Configuration of louvres model in selected climatic condition	262
6.2.1	Comparison results for louvre's slate gap	263
6.2.2	Comparison results for louvre's angle	267
6.2.2.1	Air flow distribution in flow pattern and velocity aspects	267
6.2.2.2	V_i/V_e ratio as upstream air velocity at opening (inlet) velocity (V_i)	273
6.2.3	Comparison results before and after installation of louvres	277
6.2.4	Comparison between indoor thermal performance with and without louvres on design days (21 Mac, 21 June, 21 September and 21 December)	279
6.3	Modification of air well model in selected climatic condition	286
6.3.1	Extended air well height	288
6.3.2	Air well width gap	291
6.3.3	Air well length	296
6.4	Results for integrated louvres and air well geometry in design days (21 March, 21 June, 21 September and 21 December)	300
6.4.1	Optimized air well with clear opening	300

6.4.2	Optimized air well with louvres opening	305
6.5	Summary	310
7	CONCLUSION	314
7.1	Introduction	314
7.2	Thesis Summary	314
7.3	Research Conclusions	315
7.4	Research Contributions	317
7.5	Suggestions for further research	319
	REFERENCES	323
	APPENDICES	332
	Appendix A	332
	Appendix B	333
	Appendix C	334
	Appendix D	335
	Appendix E	336
	Appendix F	337
	Appendix G	337
	Appendix H	342
	Appendix I	343
	Appendix J	347
	Appendix K	348
	Appendix L	349
	Appendix M	350

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Typical values of Z_g , α , and Z_0 for urban condition ((ASCE), 1999; Ansley <i>et al.</i> , 1977; Cook, 1985; Givoni, 1998) as cited by (Sapian, 2004) and (Nugroho, 2007c)	17
2.2	Suggested values of Z_g and α for various categories of terrain conditions. (ASHRAE, 2005)	17
2.3	ABL characteristics for different types of terrain roughness (((ASCE), 1999) as cited by (Nugroho, 2007c))	18
2.4	Summary of wind effects on people based on the Beaufort Scale (adopted from(Penwarden AD and AFE, 1975) as cited in (Tahbaz, 2009)	20
2.5	Summary of wind flow over Malaysia based on (Ismail, 1996a) (Islam <i>et al.</i> , 2011; K.Sopian <i>et al.</i> , 1994; Malaysia, 2013b; Nugroho, 2007c)	26
2.6	ASHRAE seven point thermal sensation scale (Djongyang <i>et al.</i> , 2010)	42
2.7	Comparison of ASHRAE and Bedford scale (Auliciems and Szokolay, 2007)	43
2.8	Summary of review of thermal comfort studies in tropics. (Toe, 2013b)	51
2.9	Neutral temperature obtained from recent thermal comfort studies in countries with hot-humid climate (Kwong <i>et al.</i> , 2014)	52
2.10	Mean air speed for the residential building in Malaysia (Azni Z.A. <i>et al.</i> , 2005; C.H.Lim <i>et al.</i> , 2011)	55
2.11	Criteria for assessing wind-induced discomfort considering temperature effect (at 1.5m height) [<i>quoted from</i> (Murakami S and Y., 1985) <i>and cited by</i> (Kubota <i>et al.</i> , 2008)]	55
2.12	Thermal comfort studies in Malaysia [<i>quoted from</i> (Ali, 2004) <i>and cited by</i> (Al-Obaidi and Woods, 2006)]	57

2.13	Function of ventilation in building (Nugroho, 2007c)	62
3.1	Terrain factors for equation (2) (Awbi, 2010)	75
3.2	Common building materials for the existing terraced houses in Malaysia (Toe, 2013a)	95
3.3	Selected research on solar chimney – the summary (Khanal and Lei, 2011)	109
3.4	Solar heating and cooling methods in active and passive building designs (Chan <i>et al.</i> , 2010)	112
3.5	Exterior Louvres type of fenestration (Chandrashekar, 2010b)	138
3.6	Interior Louvres type of fenestration (Chandrashekar, 2010b)	139
4.1	DesignBuilder capabilities and features modified from (Attia, 2011b) by (Baharvand, 2014)	161
4.2	Results of the NZEB Tools Matrix (Attia, 2011a)	163
4.3	Capabilities of EnergyPlus in building simulation (U.S Department of Energy, 2011)	166
4.4	DesignBuilder Capabilities	168
4.5	The measurement instruments, parameters and time intervals	176
4.6	Field measurement input data for CFD simulation	176
4.7	Coordinate of monitoring points as shown in Figure 4-7	178
4.8	Grid Statistic from DesignBuilder. The refined grid with max aspect ratio 4 shows better agreement of grid resolution and total number of cells, which produced more accurate CFD results.	179
4.9	Description of measurement instruments used in field measurement	192
4.10	Construction materials, reference U-values and thermal conductivity of the base model	193
4.11	Summary of highest and lowest monthly mean air temperature and its monthly mean air speed for ten years data (2003-2013), year 2012 and year 2013 (Malaysia, 2013b)	199
4.12	ABL characteristics for different types of terrain roughness ((ASCE), 1999) as cited by (Nugroho, 2007c))	203
4.13	Boundary condition for simulation	206
5.1	Summary of field measurement – Outdoor weather data for selected days (hot, cold and normal days)	258

5.2	Summary of field measurement – thermal performance of test room for selected days (hot, cold and normal days)	258
5.3	Summary of field measurement – thermal performance of air well for selected days (hot, cold and normal days)	258
5.4	Summary of field measurement – Outdoor weather data for selected day (hot, cold and normal day)	259
5.5	Summary of field measurement – thermal performance of test room for selected day (hot, cold and normal day)	259
5.6	Summary of field measurement – thermal performance of air well for selected day (hot, cold and normal day)	259
6.1	Flow characteristics in the test room model determined by Reynolds number (where LF= laminar flow; TR= transitional flow and TB= turbulent flow)	271
6.2	Internal air temperature and air velocity at the test room with window louvres	285
6.3	Internal air temperature and air velocity at the test room with enhanced solar chimney	309

LIST OF FIGURES

FIGURE NO	TITLE	PAGE
1.1	Benefits of solar chimney application in residential building (Nugroho, 2006)	8
2.1	The gradient of boundary layer (Fazeli, 2014)	16
2.2	Solar Radiation Distribution in Malaysia (Ahmad <i>et al.</i> , 2013)	27
2.3	Dry bulb air temperature of Subang Airport from 1975-1995 (C.K.Tang, 2012)	28
2.4	Relative humidity of Subang Airport from 1975 to 1995 (C.K.Tang, 2012)	29
2.5	The frequency of wind direction and monthly mean wind speed of year 2013 in Kuching, Sarawak. (Source: Kuching meteorological station)	30
2.6	Wind rose in Kuching, Sarawak for year 2013 (Source: Kuching meteorological station)	31
2.7	Comparison of the monthly wind speed year 2013 (Source: Kuching meteorological station)	32
2.8	Comparison of monthly mean and max solar radiation (2013) (Source: Kuching meteorological station)	33
2.9	Average daily sunshine hour by month for selected cities in Sarawak. (Sarawak Energy, 2013)	34
2.10	Thermal comfort factors (Auliciems and Szokolay, 2007)	39
2.11	Insulation of clothing in clo units (INNOVA,1997)	40
2.12	Relationship between PMV and PPD (Djongyang et al., 2010)	43
2.13	Required air speed to offset increased air temperature (ASHRAE, 2004)	46
2.14	Proposed operative temperatures in naturally ventilated spaces by ASHRAE Standard 55 2004 (ASHRAE, 2004)	47
2.15	Modified Olgay's bioclimatic chart for warm climates region (Szokolay, 2008)	48

2.16	Modified psychometric chart for naturally ventilated building for Malaysia hot humid climate. The extended air velocity of 1m/s and 1.5m/s increase the comfort zone for indoor environment in tropical climate with high humidity and temperature. (Abdul Rahman, 1999)	49
2.17	Monthly dry-bulb air temperature on the respective days	64
2.18	The comfort zone for Kuching climate data 2013 based on dry bulb temperature. (The shaded area within two vertical thick green line indicated as the ventilation comfort zone suggested by ASHRAE 55-2004)	65
3.1	Wind induced natural ventilation in building and among buildings. (Quoted from (Jones, 2001) by (Angelis, 2005))	76
3.2	Schematic diagrams show (a) single-sided single opening and (b) single-sided double opening (KJ, 2007)	79
3.3	Schematic diagrams shows the cross ventilation mechanism and its effective depth (KJ, 2007)	81
3.4	Stack ventilation via (a) solar chimney and via (b) atrium (Tong Yang and J.Clements-Croome, 2012)	82
3.5	Rate of urbanisation in Malaysia by (Malaysia, 2010) cited from (Borhanazad <i>et al.</i> , 2013)	85
3.6	Urban housing units distribution and percentage in each states of Malaysia in 2010 by (Malaysia, 2012), cited from (Toe, 2013b)	86
3.7	Percentage of total housing unit type in Malaysia urban area of year 2010. (Malaysia, 2012)	87
3.8	Percentage of total housing unit by construction material of outer walls for terraced houses in urban areas in Malaysia of year 2010. (Malaysia, 2012)	88
3.9	The image shows the range of houses land plot for high end terraced housing, typical terraced house, low cost plus and low cost terraced house. (Malaysia, 2013a)	90
3.10	Typical building height of single storey terrace house in Malaysia	90
3.11	Classification of typical Malaysian terraced houses by internal layout. (Toe, 2008)	91
3.12	Typical internal layout of single storey terraced housing	92
3.13	Possible position of air-well of single storey terrace house (Nugroho, 2007c)	93
3.14	Possible typical window sizes and position of typical single storey terrace house	94
3.15	The percentage of solar chimney study approaches based on literature review by (Khanal and Lei, 2011)	108

3.16	Opaque solar facades classification (Quesada <i>et al.</i> , 2012)	111
3.17	Vertical Solar Chimney house by (Agung Murti Nugroho and Ahmad, 2014)	114
3.18	Vertical solar chimney in Institution, Singapore by (Wong <i>et al.</i> , 2012)	114
3.19	Roof solar chimney developed by (Hirunlabh <i>et al.</i> , 2001)	115
3.20	Experimental set up for roof solar chimney by (Mathur <i>et al.</i> , 2006b)	115
3.21	Schematic drawings of three types of roof solar chimney and two types of typical house roofing by (J.Khedari <i>et al.</i> , 2011)	117
3.22	Different types of wall mounted solar chimney (a) solar wall without ventilation vent, (b) solar wall with winter mode (air-thermo circulation vent), (c) solar wall with cross ventilation mode (summer mode) (Stazi <i>et al.</i> , 2012)	118
3.23	Schematic diagram shows the incorporated solar chimney with evaporative system (Maerefat and Haghighi, 2010a)	120
3.24	Schematic diagram shows displacement ventilation generated by solar chimney and fan.(Duan <i>et al.</i> , 2015)	121
3.25	Schematic diagram shows the experimental set-up for light pipe chimney. (Taengchum <i>et al.</i> , 2013)	121
3.26	Important parameters of solar chimney (Khanal and Lei, 2014)	122
3.27	Solar Chimney at BCA building (Wittkopf, 2015)	132
3.28	Floor plan of the Penang house with solar chimney	133
3.29	Section of the Penang solar chimney house	133
3.30	The solar chimney openings (left) and the exterior look of the terrace house in Penang (right)	134
3.31	Solar Chimney House at Malang, Indonesia (Agung Murti Nugroho and Ahmad, 2014)	135
3.32	Floor plan (top) and Section (bottom) of the solar chimney house (Agung Murti Nugroho and Ahmad, 2014)	135
3.33	Horizontal fixed louvres by (Datta, 2001) (I = louvre slate length; s= vertical distance between slate)	141
4.1	Summary of the methodology used in investigating the effective solar chimney cum louvres geometry for buoyancy induced natural ventilation in terrace house	147
4.2	Conceptual drawing of the steady ventilation patterns in test room heated up by the distributed source and ventilated with stack effect via two openings. (Fitzgerald and Woods, 2008)	151

4.3	The statistic chart of ventilation performance study in buildings by (Chen, 2009b). Application of CFD in the ventilation study in buildings increase significantly compared to the others.	157
4.4	Numbers of paper published from 2002 to 2007 in journal papers which applied CFD as prediction tool for ventilation performance in domestic buildings (Chen, 2009b)	157
4.5	Overall EnergyPlus Structure (Drury B. Crawleya <i>et al.</i> , 2001)	167
4.6	The positions of HOBO U30 outdoor weather data logger (o) as well as HOBO U12 data logger (X) and test room position (hatched area)	175
4.7	Monitoring points of test room and solar chimney in CFD model	178
4.8	Grid resolution from DesignBuilder CFD simulation. Key areas are refined with fine resolution grid to speed up the CFD simulation speed and obtain accurate result for monitoring points.	179
4.9	Measured outdoor relative humidity and air temperature	181
4.10	Measured outdoor air velocity and solar radiation	181
4.11	Measured outdoor air velocity, measured test room air velocity and simulated test room air velocity	182
4.12	Measured outdoor air temperature, measured test room air temperature and simulated test room air temperature	182
4.13	The example of converged residuals of CFD simulation. The convergence represents the steady state of CFD analysis, which means the analysis has reached its solutions in the numerical calculations.	185
4.14	Types of CFD modelling approach (coupled and decoupled) in studying natural ventilation in building. (Ramponi and Blocken, 2012b)	186
4.15	The brief research framework and stages involved in this study (Leng <i>et al.</i> , 2014)	187
4.16	Field measurement/ case study house floor plan (top) and section (bottom). The hatched areas indicate the focus area in this research study (simulation)	187
4.17	The highlighted area indicated the location of case study house – Taman Yen Yen, Jalan Matang, Kuching, which is 5.65km away from Kuching city. (Image courtesy from Google Map)	188
4.18	The Occupied Zone – Plan View (Chilled Beams and Ceilings Association, 2013)	189

4.19	The Occupied Zone: Sitting or Standing (Chilled Beams and Ceilings Association, 2013)	190
4.20	Outdoor field measurement setup (HOBO U30 outdoor weather data logger)	191
4.21	HOBO U12 Data logger to measure the air temperature and air humidity	191
4.22	HOBO U12 air velocity unit to measure the indoor air speed.	191
4.23	DELTA OHM HD32.3 PMV en PPD unit to measure indoor air temperature, humidity, air velocity and globe temperature	192
4.24	Mean Air Temperature of Kuching from 2003 to 2013	195
4.25	Average of monthly mean max air temperature in Kuching from 2003 to 2013	196
4.26	Average of monthly mean air velocity in Kuching from 2003 to 2013	196
4.27	Daily average and diurnal average Dry bulb air temperature and relative humidity of Kuching year 2012 and 2013	198
4.28	Monthly mean, diurnal daily mean and monthly mode wind speed in Kuching year 2012 and 2013	198
4.29	Monthly max, mean and min of air temperature 2013 in Kuching. Optimisation of solar chimney configurations' parameter would be based on the mean max air temperature. 34°C happened to be the mean max temperature of 2013	200
4.30	Frequency of monthly mean max air temperature of year 2013, Kuching would determine the specific month for boundary condition day. September 2013 appeared to be the month with most frequent numbers of mean max air temperature (34°C)	200
4.31	Solar radiation gives direct effect to air temperature. The monthly max, mean and min of the solar radiation would be compared with air temperature to determine the boundary condition day	201
4.32	Frequency of monthly mean max solar radiation of year 2013, Kuching would determine the specific month for boundary condition day. September 2013 appeared to be the month with most frequent numbers of mean max solar radiation (988W/m ²)	201
4.33	Monthly mean, max, mode and min air velocity in Kuching were figured out to understand the wind climate of the selected field study site. Wind velocity of 1.2m/s appeared to be the most frequent air velocity at 12.2m height (Kuching meteorological department)	202

4.34	Schematic sections of case study house with research sequences (A to D)	206
4.35	Modelling and optimisation sequences with tested parameters in this study	207
5.1	Comparison between overall mean measured air temperature and mean weather data throughout field measurement period (3 Jan to 27 June 2014)	212
5.2	Comparison of overall max measured and max weather data air temperature and relative humidity throughout the field measurement (3 Jan to 27 June 2014)	212
5.3	Comparative study of field measurement and meteorological data for selected hot days (10 June to 24 June 2014) throughout the study period.	214
5.4	Comparative study of field measurement and meteorological data for selected hot day (19 June 2014) throughout the study period.	214
5.5	Comparative study of field measurement and meteorological data for selected cold days (11 Jan to 24 Jan 2014) throughout the study period.	217
5.6	Comparative study of field measurement and meteorological data for selected cold day (24 Feb 2014) throughout the study period.	217
5.7	Comparative study of field measurement and meteorological data for selected normal days (31 Jan to 13 Feb 2014) throughout the study period.	218
5.8	Comparative study of field measurement and meteorological data for selected normal day (2 Feb 2014) throughout the study period.	219
5.9	Daily max outdoor air temperature throughout the field measurement (3 Jan to 29 June 2014)	222
5.10	Daily max solar radiation throughout the field measurement (3 Jan to 29 June 2014)	224
5.11	Daily max solar radiation throughout the field measurement period (3 Jan to 29 June 2014)	225
5.12	Daily max solar radiation throughout the field measurement period(3 Jan to 29 June 2014)	226
5.13	Daily mean air temperature throughout the field experiment period(3 Jan to 29 June 2014)	228
5.14	Daily mean relative humidity throughout the field measurement period(3 Jan to 29 June 2014)	229
5.15	Daily mean wind direction and wind velocity throughout the field measurement (3 Jan to 29 June 2014)	230

5.16	Daily mean solar radiation throughout the field measurement (3 Jan to 29 June 2014)	231
5.17	Regression for solar radiation and air temperature throughout field experiment	232
5.18	Daily max air temperature for outdoor, test room and air well throughout the field measurement (3 Jan to 29 June 2014)	233
5.19	Daily max relative humidity for outdoor, test room and air well throughout the field measurement (3 Jan to 29 June 2014)	234
5.20	Daily mean air temperature for outdoor, test room and air well from 3 Jan to 29 June 2014	235
5.21	Daily mean relative humidity for outdoor, test room and air well from 3 Jan to 29 June 2014	236
5.22	The comparison between max, mean and min of air temperature taken in field measurement for outdoor, test room and air well	237
5.23	The comparison between max, mean and min of relative humidity taken in field measurement for outdoor, test room and air well	237
5.24	The comparison between max, mean and min of air velocity taken in field measurement for outdoor and test room	238
5.25	Max air temperature and relative humidity for selected hot days throughout field measurement days (10 June to 24 June 2014)	240
5.26	Max air temperature and relative humidity for selected hot day (19 June 2014)	241
5.27	Mean air temperature and relative humidity for selected hot days throughout the field measurement (10 June to 24 June 2014)	241
5.28	Mean air temperature and relative humidity for selected hot day (19 June 2014)	242
5.29	Max air temperature and relative humidity for selected cold days (31 Jan to 13 Feb 2014)	245
5.30	Max air temperature and relative humidity for selected cold day (24 Jan 2014)	245
5.31	Mean air temperature and relative humidity for selected cold days throughout field measurement period (31 Jan to 13 Feb 2014)	246
5.32	Mean air temperature and relative humidity for selected cold day (24 Jan 2014)	247

5.33	Max air temperature and relative humidity for selected normal days (31 Jan to 13 Feb 2014)	248
5.34	Max air temperature for selected normal day (2 Feb 2014)	249
5.35	Mean air temperature and relative humidity for selected normal days throughout field measurement period (31 Jan to 13 Feb 2014)	250
5.36	Mean air temperature and relative humidity for selected normal day (2 Feb 2014)	250
5.37	Overall mean radiant temperature and air temperature of test room	252
5.38	Comparison between mean, max and min for test room air temperature and mean radiant air temperature throughout the field measurement (3 Jan to 29 June 2014)	253
5.39	Comparison between mean, max and min for test room PMV and PPD throughout the field measurement (3 Jan to 29 June 2014)	254
5.40	Predicted Percentage of Dissatisfaction (PPD) and Predicted Mean Vote (PMV) for selected hot, normal and cold day throughout field experiment	255
5.41	Mean radiant temperature and air temperature for selected hot, normal and cold day throughout field measurement	256
6.1	Monitoring points A represent outdoor, point B, C and D represents the test room while point E represents the air well space.	263
6.2	Louvres gap configuration	264
6.3	Comparison of air flow velocity between 8 types of slate gap	264
6.4	Jet flow via the louvres slate (left) and Venturi effect between louvre slate where $V_1 < V_2 > V_3$ (right) (Chandrashekar, 2010b)	266
6.5	Air flow pattern induced by different air gap width. (green line=0.54m/s; dark brown line= 0.75m/s)	267
6.6	Laminar flow, turbulent flow and separation flow around the sharp edges of slates (Hepperle, 2006)	269
6.7	Types of flow characteristics (Chandrashekar, 2010b)	270
6.8	Comparison of indoor airflow pattern between four types of louvres angle	272
6.9	Static regain by duct velocity profiles (Meyer, 2005)	273
6.10	Comparison of internal (V_i) and external air velocity (V_e) ratio for different types of louvres	274
6.11	location of V_i (interior air velocity) and V_e (exterior air velocity)	274

6.12	Air speed required to offset increases air temperature to achieve thermal comfort (Fountain and Arens, 1993)	276
6.13	Air speed between monitoring point caused by different louvres angle	276
6.14	Air flow pattern for test room (before and after installation of louvres)	277
6.15	Air velocity for test room before installation of louvres angle 45 degree	278
6.16	Air velocity for test room after installation of louvres angle 45 degree	279
6.17	Comparison between indoor thermal performance with and without louvres on 21 March	280
6.18	Comparison between indoor thermal performance with and without louvres on 21 June	282
6.19	Comparison between indoor thermal performance with and without louvres on 21 September	283
6.20	Comparison between indoor thermal performance with and without louvres on 21 December	284
6.21	Ventilation performance of existing room	285
6.22	Ventilation performance of the test room with louvres	285
6.23	Monitoring point for air well/ solar chimney model in selected climatic condition	286
6.24	Monitoring point stated in DesignBuilder for air well	287
6.25	Optimization of solar chimney in relation to air velocity and air temperature	288
6.26	Comparison of air flow pattern between different solar chimney height	290
6.27	Optimization of solar chimney width gap in relation to air velocity and air temperature.	292
6.28	Comparison of air flow pattern between different solar chimney width gap	295
6.29	Optimization of solar chimney length in relation to air velocity and air temperature	297
6.30	Comparison of air flow pattern between different solar chimney length	298
6.31	Air temperature and air velocity results of optimised air well with clear opening	301
6.32	Air temperature and air velocity for optimized air well/ solar chimney with clear opening (21 March)	302
6.33	Air temperature and air velocity for optimized air well/ solar chimney with clear opening (21 June)	302

6.34	Air temperature and air velocity for optimized air well/ solar chimney with clear opening (21 Sept)	303
6.35	Air temperature and air velocity for optimized air well/ solar chimney with clear opening (21 Dec)	303
6.36	Air temperature and air velocity of optimised air well with optimised louvered opening	305
6.37	Air temperature and air velocity for optimized air well/ solar chimney with optimized louvres ‘opening (21 March)	306
6.38	Air temperature and air velocity for optimized air well/ solar chimney with optimized louvres ‘opening (21 June)	307
6.39	Air temperature and air velocity for optimized air well/ solar chimney with optimized louvres ‘opening (21 Sept)	308
6.40	Air temperature and air velocity for optimized air well/ solar chimney with optimized louvres ‘opening (21 Dec)	308
6.41	Ventilation performance of test room with enhanced solar chimney	309
6.42	The comparison of max, min and mean of air temperature and air velocity between test room with solar chimney as well as louvres cum solar chimney (<i>SC+L indicates as test room model with both solar chimney cum louvres model; SC means test room with solar chimney and clear opening</i>)	311
6.43	The Illustrated perspective shows the butterfly capping of solar chimney which could improve the updrafted air speed (Nugroho, 2006)	312
6.44	The Illustrated perspective shows the neighbourhood with enhanced version of solar chimney	313
7.1	Proposed position of solar chimney cum louvres in terraced house	318

LIST OF SYMBOLS

V_z	-	Mean wind velocity at height z (gradient wind)
V_g	-	Height where the gradient wind starts
V_{ref}	-	Mean wind velocity at reference height Z_{ref}
Z_{ref}	-	Reference Height
Z	-	Height for which the wind velocity V_z is calculated
Z_g	-	Height at which the “gradient wind” (V_g) is observed
Z_0	-	Roughness length or log layer constant
I	-	Solar intensity
Iu	-	Turbulence intensity
I_{sc}	-	Solar constant
I_o	-	Solar radiation
T_{sol}	-	Local solar time
T_{std}	-	Local standard time
E_t	-	The equation of time
L	-	Length/ gap size
α	-	An empirical exponent that depends on the surface roughness, stability and temperature gradient
\uparrow	-	Increase/ high
\downarrow	-	Decrease/ low
t_r	-	Total heat loss from skin surface of an imaginary occupants who has 1.0 met activity and 0.6 clo of clothing level
t_a	-	Real-time occupants in actual environment with actual clothing and real activity
t_o	-	Operative temperature
t_a	-	Air temperature
t_{mr}	-	Mean radiant temperature
h_r	-	Linear radiative heat transfer coefficient

h_c	-	Convective heat transfer coefficient
F_{p-i}	-	Angle factor between the person and surface
t_i	-	surface temperature
T_n	-	neutral temperature with +/-2°K range
T_{amt}	-	Annual mean air temperature of the month
C_p	-	Pressure coefficient
V	-	wind velocity/ upstream velocity
ρ	-	Air density
P_w	-	Wind pressure
P_o	-	Static Pressure of free stream P_α
$K-\varepsilon$	-	K-epsilon Turbulence Model
T_{Alo}	-	Lower air well mean air temperature
T_{Aup}	-	Upper air well mean air temperature
T_t	-	Test room mean air temperature
T_o	-	Outdoor mean air temperature
RH_{Alo}	-	Lower air well mean relative humidity
RH_{Aup}	-	Upper air well mean relative humidity
RH_t	-	Test room mean relative humidity
RH_o	-	Outdoor mean relative humidity
P_{total}	-	Total pressure
P_{static}	-	Static Pressure
$P_{dynamic}$	-	Dynamic Pressure
μ	-	Viscosity of air
Re	-	Reynolds Number
V_i	-	Air velocity of inlet
V_e	-	Air velocity of outlet

LIST OF ABBREVIATIONS

ABL	-	Atmospheric Boundary Layer
AC	-	Air conditioned
ACH	-	Air Change Rate
ACS	-	Adaptive Comfort Standard
AIAA	-	American Institute of Aeronautics and Astronautics
AR	-	Aspect Ratio
ASHRAE	-	American Society of Heating, Refrigerating And Air Conditioning Engineers
BBCC	-	Building Bio Climatic Chart
BCA	-	Building Construction Authority
BIM	-	Building Information Modelling
BRI	-	Building Related Illness
BS	-	Building Simulation
CET	-	Corrected Effective Temperature
CFD	-	Computational Fluid Dynamics
CO ₂	-	Carbon Dioxide
DEM	-	Digital Elevation Model
EMPD	-	Effective Moisture Penetration Depth
EPA	-	Environmental Protection Agency
EPBD	-	European Parliament Board of Directive
ET	-	Effective Temperature
HVAC	-	Heating, Ventilating Air Conditioning
IES-VE	-	Integrated Environment Solution – Virtual Environment
IPCC	-	Intergovernmental Panel on Climate Change
LF	-	Laminar Flow
MCS	-	Multiple Chemical Sensitivity
MRT	-	Mean Radiant Temperature

MS	-	Malaysia Standard
N.A.	-	Not Applicable
NV	-	Natural Ventilated
NZEB	-	Net Zero Energy Buildings
OT	-	Operative Temperature
PCM	-	Phase Change Material
PMV	-	Predicted Mean Vote
PPD	-	Predicted Percentage of Dissatisfied
PVC	-	Polyvinyl Chloride
RANS	-	Reynolds-Averaged Navier-Stokes Turbulence Model
RH	-	Relative Humidity
RMS	-	Average Root Mean Square
RNG	-	Renormalization K- ϵ Turbulence Model
RSC	-	Roof Solar Chimney
SBS	-	Sick Building Syndrome
SC	-	Solar Chimney
SET	-	Standard Effective Temperature
SP	-	Static Pressure
TB	-	Turbulent Flow
TR	-	Transitional Flow
UBBL	-	Uniform Building By Law
VP	-	Velocity Pressure
WWR	-	Window to Wall Ratio

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Information for the basic findings of solar chimney parameters	332
B	This study explore on the possibility to induce indoor air flow assisted by pressure gradient and temperature gradient between indoor and outdoor environment through louvres and solar chimney	333
C	Inspiration of the research gap from previous research study on solar induced ventilation tools and external louvres	334
D	Problem statements summarized in diagram – The dilemma of thermal comfort in Malaysia terraced houses The insulating value for cloth elements (Auliciems and Szokolay, 2007)	335
E	Chart showing classification of passive cooling approaches in energy-efficient building (N.B.Geetha and Velraj, 2012)	336
F	The possible factors affecting the performance of indoor thermal performance in a typical terrace houses with air well or solar chimney.	337
G	Climatic data for main cities in Malaysia	337
H	The Insulating Value for Cloth Elements (Auliciems and Szokolay, 2007)	342
I	NZEB tools mechanics	343
J	Comparison of General Features and Capabilities of Selected Simulation Programme: DOE-2, BLAST, IBLAST and EnergyPlus (Drury B. Crawleya et al., 2001)	347

K	Comparison of Load Features and Capabilities of Selected Simulation Programme: DOE-2, BLAST, IBLAST and EnergyPlus (Drury B. Crawleya et al., 2001)	348
L	Comparison of HVAC Features and Capabilities of Selected Simulation Programme: DOE-2, BLAST, IBLAST and EnergyPlus (Drury B. Crawleya et al., 2001)	349
M	List of Popular and Prevalent Turbulence Models for Predicting Airflows in Enclosed Environments (Zhai et al., 2007)	350

CHAPTER 1

INTRODUCTION

1.1 Introduction

This research studies natural ventilation through the louvres window and solar chimney (enhanced air well on existing case study house) to improve thermal performance in typical Malaysian single storey terrace housing. In this study, the air well in an existing single storey terraced house were modified towards solar chimney configuration to enhance the natural ventilation performance. The first chapter introduces the research background, significance, objectives, research questions, research scope and framework of research methodology.

1.2 Problem Statement

Energy consumption has been a critical and sensitive global issue for a few decades now. The building industry has been considered to be a high energy consumption industry where huge amount of fuel and energy are consumed throughout the building life span. In order to reduce the energy consumption along the building operational period especially for the tropic countries, passive cooling design plays an important role. Most buildings are designed with air-conditioning system in mind, thus the passive cooling design solution has been eliminated in order to prevent cold air leakage which would then lead to high costs of energy consumption. However, most

users and occupants do not realize that thermal comfort generated by effective passive cooling system is closely related to the energy consumption cost. With effective passive cooling system, they can cut down their monthly electricity bill.

Climatic thermal comfort can be achieved via effective ventilation system in order to achieve biological comfort of occupants. There are two types of ventilation system; natural ventilation system and mechanical ventilation system. The cooling effect generated by the natural ventilation system can be achieved via the pre-construction design for the building by taking the advantages of the wind forces or the air pressure difference, as well as the temperature difference between indoor and outdoor of the building. The main aim to achieve good ventilation for indoor environment is to provide fresh air in order to prevent carbon dioxide (CO₂) from exceeding the unacceptable level by occupants (Awbi, 1998). According to Bansal (1992), solar chimney is one of the alternatives for a building to achieve passive cooling. In Malaysia, air well is believed to fulfil the same function. However, many fail to work.

According to previous researchers, the properties of the solar chimney can be identified via the length, the material, the thickness of material, the air gap width, the optimum aperture type and so forth. The parameters of the solar chimney play an important role in giving the effect on the result of performance of solar chimney. Appendix A summarizes the parameters suggested by the previous researchers. However, the indication is not finalized and only presented as reference. Appendix B shows the problem statements summarized in diagram form which is the dilemma of thermal comfort in Malaysia terraced houses.

1.3 Research Statements

Ventilation plays an important role in providing fresh air and healthy room environment for human habitat. Without the consistent ventilation and air circulation, the indoor environment becomes suffocating, stifling hot, stuffy and leads to sick building syndrome. According to Laumbach (2008), sick building syndrome is mainly

caused by indoor environmental problems and individual risk aspects. The indoor environmental aspects include air pollutants, poor ventilation, poor indoor air quality, temperature, relative humidity and so forth. Thus, the performance of the building thermal envelope and configuration system become important. Thermal performance in the building directly regulates the behavioural and comfort of users of the building. Local climate conditions, such as annual ambient temperature, relative humidity, intensity of solar radiation, wind velocity and direction, would give the impact to the thermal comfort of occupants. In Malaysia, due to the high intensity of solar radiation, the direct penetration of sunlight leads to the heat transfer from the glazing to the internal of the building (Nugroho,2014). However, the high intensity of the sunlight could be a benefit by modifying the configuration of the building system in order to achieve the thermal comfort for occupants.

The hot and humid condition in Malaysia is the main dilemma and issue for the occupants is thermal comfort. In addition, the configuration of the terrace house, which is the most common residential type occupied by citizens does not consider the problem of single sided ventilation. Single sided ventilation could not provide effective ventilation (Nugroho et al., 2006). Under the circumstances of the limited layout design, the alternative of passive cooling- solar chimney and louvre window would be the way to increase the ventilation rate and air velocity in the room in order to achieve the energy saving purpose. Thus, to propose a passive cooling system which could complement the single opening of the terrace house in order to create cross-ventilation is important. It is possible to achieve the thermal comfort via low indoor air temperature and high air velocity.

Air well stated in Uniform Building By Law 1984 as basic ventilation requirement for utility, mechanical room and washroom with stated sizes and dimension. Designers tend to fulfil requirements by providing the minimum dimension, which does not achieve the effectiveness and function of air well. Thus, the configuration of provided air well does not take into consideration for the effectiveness measure. Developer and designer tend to ignore the potential of air well because enclosed spaces are taken into consideration of usable nett floor area. As a result, the measure of natural daylighting and natural ventilation of modern terraced

housing are not addressed properly, and lead to the needs of mechanical ventilation system. This has increased the energy consumption. The application of air well is not widely promoted since the wide exposed opening invites the security issues. In the end, occupants tend to seal it up to avoid problems.

There are various kinds of passive cooling approaches to achieve energy efficiency for building. According to N.B.Geetha and Velraj (2012) (Appendix E), there are three types of passive cooling methods, which are solar heat protection, heat modulation or amortization technique and heat dissipation technique. Solar chimney falls under the category of dissipation technique without thermal energy. Natural ventilation happens with the assistance of solar chimney by uplifting the hot air via temperature gradient. Other than that, the application of external louvres at window (inlet) could increase the Bernoulli Effect of air flow when uplifting happened via solar chimney. The combination of these building components has high potential to improve ventilation performance in the terrace houses. Diagram in Appendix A indicates the research gap of this study and diagram in Appendix D indicates the summary of problem statement. Thus, this study deduces that indoor ventilation could be enhanced with combination of both pressure gradients via Venturi effect as well as indoor and outdoor temperature gradient caused by solar induced stack ventilation. Another than that, Diagram in Appendix B elaborate Appendix C with previous research categories, in order to benchmarking the current study in natural ventilation field. The possibility to improve natural ventilation in terraced house is summarized in Appendix F.

In this study, a single storey terraced house located at Kuching Sarawak was selected as case study building. The house is designed with 2m length x 1m width air well to ventilate bedroom and bathroom. However due to the limited of space in the terraced house, air well was designed with minimal cost and dimension according to Uniform Building By Law requirement. The window of the bedroom is typical wide aperture which unable to induce ventilation. The study started with measurement of the thermal performance for existing bedroom with single-sided ventilation. The thermal performance of existing air well was studied as well. The modification of the air well into solar chimney and window louvres were carried out with Computational Fluid Dynamic (CFD) software in referred to the measurement result.

Furthermore, the research study the thermal performance of the existing building which applied single-sided ventilation. The effectiveness of the single-sided ventilation was analysed based on the field measurement data. Similar to air well of the existing case study building, the collected data were analysed in order to examine the potential of air well to be applied in tropical climate. Via the field measurement, the research background were verified and the objective of the study were outlined .

1.4 Research Objectives

The main objective of the research is to study natural ventilation by evaluating and investigating the effectiveness of external louvres and enhanced air well that act as solar chimney to improve the natural ventilation in a Malaysian single storey terrace house. The term solar chimney applied to indicate enhanced air well in this study. Since the wind velocity of outdoor and indoor is not significant in Malaysia tropical context compared to the temperate country, the stack ventilation might be a better alternative. Solar chimney and louvre window geometry could improve the stack ventilation for the low air movement residential building, which in turn, give better thermal comfort for occupants.

Other specific objectives:

1. To study the thermal performance of typical existing single storey terrace house with air well in Malaysia via field measurement.
2. To explore the configuration of louvre window in relation to enhancing the airflow speed
3. To explore the configuration of existing air well to solar chimney with respect to improve stack ventilation

1.5 Research Questions

1. What is the current thermal performance of the typical existing single storey house with air well in Malaysia?
2. What is the appropriate configuration of the air well geometry that can enhance the ventilation by increasing the air movement to improve indoor thermal environment?
3. What is the appropriate louvres configuration that can enhance the air flow speed in an indoor environment?

1.6 Scope of Research and Limitation of Study

The scope of the research study is to evaluate the effectiveness of proposed solar chimney and louvre window configuration in single storey terrace house in Malaysia. There are numbers of research papers on the geometry of solar chimney (Nugroho, 2007d; Sakonidou et al., 2008; Zhai et al., 2011; Z.D.Chen, 2003). However, the relationship between the louvres window (inlet) and solar chimney has not been studied especially in Malaysia terrace house context. Terrace house in Malaysia has limited external facing walls which allow cross ventilation to happen especially for the middle room. The limitation leads to the problem of insufficient ventilation and air change which can cause sick building syndrome to the occupants.

Thermal comfort in relation to air flow speed is the main target and objective for this research study. The building with good ventilation performance is considered as effective and functional building design. There are few parameters regulating the occupant's thermal comfort: the air temperature, metabolic rate of human body, clothing, relative humidity, air speed, and others (Givoni.B., 1981; Abdul Razak, 2004; Nugroho, 2007d). In this research study, the scope of is on the air temperature and air velocity. Average air velocity in Malaysia indoor environment is within the range of 0.04 to 0.47m/s (Hui, 1998c; Nugroho, 2007d). In order to achieve the thermal comfort range, the required air velocity for indoor environment has to be within 0.2 to 0.8m/s according to Shafizal Maarof and Jones (2009) and Nugroho (2007d) in the condition of ambient temperature range between 28°C to 32°C and relative humidity lower than

70%. In order to determine the air velocity and room air temperature as the variable, the other affecting parameters such as relative humidity, activities, clothing factor and so forth would set as assumption value and not considered in the experiment. The relative humidity will be set at dry bulb temperature value which considered as fall in between the conducive range for living environment (Nugroho, 2007d).

For the research to be carried out, a typical bedroom with single-sided exposed fenestration in a single storey terrace house which is attached to a 2m x 1m air well is selected for the field measurement and research study. Hence, the measurement result and analysis will be applied as the base case study model. The modifying and improving the configuration would be based on the base case model results. The method has been used by previous researchers as the research method in order to compare the findings results with the real-life experimental result (Ossen, 2005b, Nugroho, 2007d).

After determining the setting for base case study, the study is going to carried out using the computer simulation program - DesignBuilder. The use of software involved the limitation and fixed parameters. In general, the limitation of the software includes the cost for the software, the unintuitive interface, as well as other setting which could be the technical issues. The details of the limitation will be discussed further.

The setting for the weather data in the simulation software is performed under Kuching climatic data 2013 (air temperature, air velocity and solar radiation). The accuracy of the software results is examined via process of verification and validation, which is discussed in the following chapter.

1.7 Significance of Study

The outcome of the research is expected to emphasise on the effectiveness of the proposed solar chimney (enhanced air well) and external louvre window system in promoting the thermal and ventilation performance in single storey terrace houses in

Malaysian context. It will enhance thermal and ventilation condition of building by inducing air velocity via stack effect as well as Venturi effect. The study suggests and recommends the appropriate solar chimney and louvre configurations on passive ventilation system. Hence, it can further reduce the indoor temperature and increase air velocity in a typical terrace house in Malaysia. Other than the stated advantages as above, the application of solar chimney has other advantages on various aspects as indicated in Figure 1.1. The most significant aspect is thermal comfort and energy efficiency. Therefore, the findings of the study are believed to be able to enhance the designer options and act as reference to design a functional solar induced ventilation tool in building, in order to improve the thermal comfort and energy efficiency.

Furthermore, in this research, the research method was initiated with background study and proceed with exploration via design. Field measurement for the existing case study building was carried out in first place to identify the dilemma of tropical houses discomfort issue and follow with the solutions by proposing the enhanced air well and external louvres design. The progression study strengthens the research aim, supported with background data.

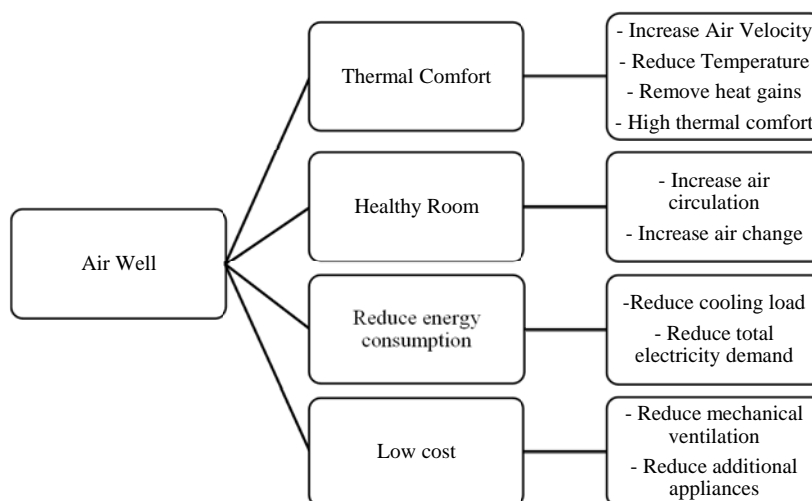


Figure 1.1: Benefits of solar chimney application in residential building (Nugroho, 2006)

1.8 Research Hypothesis

The hypothesis for the research study is that “enhanced air well and louvre window” design will achieve the following:

1. Improved air velocity in the indoor building environment.
2. Enhanced of thermal performance of indoor environment

1.9 Thesis Organisation

This thesis is divided into six chapters, beginning with the introduction to the study and wrapping up with the conclusion of the findings in the study.

Chapter 1 reviews the general perspectives of the research and clarifies the aims of the research. Other than that, Chapter 1 listed down the research objectives, hypothesis of study, research questions, significance of study, and summary of the research scope and limitation. The overall framework of the research was stated in the first chapter to project the overall process of the study.

Chapter 2 presents the literature review and analysis of climate and comfort condition for Malaysia and Kuching city (1.5600° N, 110.3450° E, Time zone: +8). Chapter 2 reviews on climatic factors which directly influence the thermal comfort such as wind, solar radiation, air velocity, air humidity and air temperature in respect to the research intention, concept, and analysis of climatic data. The understanding on the climatic data is important in order to carry out the study, since it directly gives impact to the thermal comfort of occupants and building design. In the last section of this chapter, review on thermal comfort definition, thermal comfort in tropics as well as ventilation requirement under Malaysian tropical climate are discussed. ASHRAE rating index in Malaysia's climatic context was used to determine and define the comfort zone under natural ventilation condition in the end of this chapter.

Chapter 3 is divided into two sections. Section one reviewed the natural ventilation of buildings in Malaysia climatic context. The mechanism, strategies and techniques of natural ventilation were described in this chapter as well. This chapter also covers the study of terrace houses in Malaysia, which includes the regulations of terrace houses, classification, building material, topography and ventilation factors,

layout study and urbanization factors which affect the design of terrace houses. Section two gives a review of solar chimneys, which includes the history, the generic form, and ventilation of solar chimneys, important parameters, limitations and problems of air well in tropical context, and examples of buildings with air well or solar chimneys.

Chapter 4 reviews the methodology of the research implemented in this study. Various kind of research method in natural ventilation were reviewed. The justification of research tools selection, the procedure in carrying out the field measurement and optimization, verification and validation of selected CFD, and details of final model are also described in this chapter.

Chapter 5 covers the findings and analysis of the field measurement results. The case study house thermal performance was measured with experimental instruments, in order to obtain the real time indoor and outdoor air temperature, relative humidity, and air velocity. In this chapter, the air well thermal performance, the single-sided room thermal performance as well as outdoor weather were measured and discussed. The impact of the existing thermal performance summarizes up the Chapter 5.

Chapter 6 discusses about the alternative measures proposed for poor existing thermal indoor environment performance in terraced house. Exploration on the external louvres and enhanced air well (solar chimney) configurations were carried out. The parameters for louvres and air well were explored and discussed in this chapter. The chapter will be ended up with discussion on simulation for the louvres and solar chimney model on design days.

Chapter 7 describes the research summary, final conclusion with respect to the results of the research study. Contributions discussed in architectural perspective other than technical way. In the last part of the chapter, future research recommendations were identified.

REFERENCES

- ASCE, A. S. o. C. E. (1999). *Wind Tunnel Studies of Buildings and Structures*. USAo. Document Number)
- A. Abdul Malik, and Young, A. (1993). *Thermal comfort study as an aid to determine energy savings in building in Malaysia*. Paper presented at the Proc. Energex 93, Seoul.
- Dimoudi. (2014). Solar Chimney in Buildings - The State of the Art. *Advances in Building Energy Research*, 3:1, 21-44.
- A.P. Gagge, J. A. J. S., Y. Nishi. (1971). An effective temperature scale based on a simple model of human physiological regulatory response. *ASHRAE Transactions*, 77-1(1971), 247-262.
- Abdul Rahman, S. (1999). *Air flow and Thermal Comfort Studies in Naturally Ventilated Classrooms In a school*. . Universiti Teknologi Malaysia.
- Abdul Rahman, S. and Kannan, K. S. (1997a, November 3-6). *A study of thermal comfort in naturally ventilated classrooms: towards new indoor temperature standards*. Paper presented at the Proceedings of the Asia-Pacific Conference on the Built Environment, Petaling Jaya, Malaysia, 137-149.
- Abdul Rahman, S. and Kannan, K. S. (1997b). *A study of thermal comfort in naturally ventilated classrooms: towards new indoor temperature standards*. Paper presented at the Proceedings of the Asia-Pacific Conference on the Built Environment, November 3-6, Petaling Jaya, Malaysia, pp. 137-149.
- Abdul Shukur, A. M. (1993). *Human Thermal Comfort in Tropical Climates. Doctoral Thesis (unpublished)*. . University College London, London.
- Adam, N. (1997). *Overheating in malaysian Houses*. Paper presented at the Affordable and Quality Housing Seminar, Universiti Putra Malaysia, Serdang.
- Afonso, C. and Oliveira, A. (2000). Solar chimneys: simulation and experiment. *Energy and Buildings*, 32(1), 71-79.
- Agrawal B and GN, T. (2011). *Building Integrated Photovoltaic Thermal Systems: For Sustainable Developments*. New Delhi, India: Royal Society of Chemistry.

- Agung Murti Nugroho, and Ahmad, M. H. (2014). Passive Cooling Performance of a Solar Chimney and Vertical Landscape Applications in Indonesian Terraced House. *Jurnal Teknologi*, 70(70), 99-104.
- Agung Murti Nugroho, Mohd Hamdan Ahmad, and Hiung, T. J. (2006). *Evaluation of parametrics for the development of vertical solar chimney ventilation in hot and humid climate*. Paper presented at the 2nd International Network for Tropical Architecture Conference, Christian Wacana University, Jogjakarta, 160-170.
- Ahmad, S., Shafie, S. Ab Kadir, M. Z. A., and Ahmad, N. S. (2013). On the effectiveness of time and date-based sun positioning solar collector in tropical climate: A case study in Northern Peninsular Malaysia. *Renewable and Sustainable Energy Reviews*, 28(0), 635-642.
- Ahmed, A. Z. (1998). *Model year climate for Klang Valley, Malaysia*. Paper presented at the Seminar on Advances in Malaysia Energy Research, 78-92.
- Ahmed, N. A. and Wongpanyathaworn, K. (2012). Optimising Louver Location to Improve Indoor Thermal Comfort based on Natural Ventilation. *Procedia Engineering*, 49(0), 169-178.
- Ai, Z. T. and Mak, C. M. (2014). Determination of single-sided ventilation rates in multistory buildings: Evaluation of methods. *Energy and Buildings*, 69, 292-300.
- Aimin, A. b. A. S. (2006). *Thermal Comfort of Low Cost Housing in Hot Humid Climate*. Unpublished Open Access, Universiti Teknologi Malaysia, Johor Malaysia.
- Ali, A. A. M. (2013). Using simulation for studying the influence of horizontal shading device protrusion on the thermal performance of spaces in residential buildings. *Alexandria Engineering Journal*, 52(4), 787-796.
- Ali, M. (2004). *Dynamic thermal performance of construction materials in the design of a terrace house in Klang Valley, Malaysia for satisfactory thermal comfort*. University of Malaya, Kuala Lumpur, Malaysia.
- Allocca, C., Chen, Q. and Glicksman, L. R. (2003). Design analysis of single-sided natural ventilation. *Energy and Buildings*, 35(8), 785-795.
- Al-Obaidi, M. A. A. H. and Woods, P. (2006). Investigations on effect of the orientation on thermal comfort in terraced housing in Malaysia. *International Journal of Low-Carbon Technologies*, 1(2), 167-176.
- Alonso, G., Pérez-Grande, I. and Meseguer, J. (2014). Galloping instabilities of Z-shaped shading louvers. *Indoor and Built Environment*.
- Al-Tamimi, N. A. M., Fadzil, S. F. S. and Harun, W. M. W. (2011). The Effects of Orientation, Ventilation, and Varied WWR on the Thermal Performance of

- Residential Rooms in the Tropics. *Journal of Sustainable Development*, 4(2), 142-149.
- Amori, K. E. and Mohammed, S. W. (2012). Experimental and numerical studies of solar chimney for natural ventilation in Iraq. *Energy and Buildings*, 47(0), 450-457.
- Angelis, N. (2005). *Solar chimney design investigating natural ventilation and cooling in offices with the aid of computer simulation* University College London, London.
- Ansley, R. M., Melbourne, W. and Vickery, B. J. (1977). *Architectural Aerodynamic*. London: Applied Science Publishers Ltd.
- Arch, H. (2001). Lecture: Air Movement and Natural Ventilation. Retrieved 7 April, 2015, from <http://www.arch.hku.hk/teaching/lectures/airvent/>.
- Argiriou, A. A., Balaras, C. A. and Lykoudis, S. P. (2002). Single-sided ventilation of buildings through shaded large openings. *Energy*, 27(2), 93-115.
- ASHRAE, A. S. o. H. Refrigerating and Air-Conditioning Engineers, Inc. (1999). *ASHRAE Handbook: HVAC Applications*
- ASHRAE, A. S. o. H., Refrigerating and Air-Conditioning Engineers, Inc. (2004). *ANSI/ASHRAE Standard 55-2004, Thermal Environmental Conditions for Human Occupancy*. US.: Atlanta.
- ASHRAE, A. S. o. H., Refrigerating and Air-Conditioning Engineers, Inc. (2005). *Fundamentals (SI): Chapter 16, Air Flow around Buildings*. USA.
- ASHRAE, A. S. o. H., Refrigerating and Air-Conditioning Engineers, Inc. (2010). *ANSI/ASHRAE Standard 55-2010: Thermal Environmental Conditions for Human Occupancy*: Atlanta.
- ASHRAE, A. S. o. H., Refrigerating and Air-Conditioning Engineers, Inc. (2012b). *ANSI/ASHRAE Addendum c to ANSI/ASHRAE Standard 55-2010 Thermal Environmental Conditions for Human Occupancy*. . Atlanta.
- ASHRAE. (1999-2002). *ASHRAE Handbook CD, ASHRAE Terminology*
- ASHRAE. (2012a, 16 April 2013). Temperature, Standard Effective (SET). Retrieved 17 December 2013, 2013, from http://wiki.ashrae.org/index.php/Standard_55-2010
- Asif, b. A. S. A. (2006). *Thermal comfort of low cost housing in hot humid climate*. Universiti Teknologi Malaysia, Johor Bahru.
- Asnaghi A, and SM, L. (2012). Solar chimney power plant performance in Iran. *Renewable & Sustainable Energy Reviews* 16, 3383-3390.
- Athienitis, A. K. and Santamouris, M. (2002). *Thermal Analysis and Design of Passive Solar Buildings*. London, UK: James & James Science Publishers Ltd.

- Atthajariyakul, S. and Lertsatittanakorn, C. (2008). Small fan assisted air conditioner for thermal comfort and energy saving in Thailand. *Energy Conversion and Management*, 49(10), 2499-2504.
- Auliciems, A. and Szokolay, S. V. (2007). Thermal Comfort. In PLEA (Ed.), *PLEA Notes*. University of Queensland Department of Architecture.
- Awbi, H. (2010). Basic concepts for natural ventilation of buildings. On *CISBE BSG Seminar: Natural and mix-mode ventilation modelling*. Berkshire, United Kingdom: University of Reading.
- Awbi, H. B. (1991). *Ventilation of building*. London: E&FN Spon.
- Aynsley R.M, Melbourne. W. and Vickery, A. B. J. (1977). *Architectural aerodynamics*. London Applied science Publishers.
- Azni Z.A., Samirah A.R. and S. S. (2005). *Natural Cooling and Ventilation of Contemporary Residential Homes in Malaysia: Impact on Indoor Thermal Comfort*. Paper presented at the 2005 World Sustainable Building Conference (SBO5). , Tokyo, Japan.
- Azni Zain Ahmed, Sopian, K., Othman, M. Y. H., Sayigh, A. M. M. and Surendran, P. N. (2002). Daylighting as a passive solar design strategy in tropical buildings: A case study of Malaysia. *Energy Conversion and Management*, 43, 1725-1736.
- Baharvand, M. (2014). *Natural ventilation performance of double skin facade and solar chimney in hot and humid climate*. Universiti Teknologi Malaysia, Johor Bahru.
- Bakar, J. (2002). *A design guide of public parks in Malaysia*. Malaysia: Penerbit UTM.
- Baker, N. (2014). Stack Ventilation. Natural Ventilation Retrieved 27 April, 2014, from <http://www.architecture.com/SustainabilityHub/Designstrategies/Air/1-2-1-2-Naturalventilation-stackventilation.aspx>
- Bansal, N. K., Mathur, J., Mathur, S. and Jain, M. (2005). Modeling of window-sized solar chimneys for ventilation. *Building and Environment*, 40(10), 1302-1308.
- Bansal, N. K., Mathur, R. and Bhandari, M. S. (1994). A study of solar chimney assisted wind tower system for natural ventilation in buildings. *Building and Environment*, 29(4), 495-500.
- Barozzi, G., Imbabi, M., Nobile, E. and Sousa. (1992). Physical and numerical modeling of a solar chimney based ventilation system for buildings. *Building and Environment*, 27(4), 433-445.
- Barry, R. G. and Chorley, R. J. (1998). *Atmosphere, Weather & Climate* (Vol. 7th Edition). London: Routledge.
- Bassiouny, R. and Korah, N. S. A. (2009). Effect of solar chimney inclination angle on space flow pattern and ventilation rate. *Energy and Buildings*, 41(2), 190-196.

- Bassiouny, R. and Koura, N. S. A. (2008). An analytical and numerical study of solar chimney use for room natural ventilation. *Energy and Buildings*, 40(5), 865-873.
- Board, L. R. (2012). Uniform Building By-Laws 1984 [G.N.5178/85] (as at 1st February 2012). Petaling Jaya, Malaysia.: International Law Book Services.
- Borhanazad, H., Mekhilef, S., Saidur, R. and Boroumandjazi, G. (2013). Potential application of renewable energy for rural electrification in Malaysia. *Renewable Energy*, 59(0), 210-219.
- Borhanazad, H., Mekhilef, S., Saidur, R. and Boroumandjazi, G. (2013). Potential application of renewable energy for rural electrification in Malaysia. *Renewable Energy*, 59(0), 210-219.
- Bouchair, A. (1988). *Moving air using stored solar energy*. Paper presented at the Proceedings of 13th National Passive Solar Conference, Cambridge, Massachusetts, 33-38.
- Bouchair, A. (1994). Solar chimney for promoting cooling ventilation in southern Algeria. *Building Services Engineering Research and Technology*, 15(2), 81-93.
- Brooks, C. E. P. (1950). *Climate in Everyday Life*. London: Ernest Benn.
- BSI, B. S. I. (2008). Indoor Environmental Input Parameters for Design and Assessment of Energy Performance of Buildings Addressing Indoor Air Quality, Thermal Environment, Lighting and Acoustics., *BS EN 15251:2007*. London.
- BSI. (2006). BS EN ISO 7730:2005 Ergonomics of the Thermal Environment – Analytical Determination and Interpretation of Thermal Comfort Using Calculation of the PMV and PPD Indices and Local Thermal Comfort Criteria. London.: British Standards Institute.
- Burt, C, and Button, W. (1969). *Window and environment*. United Kingdom: Pilkington Brothers Limited.
- Busch, J. F. (1992). A tale of two populations: thermal comfort in air-conditioned and naturally ventilated offices in Thailand. *Energy and Buildings*, 18(3-4), 235-249.
- C.H.Lim, Omidreza Saadatian, M. Yusof Sulaiman, Sohif Mat, and K.Sopian. (2011). Performance of wind-induced natural ventilation tower in hot and humid climate conditions. *Recent Researches in Chemistry, Biology, Environment and Culture* 125-131.
- C.K.Tang. (2012). Chapter 2 - Malaysia's Weather Data. *Building Energy Efficiency Technical Guideline for Passive Design (Part 1)* Retrieved 3 November 2014, 2014
- Chan, H.-Y., Riffat, S. B. and Zhu, J. (2010). Review of passive solar heating and cooling technologies. *Renewable and Sustainable Energy Reviews*, 14(2), 781-789.

- Chan, S. C., Che-Ani, A. I. and Nik Ibrahim, N. L. (2014). Passive designs in sustaining natural ventilation in school office buildings in Seremban, Malaysia. *International Journal of Sustainable Built Environment*(0).
- Chander, R. (1979). Housing needs in Peninsular Malaysia, 1970-1990. In S. H. a. H. S. Tan (Ed.), *Public and Private Housing in Malaysia* (pp. 5-22). Kuala Lumpur: Heinemann Educational Books (Asia) Ltd.
- Chandrashekar, D. (2010). *Air flow through louvered openings: Effect of louver slats on air movement inside a space*. University of Southern California, California.
- Chen, Z. D., Bandopadhyay, P., Halldorsson, J., Byrjalsen, C., Heiselberg, P., and Li, Y. (2003). An experimental investigation of a solar chimney model with uniform wall heat flux. *Building and Environment*, 38(7), 893-906.
- Chilled Beams and Ceilings Association, C. (2013). *Technical Fact Sheet - Thermal Comfort*. Berkshire: CBCAo. Document Number)
- Chrenko, F. A. e. (1974). *Bedford's Basic Principles of Ventilation and Heating, third ed.* H.K. London.: Lewis & Co. Ltd.
- Chungloo, S., and Limmeechokchai, B. (2007). Application of passive cooling systems in the hot and humid climate: The case study of solar chimney and wetted roof in Thailand. *Building and Environment*, 42(9), 3341-3351.
- CIBSE. (2005a). *AM10: Natural Ventilation in non-domestic buildings*. London: The Chartered Institution of Building Services Engineers.
- CIBSE. (2005b). *Guide B: heating, ventilating, air conditioning and refrigeration*. . London: The Chartered Institution of Building Services Engineers.
- Clements-Croome, D. (1997). *Naturally Ventilated Buildings: Buildings for the Senses Economy and Society*, London: E & FN Spon.
- Colin Bidden Allison, AP.AIRAH Simultude, Elvin Chatergon, and Group, F. (2013). Solar chimneys do draw but mainly they just suck. In (Vol. September, pp. 44-50): ECOLIBRIUM.
- Cook, N. J. (1985). *The Designer's Guide to Wind Loading of Building Structures Part 1*. London: Building Research Establishment.
- Dabaieh, M. and Elbably, A. (2015). Ventilated Trombe wall as a passive solar heating and cooling retrofitting approach; a low-tech design for off-grid settlements in semi-arid climates. *Solar Energy*, 122, 820-833.
- Dahlan, N. D., Jones, P. J., Alexander, D. K., Salleh, E. and Alias, J. (2009). Evidence base prioritization of indoor comfort perceptions in Malaysian typical multi-storey hostels. *Building and Environment*, 44(10), 2158-2165.

- Darus, F. M., Ahmed, A. Z. and Latif, M. T. (2011). Preliminary Assessment of Indoor Air Quality in Terrace Houses. *Health and the Environmental Journal*, 2(2), 8-14.
- Datta, G. (2001). Effect of fixed horizontal louver shading devices on thermal performance of building by TRNSYS simulation. *Renewable Energy*, 23(3-4), 497-507.
- Davenport, A. (1960). *Wind Loads on Structures*. Ottawa, Canada: National Research Council. Document Number)
- De Dear, R. J. (2004). RP-884 Project. Retrieved 20 July, 2015, from http://sydney.edu.au/architecture/staff/homepage/richard_de_dear/index.shtml
- de Dear, R. J. and Brager, G. S. (2002). Thermal comfort in naturally ventilated buildings: revisions to ASHRAE Standard 55. *Energy and Buildings*, 34(6), 549-561.
- de Dear, R.J., K.G. Leow, and Ameen, A. (1991a). Thermal comfort in the humid tropics – part I: climate chamber experiments on temperature preferences in Singapore. *ASHRAE Transactions*, 97 (Part 1), 874-879.
- de Dear, R.J., K.G. Leow, and Ameen, A. (1991b). Thermal comfort in the humid tropics – part II: climate chamber experiments on thermal acceptability in Singapore. *ASHRAE Transactions*
- Dimoudi, A. (1997). *Investigation of the Flow and Heat Transfer in a Solar Chimney*. University of Bath, United Kingdom.
- Ding, W., Hasemi, Y. and Yamada, T. (2005). Natural ventilation performance of a double-skin façade with a solar chimney. *Energy and Buildings*, 37(4), 411-418.
- Djamila, H., Chu, C.-M. and Kumaresan, S. (2013). Field study of thermal comfort in residential buildings in the equatorial hot-humid climate of Malaysia. *Building and Environment*, 62(0), 133-142.
- Djongyang, N., Tchinda, R. and Njomo, D. (2010). Thermal comfort: A review paper. *Renewable and Sustainable Energy Reviews*, 14(9), 2626-2640.
- Doherty, T. and Arens, E. A. (1988). Evaluation of the physiological bases of thermal comfort models.
- Duan, S., Jing, C., and Long, E. (2015). Transient flows in displacement ventilation enhanced by solar chimney and fan. *Energy and Buildings*, 103, 124-130.
- Dufton, A. F. (1929). The eupatheoscope
- Ellis, F. P. (1953). Thermal comfort in warm and humid atmospheres: observations on groups and individuals in Singapore. *Journal of Hygiene*, 51(386-403).
- EnergyPlus. (2013). EnergyPlus Thermal Comfort. Thermal Comfort Model Retrieved 17 December 2013, 2013, from http://www.designbuilder.co.uk/helpv2/Content/Thermal_Comfort.htm

- EPA, U. S. E. P. A. (2013). *Indoor Air* Retrieved 1 December 2013, 2013, from <http://www.epa.gov/indoorairplus/index.html>
- Erdayu Os'hara Omar, Esmawee Endut , and Saruwono, M. (2010). Adapting by Altering: Spatial Modifications of Terraced Houses in the Klang Valley Area. *Asian Journal of Environment-Behaviour Studies*, 1(3), 1-10.
- Evans, M. (1980). *Housing climate and comfort*. London: The Architectural Press Ltd.
- F.C. Houghten, C. P. Y. (1923). Determining of the comfort zones with further verification of effective temperature within this zone. *ASHVE Transactions*, 29(9), 515-536.
- Fang X, and T, Y. (2008). Regression methodology for sensitivity analysis of solar heating walls. *Applied Thermal Engineering*, 28, 2289-2294.
- Fang, L., Wyon, D., Clausen, and G.Fanger, P. (2004). Impact of Indoor air temperature and humidity in an office on perceived air quality. *Indoor Air*, 14(7), 74-81.
- Farea, T. G., Ossen, D. R., Alkaff, S. and Kotani, H. (2015). CFD modeling for natural ventilation in a lightwell connected to outdoor through horizontal voids. *Energy and Buildings*, 86(0), 502-513.
- Fazeli, A. (2014). Environmental Fluids Mechanics. Atmospheric boundary-layer profiles, from <http://egeology.blogfa.com/post-95.aspx>
- Feriadi, H. and Wong, N. H. (2004). Thermal comfort for naturally ventilated houses in Indonesia. *Energy and Buildings*, 36(7), 614-626.
- Frederikus Wenehenubun, Andy Saputra, and Sutanto, H. (2015). An experimental study on the performance of Savonius wind turbines related with the number of blades. Paper presented at the 2nd International Conference on Sustainable Energy Engineering and Application, ICSEEA 2014, Jakarta, Indonesia.
- Fiaschi D, and A, B. (2012). Design and energy analysis of solar roofs: a viable solution with esthetic appeal to collect solar heat. *Renewable Energy* 46, 60–71.
- FN, F. N. (2014). Topographic Factors. Retrieved 3 March, 2014, from <http://www.forestrynepal.org/notes/silviculture/locality-factors/8>
- Fracastoro, G. V., Mutani, G. and Perino, M. (2002). Experimental and theoretical analysis of natural ventilation by windows opening. *Energy and Buildings*, 34(8), 817-827.
- G. G. (2010). Interaction between wind and buoyancy effects in natural ventilation of buildings. *Open Constr Build Techno International Journal*, 134 - 145.
- Gail, G. S. and Dear, a. R. D. (1998). Thermal adaptation in the built environment: A literature review. *Energy and Buildings*(27), 83-96.
- Gan, G. H. (1998). A parametric study of Trombe walls for passive cooling of buildings. *Energy and Buildings*, 27(1), 37-43.

- Ghiaus, C. and Allard, F. (2005). *Natural Ventilation in the Urban Environment: Assessment and Design*. Earthscan, London.
- Givoni, B. (1969). *Man, Climate and Architecture*. Technion, Israel Institute of Technology: Elsevier Publishing Company Limited.
- Givoni, B. (1998). *Climate Considerations in Building and Urban Design*. New York: Van Nostrand Reinhold.
- Gontikaki, M. (2010). *Optimization of a solar chimney to enhance natural ventilation and heat harvesting in a multi-storey office building*. Technical University of Eindhoven, Netherlands.
- Gratia, E. and De Herde, A. (2007). Are energy consumptions decreased with the addition of a double-skin? *Energy and Buildings*, 39(5), 605-619.
- Gurupiah, M. R. (1999). *daylighting Considerations in the Design of Living Dining Room Spaces in Single Storey Terrace Houses in Malaysia*. Universiti Teknologi Malaysia, Malaysia.
- H.B.Awbi. (1996). Air movement in naturally-ventilated buildings. *Renew. Energy*, 8(1996), 241-247.
- H.S. Belding, T. F. H. (1955). Index for evaluating heat stress in terms of resulting physiological strains. *Heating, Piping and Air Conditioning*, 207(1955), 129-136.
- Hami, K., Draoui, B. and Hami, O. (2012). The thermal performances of a solar wall. *Energy*, 39(1), 11-16.
- Han, J., Zhang, G., Zhang, Q., Zhang, J., Liu, J., Tian, L., et al. (2007). Field study on occupants' thermal comfort and residential thermal environment in a hot-humid climate of China. *Building and Environment*, 42(12), 4043-4050.
- Hanafi, Z. (1991). *Environmental design in hot humid countries with special reference to Malaysia*. University of Wales, United Kingdom.
- Haris, A. H. (2010). *Malaysia's Latest Solar PV Market Development*. . Paper presented at the Clean Energy Expo Asia, Singapore - Singapore 2-4 November 2010, Singapore, 1-32
- Haw, L. C., Saadatian, O., Sulaiman, M. Y., Mat, S. and Sopian, K. (2012). Empirical study of a wind-induced natural ventilation tower under hot and humid climatic conditions. *Energy and Buildings*, 52, 28-38.
- Heiselberg, P., Kjeld Svidt, and Neilsen., P. V. (2001). Characteristics of airflow from open windows. *Building and Environment*, 859-869.
- Hensen, J. (1991). On the thermal interaction of building structure and heating and ventilating system. Unpublished PhD thesis. Technische Universiteit Eindhoven.

- Hirunlabh, J., Wachirapuwadon, S., Pratinthong, N. and Khedari, J. (2001). New configurations of a roof solar collector maximizing natural ventilation. *Building and Environment*, 36(3), 383-391.
- Hordeski, M. F. (Ed.) (2004). New York, USA: Fairmont Press.
- Houghton, F. C. and C.P.Yaglou. (1923). Determining line of equal comfort. *ASHRAE Transactions*, 29(163).
- Hughes, B. R. and Ghani, S. (2010). A numerical investigation into the effect of Windvent louvre external angle on passive stack ventilation performance. *Building and Environment*, 45(4), 1025-1036.
- Hui, S. K. (1998). *Natural ventilation of low cost dwellings in the hot humid tropics Malaysia*. Universiti Teknologi Malaysia, Skudai.
- Humphrey, M. A. (1978). *Outdoor Temperatures and Comfort Indoors*: Building Research Station, Department of Environmento. Document Number)
- Humphrey, M. A. (1994). Fields studies and climate chamber experiments in thermal comfort research. *Building Research Establishment paper 52(72)*, pp. 52-69.
- Humphreys, M. A. and J.F. Nicol. (1998). Understanding the adaptive approach to thermal comfort. *ASHRAE Transactions*, , 104 (Part 1b), 991-1004.
- Humphreys, M. A., Raja, I. A. and J.F.Nicol. (2007). Field studies of indoor thermal comfort and the progress of the adaptive approach. *Advances in Building Energy Research*, 1, 55-88.
- Hwang, R. L., Yang, K. H., Chen, C. P. and Wang, S. T. (2008). Subjective responses and comfort reception in transitional spaces for guests versus staff. *Building and Environment*, 43(12), 2013-2021.
- Hwang, R.-L., Cheng, M.-J., Lin, T.-P. and Ho, M.-C. (2009). Thermal perceptions, general adaptation methods and occupant's idea about the trade-off between thermal comfort and energy saving in hot-humid regions. *Building and Environment*, 44(6), 1128-1134.
- Hwang, R-L., T-P. Lin, and Kuo, N.-J. (2006). Field experiments on thermal comfort in campus classrooms in Taiwan. . *Energy and Buildings*, 38(1), 53-62.
- Hyde, R. (2000). *Climate Responsive Design: A Study of Buildings in Moderate and Hot Humid Climates*. London and New York: Taylor & Francis; 1 edition (October 8, 2013).
- IES, I. E. S. L. (2012). *MacroFlo Calculation Methods Manual Virtual Environment Version 6.5*. Unpublished manuscript.
- INNOVA. (1997). Thermal Comfort. In I. A. T. Instruments (Ed.) (pp. 7). Copenhagen: INNOVA Air tech Instruments.

- Intergovernmental Panel on Climate Change, Cambridge (2002). Document Number)*
- IPCC. (2002). *Climate change 2001: synthesis report, third assessment report*
- Islam, M. R., Saidur, R. and Rahim, N. A. (2011). Assessment of wind energy potentiality at Kudat and Labuan, Malaysia using Weibull distribution function. *Energy*, 36(2), 985-992.
- Ismail Said, Raja Nafidah, R.S.S, and Rajeh, M. (1999). *Reintroduction of Ventilation Components for Terrace Houses in Malaysia*. Paper presented at the 3rd International Symposium on Asia Pacific Architecture, Manoa, Honolulu, Hawaii.
- Ismail, A. M. (1996a). *Wind driven natural ventilation in high-rise office building with special reference to hot-humid climate of Malaysia*. University of Wales College of Cardiff, Cardiff.
- Ismail, M., Mohd Sofian, N. Z. and Abdullah, A. M. (2010). Indoor Air Quality in Selected Samples of Primary Schools in Kuala Terengganu, Malaysia. *Environment Asia*, 3(special), 103-108.
- J. Hirunlabh, W. Kongduang, P. Namprakai, and Khedari, J. (1999). Study of natural ventilation of houses by a metallic solar wall under tropical climate. *Renewable Energy*, 18(1999), 109-119.
- J.A.Tinker, S.H. Ibrahim, and Ghisi, E. (2004). An Evaluation of Thermal Comfort in Typical Modern Low-Income Housing in Malaysia. *ASHRAE Journal, Buildings IX*, 1-10.
- J.Khedari, P.Gerdchang, R.Sarachitti, J.Waewsak, and J.Hirunlabh. (2011). Field comparative analysis of roof solar chimney design on indoor conditions. *International Journal of Ambient Energy*, 23:1, 29-36.
- Jamaliah, J. (2004). Emerging trends of urbanisation in Malaysia. *Journal of the Department of Statistics, Malaysia*, 1, 43-54.
- Janssen, J. E. (1999). The history of ventilation and temperature control. *ASHRAE Journal*, 41(10), 48-70.
- Jayapalasingam, S. *Malaysia's Terraced Housing Towards an Environmentally Sustainable Future*. Deakin University, Australia.
- Jianliu, X. and Weihua, L. (2013). Study on solar chimney used for room natural ventilation in Nanjing. *Energy and Buildings*, 66(0), 467-469.
- Jing, H., Chen, Z. and Li, A. (2015). Experimental study of the prediction of the ventilation flow rate through solar chimney with large gap-to-height ratios. *Building and Environment*, 89, 150-159.

- Jitkhajornwanich, K. and Pitts, A. C. (2002). Interpretation of thermal responses of four subject groups in transitional spaces of buildings in Bangkok. *Building and Environment*, 37(11), 1193-1204.
- Jones, P. (2001). *Thermal Environment*. France: Universitaires de Louvain.
- Jones, P. J., Z. Hanafi, and Rahman, a. A. M. (1993). *Research on thermal performance in low cost housing in Malaysia*. Paper presented at the Proceedings of Conference on Low Cost Housing, USM, Penang, Malaysia.
- Journal of Scientific Instruments*, 6 (1929), 249–251.
- K.S. Ong, and C.C. Chow. (2003). Performance of a solar chimney. *Solar Energy*, 74(1), 1-17.
- K.Sopian, M.Y.Hj.Othman, and A.Wirsat. (1994). The wind energy potential of Malaysia. *Renewable Energy*, 6(8), 1005-1016.
- Karava, P., Stathopoulos, T. and Athienitis, A. K. (2011). Airflow assessment in cross-ventilated buildings with operable façade elements. *Building and Environment*, 46(1), 266-279.
- Karyono, T. H. (2000). Report on thermal comfort and building energy studies in Jakarta—Indonesia. *Building and Environment*, 35(1), 77-90.
- Kasaeian, A., Ghalamchi, M., and Ghalamchi, M. (2014a). Simulation and optimization of geometric parameters of a solar chimney in Tehran. *Energy Conversion and Management*, 83(0), 28-34.
- Kasaeian, A., Ghalamchi, M., and Ghalamchi, M. (2014b). Simulation and optimization of geometric parameters of a solar chimney in Tehran. *Energy Conversion and Management*, 83, 28-34.
- Khan, N., Su, Y., and Riffat, S. B. (2008). A review on wind driven ventilation techniques. *Energy and Buildings*, 40(8), 1586-1604.
- Khanal, R., and Lei, C. (2011). Solar chimney—A passive strategy for natural ventilation. *Energy and Buildings*, 43(8), 1811-1819.
- Khanal, R., and Lei, C. (2014). A scaling investigation of the laminar convective flow in a solar chimney for natural ventilation. *International Journal of Heat and Fluid Flow*, 45, 98-108.
- Khedari, J., Boonsri, B., and Hirunlabh, J. (2000a). Ventilation impact of a solar chimney on indoor temperature fluctuation and air change in a school building. *Energy and Buildings*, 32(1), 89-93.
- Khedari, J., Hirunlabh, J., and Bunnag, T. (1996). Experimental study of a roof solar collector towards the natural ventilation of new habitations. *Renewable Energy*, 8(1-4), 335-338.

- Khedari, J., Hirunlabh, J., and Bunnag, T. (1997). Experimental study of a roof solar collector towards the natural ventilation of new houses. *Energy and Buildings*, 26(2), 159-164.
- Khedari, J., N. Yamtraipat, N. Pratintong, and Hirulabh, J. (2000). Thailand ventilation comfort chart. *Energy and Buildings*, 32(3), 245-249.
- Kim, G., Schaefer, L., and Kim, J. T. (2012). Development of a Double-Skin Façade for Sustainable Renovation of Old Residential Buildings. *Indoor and Built Environment*.
- KJ, L. (2007). Architectural design of an advanced naturally ventilated building form. *Energy and Buildings*, 39(2), 1661-1181.
- Koo, S. Y., Yeo, M. S., and Kim, K. W. (2010). Automated blind control to maximize the benefits of daylight in buildings. *Building and Environment*, 45(6), 1508-1520.
- Kubota, T., Chyee, D. T. H., and Ahmad, S. (2009). The effects of night ventilation technique on indoor thermal environment for residential buildings in hot-humid climate of Malaysia. *Energy and Buildings*, 41(8), 829-839.
- Kubota, T., Miura, M., Tominaga, Y., and Mochida, A. (2008). Wind tunnel tests on the relationship between building density and pedestrian-level wind velocity: Development of guidelines for realizing acceptable wind environment in residential neighborhoods. *Building and Environment*, 43(10), 1699-1708.
- Kukreja, C. P. (1978.). *Tropical Architecture*. : McGraw- Hill.
- Kurazumi, Y., Tsuchikawa, T., Kondo, E., Horikoshi, T., and Matsubara, N. (2010). Conduction-corrected modified effective temperature as the indices of combined and separate effect of environmental factors on sensational temperature. *Energy and Buildings*, 42(4), 441-448.
- Kwok, A. G. (1998). *Thermal comfort in tropical classrooms*. Paper presented at the ASHRAE Transactions, 1031-1047.
- Kwok, A. G., and Chun, C. (2003). Thermal comfort in Japanese schools. . *Solar Energy*, 74(3) , 245-252.
- Kwok, A. G., and Rajkovich, N. B. (2010). Addressing climate change in comfort standards. *Building and Environment*, 45(1), 18-22.
- Kwong, Q. J., Adam, N. M., and Sahari, B. B. (2014). Thermal comfort assessment and potential for energy efficiency enhancement in modern tropical buildings: A review. *Energy and Buildings*, 68, Part A(0), 547-557.
- Lee, D.-S., Kim, S.-J., Cho, Y.-H., and Jo, J.-H. (2015). Experimental study for wind pressure loss rate through exterior venetian blind in cross ventilation. *Energy and Buildings*, 107, 123-130.

- Lee, J., and Chang, J. D. (2015). Influence on Vertical Shading Device Orientation and Thickness on the Natural Ventilation and Acoustical Performance of a Double Skin Facade. *Procedia Engineering*, 118, 304-309.
- Leng, P. C., Ahmad, M. H., Ossen, D. R., and Hamid, M. (2015). Effective Solar Chimney Cross Section Ventilation Performance in Malaysia Terraced House. *Procedia - Social and Behavioral Sciences*, 179(0), 276-289.
- Leon, M. A., and Kumar, S. (2007). Mathematical modeling and thermal performance analysis of unglazed transpired solar collectors. *Solar Energy*, 81(1), 62-75.
- Li, Z. (2007). *Characteristics of Buoyancy Driven Natural Ventilation through Horizontal Openings*. Aalborg University, Denmark.
- Liddament, M. W. (1996). *Guide to Energy Efficient Ventilation*. Coventry, U.K.: Air Infiltration and Ventilation Centre.
- Lim, J. T. and A. Abu Samah. (2004). *Weather and Climate of Malaysia*. Kuala Lumpur: University of Malaya Press.
- Lim, J. T. and Samah, A. A. (2004). *Weather and climate of Malaysia*: University of Malaya Press.
- Lin, Z. and Deng, S. (2008). A study on the thermal comfort in sleeping environments in the subtropics—Developing a thermal comfort model for sleeping environments. *Building and Environment*, 43(1), 70-81.
- Lomas KJ, C. M., Fiala D. . (2007). Low energy architecture for a severe US climate: design and evaluation of a hybrid ventilation strategy. . *Journal of Energy and Buildings*, 39(1), 32-44.
- M.Gontikaki, M.Treka, J.L.M.Hensen, and Hoes, P.-J. (2010). *Optimization of a solar chimney design to enhance natural ventilation in a multi-storey office building*. Paper presented at the Proceedings of the Tenth International Conference for Enhanced Building Operations,, Kuwait, October 26-28, 2010.
- Madros, H. (1998, 9-10 July). *Comfort Level in low cost housing in Johor Bahru*. Paper presented at the Conference on Low and Low-Medium Cost Housing Development, Kuching, Sarawak, Malaysia.
- Mahmoud, N. H., El-Haroun, A. A., Wahba, E., and Nasef, M. H. (2012). An experimental study on improvement of Savonius rotor performance. *Alexandria Engineering Journal*, 51(1), 19-25
- Maerefat, M. and Haghighi, A. P. (2010a). Natural cooling of stand-alone houses using solar chimney and evaporative cooling cavity. *Renewable Energy*, 35(9), 2040-2052.

- Maerefat, M. and Haghghi, A. P. (2010b). Passive cooling of buildings by using integrated earth to air heat exchanger and solar chimney. *Renewable Energy*, 35(10), 2316-2324.
- Makaremi, N., Salleh, E., Jaafar, M. Z. and GhaffarianHoseini, A. (2012). Thermal comfort conditions of shaded outdoor spaces in hot and humid climate of Malaysia. *Building and Environment*, 48(0), 7-14.
- Malaysia, D. o. S. (2002). Malaysian Standard - Code of practice on wind loading for building structure MS 1553 2002(Amendment 1:2013) (Vol. ICS:91.090). Malaysia: Department of Malaysian Standard.
- Malaysia, D. o. S. (2007). Code of Practice on Energy Efficiency and use of Renewable Energy for Non-Residential Buildings (First Version) MS 1525:2007 (Vol. ICS: 9104001). Malaysia.
- Malaysia, D. o. S. (2012). *Characteristics of Living Quarters. Population and Housing Census of Malaysia 2010*. . Putrajaya: Department of Statistics Malaysia. Document Number)
- Malaysia, D. o. U. a. R. P. o. P. M. (2013). *Garis Panduan Perancangan Perumahan (Guideline for Housing Planning)*. Unpublished manuscript, Malaysia.
- Malaysia, J. M. (2000). *General Report of the Population and Housing Census*. Malaysia: Department of Statistics Malaysia. Document Number)
- Malaysia, J. M. (2013). general climate of Malaysia. Retrieved 3 June 2014, 2014, from http://www.met.gov.my/index.php?option=com_content&task=view&id=75&Itemid=1089&limit=1&limitstart=2
- Malaysia, P. a. H. C. (2010). *2010 census: population distribution and basic demography characteristics* o. Document Number)
- Mallick, F. H. (1996). Thermal comfort and building design in the tropical climates. *Energy and*
- Manz, H. and Menti, U. (2012). Energy performance of glazing in European climates. . *Renew. Energy* 37, 226–232.
- Mathur, J., Bansal, N. K., Mathur, S., Jain, M. and Anupma. (2006a). Experimental investigations on solar chimney for room ventilation. *Solar Energy*, 80(8), 927-935.
- Mathur, J., Mathur, S. and Anupma. (2006b). Summer-performance of inclined roof solar chimney for natural ventilation. *Energy and Buildings*, 38(10), 1156-1163.
- Mattsson, B. (2006). The influence of wind speed, terrain and ventilation system on the air change rate of a single-family house. *Energy*, 31(5), 719-731.
- MF, H. (2011). *New Technologies for Energy Efficiency*. New York: Fairmont Press.

- Ministry of Energy, T. a. P. M. (1989). Guidelines of Energy Efficiency in Buildings. Malaysia: Ministry of Energy, Telecom and Posts Malaysia.
- Missenard, A. (1931). Température effective d'une atmosphère. *Chaleur et Industrie*, XII(137), 491-498.
- Miyazaki, T., Akisawa, A. and Kashiwagi, T. (2006). The effects of solar chimneys on thermal load mitigation of office buildings under the Japanese climate. *Renewable Energy*, 31(7), 987-1010.
- Malaysia Meteorological Department. (2014). Rangkaian Stesen. Retrieved 2 March, 2014, from http://www.met.gov.my/index.php?option=com_content&task=view&id=1311&Itemid=1046&la
- Mohd Peter Davis, Mazlin Ghazali, and Nordin, N. A. (2006). *Thermal Comfort Honeycomb Housing: The Affordable Alternative To Terrace Housing*. Serdang, Selangor: Institute of Advanced Technology, University Putra Malaysia.
- Mohit, M. A. and Mahfoud, A. K. A. (2015). Appraisal of residential satisfaction in double-storey terrace housing in Kuala Lumpur, Malaysia. *Habitat International*, 49, 286-293.
- Moosavi, L., Mahyuddin, N., Ab Ghafar, N. and Azzam Ismail, M. (2014). Thermal performance of atria: An overview of natural ventilation effective designs. *Renewable and Sustainable Energy Reviews*, 34(0), 654-670.
- Mui, K. W. H. and Chan, W. T. D. (2003). Adaptive comfort temperature model of air-conditioned building in Hong Kong. *Building and Environment*, 38(6), 837-852.
- Mui, K. W. and L.T. Wong. (2007). Neutral temperature in subtropical climates – a field survey in airconditioned offices. *Building and Environment*, 42(2), 699-706.
- Muneer, T. and Gul, M. S. (2000). Evaluation of sunshine and cloud cover based models for generating solar radiation data. *Energy Conversion and Management*, 41, 461-482.
- Murakami S, and Y. M. (1985). Criteria for assessing wind-induced discomfort considering temperature effect. (Japanese). *Journal of Architecture, Planning and Environmental Engineering*, ATJ1985(358), 9-17.
- N. M. Tawil, S. F. Md Lias, Usman, I. M. S., N. I. M. Yusoff, A. I. Che Ani, and Kosman, K. A. (2013). Evolution of Back Lane Design: A View of Terrace Housing in Malaysia. *Asian Social Science*, 9(15), 277-288.
- N.K. Bansal, R. Mathur, and Bhandari, M. S. (1993). Solar chimney for enhanced stack ventilation. *Building and Environment* 28(3), 373-377.

- N.K. Bansal, R. Mathur, and Bhandari, M. S. (1994). A study of solar chimney assisted wind tower system for natural ventilation in buildings. *Building and Environment*, 29 (4), 495-500.
- N.K.Bansal, Rajesh Mathur, and M.S.Bhandari. (1993). Solar chimney for enhanced stack ventilation. *Building and Environment*, 28(3), 373-377.
- NAPIC. (2012). *Property Stock Report. Residential Property Stock Table Q2 2012*. Valuation and Property Services Department, Putrajaya, Malaysia.: National Property Information Centre. Document Number)
- Nicol, F. (2004). Adaptive thermal comfort standards in the hot-humid tropics. . *Energy and Buildings*, 36(7), 628-637.
- Nicol, F. and Roaf, S. (1996). Pioneering new indoor temperature standards: The Pakistan project. *Energy and Buildings*, 23(3), 169-174.
- Nicol, J. F. and Humphreys, M. A. (2002). Adaptive thermal comfort and sustainable thermal standards for buildings. *Energy and Buildings*, 34(6), 563-572.
- Nitatwichit, C. e. a. (2012). Simulation of flow and thermal comfort zones in a Thai state school. *Journal of Chinese Institute of Engineers, Transactions of the Chinese Institute of Engineers, Series A/Chung-kuo /kung Ch'eng Hsuch K'an*, 35(91), 115-128.
- Norazura Mizal Azzmi, and Jamaludin, N. (2014). A Review of Heat Transfer in Terraced Houses of Tropical Climate. *E3S Web of Conferences*, 3(01010), 1-6.
- Nugroho, A. M. (2007). *Solar chimney geometry for stack ventilation in Malaysia terrace house*. Universiti Teknologi Malaysia, Johor Bahru.
- Nugroho, A. M., Ahmad, M. H. and Ossen, D. R. (2007). A Preliminary Study of Thermal Comfort in Malaysia's Single Storey Terraced Houses. *Journal of Asian Architecture and Building Engineering*, 6(1), 175-182.
- O.V. Ekechukwu, B. N. (1997). Design and measured performance of a solar chimney for natural circulation solar-energy dryers. *Renewable Energy*, 10 (1997), 81–90.
- O'Callaghan, P. W. (1978). *Building for energy conservation*: Pergamon Press.
- Oh, M. H., Lee, K. H. and Yoon, J. H. (2012). Automated control strategies of inside slat-type blind considering visual comfort and building energy performance. *Energy and Buildings*, 55, 728-737.
- Olgyay, V. (1963b). *Design with Climate*. USA: Princeton University.
- Olgyay, V. (1963a). *Design with Climate: Bioclimatic Approach to Architectural Regionalism*. New York: Van Nostrand Reinhold.
- Ong, K. S. (2003). A mathematical model of a solar chimney. *Renewable Energy*, 28(7), 1047-1060.

- Ong, K. S. and Chow, C. C. (2003). Performance of a solar chimney. *Solar Energy*, 74(1), 1-17.
- Orosa, J. A. (2009). Research on the Origins of Thermal Comfort. *European Journal of Scientific Research*, 34(4)(2009), 561-567.
- Ossen, D. R. (2005a). *Optimum Overhang Geometry for Controlling Fenestration Heat Gain and Building Energy Saving in Tropics*. Universiti Teknologi Malaysia, Malaysia.
- Ossen, D. R. (2005b). *Optimum overhang geometry for high rise office building energy saving in tropical climates*. Universiti Teknologi Malaysia, Malaysia.
- P.O.Fanger. (1970). *Thermal comfort: Analysis and applications in Environmental Engineering* New York: McGraw-Hill Book Company.
- Parra, J., Guardo, A., Egusquiza, E. and Alavedra, P. (2015). Thermal Performance of Ventilated Double Skin Facades with Venetian Blinds. *Energies*, 8(6), 4882-4898.
- Parsons, K. (2014). *Human Thermal Environments*. U.S.: CRC Press.
- Peng, G. (2006). Retrieval of atmospheric relative humidity in Peninsular Malaysia using MODIS Image. Retrieved 2 November 2014, from <http://www.geospatialworld.net/paper/application/ArticleView.aspx?aid=681>
- Penwarden AD, and AFE, W. (1975). *Wind Environment around Buildings*. London: Building Research Establishment Reporto. Document Number)
- Pollution and health. *Journal of Environmental Monitoring*, 6, 46-49.
- Punyasompun.S, Jongjit Hirunlabh, Joseph Khedari, and Zeghmati, B. (2009). Investigation on the application of solar chimney for multi-storey building. *Renewable Energy*, 34(2009), 2545-2561.
- Quesada, G., Rouse, D., Dutil, Y., Badache, M. and Hallé, S. (2012). A comprehensive review of solar facades. Transparent and translucent solar facades. *Renewable and Sustainable Energy Reviews*, 16(5), 2643-2651.
- Rahim, R., Baharuddin, and Mulyadi, R. (2004). Classification of daylight and radiation data into three sky conditions by cloud ratio and sunshine duration. *Energy and Buildings*, 36(7), 660-666.
- Rahim, Z. A. and Hashim, A. H. (2012). Adapting to Terrace Housing Living in Malaysia. *Procedia - Social and Behavioral Sciences*, 36(0), 147-157.
- Rajeh, M. (1989). *Natural Ventilation in Terrace Housing of Malaysia: Effect of Air Well on Air Flow and Air Velocity*. University of Queensland, Australia.
- Rajeh, S. (1994). *Wind ventilation of terrace housing in Malaysia*. Paper presented at the ISI-UTM International Convention and Exposition, Kuala Lumpur, Malaysia.

- Rao, K. R. and Ho, J. C. (1978). Thermal comfort studies in hawker centres in Singapore. *Building and Environment*, 13(3), 161-166.
- Ravanfar, A. (2003). *Simulation Study of Solar Chimney Assisted Solarium*. Iran University of Science and Technology, Toronto, Ontario, Canada.
- RIBA, R. I. o. B. A. (2014). Natural ventilation: cross ventilation. Sustainability Hub Retrieved 27 May 2014, 2014, from <http://www.architecture.com/SustainabilityHub/Designstrategies/Air/1-2-1-3-naturalventilation-crossventilation.aspx>
- Rodrigues, A. M., Canha da Piedade, A., Lahellec, A. and Grandpeix, J. Y. (2000). Modelling natural convection in a heated vertical channel for room ventilation. *Building and Environment*, 35(5), 455-469.
- Rupp, R. F. and Ghisi, E. (2014). What is the most adequate method to assess thermal comfort in hybrid commercial buildings located in hot-humid summer climate? *Renewable & Sustainable Energy Reviews*, 29, 449-462.
- S.D. Cristofalo, S. Orioli, G. S. and Alessandro, S. (1989). Thermal behavior of “Scirocco rooms” in ancient Sicilian villas. *Tunneling and Underground Space Technology*, 4 (4), 471–473.
- S.K. Das, and Kumar, Y. (1989). Design and performance of a solar dryer with vertical collector chimney suitable for rural application. *Energy Conversion and Management*, , 29 (2), 129–135.
- S.Niewott. (1981). *The climate of continental Southeast Asia, World Survey of Climatology*. New York. (E. S. Publications o. Document Number)
- Saadatian, O., Lim, C. H., Sopian, K. and Salleh, E. (2013). A state of the art review of solar walls: Concepts and applications. *Journal of Building Physics*, 37(1), 55-79.
- Sadafi, N., Salleh, E., Haw, L. C. and Jaafar, Z. (2011). Evaluating thermal effects of internal courtyard in a tropical terrace house by computational simulation. *Energy and Buildings*, 43(4), 887-893.
- Saelens, Dirk, Bert Blocken, Staf Roels, and Hens., H. (2005). *Optimization of the energy performance of multiple-skin facades*. Paper presented at the International IBPSA Conference., Montreal, Canada.
- Saji, N. B. (2012). A review of Malaysian terraced house design and the tendency of changing. *Journal of Sustainable Development*, 5(5), 140-149.
- Sandberg, M. and Moshfegh, B. (1998). Ventilated-solar roof air flow and heat transfer investigation. *Renewable Energy*, 15(1–4), 287-292.
- Sani, S. e. (Ed.) (1998) *The Environment*. (Vols. 1). Kuala Lumpur.: Archipelago Press.

- Sapian, A. R. (2004). *Possibilities of Using Void to Improve Natural Cross Ventilation in High-rise Low Cost Residential Building*. Universiti Teknologi Malaysia, Skudai, Johor.
- Sarawak Energy, M. (2013). Solar Energy. Research & Development Retrieved 13 July, 2015, from <http://www.sarawakenergy.com.my/index.php/r-d/solar-energy>
- Seo Ryeong Ju, Saniah Ahmad Zaki, and Choi, Y. K. (2011). Contextual Modernization; New Town Planning in Petaling Jaya, of Malaysia. *Journal of Asian Architecture and Building Engineering*, 93-100.
- Shalaby, S. M. and Bek, M. A. (2014). Experimental investigation of a novel indirect solar dryer implementing PCM as energy storage medium. *Energy Conversion and Management*, 83, 1-8.
- Sharma, M. R. and Ali, S. (1979). *A Thermal Stress Index for Warm, Humid Conditions in India*. Bangkok.: UNESCO Regional Office for Education in Asia and Oceania. (Document Number)
- Sharma, M. R. and Ali, S. (1986). Thermal summer index: a study of thermal comfort of Indian subjects. *Building and Environment*, 21(21), 11-24.
- Sharma, S. D., Kotani, H., Kaneko, Y., Yamanaka, T. and Sagara, K. (2007). Design, Development of a Solar Chimney with Built-in Latent Heat Storage Material for Natural Ventilation. *International Journal of Green Energy*, 4(3), 313-324.
- Sharples, Steve, and Maghrabi A. (2000). *Airflow through louvers: An experimental and CFD study*. Paper presented at the 21st Annual AIVC Conference : Innovations in ventilation technology.,
- Shen, W. Q., Ming, T. Z., Ding, Y., Wu, Y. J., and de Richter, R. K. (2014). Numerical analysis on an industrial-scaled solar updraft power plant system with ambient crosswind. *Renewable Energy*, 68, 662-676.
- Shimura, K., T. Horikoshi, and Miyamoto, S. (1996). *Experimental study on optimum air temperature and humidity conditions for Japanese in summer*. Paper presented at the Proceedings of the 7th International Conference on Indoor Air Quality and Climate (INDOOR AIR '96), Vol. 1, July 21-26, , Nagoya, Japan, pp. 281-285.
- Shiv Lal, S.C. Kaushik, and Bhargav, P. K. (2013a). Solar chimney: A sustainable approach for ventilation and building space conditioning *International Journal of Development and Sustainability*, 2(1).
- Shiv Lal, S.C.Kaushik, and P.K.Bhargav. (2013b). Solar chimney: A sustainable approach for ventilation and building space conditioning. *International Journal of Development and Sustainability*, 2(1), 1-21.

- Soad Aokhamis Mousavi, and Alibaba, H. Z. (2015). *A state of art for using Double skin façade in hot climate* Paper presented at the 2015 4th International Conference on Environmental, Energy and Biotechnology.
- Stabat, P., Caciolo, M., and Marchio, D. (2012a). Progress on single-sided ventilation techniques for buildings. *Advances in Building Energy Research*, 6(2), 212-241.
- Stabat, P., Caciolo, M., and Marchio, D. (2012b). Progress on single-sided ventilation techniques for buildings. *Advances in Building Energy Research (ABER)*, 6(2), 212-241.
- Stazi, F., Mastrucci, A., and di Perna, C. (2012). The behaviour of solar walls in residential buildings with different insulation levels: An experimental and numerical study. *Energy and Buildings*, 47, 217-229.
- Stephane Sanquer, Guillaume Caniot, Wang Li, and Delaunay, D. (2011). *A combined CFD-Network method for the cross-ventilation assessment in buildings*. Paper presented at the 13th International Conference on Wind Engineering, Amsterdam, The Netherlands.
- Straaten, J. F. V. (1967). *Thermal Performance of Building*. Amsterdam: Elsevier Publishing Company.
- Susanti, L., Homma, H., Matsumoto, H., Suzuki, Y., and Shimizu, M. (2008). A laboratory experiment on natural ventilation through a roof cavity for reduction of solar heat gain. *Energy and Buildings*, 40(12), 2196-2206.
- Szokolay, S. (2008). *Introduction to Architectural Science*. (Vol. 2): Architectural Press.
- Szokolay, S. V. (1980). *Environmental science handbooks for architecture and builders*. New York: : John Wiley & Sons Inc. and Lancaster, England: Construction Press Ltd.
- Szokolay, S. V. (1984). *Passive and Low Energy Design for Thermal and Visual Comfort*. Paper presented at the Third International PLEA Conference, Mexico City, 11-28.
- Szokolay, S. V. (1998). *Thermal Comfort in Warm-Humid Tropics*. Brisbane: University of Queenslando. Document Number)
- T. Horikoshi, T. T., Y. Kurazumi, N. Matsubara. (1995). Mathematical expression of combined and separate effect of air temperature, humidity, air velocity and thermal radiation on thermal comfort. *Archives of Complex Environmental Studies (ACES)*, 7(3-4) (1995), 9-12.
- Taengchum, T., Chirarattananon, S., Exell, R. H. B., Kubaha, K., and Chaiwiwatworakul, P. (2013). A study on a ventilation stack integrated with a light pipe. *Applied Thermal Engineering*, 50(1), 546-554.

- Tahbaz, M. (2009). Estimation of the wind speed in urban areas - height less than 10 meters. *International Journal of Ventilation*, 8 (1), 75-84.
- Takashi, K., and Arakawa, H. (1991). *Climate of Southern and West Asia* (Vol. 9). Amsterdam: Elsevier Scientific Publications.
- Tan, A. Y. K., and Wong, N. H. (2012). Natural ventilation performance of classroom with solar chimney system. *Energy and Buildings*, 53, 19-27.
- Tan, A. Y. K., and Wong, N. H. (2014). Influences of ambient air speed and internal heat load on the performance of solar chimney in the tropics. *Solar Energy*, 102(0), 116-125.
- Tantasavasdi, C., Srebric, J. and Chen, Q. (2001). Natural ventilation design for houses in Thailand. *Energy and Buildings*, 33(8), 815-824.
- Tecele, A., Bitsuamlak, G. T. and Jiru, T. E. (2013). Wind-driven natural ventilation in a low-rise building: A Boundary Layer Wind Tunnel study. *Building and Environment*, 59(0), 275-289.
- Tetsu Kubota, and Ahmad, S. (2006). Wind Environment Evaluation of Neighborhood Areas in Major Towns of Malaysia. *Journal of Asian Architecture and Building Engineering*, 5(1 May 2006), 8.
- Tetsu Kubota, Sangwoo Jeong, Doris Hooi Chyee, T. and Ossen, D. R. (2011). Energy Consumption and Air Conditioning Usage in Residential Building of Malaysia. *Journal of International Development of Cooperation*, 17.3, 61-69.
- Thomson, P. D., and O'Brian, R. (1980). *Weather*: Times Life Books.
- Thumann A, and DP, M. (2008). *Handbook of Energy Engineering*. . Florida, USA: Fairmont Press.
- Tichaona Kumirai, Jan-Hendrik, and D.C.U.Conradie. (2015). Performance of a solar chimney by varying design parameters [Electronic Version], from http://researchspace.csir.co.za/dspace/bitstream/10204/8302/1/Kumirai_2015.pdf
- Toe, D. H. C. (2008). *Night Ventilation Technique for Terraced Houses in Hot-Humid Climate of Malaysia*. Unpublished Open Access, Universiti Teknologi Malaysia, Skudai, Malaysia.
- Toe, D. H. C. (2013a). *Application of Passive Cooling Technique to Improve Indoor Thermal Comfort of Modern Urban Houses in Hot-Humid Climate of Malaysia*. Unpublished Open Access, Hiroshima University, Hiroshima, Japan.
- Tong Yang, and J.Clements-Croome, D. (Eds.). (2012) *Encyclopedia of Sustainability Science and Technology*. SpringerLink.

- Triantafyllou, A. G., Zoras, S., Evagelopoulos, V. and Garas, S. (2007). CO Concentrations and Elemental Analysis of Airborne Particles in a School Building. *Journal of Water Air Soil Pollution*, 8, 77 – 87.
- TSI, T. I. (2013). *Indoor Air Quality Handbook*. U.S.A.: TSI incorporated.
- United Nation, W. B. s. e. b. o. U. N. (2009). *World urbanization prospects o*. Document Number)
- Vernon, H. M. (1930). The measurement of radiatnt heat in relation to human comfort. *Journal of Physiology*, 70 (1930), XV–XVII.
- Villi, G., Pasut, W., and De Carli, M. (2009). CFD modelling and thermal performance analysis of a wooden ventilated roof structure. *Building Simulation*, 2(3), 215-228.
- Vladimir, I. (2005). *Secrets to climate adapted building design*. Paper presented at the World Sustainable Building Design, Tokyo.
- Wang Liping, and Hien, W. N. (2007). Applying Natural Ventilation for Thermal Comfort in Residential Buildings in Singapore. *Architectural Science Review*, 50.3, 224-233.
- Wang, L. (2010). *Design of double skin (envelope) as a solar chimney: Adapting natural ventilation in double envelope for mild or warm climates*. University of Southern California, U.S.
- Weather Analytics, W. (2013). Location of meteorological station In W. Analytics (Ed.), *Weather Data of Kuching, Sarawak*
- Webb, C. G. (1952). On some observations of indoor climate in Malaya. *Journal of the Institution of Heating and Ventilating Engineers*. 20, 189-195.
- Webb, C. G. (1959). An analysis of some observations of thermal comfort in an equatorial climate. *British Journal of Industrial Medicine*, , 16, 297-310.
- Wei, D., Qirong, Y., and Jincui, Z. (2011). A study of the ventilation performance of a series of connected solar chimneys integrated with building. *Renewable Energy*, 36(1), 265-271.
- Wittkopf, S. (2015). Tropical Net Zero. HPB magazine, Spring 2015, 44-54.
- Willis, C. (2014). History of Cities and City Planning. Introduction Retrieved 26 February 2014, 2014, from <http://www.art.net/~hopkins/Don/simcity/manual/history.html>
- WMO. (2014). World Weather Information Service: Malaysia. Retrieved 2 March 2014, from <http://worldweather.wmo.int/020/m020.htm>
- Wong, N. H., and Khoo, S. S. (2003). Thermal comfort in classrooms in the tropics. *Energy and Buildings*, 35(4), 337-351.

- Wong, N. H., Feriadi, H., Lim, P. Y., Tham, K. W., Sekhar, C., and Cheong, K. W. (2002). Thermal comfort evaluation of naturally ventilated public housing in Singapore. *Building and Environment*, 37(12), 1267-1277.
- Wong, N. H., Tan, A. Y. K., Ang, K. S., Mok, S., and Goh, A. (2012). *Performance evaluation of solar chimney system in the tropics*. Paper presented at the ICSDC 2011: Integrating Sustainability Practices in the Construction Industry - Proceedings of the International Conference on Sustainable Design and Construction 2011, 299-305.
- Wyndham, C. H. (1963.). Thermal comfort in the hot humid tropics of Australia. . *British Journal of Industrial Medicine*, 20, 110-117.
- Xu, J. L., and Liu, W. H. (2013). Study on solar chimney used for room natural ventilation in Nanjing. *Energy and Buildings*, 66, 467-469.
- Y. Nishi, A. P. G. (1971). Humid operative temperature. A biophysical index of thermal sensation and discomfort. *Journal de Physiologie*, 63(1971), 365-368.
- Yakubu, G. S., and Sharples, S. (1991). Airflow through modulated louvre systems. *Building Services Engineering Research and Technology*, 12(4), 151-155.
- Yan, Z., Guang-e, J., Xiao-hui, L., and Qing-ling, L. (2011). Research for Ventilation Properties of Solar Chimney with Vertical Collector. *Procedia Environmental Sciences*, 11, Part C, 1072-1077.
- Yang, A. S., Wen, C. Y., Juan, Y. H., Su, Y. M., and Wu, J. H. (2014). Using the central ventilation shaft design within public buildings for natural aeration enhancement. *Applied Thermal Engineering*, 70(1), 219-230.
- Yang, Q., Du, W., and Zhang, J. (2010). Research on ventilation performance of a series solar chimney integrated with a building. *Taiyangneng Xuebao/Acta Energiæ Solaris Sinica*, 31(7), 873-878.
- Yang, W., and G. Zhang. (2008). Thermal comfort in naturally ventilated and air-conditioned buildings in humid subtropical climate zone in China. *International Journal of Biometeorology*, 52(5), 385-398.
- Yao, R., Li, B., and Liu, J. (2009). A theoretical adaptive model of thermal comfort – Adaptive Predicted Mean Vote (aPMV). *Building and Environment*, 44(10), 2089-2096.
- Yau, Y. H., and Pean, H. L. (2011). The climate change impact on air conditioner system and reliability in Malaysia—A review. *Renewable and Sustainable Energy Reviews*, 15(9), 4939-4949.
- Yeang, K. (1980). Notes on Factors Influencing the Design of Terrace Houses. *Majalah Arkitek*, 21-25.

- Yiwei Liu, and Feng, W. (2012). Integrating passive cooling and solar techniques into the existing building in South China. *Advanced Materials Research* 368-373(2012), 3717-3720.
- Zain, A., A. Sayigh, and Othman, a. M. Y. (1997). *Field study on the thermal comfort of students in an institution of higher learning*. Paper presented at the Proceedings of the First International Symposium of Alternative & Renewable Energy, ISSAE'97, Johor Bahru, Malaysia.
- Zainal, M. (1993). *Thermal comfort for factory workers in Malaysia*. Paper presented at the Proceedings of the 6th International Conference on Indoor Air Quality and Climate (INDOOR AIR '93), July 4-8, Helsinki, pp. 157-161.
- Zainal, M., and Adnan, H. (1997). *Thermal comfort and indoor air quality (IAQ) in factory environment*. Paper presented at the Proceedings of the Asia-Pacific Conference on the Built Environment, November 3-6, Petaling Jaya, Malaysia, pp. 121-135.
- Zainal, M., and Keong, C. C. (1996). *Thermal comfort and energy conservation in factory buildings*. Paper presented at the Proceedings of the 7th International Conference on Indoor Air Quality and Climate (INDOOR AIR '96) from July 21-26.
- Zalewski L, Lassue S, Duthoit B, and al., e. (2002). Study of solar walls — validating a simulation model. *Building and Environment*, 37, 109-121.
- Zhai, X. Q., Dai, Y. J., and Wang, R. Z. (2005). Experimental investigation on air heating and natural ventilation of a solar air collector. *Energy and Buildings*, 37(4), 373-381.