

ENHANCED HOP-BY-HOP ROUTING ALGORITHMS FOR UNDERWATER
ACOUSTIC SENSOR NETWORKS

MOEEN UD DIN TARIQ

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Computer Science)

Faculty of Computing
Universiti Teknologi Malaysia

JANUARY 2017

This thesis work is dedicated to my parents and my teachers throughout my education career who have not only loved me unconditionally but whose good examples have taught me to work hard for the things that I aspire to achieve.

ACKNOWLEDGEMENT

”All praise to Allah, the lord of the worlds, and His Prophet Muhammad (peace be upon him), his family and his companions.”

First of all, I wish to express my gratitude and deep appreciation to Almighty Allah, who made this study possible and successful. This study would not be accomplished unless the honest espousal that was extended from several sources for which I would like to express my sincere thankfulness and gratitude. Yet, there were significant contributors for my attained success and I cannot forget their input, especially my research supervisors, Assoc. Prof. Dr. Muhammad Shafie Abd Latiff, Dr. Yahaya Coulibaly and Dr. Mohammad Ayaz, who did not leave any stone unturned to guide me during my research journey. I am also very thankful to my dearest friend Mr. Faisal Asghar for his faith, his believe, for always being there for me and for his continuous motivation that helped me achieved my goals during this journey.

I shall also acknowledge the extended assistance from the administrations of Faculty of Computing (FC) and School of Graduate Studies (SPS) who supported me all through my research experience and simplified the challenges I faced. For all whom I did not mention but I shall not neglect their significant contribution, thanks for everything.

ABSTRACT

Underwater Acoustic Sensor Network (UW-ASN) is a wireless network infrastructure applicable in deep ocean to sense, collect and transmit information to seashore data collector. Underwater sensor network consists of sensor nodes disposed in different depths, equipped with a low bandwidth acoustic modem and acts collaboratively to route the packet from one node to another. Underwater routing protocols provide route information to underwater sensor nodes to transmit collected information efficiently using an optimal path. Routing protocol related to UW-ASN is identified with the issues of low energy consumption, high end-to-end delay and shorter network lifetime. These are due to the distribution of unnecessary information packet flooding in route establishment, improper selection of next hop neighbour and inefficient routing path generation. This research develops a routing protocol that will be able to control flooding of hello packet at information distribution phase, to calculate link quality and composite metric cost for next hop selection and to regularly update the energy status in order to achieve optimum balance in routing path. The developed protocol is called Distance based Reliable and Energy Efficient (DREE) consists of three schemes. The first scheme is called distance calculation and information distribution scheme that calculates the distance between potential neighbours and distribute the local information in an energy efficient manner. The second scheme is route planning and data forwarding scheme in which a node calculates the link quality towards its neighbours and selects a path based on physical distance, link quality and node energy information. Finally, the third scheme is energy balancing scheme that provides each node with new energy status of its neighbours on regular basis. DREE is compared with a Reliable and Energy Efficient routing protocol (R-ERP²R) and Depth based Routing (DBR) protocol. Simulation shows that DREE reducing energy consumption in the information distribution phase by 187% and 179% compared to R-ERP²R in random and grid topology respectively. DREE achieves higher packet delivery ratio of 96% with a similar end-to-end delay as R-ERP²R. DREE improves packet delivery ratio by 7% and 13% over R-ERP²R and DBR, with 9.3% and 201% less energy consumption respectively in data forwarding phase. Finally, DREE improves network lifetime by 18% and 74.5% compared to R-ERP²R and DBR protocols.

ABSTRAK

Rangkaian Penderia Akustik Dalam Air (UW-ASN) adalah infrastruktur rangkaian tanpa wayar diaplikasikan dalam lautan dalam untuk mengesan, mengumpul dan menghantar maklumat ke pengumpul data di tepi pantai. Rangkaian penderia dalam air mengandungi nod penderia disusun dengan kedalaman yang berbeza, dilengkapi dengan model akustik yang rendah lebar jalur dan bertindak secara kolaboratif untuk menghala paket dari satu nod ke nod yang lain. Protokol penghalaan dalam air perlu menyediakan maklumat halaan kepada nod deria dalam air untuk menghantar maklumat terkumpul secara efisien menggunakan laluan yang optima. Protokol penghalaan berkaitan dengan UW-ASN dikenal pasti mengalami isu-isu seperti penggunaan tenaga yang rendah, tangguhan hujung-ke-hujung yang tinggi dan hayat rangkaian yang pendek. Ini adalah disebabkan oleh pengagihan kebanjiran paket maklumat yang tidak perlu semasa pemantapan halaan, pemilihan hop jiran seterusnya yang tidak tepat dan penjanaan laluan penghalaan yang tidak efisien. Penyelidikan ini membina protokol penghalaan yang mampu mengawal kebanjiran paket hello semasa fasa pengagihan maklumat, yang boleh mengira kualiti sambungan dan kos metrik komposit untuk pemilihan hop seterusnya dan yang dapat mengemaskini secara berkala status tenaga untuk mencapaiimbangan yang optima dalam laluan penghalaan. Protokol yang dibangunkan dipanggil Boleh percaya dan Cekap Tenaga berasaskan Jarak (DREE) mengandungi tiga skema. Skema pertama dipanggil skema pengiraan jarak dan pengagihan maklumat yang mengira jarak antara jiran-jiran yang berpotensi dan mengagihkan maklumat tempatan dalam bentuk cekap tenaga. Skema kedua adalah skema perancangan laluan dan pemajuan data di mana nod mengira kualiti sambungan ke arah jiran-jirannya dan memilih laluan berdasarkan jarak fizikal, kualiti sambungan dan maklumat tenaga. Akhirnya, skema ketiga adalah skemaimbangan tenaga yang menyediakan kepada setiap nod status tenaga jiran-jiran barunya secara berkala. DREE dibandingkan dengan protokol penghalaan Tenaga Efisien (R-ERP²R) dan protokol Penghalaan Berasaskan Kedalaman (DBR). Simulasi menunjukkan DREE mengurangkan masing-masing penggunaan tenaga semasa fasa pengagihan maklumat kepada 187% dan 179% dibandingkan dengan R-ERP²R dalam topologi rawak dan grid. DREE mencapai kadar penghantaran paket yang tinggi iaitu 96% dengan tangguhan hujung-ke-hujung sebagaimana R-ERP²R. DREE meningkatkan kadar penghantaran paket kepada 7% dan 13% ke atas R-ERP²R dan DBR dengan mengurangkan masing-masing 9.3% dan 201% semasa fasa pemajuan data. Akhirnya, DREE meningkatkan hayat rangkaian sebanyak 18% dan 74.5% berbanding dengan protokol R-ERP²R dan DBR.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
	LIST OF ABBREVIATIONS	xiii
	LIST OF SYMBOLS	xv
	LIST OF APPENDICES	xvi
1	INTRODUCTION	1
	1.1 Overview	1
	1.2 Motivation	1
	1.2.1 Underwater Scenario Environment	2
	1.2.2 Applications of UW-ASN	3
	1.2.3 Constraints of UW-ASN	5
	1.3 Problem Background	7
	1.4 Problem Statement	10
	1.5 Research Questions	10
	1.6 Aim of Research	11
	1.7 Research Objectives	11
	1.8 Scope of the Research Work	11

1.9	Thesis Organization	12
2	LITERATURE REVIEW	14
2.1	Overview	14
2.2	Underwater Networks	15
2.2.1	Physical Layer and Related Issues	16
2.2.2	Media Access Control Related Issues	17
2.2.3	Network Layer Protocols and Related Issues	18
2.2.4	Transport Layer and Related Issues	21
2.3	Review of Beacon Based Routing Protocols	22
2.3.1	Hop-by-hop Path Based Routing Protocols	26
2.3.2	End-to-End Path Based Routing Protocols	38
2.4	Research Gap and Directions	43
2.5	Summary	47
3	METHODOLOGY	48
3.1	Overview	48
3.2	Operational Framework	50
3.3	Research Design and Development	50
3.3.1	Distance Calculation, Link Quality Estimation and Information Distribution Phase	50
3.3.2	Route Planning and Data Forwarding Phase with Energy Balancing Scheme	55
3.3.3	Route Update and Maintenance Phase	58
3.4	Simulation Framework	58
3.4.1	Channel Model	60
3.4.2	Node Energy Model	62
3.4.3	Simulation Environment	63
3.4.4	Performance Metrics	65
3.4.5	Assumptions and Limitations	66
3.5	Summary	66

4	DISTANCE BASED ENHANCED HOP-BY-HOP ROUTING PROTOCOL	67
4.1	Overview	67
4.2	Distance based Reliable and Energy Efficient (DREE) Routing Protocol	67
4.2.1	Distance Calculation and Information Distribution	69
4.2.2	Link Quality Estimation	73
4.2.3	Route Planning and Data Forwarding	80
4.2.4	Energy Balancing	84
4.2.5	Route Update and Maintenance	86
4.3	Summary	87
5	PERFORMANCE EVALUATION OF DREE	88
5.1	Overview	88
5.2	Results and Analysis	88
5.2.1	Node Mobility	89
5.2.2	Packet Rate	91
5.3	Performance Comparison with R-ERP ² R and DBR	93
5.3.1	Energy Consumption in Information Distribution Phase	94
5.3.2	End-to-End Delay	95
5.3.3	Network Lifetime	97
5.3.4	Packet Delivery Ratio	99
5.3.5	Energy Consumption in Data Forwarding Phase	101
5.4	Summary	102
6	CONCLUSION AND FUTURE WORK	104
6.1	Overview	104
6.2	Summary of Contribution	104
6.3	Open Issues and Future Work	106
	REFERENCES	110
	Appendices A – B	121 – 126

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Working and requirement analysis of beacon based protocols	24
2.2	Issues of beacon based hop-by-hop protocols to be addressed	44
2.3	Simulation Parameters	64
2.4	PHY layer, MAC layer and other various parameters	65

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Different type of node deployment in UW-ASN	3
2.1	Underwater layer model	16
2.2	Basic categorization of underwater routing protocols	20
2.3	Different categories and sub categorizes of underwater routing protocols	23
2.4	Asiising Hop IDs in H ² -DAB	30
2.5	H ² -DAB data packet format	31
2.6	Data forwarding with 2H-ACK	32
2.7	Route discovery and data transmission in ICRP	39
3.1	Operational framework of the research work	49
3.2	Research methodology plan for DREE protocol	51
3.3	Information distribution in R-ERP ² R and its associated problems	52
3.4	Controlled flooding in DREE	53
3.5	Energy balancing process in DREE	57
3.6	Energy status update after overhearing a process	57
3.7	Aqua-Sim class diagram	60
3.8	Node Energy Model configuration using OTcL script	62
3.9	An example of random node deployment in DREE in Aqua- Sim	63
3.10	An example of grid node deployment in DREE in Aqua-Sim	63
4.1	Format of Hello packet	69
4.2	Process of "Hello" packet distribution in DREE	69
4.3	Scheme for distance calculation and information distribution in DREE	70
4.4	The process of Hello packet with higher distance	71

4.5	Flow diagram of distance calculation and information distribution in DREE	72
4.6	Format of FLQE dummy packet	75
4.7	Scheme for link quality estimation in DREE	76
4.8	FLQE calculation (CallFLQECalc)	77
4.9	Flow diagram for link quality estimation in DREE	79
4.10	Data packet format	80
4.11	Data forwarding in DREE (Receiver Function)	82
4.12	Data forwarding in DREE (Sender function)	83
4.13	Energy balancing in DREE protocol	84
4.14	Energy balancing scheme in DREE	85
4.15	Depicting horizontal node mobility	86
4.16	Depicting update in routing table	86
5.1	Node mobility effect on data delivery ratio in DREE	89
5.2	Node mobility effect on end-to-end delay in DREE	90
5.3	Node mobility effect on energy consumption in DREE	91
5.4	Effect of increase in packet rate on packet delivery ratio in DREE	91
5.5	Effect of increase in packet rate on end-to-end delay in DREE	92
5.6	Effect of increase in packet rate on energy consumption in DREE	93
5.7	Energy consumption in information distribution phase (random topology)	94
5.8	Energy consumption in information distribution phase (grid topology)	95
5.9	Comparing end-to-end delay (random topology)	96
5.10	Comparing end-to-end delay (grid topology)	96
5.11	Comparing network lifetime (random topology)	97
5.12	Comparing network lifetime (grid topology)	98
5.13	Comparing packet delivery ratio (random topology)	99
5.14	Comparing packet delivery ratio (grid topology)	100
5.15	Comparing energy consumption in data forwarding phase (random topology)	101
5.16	Comparing energy consumption in data forwarding phase (grid topology)	102

LIST OF ABBREVIATIONS

2H-ACK	-	Two Hop Acknowledgement
AODV	-	Adhoc On-demand Distance Vector
APCR	-	Adaptive Power Control Routing
ARQ	-	Automatic Repeat Request
ASL	-	Asymmetric Link
AUV	-	Autonomous Underwater Vehicle
BER	-	Bit Error Rate
CARP	-	Channel Aware Routing Protocol
DBR	-	Depth Based Routing
DBRS	-	Distance Based Routing Scheme
DCR	-	Depth Controlled Routing
DESERT	-	DEsign, Simulate, Emulate and Realize Test-beds
DFR	-	Dynamic Flooding-based Routing
DREE	-	Distance based Reliable and Energy Efficient
DSR	-	Dynamic Source Routing
DV-hop	-	Distance Vector hop
DY-NAV	-	Dynamic Network Allocation Vector
ETX	-	Expected Transmission Count
FDBR	-	Fuzzy Depth Based Routing
FLQE	-	Fuzzy Logic Based Link Quality Estimator
GPNC	-	Geographical routing based on Partial Network Coding
GPS	-	Global Positioning System
H ² -DAB	-	Hop-by-hop Dynamic Addressing Based
ICRP	-	Information Carrying based Routing Protocol
ISO	-	International Standards Organization
L2-ABF	-	End-to-End Delay and Energy Efficient Routing Protocol

LOARP	-	Low Overhead Routing Protocol
MAC	-	Medium Access Control
MRP	-	Multilayer Routing Protocol
NS2	-	Network Simulator 2
OFDM	-	Orthogonal Frequency Division Multiplexing
OSI	-	Open System Interconnection
OTcl	-	Object-oriented Tool Command Language
PRR	-	Packet Receive Ratio
PTMAC	-	Pipeline Transmission Medium Access Control
QELAR	-	Machine Learning based Adaptive Routing
RDBF	-	Relative Distance Based Forwarding
R-ERP ² R	-	Reliable and Energy Efficient Routing Protocol
RF	-	Radio Frequency
RSSI	-	Receiver Signal Strength Indicator
SF	-	Stability Factor
SNR	-	Signal-to-Noise Ratio
SPRR	-	Smoothed Packet Receive Ratio
SUN	-	Source Routing Protocol for Underwater Networks
TCP/IP	-	Transmission Control Protocol/Internet Protocol
TDoA	-	Time Difference of Arrival
ToA	-	Time of Arrival
TWSN	-	Terrestrial Wireless Sensor Networks
UDP	-	User Datagram Protocol
UW-Aloha	-	Underwater Abramsons Logic of Hiring Access
UW-ASN	-	Underwater Acoustic Sensor Network
WOSS	-	World Ocean Simulator System

LIST OF SYMBOLS

α	-	Normalization symbol or smoothness factor
β	-	Normalization Symbol for link quality estimation
$\mu(i)$	-	Represents membership function for high quality links
δt	-	Represents high precision time

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Simulator and Emulator Capabilities	121
B	List of Publications	126

CHAPTER 1

INTRODUCTION

1.1 Overview

Underwater acoustic sensor network (UW-ASN) is an emerging area of research because of its applicability of monitoring, navigation, surveillance and tracking applications in various environmental, industrial and military domains. The increasing interest in these applications motivates research for development of underwater routing protocols in acoustic medium. Multiple underwater routing protocols have been proposed over the years that provide suitable low overhead mechanisms to sense, collect and transmit sensed information to onshore control systems. However, the intrinsic conditions in underwater environment raises many challenges for the design of reliable and efficient routing protocol. The motivation behind this research is to address the problem of high energy consumption in the information distribution phase, the problem of high end-to-end delay in route planning and data forwarding phase and finally the problem of enhancing network lifetime that has a significant effect on the performance of the network.

1.2 Motivation

The oceanic world has been fascinating humans for many centuries and has been a tremendous source of aliment, mean of transportation and also hold loads of natural resources (such as salt, natural gases, coal mines) in it. Since water plays a vital role in human's survivability, with the advancement of science and technology it was only in last century humans seriously started the exploring underwater world, which was inadequate before. Water covers 71% of earth surface and nearly 10% has been scrutinized (Ayaz *et al.*, 2011). Oceans play an important role in climatic change over the land occupied by humans and hence its investigation is important to

understand the causes of natural events like hurricanes, sea storms, tsunamis, etc. However, due to stringent oceanic environment (such as high water pressure, extreme temperatures) and other uncertain events, unmanned exploration with self-configuring and communicating capabilities is inevitable. Hence, unmanned exploration gives rise to the use of automated underwater sensor network technology and underwater communication protocols.

Underwater routing protocols play a vital role in sensing, collecting and transmitting sensed information from underwater sources and then delivering this information to the onshore data collection centre. However, underwater network routing protocols requires exhaustive research work to improve their performance. Underwater networks have many applications in the modern world such as oil/gas exploration, pollution monitoring, measuring of seismic activities for disaster prevention, navigation support for ships and intrusion detection. These applications are in great demand but require further enhancement in this technology to work properly and to collect data in an effective way.

1.2.1 Underwater Scenario Environment

Different architectures and node deployment strategies for underwater sensor network have been presented in literature such as Al-Bzoor *et al.* (2013); Climent *et al.* (2012); Ibrahim *et al.* (2013b) and Yadav *et al.* (2014). These deployment methods can be classified into two broad categories (i) classification with respect to motion such as stationary, mobile or hybrid nodes or (ii) classification with respect to coverage space such as 2D or 3D (Zeng *et al.*, 2013). Underwater acoustic wireless sensor networks are formed with multiple sensor nodes as shown in Figure 1.1 (Heidemann *et al.*, 2012). Some nodes are tied using the wire at the bottom of the ocean with anchors but can move up to the length of the wire they are connected and are called anchor nodes. Anchor nodes and autonomous underwater vehicles (AUV) are used to collect information from a specific areas and very helpful in providing localization information or to be used as a reference point to the nodes. Ordinary sensor nodes are deployed underwater in most of the scenarios and move freely underwater along with water currents. However, some underwater routing protocols such as Information carrying based routing protocol (ICRP) proposed by Liang *et al.* (2007) make use of fix ordinary sensors nodes as well. The job of these ordinary nodes is to sense, collect and transmit the sensed information in the direction of the sink with the help of acoustic modems. Sink nodes are floating nodes and are deployed at the water surface;

However in some scenarios sink nodes are stationary (Yan *et al.*, 2008). Sink nodes are usually equipped with acoustic and radio modems. Radio modems provide inter sink and communication with onshore control centre, whereas acoustic modems are used to communicate with ordinary underwater nodes. Onshore data collection centre make use of terrestrial or satellite communication to send further collected data to an offshore data centre for data analysis.

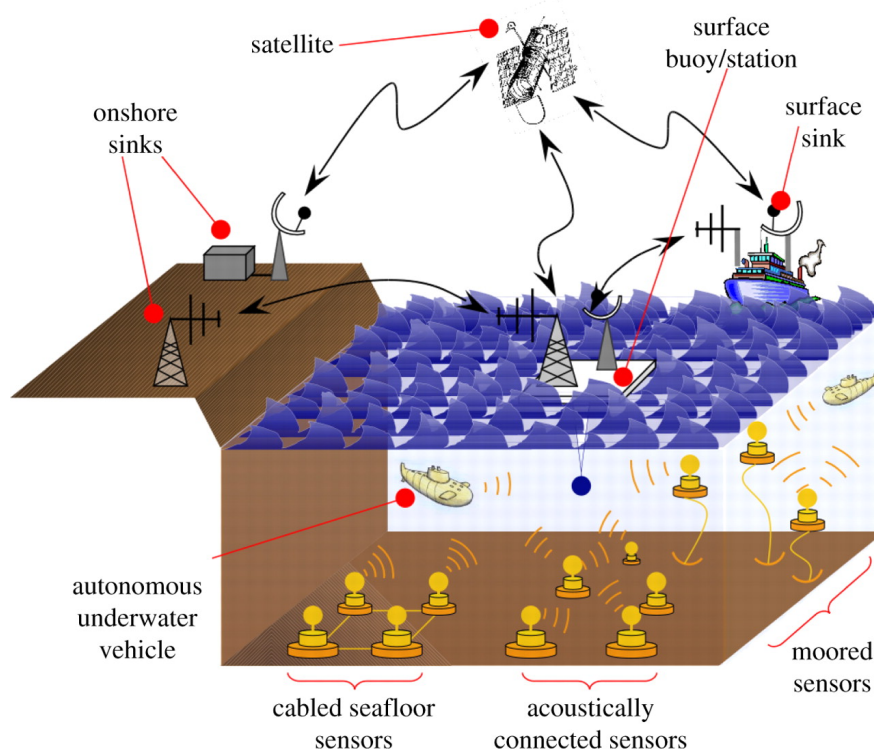


Figure 1.1: Different types of node deployment in UW-ASN

All these different sensor nodes must work together in the form of an organized network, as the set goals/objectives depend upon their collective performance. Hence, the communication schemes require a change in their way of operation to work in collaboration and efficiently in underwater networks.

1.2.2 Applications of UW-ASN

Underwater sensor networks are considered a promising solution for the applications, where different sensor nodes adapt with the complexities and challenges

posed by extreme underwater environment and work together to achieve their goals. A brief summary of some of these applications is given below:

- i. *Disaster Prevention:* Underwater sensor networks can be used for disaster prevention applications from generation to their behavior such as sea quakes, sea storms and tsunami that help provide warnings to coastal areas.
- ii. *Environmental oceanic Monitoring:* Underwater sensor networks facilitate in monitoring water currents, changes in the maritime environment, improving weather forecasts and can help develop human activities and provide study of their effect on marine eco systems (Akyildiz *et al.*, 2005). Moreover, monitoring of chemical, biological and nuclear pollution and tracking/study of the aquatic species are typical applications for which UW-ASN is assumed to be a promising solution. Furthermore, studies by Zhang *et al.* (2004) also describe applications for areal detection of certain micro-organisms. One of the common and most important application in the modern world is oil/gas pipeline safety and leakage detection, as a security risk and monitoring importance increases with increase in length of pipe that is mostly over couple of miles underwater (Jawhar *et al.*, 2007).
- iii. *Underwater Exploration:* Underwater sensor networks have applications in mine, mineral and oil/gas reservoir detections underwater. Moreover, they can also be used in long digital data transfer optical cables and oil/gas pipeline monitoring and deployment.
- iv. *Oceanic Sampling:* Synoptic and cooperative sampling of 3D ocean environment can be done in underwater networks assisted with AUV's.
- v. *Tactical Surveillance and Targeting:* Underwater sensor networks assisted with AUV's can perform tactical surveillance, targeting and intrusion detection in the 3D underwater environment. According to Akyildiz *et al.* (2005), underwater surveillance shows better results over traditional terrestrial radar systems for low signature targets.
- vi. *Assisted Navigation:* Underwater sensor networks are supportive in submarine and ships navigation and help to provide safe passage in the presence of hazards and assist in locating underwater rocks and shoals (i.e. sandbanks and ridges).

1.2.3 Constraints in UW-ASN

Terrestrial wireless sensor networks (TWSN) make use of radio waves for communication but in underwater networks these radio waves at high frequency are prone to absorption but could propagate at ultra-low frequencies ranging between 30 - 300 Hz (Akyildiz *et al.*, 2004). Using radio waves at low frequencies require large directional antenna's and high transmission power. On the other hand, optical communication is subject to scattering and not a good choice for long distance communication in the underwater environment (Akyildiz *et al.*, 2004). However, up to several Mbits/sec could be achieved with optical modems in crystal clear water but for short range connections (Fair *et al.*, 2006). Therefore, acoustic waves mostly are considered preferred method of communication for the underwater networks. Acoustic channel is considered a reliable communication medium for short range, adhoc and cost efficient UW-ASN. Despite a preferred choice, underwater acoustic channels are considered new and pose a whole lot of new communication challenges at broad level. Underwater sensor network channels can be classified as vertical and horizontal channels. However, horizontal channels are considered to have posed with significant challenges like signal absorption, multipath effect due to moving obstacles causing frequency selectivity, noises generated by natural events or man-made devices, large delays and signal scattering due to reflections that result in temporal signals (Sameer *et al.*, 2012). Moreover, it is also been shown that the increase in frequency in the acoustic channel results in increased attenuation due to absorption of high frequency components underwater. For example at frequency of 12.5 kHz, the amount of absorption is 1 dB/km, while at frequency of 70 kHz, it is more than 20 dB/km (Heidemann *et al.*, 2006).

On the other hand, low frequencies are dependent upon ambient noise, which limit the available bandwidth. Hence, in both cases low bit rate is the outcome which is significantly low as compared to radio networks (Akyildiz *et al.*, 2004). Beside that, propagation of sound waves in underwater environment are contingent on the physical characteristics of underwater environment such as density, pressure, temperature and salinity of water that further degrades the performance of acoustic channels (Heidemann *et al.*, 2006). Furthermore, acoustic waves travel at the speed of 1500 m/s underwater which is slower than radio waves in air by five orders of magnitude and vary spatially with above said physical characteristics (Heidemann *et al.*, 2012). Furthermore, delay increases with the rise in distance between communicating nodes, resulting in time-varying frequency shifts and spreading of frequency, resulting in Doppler variance of received signal. Delay in underwater

networks is 0.67 km/s, which is five order of magnitude lower than radio networks (Akyildiz *et al.*, 2004). This variation in acoustic signals gives rise to the phenomenon of refraction, which together with multipath results in poor reception and in some places lead to shadow zones (Partan *et al.*, 2007) that complicates the interpretation at the receiver. Together these constraints result in communication channel of poor quality and high latency, thus combining the worst aspect of terrestrial mobile and satellite radio channel into communication medium of extreme difficulty. Therefore, while designing routing protocols for incorporating the limitations posed by acoustic medium must be considered for the efficiency of the protocol. The change in the communication medium from radio channels to acoustic channels make traditional wired and wireless routing protocol unsuitable, which result in poor performance.

Therefore, challenges enforced by undersea environment requires the new set of routing protocols and algorithms that can cope up with its harshness and provide effective communication. The challenges imposed by the underwater environment are:

- i. *Node Mobility*: Multiple applications require free nodes that are not anchored at the bottom or fixed at the surface. In this situation, nodes move both in vertical and horizontal direction with water currents, especially in shallow water. However, vertical movement is not significant (Cui *et al.*, 2006). This phenomenon results in communication gaps/voids and often requires autonomous underwater vehicles (AUV's) for retrieving the location of separated nodes and help in adjusting their position for data routing. Although node movement is helpful in the vast coverage area in sparse networks as a data mule and providing connectivity among nodes but also result in overhead and require movement prediction models for improved efficiency.
- ii. *High Bit Error Rate*: Acoustic channels have limited bandwidth and multiple channel impairments like multi-path, fading and noise. Therefore, the error rate is very high and frequent disconnections are common as compared to terrestrial sensor networks and the error rate increases with the increase in distance between the nodes.
- iii. *Communication Range*: Communication range in underwater networks is inversely proportional to the bandwidth, which means that increase in range results in very limited bandwidth. For example, a medium range of 1-10 km only results in 10 kHz of bandwidth, whereas short range of 0.1-1 km can achieve bandwidth of 20-50 kHz (Akyildiz *et al.*, 2005).
- iv. *Limited Energy*: Nodes in UW-ASN are battery powered and charging

batteries is hectic. Hence, energy is limited as compared to the terrestrial networks that can even be charged with solar power.

- v. *Node Failure*: Last but not least, UW-ASN are prone to fouling and corrosion.

1.3 Problem Background

Stringent underwater environment imposes constraints on human involvement in the exploration of underwater resources. For systematic observations, smooth communication and to obtain optimal results underwater sensor nodes must be able to self-configure, share their coordinates, interactively communicate with other sensor nodes and efficiently pass data to the sink nodes on the surface. However, the downside of traditional exploration mechanism is that they require human involvement that is not possible due to the unpredictable nature of the aquatic environment, vastly monitored area and cost involved. Hence, the efficiency and applicability of traditional mechanisms is limited with some imposed constraints (Prathap *et al.*, 2012). Last but not least, with no inter nodes or offshore communication, traditional mechanisms are not scalable. Hence, they are unsuitable and unreliable for broad coverage. Therefore, the need of an unmanned solution such as routing protocols for efficient monitoring and data collection for large-scale real-time applications are required. A solution where, nodes not only be able to communicate with each other efficiently using acoustic wireless links but also able to relay data and communicate with an offshore control system. Issues in designing a routing protocols are discussed below.

Maturity in terrestrial wireless sensor network technology inspires researchers to experiment using UW-ASN technology in the inhospitable underwater environment. However, UW-ASN poses significant challenges and requires extensive research to obtain resilient, robust network with improved performance. Communication in UW-ASN is not as simple as in TWSN, where common issues like power, energy efficiency, and deployment become significant in 3D underwater topology and must be taken into consideration while designing a routing protocol. Underwater network protocols have high propagation delay in an acoustic medium. This means that the communication overhead must be bound by a minimum threshold to enhance network lifetime concerning energy and to avoid further delay in the slower acoustic medium.

Nodes in underwater networks are equipped with limited battery power and hence utilizing this energy efficiently is one of the most important issues in these

networks. Energy efficiency in routing protocols is referred to as providing routing services by reducing energy consumption in events such as transmission/reception of messages, reducing interference, reducing error rate and number of retransmissions attempts (Mundada *et al.*, 2012; Zaman, 2012; Pour, 2015). For example, protocols proposed by Ayaz *et al.* (2012a); Coutinho *et al.* (2013); Wahid *et al.* (2014a, 2015) consume excessive energy in information distribution phase to setup path for data delivery. These protocols flood unnecessary traffic which is not required for setting up data path or never used for data communication. H²-DAB protocol maintains duplicate paths which it never uses throughout its working process. On the other hand routing protocol such as R-ERP²R by Wahid *et al.* (2014a) deploy uncontrolled flooding, where every new information received at a node such as distance is propagated throughout the network. Hence these protocols consume a lot of energy in information distribution phase and are not energy efficient. Moreover, these protocols do not deploy any collision avoidance mechanism and hence collisions are inevitable. Therefore, a controlled flooding technique is necessary in the information distribution phase to reduce high energy consumption. Otherwise, it is possible that a node may die early due to excessive energy consumption and during data forwarding process a source node may not find any data forwarding candidate at next hop.

Another issue of concern is reducing high end-to-end delay in the route planning and data forwarding phase. R-ERP²R considers link quality with energy to form a composite metric for cost calculation for the link at next hop. Composite metric means combining two or more related metrics and estimating link cost based on the combination of these metrics. Routing protocols depend upon estimation of link quality to overcome low power unreliable links and to increase network efficiency in terms of end-to-end delay and node energy (Gnawali *et al.*, 2009; Baccour *et al.*, 2012). In R-ERP²R, link quality is used with energy for node selection at next hop. However, these two metrics are not related, as increase or decrease in energy of the node does not affect the quality of the communication link and vice versa. R-ERP²R does not guarantee selection of nodes with higher energy and or with highest link quality. In first case where R-ERP²R does not select node with highest energy results in reduced network lifetime. While in the second case of link quality, R-ERP²R suffers from packet loss as ETX accounts for partial link quality and suffers with higher end-to-end delay. This is because packet receive ratio for two different nodes at the same distance from the source can be different and less as compared to a node having more distance than these two nodes (Baccour *et al.*, 2012). Moreover, R-ERP²R makes use of DYNAMIC 802.11 by Shin & Kim (2008) as MAC layer protocol, which adds to further delay as it is a handshaking based protocol. Depth based protocol (DBR), on the other hand, consider a single depth metric for data forwarding and cannot provide a robust

path. Its greedy multipath approach results in frequent collisions and require multiple retransmissions to deliver data at next hop. Hence, it also suffers from higher end-to-end delay and higher energy consumption. Moreover, for data forwarding protocol such as H²-DAB by Ayaz *et al.* (2012a) utilize a reactive multipath approach, which not only add the delay at each next hop but results in collisions as well, especially in dense deployment.

Studies (Liu *et al.*, 2009; Draves *et al.*, 2004) have shown that reliability based metrics such as ETX exhibit better performance than protocols with conventional metrics such as hop count and latency. This is because protocols that use shortest path or minimum hop based metrics rely on the assumption that underlying link is of good quality and hence suffer from performance degradation. In underwater networks the channels are highly unreliable due to the factors described in 1.2.3 and continuous mobility of the node. The continuous node mobility does not allow reliable data connections as in TWSN, where transmission control protocol (TCP) is used to maintain a end-to-end connection. Therefore, routing protocols proposed for underwater networks prefer hop-by-hop communication. In beacon based protocols, R-ERP²R by Wahid *et al.* (2014a) is the only protocol that consider ETX metric proposed by De Couto *et al.* (2005) for estimating the quality of the link. However, ETX accounts for only partial quality of the link which its overestimates (Baccour *et al.*, 2012). Therefore, to resist transient fluctuations in underwater networks, to provide quality of service and to select a stable link between nodes in communication require accurate estimation of the underlying link. The selection of node based on the link quality estimation guarantees reliability, it reduces end-to-end delay by reducing retransmission attempts and by avoiding route re-selection due to link failure (Vigita & Julie, 2013; Baccour *et al.*, 2012). However, link quality is to be used with some related metric for the node selection at next hop.

In the data forwarding phase, it is also noticed that some protocols such as H²-DAB (Ayaz & Abdullah, 2009) and DBR (Yan *et al.*, 2008) do not provide any scheme to use next hop nodes alternatively and hence compromise the network lifetime. They do not provide any scheme to balance energy or alternative selection of nodes at next hop, rather they repeatedly use the same nodes. As a result, some nodes in the network die early, creating communication voids. A communication void is a situation where a node is unable to find next hop node in the direction of the sink node (Kheirabadi & Mohamad, 2013). Communication voids not only results in unanticipated changes in the topology but also produce signaling overhead in data transmission as data carrying node search for different new paths. Furthermore, in H²-DAB protocol developed by

Ayaz & Abdullah (2009), the addressing scheme is designed to achieve the high data delivery rate. However, the addressing design is compromising the life of the network by using the same path over and over again. R-ERP²R work on proactive routing tables, which means that once the routing table is built it is only updated after a specific time interval. As a result same nodes are used repeatedly in one interval and hence lifetime of network is reduced. Therefore, a scheme is required using which a node energy status can be updated on regular basis instead of set intervals. This allows a source to choose different nodes in a specific interval and enhance network lifetime.

1.4 Problem Statement

This research is to address the problem of high energy consumption in the information distribution phase due to uncontrolled flooding or unnecessary traffic flow in building up routes. In underwater networks multiple channel impairments together with node mobility result in unstable links. Selection of such links for data communication based on improper quality estimation results in multiple re-transmission attempts that lead to higher end-to-end delay. Therefore, sending data over communication links, requires proper quality estimation of the link between the two neighboring nodes. This research therefore, mainly focuses on next hop neighbor selection based on composite metric (link quality and distance) in data forwarding phase to reduce end-to-end delay. This research also address the issue of inefficient energy balancing schemes that allow repeated use of same nodes for data communication. Such schemes leads to the death of nodes due to frequent usage and reduce lifetime of the network. Therefore, the problem on how to efficiently provide energy balancing has been taken into consideration to enhance the lifetime of a underwater network.

1.5 Research Questions

- i. How to control the unnecessary packet flooding to reduce the energy consumption in the information distribution phase?
- ii. How to estimate optimal link quality estimation and consider more than one metric to improve end-to-end delay?
- iii. How to retrieve and update energy status of nodes at next hop to improve network lifetime in data forwarding phase?

1.6 Aim of the Research

The aim of this research work is to design and develop routing schemes for underwater networks that will enhance information distribution for setting up network path, find an optimized route on hop-by-hop basis and keep communicating nodes informed of their energy status at all times. These schemes work together as one unit and will reduce energy consumption, end-to-end delay in the network while increasing packet delivery ratio and improving the network lifetime.

1.7 Research Objectives

The following objectives are defined to design and develop enhanced hop-by-hop routing protocol in UW-ASN.

- i. To design and develop a scheme that controls flooding of hello packet to reduce energy consumption in the information distribution phase.
- ii. To design and develop a scheme that estimates link quality and compute cost using a composite metric for the selection of node at next hop to reduce end-to-end delay.
- iii. To design and develop an energy balancing scheme that allow energy status update at each communicating node on regular basis to improve network lifetime in data forwarding phase.

1.8 Scope of the Research Work

Many routing protocols for UW-ASN have been proposed in last few years. However most of them assume special setups or requirements. For example either they require a particular sensor (depth calculation sensor) as hardware or require full dimension location or other special equipment for data forwarding. Example of some such protocols that use extra mechanical devices, pressure sensors or localization assumptions includes DFR (Shin *et al.*, 2012), DCR (Coutinho *et al.*, 2013) and DBR (Yan *et al.*, 2008). On the other hand beacon based protocols such as H²-DAB (Ayaz & Abdullah, 2009), R-ERP²R (Wahid *et al.*, 2014a) do not use any special setups

or localization assumptions. Therefore, the scope for this work covers the following points:

- i. Nodes movement is not considered continuous, rather node will move up to certain point and come back to its original position.
- ii. At MAC layer underwater broadcast MAC is considered for the development of this protocol in random and grid topology.

1.9 Thesis Organization

This rest of the thesis is arranged as follows:

Chapter 2 provides background to the domain and further provides discussion on related issues in underwater networks. Classification of the existing beacon based underwater routing protocols and debate on their strength and weaknesses is provided. Detail on operational working comparison of different protocols for underwater networks are also presented. Finally Chapter 2 discusses research gap used to design and develop beacon based hop-by-hop routing protocol.

Chapter 3 presents detail methodology and discusses the design of the distance based reliable and energy efficient hop-by-hop routing protocol. It provides details on problems of the benchmark routing protocols and presents solution to these problems. Chapter 3 clearly explain objectives of with methodology plan. It provides details on simulation framework, channel model, node energy model and parameters used in the simulation of proposed protocol.

Chapter 4 offers a detail insight development of designed distance based reliable and energy efficient hop-by-hop routing protocol. Information distribution, data forwarding and energy balancing schemes are presented and explained in detail using examples. Moreover, flowcharts of the schemes are also presented that explain the behavior of proposed routing protocol.

Chapter 5 yields performance simulation evaluation of the designed routing protocol. Different performance metrics such as node mobility and packet rate are considered and results are discussed. Moreover, a comparison with benchmark routing

protocols based on the packet delivery ratio, energy consumption in information distribution phase, energy consumption in data forwarding phase, end-to-end delay and network lifetime is also presented and explained with the help of figures.

Chapter 6 concludes the work by summarizing the main contributions and findings of the study with some possible future directions.

REFERENCES

- Abraham Varughese, R. S. (2012). Distance based routing scheme for underwater sensor networks. *International Journal of Applied Information Systems (IJ AIS)*. 4(8), 12–16.
- Akyildiz, I. F., Pompili, D. & Melodia, T. (2004). Challenges for efficient communication in underwater acoustic sensor networks. *ACM Sigbed Review*. 1(2), 3–8.
- Akyildiz, I. F., Pompili, D. & Melodia, T. (2005). Underwater acoustic sensor networks: research challenges. *Ad hoc networks*. 3(3), 257–279.
- Al-Bzoor, M., Zhu, Y., Liu, J., Ammar, R., Cui, J.-H. & Rajasekaran, S. (2013). An adaptive surface sink redeployment strategy for Underwater Sensor Networks. In *Proceedings the Eighteenth IEEE Symposium on Computers and Communications*. 7-10 July. Split, Croatia: IEEE, 801–806.
- Al-Bzoor, M., Zhu, Y., Liu, J., Ammar, R., Cui, J.-H. & Rajasekaran, S. (2015). An adaptive power controlled routing protocol for underwater sensor network. *International Journal of Sensor Networks*. 18(3-4), 238–249.
- Ali, T., Jung, L. T. & Faye, I. (2014). End-to-End Delay and Energy Efficient Routing Protocol for Underwater Wireless Sensor Networks. *Wireless Personal Communications*. 79(1), 339–361.
- Awerbuch, B., Holmer, D., Rubens, H. & Cole, R. G. (2007). Beacon-based routing for tactical networks. In *Proceedings of Military Communications Conference*. 29-31 October. Orlando, FL, USA: IEEE, 1–8.
- Ayaz, M. & Abdullah, A. (2009). Hop-by-hop dynamic addressing based (H2-DAB) routing protocol for underwater wireless sensor networks. In *Proceedings of International Conference on Information and Multimedia Technology*. 16-18 December. Washington, DC, USA: IEEE, 436–441.
- Ayaz, M., Abdullah, A. & Faye, I. (2010). Hop-by-hop reliable data deliveries for underwater wireless sensor networks. In *Proceedings of International Conference on Broadband and Wireless Computing, Communication and Applications*. 4-16 November. Fukuoka, Japan: IEEE, 363–368.

- Ayaz, M., Abdullah, A., Faye, I. & Batira, Y. (2012a). An efficient dynamic addressing based routing protocol for underwater wireless sensor networks. *Computer Communications*. 35(4), 475–486.
- Ayaz, M., Baig, I., Abdullah, A. & Faye, I. (2011). A survey on routing techniques in underwater wireless sensor networks. *Journal of Network and Computer Applications*. 34(6), 1908–1927.
- Ayaz, M., Jung, L. T., Abdullah, A. & Ahmad, I. (2012b). Reliable data deliveries using packet optimization in multi-hop underwater sensor networks. *Journal of King Saud University-Computer and Information Sciences*. 24(1), 41–48.
- Baccour, N., Koubaa, A., Mottola, L., Zuniga, M. A., Youssef, H., Boano, C. A. & Alves, M. (2012). Radio link quality estimation in wireless sensor networks: a survey. *ACM Transactions on Sensor Networks (TOSN)*. 8(4), 1–34.
- Baccour, N., Koubâa, A., Youssef, H., Jamâa, M. B., Do Rosario, D., Alves, M. & Becker, L. B. (2010). F-lqe: A fuzzy link quality estimator for wireless sensor networks. In *Proceedings of European Conference on Wireless Sensor Networks*. 17-19 February. Coimbra, Portugal: Springer, 240–255.
- Basagni, S., Petrioli, C., Petroccia, R. & Spaccini, D. (2012). Channel-aware routing for underwater wireless networks. In *Proceedings of OCEANS, 2012 Oceans-Yeosu*. 21-24 May. Yeosu, South Korea: IEEE, 1–9.
- Basagni, S., Petrioli, C., Petroccia, R. & Stojanovic, M. (2010a). Choosing the packet size in multi-hop underwater networks. In *Proceedings of OCEANS*. 24-27 May. Sydney, Australia: IEEE, 1–9.
- Basagni, S., Petrioli, C., Petroccia, R. & Stojanovic, M. (2010b). Optimizing network performance through packet fragmentation in multi-hop underwater communications. In *Proceedings of OCEANS*. 24-27 May. Sydney, Australia: IEEE, 1–7.
- Belbekkouche, A., Hafid, A. & Gendreau, M. (2008). A reinforcement learning-based deflection routing scheme for buffer-less OBS networks. In *Proceedings of Global Telecommunications Conference*. 30 November - 04 December. New Orleans, LA, USA: IEEE, 1–6.
- Biswas, S. & Morris, R. (2005). ExOR: opportunistic multi-hop routing for wireless networks. *ACM SIGCOMM Computer Communication Review*. 35(4), 133–144.
- Caruso, A., Paparella, F., Vieira, L. F., Erol, M. & Gerla, M. (2008). The meandering current mobility model and its impact on underwater mobile sensor networks. In *Proceedings of the 27th Conference on Computer Communications*. 13-18 April. Phoenix, AZ, USA: IEEE, 221–225.

- Cerpa, A., Wong, J. L., Potkonjak, M. & Estrin, D. (2005). Temporal properties of low power wireless links: modeling and implications on multi-hop routing. In *Proceedings of the 6th ACM international symposium on Mobile ad hoc networking and computing*. 28-25 May. Chicago, IL, USA: ACM, 414–425.
- Chakeres, I. D. & Perkins, C. E. (2008). *Dynamic MANET on-demand routing protocol*. Technical report. IETF Internet Draft. Retrieval at <https://tools.ietf.org/html/draft-ietf-manet-dymo-26>, accessed on: 29-03-2016.
- Chen, D. & Varshney, P. K. (2007). A survey of void handling techniques for geographic routing in wireless networks. *IEEE Communications Surveys & Tutorials*. 9(1), 50–67.
- Chen, Y.-J. & Wang, H.-L. (2007). Ordered CSMA: a collision-free MAC protocol for underwater acoustic networks. In *Proceedings of OCEANS*. 18-21 June. Scotland, United Kingdom: IEEE, 1–6.
- Chen, Y.-S. & Lin, Y.-W. (2013). Mobicast routing protocol for underwater sensor networks. *IEEE Sensors Journal*. 13(2), 737–749.
- Climent, S., Capella, J. V., Meratnia, N. & Serrano, J. J. (2012). Underwater sensor networks: A new energy efficient and robust architecture. *Sensors*. 12(1), 704–731.
- Climent, S., Sanchez, A., Capella, J. V., Meratnia, N. & Serrano, J. J. (2014). Underwater acoustic wireless sensor networks: advances and future trends in physical, MAC and routing layers. *Sensors*. 14(1), 795–833.
- Coutinho, R. W., Vieira, L. F., Loureiro, A. *et al.* (2013). DCR: Depth-Controlled routing protocol for underwater sensor networks. In *Proceedings the Eighteenth IEEE Symposium on Computers and Communications*. 7-10 July. Split, Croatia: IEEE, 453–458.
- Cui, J.-H., Kong, J., Gerla, M. & Zhou, S. (2006). The challenges of building mobile underwater wireless networks for aquatic applications. *IEEE Network*. 20(3), 12–18.
- De Couto, D. S., Aguayo, D., Bicket, J. & Morris, R. (2005). A high-throughput path metric for multi-hop wireless routing. *Wireless Networks*. 11(4), 419–434.
- Dhurandher, S. K., Misra, S., Obaidat, M. S. & Khairwal, S. (2008). UWSim: A simulator for underwater sensor networks. *Simulation*. 84(7), 327–338.
- Draves, R., Padhye, J. & Zill, B. (2004). Comparison of routing metrics for static multi-hop wireless networks. *ACM SIGCOMM Computer Communication Review*.

34(4), 133–144.

- Dunn, F., Hartmann, W., Campbell, D., Fletcher, N. & Rossing, T. (2015). *Springer handbook of acoustics*. (2nd ed.). Newyork, USA: Springer.
- Fair, N., Chave, A., Freitag, L., Preisig, J., White, S., Yoerger, D. & Sonnichsen, F. (2006). Optical modem technology for seafloor observatories. In *Proceedings of OCEANS*. 16-19 May. Singapore: IEEE, 1–6.
- Fall, K. & Varadhan, K. (2005). The ns Manual (formerly ns Notes and Documentation). *The VINT project*. 47, 1–431.
- Felamban, M., Shihada, B. & Jamshaid, K. (2013). Optimal node placement in underwater wireless sensor networks. In *Proceedings of 27th International Conference on Advanced Information Networking and Applications*. 25-28 March. Barcelona, Spain: IEEE, 492–499.
- Gao, T., Ji, T., Jin, R., Ding, J. & Zou, J. (2014). A survey of routing protocol in underwater sensor networks. In *Proceedings of International Conference on Future Computer and Information Technology*. 22-23 August. Tianjin, China: WIT Press, 1–15.
- Garg, V. & Jhamb, M. (2013). A Review of Wireless Sensor Network on Localization Techniques. *International Journal of Engineering Trends and Technology (IJETT)*. 4(4), 1049–1053.
- Gnawali, O., Fonseca, R., Jamieson, K., Moss, D. & Levis, P. (2009). Collection tree protocol. In *Proceedings of the 7th ACM conference on embedded networked sensor systems*. 4-6 November. Berkley, CA, USA: ACM, 1–14.
- Guanghai, F., Deqing, W., Huabin, C., Xiaoyi, H. & Weicheng, W. (2008). Simulation research on P-Aloha protocol in underwater acoustic network based on OPNET. In *Proceedings of International Conference on Communications, Circuits and Systems (ICCCAS)*. 25-27 May. Fujian, China: IEEE, 153–156.
- Guerra, F., Casari, P. & Zorzi, M. (2009). World Ocean Simulation System (WOSS): A Simulation Tool for Underwater Networks with Realistic Propagation Modeling. In *Proceedings of the Fourth ACM International Workshop on UnderWater Networks*. 4-6 November. Berkeley, CA, USA: ACM, 1–4.
- Guo, Z., Colombo, G., Wang, B., Cui, J.-H., Maggiorini, D. & Rossi, G. P. (2008). Adaptive routing in underwater delay/disruption tolerant sensor networks. In *Proceedings of Fifth Annual Conference on Wireless on Demand Network Systems and Services (WONS'08)*. 23-25 January. Garmisch-Partenkirchen, Germany: IEEE, 31–39.

- Haeri, S., Thong, W. W.-K., Chen, G. & Trajkovic, L. (2013). A reinforcement learning-based algorithm for deflection routing in optical burst-switched networks. In *Proceedings of 14th International Conference on Information Reuse and Integration (IRI)*. 14-16 August. San Francisco, CA, USA: IEEE, 474–481.
- Han, G., Jiang, J., Bao, N., Wan, L. & Guizani, M. (2015). Routing protocols for underwater wireless sensor networks. *IEEE Communications Magazine*. 53(11), 72–78.
- Hao, K., Jin, Z., Shen, H. & Wang, Y. (2015). An Efficient and Reliable Geographic Routing Protocol Based on Partial Network Coding for Underwater Sensor Networks. *Sensors*. 15(6), 12720–12735.
- Heidemann, J., Stojanovic, M. & Zorzi, M. (2012). Underwater sensor networks: applications, advances and challenges. *Philosophical Transactions of the Royal Society of London A: Mathematical, Physical and Engineering Sciences*. 370(1958), 158–175.
- Heidemann, J., Ye, W., Wills, J., Syed, A. & Li, Y. (2006). Research challenges and applications for underwater sensor networking. In *Proceedings of Wireless Communications and Networking Conference*. 3-6 April. Las Vegas, NV, USA: IEEE, 228–235.
- Hu, T. & Fei, Y. (2010). QELAR: a machine-learning-based adaptive routing protocol for energy-efficient and lifetime-extended underwater sensor networks. *IEEE Transactions on Mobile Computing*. 9(6), 796–809.
- Ibrahim, S., Al-Bזור, M., Liu, J., Ammar, R., Rajasekaran, S. & Cui, J.-H. (2013a). General optimization framework for surface gateway deployment problem in underwater sensor networks. *EURASIP Journal on Wireless Communications and Networking*. 2013(1), 1–13.
- Ibrahim, S., Liu, J., Al-Bזור, M., Cui, J.-H. & Ammar, R. (2013b). Towards efficient dynamic surface gateway deployment for underwater network. *Ad Hoc Networks*. 11(8), 2301–2312.
- Issariyakul, T. & Hossain, E. (2011). *Introduction to network simulator NS2*. (2nd ed.). Newyork, USA: Springer Science & Business Media.
- Jafri, M. R., Ahmed, S., Javaid, N., Ahmad, Z. & Qureshi, R. (2013). Amctd: Adaptive mobility of courier nodes in threshold-optimized dbr protocol for underwater wireless sensor networks. In *Proceedings of 8th International Conference on Broadband and Wireless Computing, Communication and Applications*. 28-30 October. Compiegne, France: IEEE, 93–99.
- Jawhar, I., Mohamed, N. & Shuaib, K. (2007). A framework for pipeline

- infrastructure monitoring using wireless sensor networks. In *Proceedings of Wireless Telecommunications Symposium*. 26-28 April. Pomona, CA, USA: IEEE, 1–7.
- Khairnar, V. D. & Kotecha, K. (2013). Simulation-Based Performance Evaluation of Routing Protocols in Vehicular Ad-hoc Network. *International Journal of Scientific and Research Publications*. 3(10), 1–14.
- Kheirabadi, M. T. & Mohamad, M. M. (2013). Greedy routing in underwater acoustic sensor networks: a survey. *International Journal of Distributed Sensor Networks*. 9(7), 1–21.
- Köpke, A., Swigulski, M., Wessel, K., Willkomm, D., Haneveld, P. T. K., Parker, T. E. V., Visser, O. W., Lichte, H. S. & Valentin, S. (2008). Simulating Wireless and Mobile Networks in OMNeT++ the MiXiM Vision. In *Proceedings of the 1st International Conference on Simulation Tools and Techniques for Communications, Networks and Systems & Workshops*. 3-7 March. Marseille, France: ICST, 1–8.
- Lee, S. & Kim, D. (2013). Underwater hybrid routing protocol for UWSNs. In *Proceedings of Fifth International Conference on Ubiquitous and Future Networks*. 2-5 July. Da Nang, Vietnam: IEEE, 472–475.
- Li, Z., Yao, N. & Gao, Q. (2014). Relative Distance Based Forwarding Protocol for Underwater Wireless Networks. *International Journal of Distributed Sensor Networks*. 10(2), 1–11.
- Liang, W., Yu, H., Liu, L., Li, B. & Che, C. (2007). Information-carrying based routing protocol for underwater acoustic sensor network. In *Proceedings of International Conference on Mechatronics and Automation*. 5-8 August. Heilongjiang, China: IEEE, 729–734.
- Liu, J., Han, X., Al-Bzoor, M., Zuba, M., Cui, J.-H., Ammar, R., Rajasekaran, S. *et al.* (2012). PADP: Prediction assisted dynamic surface gateway placement for mobile underwater networks. In *Proceedings of IEEE Symposium on Computers and Communications*. 1-4 July. Cappadocia, Turkey: IEEE, 139–144.
- Liu, T., Kamthe, A., Jiang, L. & Cerpa, A. (2009). Performance evaluation of link quality estimation metrics for static multihop wireless sensor networks. In *Proceedings of 6th Annual IEEE Communications Society Conference on Sensor, Mesh and Ad Hoc Communications and Networks*. 22-26 June. Rome, Italy: IEEE, 1–9.
- Lv, C., Wang, S., Tan, M. & Chen, L. (2014). UA-MAC: an underwater acoustic channel access method for dense mobile underwater sensor networks.

International Journal of Distributed Sensor Networks. 10(2), 1–10.

- Mohammadi, R., Javidan, R. & Jalili, A. (2015). Fuzzy Depth Based Routing Protocol for Underwater Acoustic Wireless Sensor Networks. *Journal of Telecommunication, Electronic and Computer Engineering (JTEC)*. 7(1), 81–86.
- Molins, M. & Stojanovic, M. (2007). Slotted FAMA: a MAC protocol for underwater acoustic networks. In *Proceedings of OCEANS*. 16-19 May. Singapore: IEEE, 1–7.
- Mundada, M. R., Kiran, S., Khobanna, S., Varsha, R. N. & George, S. A. (2012). A Study on Energy Efficient Routing Protocols in Wireless Sensor Networks. *International Journal of Distributed and Parallel Systems (IJDPS)*. 3(1), 311–330.
- Noh, Y., Lee, U., Wang, P., Choi, B. S. C. & Gerla, M. (2013). VAPR: void-aware pressure routing for underwater sensor networks. *IEEE Transactions on Mobile Computing*. 12(5), 895–908.
- Ovaliadis, K. & Savage, N. (2013). Underwater Sensor Network Simulation Tool (USNeT). *International Journal of Computer Applications*. 71(22), 19–27.
- Partan, J., Kurose, J. & Levine, B. N. (2007). A survey of practical issues in underwater networks. *ACM SIGMOBILE Mobile Computing and Communications Review*. 11(4), 23–33.
- Peleato, B. & Stojanovic, M. (2007). Distance aware collision avoidance protocol for ad-hoc underwater acoustic sensor networks. *IEEE Communications Letters*. 11(12), 1025–1027.
- Peng, Z., Le, S., Zuba, M., Mo, H., Zhou, H., Cui, J.-H., Zhou, S., Jiang, Z., Schindall, J. *et al.* (2013). Field test experience of an underwater wireless network in the atlantic ocean. In *Proceedings of OCEANS*. 10-13 June. Bergen, Norway: IEEE, 1–10.
- Perkins, C., Belding-Royer, E. & Das, S. (2003). *Ad Hoc On-Demand Distance Vector (AODV) Routing*. Technical report. IETF Internet Draft. Retrieval at <https://tools.ietf.org/html/rfc3561>, accessed on: 29-03-2016.
- Pompili, D. & Akyildiz, I. F. (2009). Overview of networking protocols for underwater wireless communications. *IEEE Communications Magazine*. 47(1), 97–102.
- Pompili, D. & Akyildiz, I. F. (2010). A multimedia cross-layer protocol for underwater acoustic sensor networks. *IEEE Transactions on Wireless Communications*. 9(9), 2924–2933.
- Pompili, D., Melodia, T. & Akyildiz, I. F. (2009). A CDMA-based medium access

- control for underwater acoustic sensor networks. *IEEE Transactions on Wireless Communications*. 8(4), 1899–1909.
- Pour, N. K. (2015). *Energy Efficiency in Wireless Sensor Networks*. Ph.D. Thesis. The University of Technology Sydney.
- Prathap, U., Shenoy, D. P., Venugopal, K. & Patnaik, L. (2012). Wireless sensor networks applications and routing protocols: survey and research challenges. In *Proceedings of International Symposium on Cloud and Services Computing*. 17-18 December. Mangalore, India: IEEE, 49–56.
- Proakis, J. G., Sozer, E. M., Rice, J. A. & Stojanovic, M. (2001). Shallow Water Acoustic Networks. *IEEE Communications Magazine*. 39(11), 114–119.
- Rahman, R. H., Benson, C., Jiang, F. & Frater, M. (2013). Loarp: A low overhead routing protocol for underwater acoustic sensor networks. *Journal of Networks*. 8(2), 317–330.
- Robert, J. U. (1983). *Principles of underwater sound*. (3rd ed.). New York, USA: New York: McGraw-Hill Book Company.
- Roy, S., Duman, T. M. & McDonald, V. K. (2009). Error rate improvement in underwater MIMO communications using sparse partial response equalization. *IEEE Journal of Oceanic Engineering*. 34(2), 181–201.
- Sameer, B. T., Koilpillai, R. D. & Muralikrishna, P. (2012). Underwater acoustic communications: Design considerations at the physical layer based on field trials. In *Proceedings of National Conference on Communications*. 3-5 February. Kharagpur, India: IEEE, 1–5.
- Seah, W. K. & Tan, H. P. (2006). Multipath virtual sink architecture for wireless sensor networks in harsh environments. In *Proceedings of the first international conference on Integrated internet ad hoc and sensor networks*. 30-31 May. Nice, France: ACM, 1–8.
- Sehgal, A., Cernea, D. & Birk, A. (2010). Modeling underwater acoustic communications for multi-robot missions in a robotics simulator. In *Proceedings of OCEANS*. 24-27 May. Sydney, Australia: IEEE, 1–6.
- Shin, D., Hwang, D. & Kim, D. (2012). DFR: an efficient directional flooding-based routing protocol in underwater sensor networks. *Wireless Communications and Mobile Computing*. 12(17), 1517–1527.
- Shin, D. & Kim, D. (2008). A dynamic NAV determination protocol in 802.11 based underwater networks. In *Proceedings of International Symposium on Wireless Communication Systems*. 21-24 October. Reykjavik, Iceland: IEEE, 401–405.

- Singer, A. C., Nelson, J. K. & Kozat, S. S. (2009). Signal processing for underwater acoustic communications. *IEEE Communications Magazine*. 47(1), 90–96.
- Stallings, W. (2009). *Wireless communications & networks*. (2nd ed.). Uttar Pradesh, India: Pearson Education India.
- Stojanovic, M. (2005). Optimization of a data link protocol for an underwater acoustic channel. In *Proceedings of OCEANS*. 20-23 June. Brest, France: IEEE, 68–73.
- Stojanovic, M. (2007). On the relationship between capacity and distance in an underwater acoustic communication channel. *ACM SIGMOBILE Mobile Computing and Communications Review*. 11(4), 34–43.
- Stojanovic, M., Catipovic, J. & Proakis, J. G. (1993). Adaptive multichannel combining and equalization for underwater acoustic communications. *The Journal of the Acoustical Society of America*. 94(3), 1621–1631.
- Sun, G.-z. & Huang, Y.-q. (2007). A position-based routing protocol for underwater acoustic sensor networks. *SHENGXUE JISHU*. 26(4), 597–601.
- Sun, N., Han, G., Wu, T., Jiang, J. & Shu, L. (2015). A reliable and energy efficient VBF-improved cross-layer protocol for underwater acoustic sensor network. In *Proceedings of 11th International Conference on Heterogeneous Networking for Quality, Reliability, Security and Robustness*. 19-20 August. Taipei, Taiwan: IEEE, 44–49.
- Sun, P., Seah, W. K. & Lee, P. W. (2007). Efficient data delivery with packet cloning for underwater sensor networks. In *Proceedings of IEEE Symposium on Underwater Technology and Workshop on Scientific Use of Submarine Cables and Related Technologies*. 17-20 April. Tokyo, Japan: IEEE, 34–41.
- Syed, A., Ye, W., Heidemann, J. *et al.* (2008). Comparison and evaluation of the T-Lohi MAC for underwater acoustic sensor networks. *IEEE Journal on Selected Areas in Communications*. 26(9), 1731–1743.
- Vigita, S. R. & Julie, G. (2013). Reliable Link-Based Routing Protocol for Highly Dynamic Mobile Adhoc Networks. *International Journal of Engineering Trends and Technology (IJETT)*. 4(5), 1636–1642.
- Wahid, A., Kim, D. & Lim, K. (2011a). A Multi-layered Routing Protocol for UWSNs Using Super Nodes. In *Proceedings of International Conference of Communication and Networking*. 8-10 December. Berlin, Heidelberg: Springer, 258–267.
- Wahid, A., Lee, S., Jeong, H.-J. & Kim, D. (2011b). EEDBR: Energy-Efficient Depth-Based Routing Protocol for Underwater Wireless Sensor Networks. In

- Proceedings of Third International Conference on Advanced Computer Science and Information Technology*. 27-29 September. Berlin, Heidelberg: Springer, 223–234.
- Wahid, A., Lee, S. & Kim, D. (2011c). An energy-efficient routing protocol for UWSNs using physical distance and residual energy. In *Proceedings of OCEANS*. 6-9 June. Santander, Spain: IEEE, 1–6.
- Wahid, A., Lee, S. & Kim, D. (2014a). A reliable and energy-efficient routing protocol for underwater wireless sensor networks. *International Journal of Communication Systems*. 27(10), 2048–2062.
- Wahid, A., Lee, S. & Kim, D. (2015). An environment-aware routing protocol for underwater wireless sensor networks. *International Journal of Autonomous and Adaptive Communications Systems*. 8(2-3), 228–242.
- Wahid, A., Lee, S., Kim, D. & Lim, K.-S. (2014b). MRP: A Localization-Free Multi-Layered Routing Protocol for Underwater Wireless Sensor Networks. *Wireless personal communications*. 77(4), 2997–3012.
- Woo, A. & Culler, D. (2003). *Evaluation of Efficient Link Reliability Estimators for Low-Power Wireless Networks*. Technical Report UCB/CSD-03-1270. EECS Department, University of California, Berkeley. Retrievable at <http://www.eecs.berkeley.edu/Pubs/TechRpts/2003/6239.html>, accessed on: 29-03-2016.
- Xie, P. & Cui, J.-H. (2007). R-MAC: An energy-efficient MAC protocol for underwater sensor networks. In *Proceedings of International Conference on Wireless Algorithms, Systems and Applications*. 1-3 August. Chicago, USA: IEEE, 187–198.
- Xie, P., Zhou, Z., Peng, Z., Cui, J.-H. & Shi, Z. (2010). SDRT: a reliable data transport protocol for underwater sensor networks. *Ad Hoc Networks*. 8(7), 708–722.
- Yadav, S., Gupta, K., Yadav, A. S. & Banasthali, R. I. (2014). Strategy of a novel System Architecture for Underwater Sensor Network. *International Journal of Education and Science Research Review*. 1(3), 39–43.
- Yan, H., Shi, Z. J. & Cui, J.-H. (2008). DBR: depth-based routing for underwater sensor networks. In *Proceedings of the 7th International IFIP-TC6 Networking Conference on AdHoc and Sensor Networks, Wireless Networks, Next Generation Internet*. 5-9 May. Berlin, Heidelberg: Springer, 72–86.
- Zaman, N. (2012). *Wireless Sensor Networks and Energy Efficiency: Protocols, Routing and Management*. (1st ed.). Hershey, PA, USA: IGI Global.

- Zeng, D., Wu, X., Wang, Y., Chen, H., Liang, K. & Shu, L. (2013). A Survey on Sensor Deployment in Underwater Sensor Networks. In *Proceedings of China Conference on Wireless Sensor Networks*. 17-19 October. Qingdao, China: Springer, 133–143.
- Zeng, K., Lou, W. & Li, M. (2011). *Multihop Wireless Networks: Opportunistic Routing*. (1st ed.). Hoboken, NJ, USA: John Wiley & Sons.
- Zhang, B., Sukhatme, G. & Requicha, A. A. (2004). Adaptive sampling for marine microorganism monitoring. In *Proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems*. 28 September-2 October. Sendai, Japan: IEEE, 1115–1122.
- Zhou, Z. & Cui, J.-H. (2008). Energy efficient multi-path communication for time-critical applications in underwater sensor networks. In *Proceedings of the 9th ACM international symposium on Mobile ad hoc networking and computing*. 26-30 May. Hong Kong, China: ACM, 221–230.
- Zhou, Z., Peng, Z., Cui, J.-H., Shi, Z. & Bagtzoglou, A. C. (2011). Scalable localization with mobility prediction for underwater sensor networks. *IEEE Transactions on Mobile Computing*. 10(3), 335–348.
- Zhu, Y., Le, S., Pu, L., Lu, X., Peng, Z., Cui, J.-H. & Zuba, M. (2013a). Aqua-Net Mate: A real-time virtual channel/modem simulator for Aqua-Net. In *Proceedings of OCEANS*. 10-13 June. Bergen, Norway: IEEE, 1–6.
- Zhu, Y., Lu, X., Pu, L., Su, Y., Martin, R., Zuba, M., Peng, Z. & Cui, J.-H. (2013b). Aqua-Sim: An NS-2 Based Simulator for Underwater Sensor Networks. In *Proceedings of ACM WUWNet*. 11-13 November. Kaohsiung, Taiwan: ACM, 1–7.