CHANNEL ASSIGNMENTS USING CONSTRAINED GREEDY ALGORITHM, T-COLORING AND SIMULATED ANNEALING IN MESH AND CELLULAR NETWORKS

NUR ATIKAH BINTI SALAHUDIN

A thesis submitted in fulfilment of the requirements for the award of the degree of Doctor of Philosophy (Mathematics)

Faculty of Science Universiti Teknologi Malaysia

OCTOBER 2018

To my beloved husband and sons

*

Mohamad Amirul Hakim bin Abu Bakar Mohamad Adam Uwais bin Mohamad Amirul Hakim Muhamad Aqeef Imran bin Mohamad Amirul Hakim

My parents



Salahudin bin Mahmud Kamariah binti Che Mat

Family-in-laws

.

Abu Bakar bin Ahmad Suliah binti Abu

and all family members

ACKNOWLEDGEMENTS

BismillahirRahmaanirRahiim. Alhamdulillaahi rabbil 'aalamiin.

In the name of Allah the Most Gracious and the Most Merciful, I thank Thee with all my heart for granting Thy Servant immeasurable help during the course of this study.

I wish to deeply express my gratitude to my supervisor, Prof. Dr. Shaharuddin Salleh for the great opportunity to join in this research. His confidence, understanding, supervision, motivation and support have been essential factors for me to work on this study. I really appreciate what he doing to help me finish the research.

Next, I would like to thank MyPhD MyBrain15, Kementerian Pendidikan Malaysia for financial support. My sincere appreciation also extends to all lecturers and postgraduate staff at the Department of Mathematics, Faculty of Science, UTM Johor Bahru.

I wish to express my heartfelt thanks for my family during my study: my husband, sons, parents, family-in-laws and family members. Their support, understanding, patience, love, prayer and sacrifice are unbounded.

Finally, I would like to extend my sincere appreciation to all who has helped me in one way or another, but whose names are not mentioned.

ABSTRACT

Channel assignment is an important step in communication networks. The objectives of minimizing networks interference and the channels used are the problems in the channel assignments of the networks. In real environments, some difference will be expected in the performance of the networks when the channel allocation algorithms under more accurate interference models are deployed. In this research, the wireless mesh networks represent dynamic networks while static networks are represented by the cellular networks. In the wireless mesh networks, communication between a pair of nodes happens when both nodes are assigned with channels. The cellular networks are the radio network distributed over land areas called cells, each served by at least one fixed-location transceiver. Channel assignments in the networks is an application of the vertex coloring in graph theory. Previously, the Greedy Algorithm was used for link scheduling but only the adjacent channel constraint was considered. Here, an algorithm called Improved Greedy Algorithm was proposed to solve the channel assignments by considering the adjacent channel and co-channel constraints which is an improvement to the algorithm. Besides, Simulated Annealing and T-coloring problem are combined to minimize the channels used. The algorithms are applied for single and multiple channels communications in the wireless mesh networks and cellular networks to show the different results of the channel assignments. Further improvement is made on the multiple channels case where the Improved Greedy Algorithm is applied by considering the cosite constraint in addition to the co-channel and adjacent channel constraints. The Improved Greedy Algorithm has been tested in a series of simulations. Results for the simulations prove that the Improved Greedy Algorithm perform significantly well for the channel assignment problem.

ABSTRAK

Tugasan saluran adalah satu langkah yang penting dalam rangkaian komunikasi. Objektif meminimumkan gangguan rangkaian dan saluran yang digunakan adalah masalah dalam rangkaian tugasan saluran. Dalam persekitaran sebenar, beberapa perbezaan akan dijangka dalam prestasi rangkaian apabila algoritma peruntukan saluran di bawah model gangguan yang lebih tepat digunakan. Dalam kajian ini, rangkaian *mesh* tanpa wayar mewakili rangkaian dinamik manakala rangkaian statik diwakili oleh rangkaian selular. Dalam rangkaian mesh tanpa wayar, komunikasi antara sepasang nod berlaku apabila setiap nod diperuntukkan dengan satu saluran. Rangkaian selular adalah rangkaian radio bagi satu kawasan dipanggil sel-sel, yang mewakili satu stesen pangkalan yang tetap. Tugasan saluran dalam rangkaian adalah satu aplikasi pewarna bucu dalam teori graf. Sebelum ini, Algoritma Greedy digunakan untuk penjadualan pautan tetapi hanya mempertimbangkan gangguan saluran bersebelahan. Di sini, satu algoritma dicadangkan iaitu Algoritma Improved Greedy untuk menyelesaikan tugasan saluran dengan mempertimbangkan gangguan saluran bersebelahan dan gangguan saluran bersama di mana ianya merupakan pembaharuan bagi algoritma tersebut. Selain itu, Algoritma Simulated Annealing dan T-coloring digabungkan untuk mengurangkan penggunaan saluran. Algoritma ini diaplikasikan dalam komunikasi saluran tunggal dan saluran berganda dalam rangkaian mesh tanpa wayar dan rangkaian selular untuk menunjukkan keputusan tugasan saluran yang berbeza. Penambahbaikan selanjutnya dibuat pada kes saluran berganda di mana Algoritma Improved Greedy digunakan dengan mempertimbangkan gangguan cosite sebagai tambahan kepada gangguan saluran bersama dan saluran bersebelahan. Algoritma Improved Greedy telah diuji dalam satu siri simulasi. Keputusan simulasi itu membuktikan bahawa Algoritma Improved Greedy dapat melaksanakan dengan baik untuk masalah tugasan saluran.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	vi
	ABSTRAK	vii
	TABLE OF CONTENTS	viii
	LIST OF TABLES	xiii
	LIST OF FIGURES	xiv
	LIST OF ABBREVIATIONS	xix
	LIST OF SYMBOLS	XX
	LIST OF APPENDICES	xxi
1	INTRODUCTION	1
	1.1 Introduction	1
	1.2 Background of the Study	2
	1.3 Problem Statement	4
	1.4 Research Questions	5
	1.5 Objectives of the Study	5
	1.6 Scope of the Study	5
	1.7 Significance of the Study	6
	1.8 Thesis Organization	7
2	LITERATURE REVIEW	8
	2.1 Introduction	8

	2.2	Graph Coloring Methods	8
		2.2.1 Vertex Coloring	10
		2.2.2 Edge Coloring	13
		2.2.3 Surface Coloring	14
	2.3	Channel Assignments	16
	2.4	Dynamic Channel Assignment	18
		2.4.1 Wireless Mesh Network	20
	2.5	Fixed Channel Assignment	23
	2.6	Hybrid Channel Allocation in Wireless Mesh	
		Network	23
3	SIN	GLE CHANNEL ASSIGNMENTS IN	
	WII	RELESS MESH NETWORKS AND	
	CEI	LLULAR NETWORKS	25
	3.1	Introduction	25
	3.2	Greedy Algorithm	26
	3.3	T-coloring	29
	3.4	Single Channel Assignments Using Improved	
		Greedy Algorithm with Adjacent Channel and	
		Co-channel Constraints in Wireless Mesh	
		Networks	31
		3.4.1 Simulation Results	35
		3.4.2 Discussion of the Results	41
	3.5	Single Channel Assignments Using Improved	
		Greedy Algorithm with Adjacent Channel and	
		Co-channel Constraints in Cellular Networks	44
		3.5.1 Discussion of the Results	56
4	MU	LTI-CHANNEL ASSIGNMENTS IN	
	WII	RELESS MESH NETWORKS AND	
	CEI	LLULAR NETWORKS	58
	4.1	Introduction	58
	42	Multi-channel Assignments	59

4.3	Impro	oved Greedy Algorithm with Adjacent	
	Chan	nel, Co-channel and Cosite Constraints for	
	Multi	-channel Assignments	62
	4.3.1	Improved Greedy Algorithm with	
		Adjacent Channel, Co-channel and Cosite	
		Constraints for Multi-channel	
		Assignments in Wireless Mesh Networks	62
	4.3.2	Improved Greedy Algorithm with	
		Adjacent Channel, Co-channel and Cosite	
		Constraints for Multi-channel	
		Assignments in Cellular Networks	70
	4.3.3	Results and Disscusions	76
4.4	Impro	oved Greedy Algorithm with T-coloring for	
	Multi	-channel Assignments	78
	4.4.1	Improved Greedy Algorithm with T-	
		coloring for Multi-channel Assignments	
		in Wireless Mesh Networks	79
	4.4.2	Improved Greedy Algorithm with T-	
		coloring, Co-channel and Cosite	
		Constraints for Multi-channel	
		Assignments in Wireless Mesh Networks	82
	4.4.3	Improved Greedy Algorithm with T-	
		coloring and Cosite Constraints for	
		Multi-channel Assignments in Cellular	
		Networks	85
	4.4.4	Improved Greedy Algorithm with T-	
		coloring, Co-channel and Cosite	
		Constraints for Multi-channel	
		Assignments in Cellular Networks	87
	4.4.5	Discussion of the Results	89

5	IM	PROVED GREEDY ALGORITHM WITH	
	SIN	MULATED ANNEALING IN CHANNEL	
	ASS	SIGNMENTS	91
	5.1	Introduction	91
	5.2	Simulated Annealing	91
	5.3	Channel Assignments Using Simulated	
		Annealing	94
		5.3.1 Single Channel Assignments in Wireless	
		Mesh Networks Using Simulated	
		Annealing	95
		5.3.2 Single Channel Assignments in Cellular	
		Networks Using Simulated Annealing	98
		5.3.3 Multi-channel Assignments in Wireless	
		Mesh Networks Using Simulated	
		Annealing	101
		5.3.4 Multi-channel Assignments in Cellular	
		Networks Using Simulated Annealing	105
	5.4	Improved Greedy Algorithm Using Simulated	
		Annealing and T-coloring for Single Channel	
		Assignments in Wireless Mesh Networks	108
	5.5	Improved Greedy Algorithm Using Simulated	
		Annealing and T-coloring for Single Channel	
		Assignments in Cellular Networks	112
	5.6	Improved Greedy Algorithm Using Simulated	
		Annealing and T-coloring for Multi-channel	
		Assignments in Wireless Mesh Networks	115
	5.7	Improved Greedy Algorithm Using Simulated	
		Annealing and <i>T</i> -coloring for Multi-channel	
		Assignments in Cellular Networks	119
	5.8	Results and Discussions	122

6 GENERAL CONCLUSION AND			
	REC	COMMENDATIONS	125
	6.1	General Conclusion	125
	6.2	Recommendations	127
REF	EREN	CES	128
Appe	endix A		132

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Taxonomy of graph coloring	10
3.1	The adjacency matrix and co-channel matrix for Figure	
	3.9	36
3.2	Comparison between Greedy algorithm and Constrained	
	Greedy algorithm using T-coloring method	42
3.3	Number of channels for Improved Greedy algorithm	
	according to Figure 3.10	42
3.4	Number of degree and assigned channels for Figure 3.11	43
3.5	Summary for the <i>H</i> networks according to the	
	constraints	57
4.1	Summary of the total of the channels for graph G_1 , G_2	
	and G_3	77
4.2	Total number of channels according to their constraints	
	and H networks	77
4.3	Results for Improved Greedy algorithm in wireless mesh	
	networks with $T = \{0, 1, 2, 5\}$ and cosite constraint is 2	90
4.4	Results for Improved Greedy algorithm in wireless	
	mesh networks with $T = \{0, 1, 2, \}$, co-channel and	
	cosite constraints are 3	90
4.5	Results for Improved Greedy algorithm with T-coloring	
	for cellular networks	90
5.1	Results of the graphs for single channel assignments	123
5.2	Results of the graphs for multi-channel assignments	123

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Example of a possible configuration for a wireless	
	mesh network	3
2.1	Example of a connected graph	9
2.2	Example of vertex coloring graphs	11
2.3	Example of edge coloring graphs	13
2.4	Example of Four Color Theorem	15
2.5	Some of the reviews on channel assignment	17
2.6	Channels and frequencies for 802.11b/g	22
3.1	Example of single channel assignment graph using	
	Greedy algorithm by considering adjacent channel	
	constraint as 1	27
3.2	Example of single channel assignment graph using	
	Greedy algorithm by considering adjacent channel	
	constraint as 2	28
3.3	Example of single channel assignment graph using	
	Greedy algorithm by considering adjacent channel	
	constraint as 3	28
3.4	T -coloring of graph for $T = \{0, 2, 5\}$	30
3.5	Example of the single channel assignment graph using	
	Constrained Greedy algorithm by considering adjacent	
	channel constraint as 1 and cochannel constraint is 0	33
3.6	Example of the single channel assignment graph using	
	Constrained Greedy algorithm by considering adjacent	
	channel constraint as 2 and cochannel constraint is 2	33

3.7	Example of the single channel assignment graph using	
	Constrained Greedy algorithm by considering adjacent	
	channel constraint as 2and cochannel constraint is 3	34
3.8	Example of the single channel assignment graph using	
	Constrained Greedy algorithm by considering adjacent	
	channel constraint as 3 and cochannel constraint is 2	34
3.9	Example of a graph with 5 nodes	35
3.10	Example of the graph with different number of nodes	
	but same value of the adjacent range and cochannel	
	range	37
3.11	Example of graph with the same number of nodes (25	
	nodes) and same value of adjacent range and	
	cochannel range	38
3.12	Example of graphs for adjacent range less than	
	cochannel range	39
3.13	Example of graphs for adjacent range greater than	
	cochannel range	40
3.14	Illustration for graph in Figure 3.12	43
3.15	Illustration of the graph for Figure 3.13	44
3.16	The hexagonal cell shape for Cellular networks	46
3.17	Graph coloring model corresponding to H network	
	cells	47
3.18	Assigned channel for H networks by considering both	
	adjacent channel constraint and cochannel constraint	
	are two	49
3.19	Assigned channel for H networks by considering the	
	adjacent channel constraint as three and cochannel	
	constraint is two	51
3.20	Assigned channel for H networks by considering both	
	the adjacent channel constraint and cochannel	
	constraint are three	53
3.21	Assigned channel for <i>H</i> networks by considering the	
	adjacent channel constraint as three and cochannel	

	constraint is four	54
3.22	Assigned channel for H networks by considering the	
	adjacent channel constraint as four and the cochannel	
	constraint is three	56
4.1	Initial setup of the connected graph in wireless mesh	
	network	61
4.2	Output for two-channel case by considering both	
	adjacent channel and co-channel constraints as 1 while	
	cosite constraint is 3	65
4.3	Output for two-channel case by considering adjacent	
	channel, co-channel and cosite constraints as 1	66
4.4	Output for two-channel case by considering adjacent	
	channel, co-channel and cosite constraints as 2	67
4.5	Output for two-channel case by considering adjacent	
	channel, co-channel and cosite constraints as 3	68
4.6	Output for two-channel case by considering adjacent	
	channel constraint as 3, while co-channel and cosite	
	constraints as 2	69
4.7	Channel assignment for H_2 networks by considering	
	the adjacent channel constraint as two, the co-channel	
	constraint is three and cosite constraint is two	72
4.8	Output for two-channel case by considering the	
	adjacent channel, co-channel and cosite constraints as	
	1	73
4.9	Output for two-channel case by considering the	
	adjacent channel, co-channel and cosite constraints as	
	2	74
4.10	Output for two-channel case by considering the	
	adjacent channel, co-channel and cosite constraints as	
	3	74
4.11	Output for two-channel case by considering the	
	adjacent channel constraint as 3 while both co-channel	
	and cosite constraints as 2	75

4.12	Output for two-channel case by considering the	
	adjacent channel constraint as 2, co-channel constraint	
	as 3 and cosite constraint as 2	76
4.13	Summary of the total of the channels for graph G_1 , G_2 ,	
	and G_3	77
4.14	Total number of channels according to their constraints	
	and H networks	78
4.15	Output for two-channel case by considering cosite	
	constraint as 2 while $T = \{0, 1, 2, 5\}$	81
4.16	Output for two-channel case by considering both co-	
	channel constraint and cosite constraint as 3 while $T =$	
	{0, 1, 2, 6}	84
4.17	Output for two-channel case by considering the cosite	
	constraint as 3 and $T = \{0, 1, 2, 5\}$	86
4.18	Output for two-channel case by considering the cosite	
	constraint and co-channel constraint as 3 while $T =$	
	{0, 1, 2, 5}	89
5.1	Example of graph with local maxima	92
5.2	Single channel graph by considering adjacency	
	channel and cochannel constraints as 1	98
5.3	Single channel assignment in the cellular network by	
	considering the adjacency channel constraint as 2 and	
	cochannel constraint as 3	101
5.4	Multi-channel graph by considering the adjacency	
	channel, cochannel and cosite constraints as 1	105
5.5	Single channel assignment in the cellular network by	
	considering the adjacency channel constraint as 2	
	while the cosite and cochannel constraints as 3	108
5.6	Single channel graph by considering the <i>T</i> -coloring list	
	$T = \{0, 1, 3\}$ and cochannel constraints as 2	112
5.7	Single channel assignment in the cellular network by	
	considering the <i>T</i> -coloring list $T = \{0, 1, 3\}$ and	
	cochannel constraint as 3	115

5.8	Multi-channel graph by considering T-coloring list	
	$T = \{0, 1, 3\}$, while the cochannel and cosite	
	constraints as 2	118
5.9	Multi-channel assignment in the cellular network by	
	considering the <i>T</i> -coloring list $T = \{0, 1, 3\}$ while	
	cochannel constraint is 3 and cosite constaint as 2	122

LIST OF ABBREVIATIONS

WMN - Wireless mesh network

WLAN - Wireless local area networks

ADCA - Adaptive dynamic channel allocation protocol

NICs - Network interface cards

TWIN - Time domain wavelength interleaved network

TWSN - Time wavelength switched network

LCA - Level channel assignment

MCM - Multi-channel multicast

MAC - Medium access control

ICAR - Interference and congestion aware routing

LIST OF SYMBOLS

adj - The adjacent channel constraint

coc - The cochannel constraint

cos - The cosite constraint

C - A set of channels

 c_a - Channel for node/cell a

 c_{ip} - Channel number i for node/cell p

d(a, b, k) - Distance between nodes/cells a and b with value k

E - Edge of graph

G(V, E) - Graph with vertex V and edge E

V - Vertex of a graph

 \overline{V} - A set of rearrangement vertex/cell

 \bar{v} - The rearrangement vertex/cell

 $\{v_i\}$ - A set of vertex

 $\{e_{ij}\}$ - A set of edge

 $sp_T(c)$ - c -span

 $sp_T(G)$ - T -span

 $\chi(G)$ - Chromatic number of G

 $\chi_T(G)$ - *T*-chromatic number

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
		122
A	List of Publications	132

CHAPTER 1

INTRODUCTION

1.1 Introduction

Channel assignment is an important thing in a communication network. Channel allocation schemes in the communication network can be divided into three types which are dynamic channel allocation, static channel allocation, and hybrid channel allocation. The types of the channel assignments depend on the communication network.

Dynamic channel allocation is applied in wireless network. Any type of computer network that uses wireless data connections for connecting network nodes is a wireless network (Kirti, 2014). Wireless networking is a method to avoid the costly process of introducing cables into a building, or as a connection between various equipment locations. There are several types of wireless networks such as wireless mesh networks (WMN), wireless sensor networks, and wireless local area networks (WLAN).

Static or fixed channel allocation usually use in cellular network where geographical regions were divided into cells, represented in hexagonal and each cell had a number of antennas with an associated set of frequency bands (Claudia *et al.*, 2013). A channel assignment problem in a cellular network is defined as minimize the number of channels for the network depends on the interference.

Hybrid channel allocation is a combination from static channel allocation and dynamic channel allocation. In the network, each mesh node has both static and dynamic interfaces as proposed by Ding *et al.* (2013). They present an Adaptive Dynamic Channel Allocation protocol (ADCA), which considers optimization for both throughput and delay in the channel assignment. The channel assignment problem is usually solved by graph coloring theory (Sivarajan *et al.*, 1989).

The next section in this chapter includes the background and problem statement of the research. Research questions, objectives, the scope of the study and significant of the study are also explained. Finally, the brief explanation for each chapter is outlined in thesis organization.

1.2 Background of the Study

Wireless networks are being used widely around the world nowadays. A wireless mesh network (WMN) is a communication network that enables to apply in many applications such as broadband home networking, community networks, last-mile internet access, etc. The networks can automatically re-routing around a node that has lost power.

WMN consists of mesh clients which represent laptop, cell phones and other wireless devices while mesh routers represent the traffic or connection between the nodes (channels). The WMN routers effectively form a multi-hop wireless access backbone. Some of the special nodes are connected with gateways which directly connected to the Internet. Figure 1.1 shows an example of a possible configuration for a wireless mesh network.

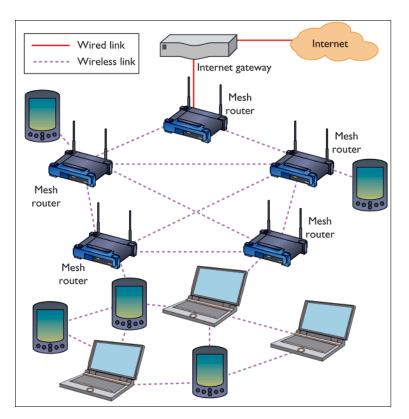


Figure 1.1 Example of a possible configuration for a wireless mesh network (Portmann and Pirzada, 2008)

Cellular network is represented in hexagon network consist of cells. The cells served by at least one transceiver from fixed-location known as a cell site or base station. These cells provide radio coverage over a wide geographic area when joined together. This enables the communications to happen between the cells with fixed transceivers and telephones anywhere in the network, via base stations, even if some of the transceivers are moving through more than one cell during transmission.

Ding, Y (2014) analyzed that channel assignments in the networks become a promising technology that enables many useful applications. In their study, they survey that interference give different performance of the channel assignments. The expected performance will give accurate results when deployed in real environments. Therefore, it is necessary to design channel allocation algorithms based on more realistic interference.

1.3 Problem Statement

In the wireless mesh network, channel assignment problem can be modeled as a connected graph G(V, E) representing a wireless network with n nodes and m edges, where $V = \{v_i\}$ for i = 1, 2, ..., n and $E = \{e_{ij}\}$ for i, j = 1, 2, ..., m. Similar with wireless mesh network, the cellular network also can be modeled as a connected graph G(V, E) representing a wireless network with n nodes and m edges which represent in hexagonal network. The cell for the hexagon network represents the node for the graph where each cell is assigned with one transmitter. We shall assume that, to avoid interference, two constraints are considered for single channel communication which are adjacent constraint and cochannel constraint while for multi-channel assignment, there is an addition constraint which is cosite constraint.

The channels are assigned in such a way that they are constantly reused once a particular assignment is completed. In what way can the channels be assigned to the nodes with minimum use of channels in order to transfer data communication by considering the electromagnetic constraints?

1.4 Research Questions

The research questions of the study are:

- a. How is the graph coloring changing when interference happen?
- b. How can the graph model adapt to different settings in the cases of static and dynamic networks?
- c. How to minimize number of channel used in the network?
- d. How to optimize the performance of the network?
- e. What simulation software is used to prove the algorithm?

1.5 Objectives of the Study

The objectives of the study are:

- a. Propose an improvement to the channel assignments for static and dynamic graph models using single channel on nodes in the network.
- b. Propose an improvement to the channel assignments for static and dynamic graph models using multi-channel on nodes in the network.
- Develop new metaheuristic methods based on simulated annealing for single and multiple channels.
- d. Applications to a, b, and c above on the problem of channel assignments for mesh and cellular networks.

1.6 Scope of the Study

This study is about channel allocation in cellular and wireless mesh networks where represents the static and dynamic networks respectively. In communication

networks, channel assignment is an important thing to optimize the performance of the network. The channel allocation is a graph coloring problem where we are focusing on the vertex coloring. As explained above, two constraints are considered in single channel communication namely adjacent constraint and co-channel constraint. For the multi-channel communication, cosite constraint is considered in the channel assignment. The network is optimized if the channel used is minimized by considering the constraints. Most of the previous research in cellular and wireless mesh networks are in computer and mobile engineering. Our study is considering and focusing on graph coloring to allocate channels by considering the constraints and not involved in the engineering and computing field. Our algorithms are applied in wireless mesh networks and cellular networks for single and multi-channels assignments.

1.7 Significance of the Study

Channel assignment in communication networks is a graph coloring problem. The optimize performance of the networks can be achieved by minimizing the channel used while reducing the interference of the nodes. In the research, we proposed an algorithm of channel assignment for single channel and multi-channel communication by considering three constraints; adjacent, co-channel and cosite constraints using simulated annealing and *T*-coloring problem. We improve the Greedy method by adding the constraints. The arrangement of the nodes in mesh networks is important in our algorithm that inspired us to develop metaheuristic method using simulated annealing. This model focused on single channel communication and multi-channel communication. The results from the study are useful for optimizing the performance of the cellular network and wireless mesh network in real environments..

1.8 Thesis Organization

The thesis is organized into six chapters. Chapter 1 is the introduction which discusses the research plan of the study and introduction of the networks. Chapter 2 is reviewing of the related works from previous authors as references. Some of the previous models are explained briefly in this chapter. The graph coloring is describing deeply as the main problem that related with our study.

In Chapter 3, a new algorithm namely Improved Greedy algorithm with adjacent channel and cochannel constraints is proposed to assign a single channel for the networks. In Chapter 4, the multi-channel assignment is proposed using Improved Greedy algorithm by considering the three constraints; adjacent, cochannel and cosite constraints. Both algorithms are applied in mesh and cellular networks.

The algorithm is improved in Chapter 5 by using Improved Greedy algorithm combining with simulated annealing and *T*-coloring problem. The two constraints; adjacent and co-channel constraints are considered in single channel communication while in multi-channel communication, three constraints; adjacent channel, co-channel, and cosite constraints are being considered. Conclusion and open issues are discussing in Chapter 6 for further study in the future.

REFERENCES

- Akella, M. R., Batta, R., Sudit, M., Rogerson, P., and Blatt, A. (2007). Cellular network configuration with co-channel and adjacent-channel interference constraints. *Computers & Operations Research*. 35(2008): 3738 3757.
- Akyildiz, F., Wang, X., and Wand, W. (2005). Wireless mesh networks: a survey. Computer Networks. 47(4): 445-487.
- Alon, N. (2003). A simple algorithm for edge-coloring bipartite multigraphs. *Information Processing Letters*. 85(6): 301-302.
- Alon, N., Sudakov, B., and Zaks, A. (2001). Acyclic edge colorings of graphs. *Journal of Graph Theory*. 37(3): 157-167.
- Appel, K., and Haken, W. (1976). Research announcements every planar map is four colorable. *Bulletin of the American Mathematical Society*. 82(5): 711-712.
- Beljadid, A., Hafid, A. S., and Gendreau, M. (2007). Optimal design of broadband wireless mesh networks. *Proc. of the 50th International Conference on GLOBECOM 07*.
- Brar, G., Blough, D. M., and Santi, P. (2006). Computationally efficient scheduling with the physical interference model for throughput improvement in wireless mesh networks. *Proceedings of the 12th annual international conference on Mobile computing and networking*. September 23-29. Los Angeles, CA, USA.
- Bu, Y., Finbow, S., Liu, D.D.-F., and Zhu, X. (2014). List backbone colouring of graphs. *Discrete Applied Mathematics*. 167: 45-51.
- Claudia, V., Mirna, M., and Jezreel, M. (2013). Characterization of software processes improvement needs in SME's. *International Conference on Mechatronics, Electronics and Automotive Engineering*. 223-228.

- Das, S. M., Koutsonikolas, D., Hu, Y. C., and Peroulis, D. (2006). Characterizing multi-way interference in wireless mesh networks. *Wintech, Los Angeles, California, USA*.
- Das, A. K., Alazemi, H. M. K., Vijayakumar, R., and Roy, S. (2005). Optimization models for fixed channel assignment in wireless mesh networks with multiple radios. *IEEE SECON*. Santa Clara. 26-29.
- Ding, Y., Pongaliur, K., and Xiao, L. (2013). Channel allocation and routing in hybrid multichannel multiradio wireless mesh networks. *IEEE Transactions* on Mobile Computing. 12(2): 206-218.
- Ding, Y., and Xiao, L. (2010). Channel allocation in multichannel wireless mesh networks. *Journal of Computer Communications (Article in Press)*.
- Ding, Y., Pongaliur, K., and Xiao, L. (2009). Hybrid multi-channel multi-radio wireless mesh networks. *Quality of Service. IWQoS. 17th International Workshop on IEEE*. doi: 10.1109/IWQoS.2009.5201403.
- Gadkar, A., and Subramaniam, S. (2010). Wavelength-reuse in optical time-slotted networks. *Optical Switching and Networking*. 7(4): 153-164.
- Geltman, K. E. (2014, February 20). The simulated annealing algorithm. Retrieved From http://katrinaeg.com/simulated-annealing.html.
- Girgis, M. R., Mahmoud, T. M., Abdullatif, B. A., and Rabie, A. M. (2014). Solving the wireless mesh network design problem using genetic algorithm and simulated annealing optimization methods. *International Journal of Computer Applications*. 96(11): 0975-8887.
- Gore, A. D., and Karandikar, A. (2011). Link Scheduling algorithms for wireless mesh networks. *IEEE Communications Surveys and Tutorials*. 13(2): 258-273.
- Hale, W. K. (1980). Frequency assignment: Theory and applications. *Proc. IEEE*. 68: 1497-1514.
- Heawood, P. J. (1890). Map-colour theorems. *Quarterly Journal of Mathematics*. Oxford. 24: 332-338.
- Holyer, I. (1981). The NP-completeness of edge-colouring. SIAM J. COMPUT Society for Industrial and Applied Mathematics. 10(4): 718-720.
- Kaabi, F., Ghannay, S., and Filali, F. (2010). Channel allocation and routing in wireless mesh networks: a survey and qualitative comparison between schemes. *International Journal of Wireless & Mobile Networks*. 2(1).

- Kirti. (2014). Basic concepts of wireless network. *International Journal of Science and Research (IJSR)*. 3(7): 2319-7064.
- Kubicka, E., and Schwenk, A. J. (1989). An introduction to chromatic sums. *Proc. ACM Computer Science Conference*. Louisville, New York. 39–45.
- Liu, W., Han, Y., and Yu, H. (2000). Channel Assignment Strategies for Cellular Phone Systems. *Mathematical Contest in Modeling (MCM)*.
- Matsui, T., Sukegawa, N., and Miyauchi, A. (2014). Fractional programming formulation for the vertex coloring problem. *Information Processing Letters*, *Article in Press*.
- Mor, V., and Kumar, Harish. (2017). Energy Efficient Greedy Algorithm for Wireless Mesh Networks. *International Journal of Current Research*. 9(10): 53-57.
- Pan, D., and Xing, B. (2008). An ant routing algorithm for wireless mesh network. Intelligent Control and Automation. Chongqing. 4595-4599.
- Portmann, M., and Pirzada, A. A. (2008). Wireless Mesh Networks for Public Safety and Crisis Management Applications. *IEEE Internet Computing*. 12(1): 18-25.
- Raman, B. (2006). Channel allocation in 802.11-based mesh networks. *Proceedings IEEE INFOCOM*. doi: 10.1109/INFOCOM.2006.317.
- Raniwala, A., Gopalan, K., and Chiueh, T. (2005). Centralized channel assignment and routing algorithms for multi-channel wireless mesh networks. *Mobile Computing and Communications Review*. 8(2).
- Rasheed, T., and Slongo, M. (2008). Channel assignment in wireless mesh networks: a state-of-art. *Create-Net Technical Report CN-TR- 200800022*.
- Roberts, F.S. (1991). T-colorings of graphs: recent results and open problems. *Discrete Mathematics*. 93(2-3): 229-245.
- Roos, D. (2007, June 20). *How wireless mesh networks work*. Retrieved From http://computer.howstuffworks.com/how-wireless-mesh-networks-work.htm.
- Rouse, M. (2015, February). *Greedy algorithm*. Retrieved From http://whatis.techtarget.com/definition/greedy-algorithm.
- Sahni, S., and Gonzales, T.(1976). P-Complete approximation problem. *Proc. 32nd Ann. ACM Symp. on the Theory of Computing*.
- Salleh, S., Zomaya, A., Olariu, S., and Sanugi, B. (2005). Numerical simulation and case studies using Visual C++.Net. *Wiley-Interscience*, *USA*.

- Si, W., Selvakennedy, S., and Zomaya, A.Y. (2010). An overview of channel assignment methods for multi-radio multi-channel wireless mesh networks. (70)505-524.
- Sivarajan, K. N., McEliece, R. J., and Ketchum, J.W. (1989). Channel assignment in cellular radio. *Proc. 39th IEEE Veh. Technol. Soc. Conf.*, 846-850.
- Skulrattanakulchai, S. (2006). Δ-List vertex coloring in linear time. *Information Processing Letters*. 98(3): 101-106.
- Subramanian, A. P., Gupta, H., Das, S. R., and Cao, J. (2008). Minimum interference channel assignment in multiradio wireless mesh networks. *IEEE Transactions on Mobile Computing*. 7(12): 1459-1473.
- Weisstein, E. W. (2016, Aug 18). *Vertex coloring*. Retrieved From http://mathworld.wolfram.com/VertexColoring.html.
- Weisstein, E. W. (2016, Aug 18). *Edge coloring*. Retrieved From http://mathworld.wolfram.com/EdgeColoring.html.
- Weisstein, E. W. (2016, Aug 18). *Four-color theorem*. Retrieved From http://mathworld.wolfram.com/Four-ColorTheorem.html.
- Yang, D., Fang, X., Li, N., and Xue, G. (2009). A simple greedy algorithm for link scheduling with the physical interference model. *GLOBECOM IEEE Global Telecommunications Conference*.
- Zeng, G., Wang, B., Ding, Xiao, Y. L., and Mutka, M. (2007). Multicast algorithms for multi-channel wireless mesh networks. *IEEE International Conference on Network Protocols*. Beijing. 1-10.