

Utilisation of raw palm oil mill effluent (POME) as a renewable substrate for fermentative H₂ production: Optimisation using statistical approach

Mohd Fahmi Muhammad Mubarak^{a,b}, Muhamad Hanif Md Nor^{a,b}, Nor Azman Kasan^c, Mohd Firdaus Abdul Wahab^{a,b}, Azmi Aris^d, Norahim Ibrahim^{a,b}, Zaharah Ibrahim^{a,b,*}

^a Department of Biosciences, Faculty of Science, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

^b EnVBiotech Research Group, Faculty of Science, Universiti Teknologi Malaysia, 81310 UTM Johor Bahru, Johor, Malaysia

^c Institute of Tropical Aquaculture, School of Fisheries and Aquaculture Sciences, Universiti Malaysia Terengganu, 21030 Kuala Terengganu, Terengganu, Malaysia

^d Centre for Environment Sustainability and Water Security (IPASA), Research Institute for Sustainable Environment (RISE), Universiti Teknologi Malaysia, 81310 Johor Bahru, Johor, Malaysia

* Corresponding author: zaharah@utm.my

Article history

Received 6 January 2020

Revised 13 February 2020

Accepted 19 March 2020

Published Online 15 June 2020

Abstract

Fermentative H₂ production was studied using raw POME as the substrate with heat-shock pre-treated POME anaerobic sludge acted as the inoculum. The effect of crucial operating variables (initial pH of medium, incubation temperature, and inoculum size) on H₂ production was studied using Box–Behnken Design. A second-order polynomial regression model was generated to evaluate H₂ production trend under conditions tested. The model analysis revealed the high significance of linear effects of initial pH, incubation temperature, and inoculum size ($P < 0.01$) towards H₂ production. Similar results indicated that the interaction effect between initial pH and inoculum size, and interaction effect between incubation temperature and inoculum size were highly significant ($P < 0.01$). The regression model suggested that the optimum conditions were set to a pH value, incubation temperature and inoculum size of 6.4, 58.0°C and 8.0% v/v, respectively. In order to validate the optimum conditions determined by the model, heat-shock pre-treated POME anaerobic sludge was incubated with raw POME under optimum conditions. Validation experiment showed that a cumulative H₂ volume of 239.0 mL was produced. Microbial community analysis of inoculum showed that mixed consortia between *Clostridium* sp. and other obligate anaerobic non-spore forming bacteria, mostly belonging to the *Firmicutes* and *Bacteroidetes* phyla were identified as the major H₂-producers and were hugely responsible towards fermentative H₂ production.

Keywords: Fermentative H₂ production, POME anaerobic sludge, optimisation, Box–Behnken Design, microbial community analysis

© 2020 Penerbit UTM Press. All rights reserved

INTRODUCTION

The palm oil industry in Malaysia has grown rapidly over the years and unsurprisingly, Malaysia is well-known as the world's second largest producer of palm oil, accounted for 10.3% of the world's oils and fats production in the year of 2007 (Lam *et al.*, 2009; Choong *et al.*, 2018). Even though Malaysia is behind Indonesia as the world largest palm oil producer due to the rapid expansion of oil palm plantations, Malaysia still holds its position as the world's largest crude palm oil exporter (AIM, 2015; Awalludin *et al.*, 2015). As for global distribution of palm oil supply annually, more than 80% is accounted between Malaysia, Indonesia and Thailand, combined altogether (Amiruddin *et al.*, 2005; Awalludin *et al.*, 2015). The industry serves as an important backbone to the country's economy and has significantly increased the standard of living of its populations (Yusoff and Hansen, 2007).

In spite of this, sustainability of palm oil production has always been doubted, particularly by non-governmental organisations (NGOs), especially the involvement of palm oil mills, which is palm oil mill effluent (POME), the most existing visible pollutant that is produced by the mills themselves (Poh and Chong, 2010). The extraction of crude palm oil (CPO) involves the boiling of fresh fruit bunch (FFB), which

needs an obviously large amount of water during the extraction process. Each tonne of crude palm oil produced, it is estimated between 5.0 to 7.5 tonnes of water needed with more than 50% of that water used in the extraction process ends up as POME (Yacob *et al.*, 2006; Wu *et al.*, 2009).

Generally, raw POME is an acidic brownish colloidal suspension that consists of 95 – 96% water, 0.6 – 0.7% oil, and 4 – 5% total solids (Onyia *et al.*, 2001; Ahmad *et al.*, 2006), along with high polluting properties with an average level of chemical oxygen demand, COD (50 g/L), biochemical oxygen demand, BOD (25 g/L), total solids (41 g/L), suspended solids (18 g/L) and oil and grease (6 g/L) (Ahmad *et al.*, 2006), which are produced from the mixture of steriliser condensate, separator sludge and hydrocyclone waster in a ratio of 9:15:1 (Wu *et al.*, 2010). It also contains cellulosic material, fat, oil and grease (Rupani *et al.*, 2010; Iskandar *et al.*, 2018). Even though the effluent is non-toxic since no chemical is being added during the extraction process of CPO from FFB, it produces polluted wastewater which not only affects the aquatic niche, but also contributes odour problems to local community (Borja *et al.*, 1996; Loh *et al.*, 2013). Furthermore, due to intense colour of POME, it can directly prevent sunlight from penetrating into the water streams, hence compromising photosynthetic organisms that live in the water (Azreen *et al.*, 2017). This concerning

situation leads to a growing necessity by the palm oil mill industry for a sustainable treatment of POME to reduce the pollution occurred. Along with more than 440 mills functioning throughout Malaysia which produce POME in huge scale every day (Cheng *et al.*, 2010; Gobi and Vadivelu, 2013), the discharge of POME into the water bodies such as rivers poses a possible threat to the environment and its surrounding.

Hydrogen gas (H₂) can be classified as an ideal, green, and sustainable energy carrier. It contains the biggest gravimetric energy density compared to any hydrocarbon fuel. It can be viewed as an alternative source of renewable energy to fossil fuel since the combustion of H₂ produces no greenhouse gases (GHG) emission (Chong *et al.*, 2009; Azwar *et al.*, 2014; Rezanian *et al.*, 2017). H₂ has been proposed as the ultimate transport fuel for vehicles and vessels because of its non-polluting characteristics, and it also enables the use of highly efficient fuel cells to convert chemical energy into electricity (Forsberg, 2007). This energy is high in demand for various applications of numerous industries, such as the transportation sector, as coolant in electrical generators at power stations and rocket propulsion (Goyal *et al.*, 2006).

Optimisation has been studied and applied in other research areas, including the H₂ production when dealing with wastes as substrates. It is of great significance to produce H₂ from organic wastes by fermentative H₂ production, because it plays the dual role of energy production and waste reduction (Wang and Wan, 2009). Thus, this step is to ensure the system developed fits and increases into projection of production scale when it has been optimised. The optimisation studies of fermentative H₂ production have been widely reported (Wang and Wan, 2008; O-Thong *et al.*, 2008; Wang and Wan, 2009; Rasdi *et al.*, 2009; Nath and Das, 2011; Sreela-or *et al.*, 2011a; Sreela-or *et al.*, 2011b; Shanmugam *et al.*, 2014; Azman *et al.*, 2016a; Azman *et al.*, 2016b; Azman *et al.*, 2016c). This experimental strategy allows multivariate analysis by modification of several variables at one time, and moreover to optimise for the responses of interest. However, due to the nature of the source of microorganisms, substrates used, and system approach, there are wide variations to pinpoint the range level of certain factors.

Suitable microorganism which acts as inoculum is regarded as a significant factor that contributes toward fermentative H₂ production. Even though pure cultures have been studied broadly and in-depth, mixed cultures and naturally mixed consortia still have huge prospect when dealing with more complex substrates such as domestic and industrial wastewaters (Wong *et al.*, 2014; Arimi *et al.*, 2015). Thus, a pre-treatment procedure is necessary to be studied when naturally mixed consortia are used as inoculum in producing H₂. The pre-treatment works by enriching the H₂-producers and suppressing the H₂-consumers. Hence, the degree of H₂ production rate and yield can be bolstered when dealing with inoculum samples that are composed of various microorganisms (Wong *et al.*, 2014). However, it should be noted that this pre-treatment procedure should be imposed with minimal cost which later imposes a huge impact towards scaling-up the production (Pendyala *et al.*, 2012). Heat-shock, acidification, chemical and aeration are among the pre-treatment procedures that have been applied (Mohan *et al.*, 2008; Wang and Wan, 2008; Mohammadi *et al.*, 2011; Pendyala *et al.*, 2012; Wong *et al.*, 2014), in which the heat-shock pre-treatment is preferred over other options due to its easy implementation and cost-effective, with high production rate of H₂ (Wang and Wan, 2008; Mohammadi *et al.*, 2011; Wong *et al.*, 2014).

In this study, Box-Behnken Design (BBD) was chosen by combining 2^k factorials with incomplete block design, that is very efficient in terms of the number of required runs. It also does not contain any point at the vertices of the cubic region created by the upper and lower limits for each variable compared to Central Composite Design (CCD) (Anderson and Whitcomb, 2000; Montgomery, 2009), which was the main reason for BBD to be chosen in this study. Furthermore, there are limited knowledge and information nowadays in maximising H₂ production, especially raw POME as the substrate and using BBD as a tool of statistical approach for optimisation. Finally, the molecular analysis of microbial population from the sludge used in the study was performed to identify the H₂-producers which were responsible for H₂ production.

EXPERIMENTAL

POME sample collection and characterisation

POME samples were obtained from a local palm oil mill factory in Kulai, Johor, Malaysia. The samples were consisted of POME anaerobic sludge and raw POME, which later were stored in cold room facilities at 4°C to minimise the degradation of samples by indigenous microbial activities, thus preserving the quality of the samples. The characteristics of POME are summarised in Table 1.

Table 1 Characteristics of raw POME sample.

Parameter	Value (g/L)
COD	35.0 ± 4.5
BOD ₅	23.0 ± 2.3
Colour intensity*	21.2 ± 3.3
Ammoniacal nitrogen	0.2 ± 0.2
pH*	4.6 ± 0.2
Total suspended solids (TSS)	27.0 ± 1.8
Mixed liquor suspended solid (MLSS)	23.1 ± 3.5
Mixed liquor volatile suspended solid (MLVSS)	11.4 ± 3.6

*All values in g/L except colour (ADMI) and pH

Preparation of POME anaerobic sludge as source of inoculum

The bacterial inoculum used in this experiment was obtained from the POME anaerobic sludge. The sludge was initially passed through a mesh screen to remove fragments. The concentration of the volatile suspended solids (VSS) of the sludge was 11.4 ± 3.6 g/L. The sludge was pre-treated with heat-shock methods at 80°C for 30 min in order to suppress the H₂-consumers.

Fermentation of H₂ production in batch system

The experiment was conducted in 60 mL serum bottles with working volume of 40 mL. Raw POME was used as the substrate for fermentation without any additional nutrient. Heat-shock pre-treated sludge was inoculated with raw POME and incubated for 24 h to produce H₂. The system was flushed with N₂ for 5 min to ensure anaerobic condition throughout the experiment and was capped tightly with rubber septum. The initial pH, incubation temperature, and inoculum size of experiment were adjusted according to the values determined by BBD. As for pH adjustment, 1 M HCl and 1 M NaOH were used throughout of this experiment.

The experimental design of Box-Behnken Design

A response surface methodology using BBD was introduced to limit the sample size as the number of parameters grew and to determine the most suitable level for the selected variables to achieve optimal H₂ production from raw POME using heat-shock pre-treated POME anaerobic sludge as the inoculum. Three significant variables, initial pH (A), incubation temperature (B), and inoculum size (C) were studied in BBD. These were assessed at three coded values: low level (-1), centre point (0), and high level (+1), which resulted in 17 experiments including 5 centre points. Each of the experiment was conducted in triplicate and the average of H₂ production was defined as the experimental responses. The coded values of the independent variables were determined using the following equations:

$$x_i = \frac{X_i - X_0}{\Delta X_i} \quad - \text{Eq. 1}$$

where;

- x_i is the dimensionless coded value of variable;
- X_i is the actual value of the *i*th variable;
- X_0 is the actual value of X_i in the centre point;
- ΔX_i is the increment value.

The experimental results were then fitted into the following second-order polynomial regression model to define the behaviour of the system:

$$Y = \beta_0 + \sum_{i=1}^k \beta_i X_i + \sum_{ii=1}^k \beta_{ii} X_i^2 + \sum_{ij=1}^k \beta_{ij} X_i X_j \quad - \text{Eq. 2}$$

where;

- Y is the predicted response values (H₂ production);
- k is the number of factor variables;
- β₀ is the fixed value at centre point;
- β_i is the linear coefficient;
- X_i is the value of ith variable;
- β_{ii} is the quadratic coefficient;
- β_{ij} is the interaction coefficient.

Statistical regression analysis, analysis of variance (ANOVA) and 3D graphical plotting, Design-Expert® 7.0 software (Stat-Ease Inc., Minneapolis MN, USA) were used to determine the fitness of model, significance of the variables and their interactions as well as their effects towards the H₂ production. Table 2 shows the summary of the BBD experimental design for this study.

Table 2 Coded and actual values of experimental variables used in BBD.

Variable	Component	Level		
		-1	0	+1
A	Initial pH	6.25	6.50	6.75
B	Incubation temperature (°C)	57.5	60.0	62.5
C	Inoculum size (% v/v)	5.0	7.5	10.0

Verification of the model

In order to validate the optimum conditions predicted by the model, a set of batch system was performed under the optimum conditions. The results obtained in the verification experiment were then used to determine the accuracy of the model.

Analytical methods and analysis

The water displacement method was used to collect and measure the volume of biogas produced. The fraction of H₂ in the biogas was determined by a Gas Chromatograph-Thermal Conductivity Detector (Agilent 7890B Model, Agilent Technologies, Santa Clara CA, USA) fitted with HayeSep Q and MolSieve 5A columns. He and Ar were used as the carrying gases at the flow rate of 45 mL/min. The temperatures of the oven, column inlet and detector were 60°C, 190°C and 250°C, respectively. The biogas was manually injected and the injection volume was 1 mL. All wastewater parameters that conducted in this study were measured according to the Standard Methods (APHA, 2012).

The H₂ production was calculated from the serum bottle headspace measurements of gas composition and the total volume of biogas at each interval using the following equation:

$$V_{H,i} = V_{H,i-1} + C_{H,i}(V_{G,i} - V_{G,i-1}) + V_H (C_{H,i} - C_{H,i-1}) \quad - \text{Eq. 3}$$

V_{H,i} and V_{H,i-1} are cumulative H₂ volumes at the current (i) and previous (i-1) time intervals, V_{G,i} and V_{G,i-1} are the total biogas volumes in the current and previous time intervals, C_{H,i} and C_{H,i-1} the fraction of H₂ in the headspace of the bottle measured using gas chromatography in the current and previous intervals, and V_H the total volume of headspace in the bottle (Chong et al., 2009; Azman et al., 2016c).

Microbial community analysis

Sampling, DNA extraction, and PCR

Sludge was retrieved from the bottom of the serum bottle and stored at 4°C. The total genomic community DNA was extracted using DNeasy PowerSoil Kit (Qiagen, USA). The procedure was performed in accordance with the manufacturer’s protocol. The PCR mixture (50 µL total volume) contained GoTaq® Master Mixes (Promega Corp., Fitchburg WI, USA), nuclease free water, 100 ng/L of DNA template

and 10 µM of each primer (Fd1 = 5’ AGA GTT TGA TCC TGG CTC AG 3’ and rD1 = 5’ ACG GCT ACC TTG TTA CGA CTT 3’). The PCR was performed in an Eppendorf™ Mastercycler™ Nexus Thermal Cycler (Thermo Fisher Scientific, Waltham MA, USA). The amplification was performed with thermal cycling including initial denaturation at 95°C for 2 min, 30 cycles of denaturation (94°C, 30 s), annealing (55°C, 30 s), and extension (72°C, 1 min), and finally extension at 72°C for 10 min (Bay, 2014).

Cloning 16S rRNA

PCR products were purified from a 1% agarose gel using a gel extraction kit according to the manufacturer’s instructions (Qiagen, Germany). The recovered PCR fragment was cloned into pGEM®-T vector (Promega Corp., Fitchburg WI, USA) and transformed into JM109 High-Efficiency Competent Cells (Promega Corp., Fitchburg WI, USA). White colonies were randomly selected from plates.

Sequences analysis

The recombinant plasmids were extracted using EasyPure® Plasmid MiniPrep Kit (TransBionovo Co. Ltd., China) according to the manufacturer’s instructions. Restriction endonuclease EcoRI (TransBionovo Co. Ltd., China) was used on a 1% agarose gel to verify the insertion of fragment. Approximately 5 nucleotides were sent to Apical Scientific Sdn. Bhd., Malaysia for sequencing. Chromatograms were edited using ABI Sequence Scanner 2 and GeneDoc software, while DECIPHER (Wright et al., 2012) was used to scan for potential chimeric sequences. The sequences were compared to known 16S rRNA sequences in the GenBank™ database, using the basic logical alignment search tool (BLAST) to locate nearly exact matches in the GenBank database. DNA sequences were aligned using the program ClustalW (Thompson et al., 1994) and further edited manually. Phylogenetic analyses were performed using the neighbour-joining (NJ) method by the MEGA ver. 7.0 (Kumar et al., 2016).

RESULTS AND DISCUSSION

Box-Behnken design

The introduction of BBD, which formed by combining 2^k factorials with incomplete block design and is very efficient in terms of the number of required runs. It also does not contain any points at the vertices of the cubic region created by the upper and lower limits for each variable compared to CCD. A strong advantage of BBD is when the points on the corners of the cube represent factor-level combinations that are prohibitively expensive or impossible to test due to the physical process constraints (illustrates in Fig. 1) (Anderson and Whitcomb, 2000; Montgomery, 2009).

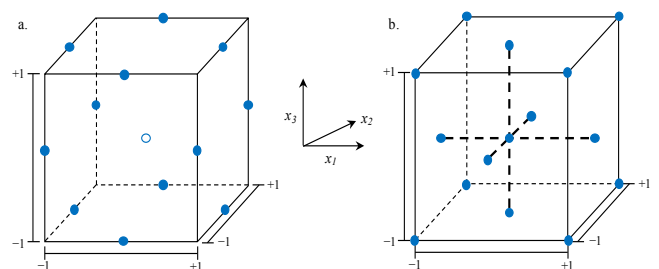


Fig. 1 A comparison between two designs; a) BBD for 3 factors, and b) face-centred CCD for k = 3.

A total of 17 experiments with different combinations among initial pH (A), incubation temperature (B), and inoculum size (C) were labelled as independent variables to determine their individual and combined effects on H₂ production (Y) through the development of a statistical correlation model using BBD. Central points consisted of five experiments were designated in this study and the remaining runs were evaluated in two different levels (lower level (-1) and higher level (+1)) as according to Table 3.

Table 3 The BBD experimental design.

Run	A	B	C	Cumulative H ₂ production (mL)	
				Experimented	Predicted
1	6.25	57.5	7.5	231.3	232.5
2	6.75	57.5	7.5	195.4	196.8
3	6.25	62.5	7.5	209.7	208.3
4	6.75	62.5	7.5	171.0	169.8
5	6.25	60.0	5.0	167.2	169.3
6	6.75	60.0	5.0	103.9	105.7
7	6.25	60.0	10.0	194.0	192.2
8	6.75	60.0	10.0	183.8	181.7
9	6.50	57.5	5.0	172.1	168.9
10	6.50	62.5	5.0	127.6	127.0
11	6.50	57.5	10.0	201.4	202.0
12	6.50	62.5	10.0	189.5	192.7
13	6.5	60	7.5	227.0	222.4
14	6.5	60	7.5	223.0	222.4
15	6.5	60	7.5	226.0	222.4
16	6.5	60	7.5	218.0	222.4
17	6.5	60	7.5	218.0	222.4

Based on the 17 experimental runs by referring to Table 3, the data showed that the model could be best explained in quadratic model. Thus, the equation for this model was expressed as:

$$Y_{H_2} = 222.40 - 18.51A - 12.80B + 24.74C - 0.70AB + 13.28AC + 8.15BC - 15.49A^2 - 5.06B^2 - 44.69C^2 \quad \text{Eq. 4}$$

where Y is the predicted cumulative H₂ production while A, B and C represent for coded values of initial pH, incubation temperature, and inoculum size, respectively.

The determination of the fitness of the model was based on the F-value and p-value from the statistical characteristic of the quadratic polynomial model. The F-value demonstrates the significant effect of the variance towards the model by comparing the ratio of the mean square (MS) model to error mean square. By referring to Table 4, F-value of the model was 132.88 with the p-value of < 0.0001. This indicated that this model was significant based on the p-value obtained.

In addition, the F-value and p-value could also be used to determine the significance and interactive strength among each of the individual model term. According to this study, results showed that factor A, B, C, AC, BC, A², B² and C² had profoundly affected the H₂ production with p-value of < 0.05, excluding factor of AB. Besides, the p-value lack-of-fit test of the model was > 0.05 (p-value of 0.5567), which was illustrated as insignificant. Hence, with the insignificant of lack-of-fit test, it showed that the model had been fitted well with the data and would provide a solid foundation for predicting H₂ production under any variable combination.

Table 4 Analysis of variance (ANOVA) and results of regression line analysis of BBD.

Source	Sum of Squares	df	Mean Square	F-value	p-value
Model	19971.78	9	2219.09	132.88	< 0.0001
A	2741.70	1	2741.70	164.17	< 0.0001
B	1310.72	1	1310.72	78.48	< 0.0001
C	4895.55	1	4895.55	293.14	< 0.0001
AB	1.96	1	1.96	0.12	0.7420
AC	704.90	1	704.90	42.21	0.0003
BC	265.69	1	265.69	15.91	0.0053
A ²	1009.95	1	1009.95	60.47	0.0001
B ²	107.91	1	107.91	6.46	0.0386
C ²	8408.31	1	8408.31	503.48	< 0.0001
Residual	116.90	7	16.70		
Lack of Fit	43.70	3	14.57	0.80	0.5567
Pure Error	73.20	4	18.30		
Cor Total	20088.68	16			

Note: R² = 0.9942; adjusted R² = 0.9867; predicted R² = 0.9595; adequate precision = 40.444

The statistical significance of the model was further checked by other regression analyses based on Table 4. The R² coefficient value was 0.9942, which is suggested as a good correlation between experimental and predictor variables since 99.42% of the response variation could be explained using the model. The adjusted R² value (0.9867) was very close to predicted R² value (0.9595), which indicated that the model was highly accurate in predicting the response. The adequate precision value for this study was 40.444. This adequate precision value demonstrated that the model has strong adequate discrimination ability since the value was greater than 4. Cao *et al.* (2008) reported that the coefficient of variation (CV) can be used to represent the relative variability of the model, which is measured in terms of the distribution of residual data variations around the mean value, and the model can be classified as reasonably reproducible if the CV is below 10%. Hence, the CV for this study was reflected at 2.13%, indicating that the model was sufficient to navigate in high precision and was dependable.

Singh *et al.* (2013) reported that the normal plot of residual is a crucial tool to diagnose, validate and explain the systematic departures of residuals from the statistical assumptions. Fig. 2 illustrates the residuals were plotted against the normal distribution of the model. Results indicated that the residuals for H₂ production were normally distributed since all the points have been clustered around the diagonal line and were independent of each other. Hence, the normal distribution plot had obeyed the assumption of normality which specified that the deviation from the linear was very minor. Therefore, it could be concluded that all residuals came from a normal distributed population and the error of variances was homogenous (Anderson and Whitcomb, 2000; Montgomery, 2009).

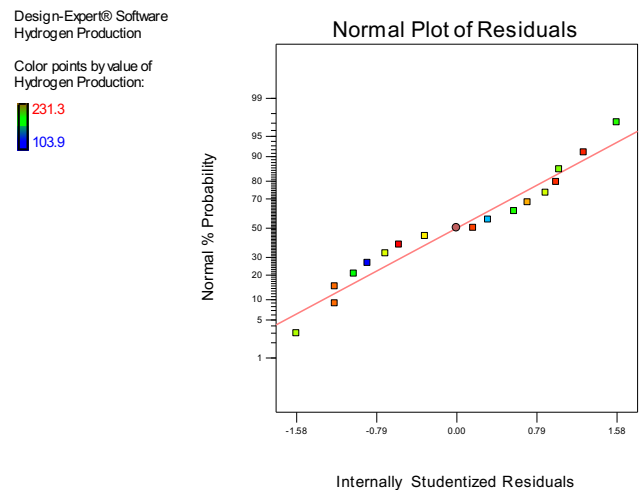


Fig. 2 Normal plot of residuals for H₂ production.

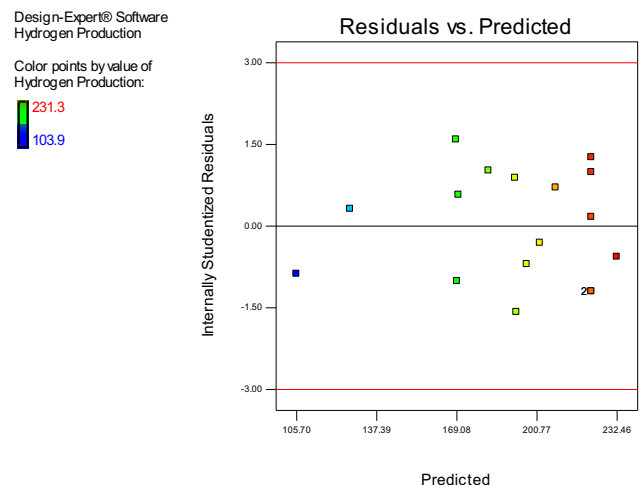


Fig. 3 Residuals against predicted plot for H₂ production.

Fig. 3 illustrates the residuals against predicted response plot which subjected for checking the appearance of non-constant variance in model by evaluating the pattern of the plotted points. In this study, the residual was randomly scattered without any specific pattern and trend such as a V-shaped pattern, which demonstrated that the residuals were from a common normal distribution with constant variance, but with no correlation between different residuals (Montgomery, 2009; Hoerl, 2012). Hence, the model was adequately fitted to the data, and was able to predict the response.

Localisation of H₂ production optimum conditions

Fig. 4 until Fig. 6 illustrate the three-dimensional (3D) response surface plots and corresponding contour graph for H₂ production. These were indicative of the infinite combined effects of any two independent variables towards maximum H₂ production with all other independent variables fixed at zero level. The optimum H₂ production value was at the central point of the smallest ellipse in the contour graph or at the maximum hump of the 3D graph.

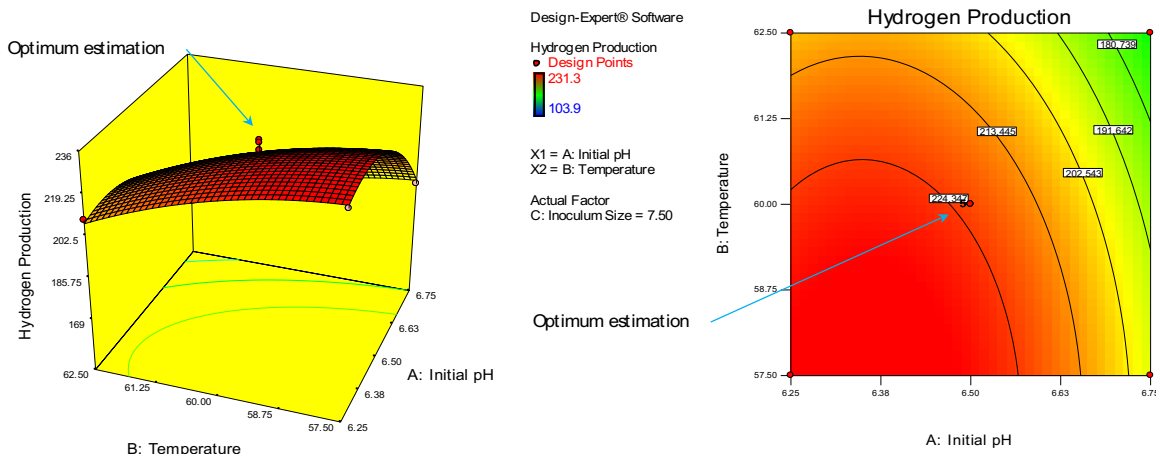


Fig. 4 3D response plots and 2D contour plots showing the effects of initial pH, incubation temperature and their mutual interaction on cumulative H₂ production with optimum level of inoculum size at 7.5% v/v

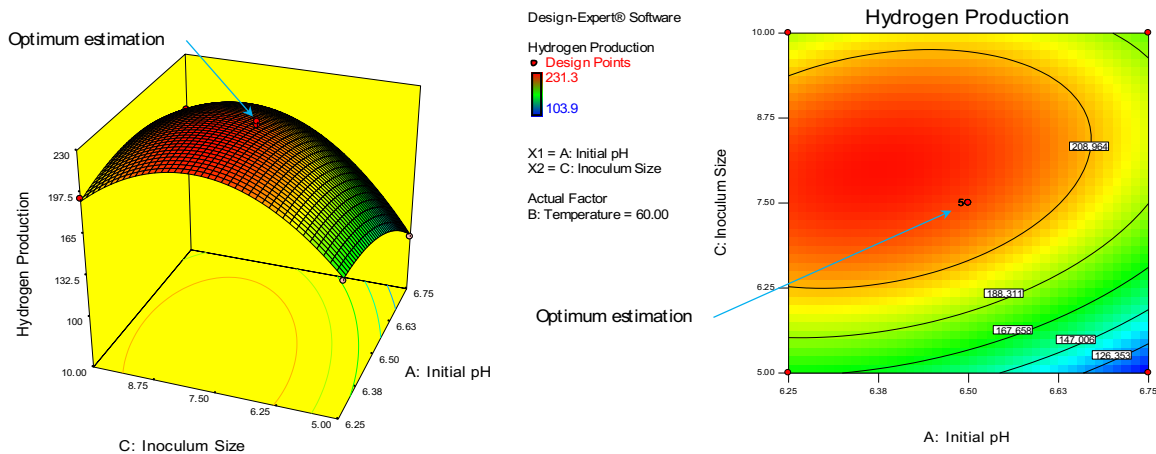


Fig. 5 3D response plots and 2D contour plots showing the effects of initial pH, inoculum size and their mutual interaction on cumulative H₂ production with optimum level of incubation temperature at 60°C

Initial pH of the substrate which acted as the medium for H₂-producers was considered as an important factor which affected fermentative H₂ production. It was directly involved with the metabolic activity of the H₂-producers as well as the metabolism pathway (Wang and Wan, 2009; Azman et al., 2016c; Wang and Yin, 2017). Based on Fig. 4 and Fig. 5, when the initial pH value of substrate was increased from 6.50 to 6.75, a drastic drop in H₂ production could be observed. Similar studies were reported previously by Lin and Cheng (2006) and Dareioti et al. (2014), in which their H₂ production was increased until pH values of 6.0 and 6.5 before being subsequently decreased when the pH values exceeded pH 7.5 and pH 9.0, respectively. It has been demonstrated that in an appropriate range, increasing the pH could improve the ability of H₂-producers to produce H₂ during fermentative H₂ production. However, pH value of the substrate that is too high might result in a decrease in the activity of hydrogenase enzyme of H₂-producers with the shifting metabolic pathway from the acidogenic phase to the solventogenic phase, which in turn could lead to a reduction in H₂ production (Gadhe et al., 2013; Azman et al., 2016c).

Incubation temperature was a crucial factor which would influence H₂ production by H₂-producers (Wang and Wan, 2009; Junghare et al., 2012; Azman et al., 2016c; Wang and Yin, 2017). As shown in Fig. 4 and Fig. 6, the production of H₂ was gradually decreased when the incubation temperature was elevated from 60.0°C to 62.5°C. This scenario was probably due to the switch from acidogenesis pathway of fermentative H₂ production to the solventogenesis phase in which acetic acid and butyric acid were further processed to produce solvents including acetone, butanol and ethanol (Liu et al., 2011; Khamaiseh et al., 2014; Azman et al., 2016c). Furthermore, high temperature imposed on H₂-producers might deteriorate the optimum physiological condition which involved its functional enzymes (Wang and Wan, 2009). Yokoyama et al. (2007), Lee et al. (2008) and Zhang et al. (2015) showed in their reports that beyond their optimal temperature, the H₂ production was tended to decline even though their inoculum were productive at thermophilic condition. Thus, an optimal condition of incubation temperature was highly dependable on microbial biocatalysts which later were responsible towards higher H₂ production.

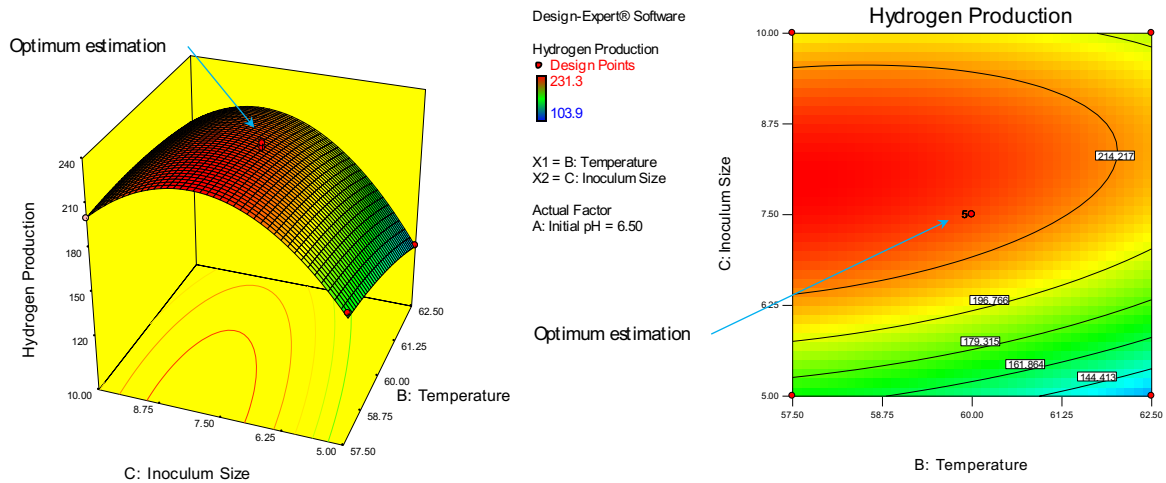


Fig. 6 3D response plots and 2D contour plots showing the effects of incubation temperature, inoculum size and their mutual interaction on cumulative H₂ production with optimum level of initial pH at 6.5

An appropriate inoculum size mixed with substrate might lead to higher H₂ production as demonstrated in Fig. 5 and Fig. 6. H₂ production was increased from 5.0% v/v until 7.5% v/v but started to decline when inoculum size exceeded 7.5% v/v. This scenario explained that when the inoculum size was increased, the substrate available for the H₂-producers was tended to be limited, leading to certain microorganisms starving, hence decreasing the survival rate of H₂-producers available for H₂ production. This scenario was also observed by Chittibabu *et al.* (2006) and Lazaro *et al.* (2015) in their studies which both concluded that up to a certain and suitable value, an increase in inoculum concentration could positively affect the H₂ production.

Based on Fig. 4 until Fig. 6, it was obvious that initial pH, incubation temperature, and inoculum size exhibited significant influence towards H₂ production. The value of initial pH would affect the electric charge on the cell membrane surface, which gave impacts on both microbial biocatalysts activity and nutrient adsorption. The optimal pH condition for fermentative H₂ production was ranged from pH 4.5 to pH 9.0, in which pH value lower than 4.5 could lead to the microorganisms' deterioration and would further suppress the activity of H₂ production (Ghimire *et al.*, 2015). Therefore, a low initial pH could simply prevent substrate from being further utilised for H₂ production. However, Khanal *et al.* (2003) reported that the neutral operational initial pH favoured the acetic acid pathways which significantly produced higher H₂ production compared to butyric acid pathways that preferred acidic pH condition. Incubation temperature influenced the microbial biocatalysts activity significantly, where low temperature might inhibit the crucial enzymes for H₂ production and lead to both low H₂ production rate and low substrate utilisation rate. Even though there was no concrete conclusion of optimal temperature for fermentative H₂ production, the best and effective H₂ production was between 35°C to 37°C and 55°C to 60°C for mesophilic and thermophilic temperature, respectively (Wang and Wan, 2009; Wang and Wan, 2011; Zhang *et al.*, 2015). Suitable inoculum size was crucial in producing high yield of H₂, hence both inoculum size and substrate available were dependent towards each other. Inoculum size that exceeded the limit in the system could lead to low substrate available which later resulting in low H₂ production and vice-versa due to survival of microorganisms' lack of nutrient (Chittibabu *et al.*, 2006; Lazaro *et al.*, 2015).

The 3D and contour plots from Fig. 4 until Fig. 6 were used to present the predicted response as a function of process factors (Anderson and Whitcomb, 2005). Yet, the effects of two factors could only be presented for each graph. Therefore, perturbation plots were used to demonstrate the effects by changing each factor towards the response and at the same time keeping all other factors constant (Anderson and Whitcomb, 2005). Fig. 7 illustrates the perturbation plot consisted of all factors studied in BBD. Based on the Fig. 7, it was clear that all factors had contributed towards H₂ production. Both initial pH (factor A) and incubation temperature (factor B) showed that increasing

the level could cause H₂ production to decrease gradually after the centre point value while the inoculum size (factor C) depicted an increase in H₂ production up to the centre point value and started to decline beyond the point.

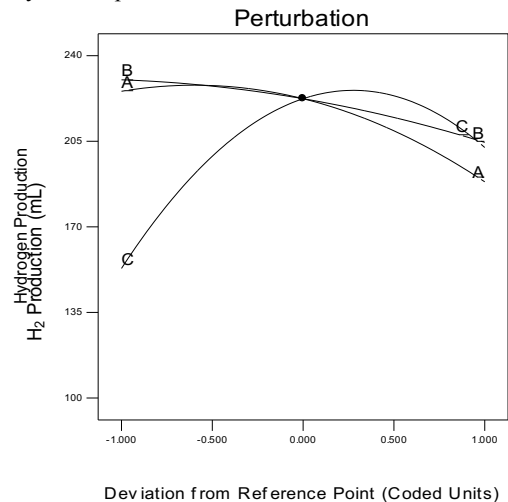


Fig. 7 Perturbation plot showing the effect of each factor towards H₂ production at their respective middle point. Legend: A – initial pH, B – incubation temperature, and C – inoculum size

Model validation

The optimum H₂ production using raw POME as the substrate with heat-shock pre-treated POME anaerobic sludge as the inoculum was predicted by the Design-Expert® software according to the desirability function which had assigned relative importance to the maximum H₂ production. Based on the solution with highest desirability as suggested by the program, the optimum parameters for maximum H₂ production were as followed: 6.4 of initial pH, 58.0°C of incubation temperature and 8.0% v/v of inoculum size. All validation experiments were carried out in 60 mL serum bottle, in triplicate as for the accuracy of the data.

The maximum predicted and average cumulative H₂ production observed after validation experiments were 234.8 mL and 239.0 mL, respectively. By comparing between predicted and actual experiment results, it showed that there was 1.79% increment of observed H₂ production value compared to predicted value. Therefore, the findings demonstrated the high effectiveness of the model in predicting the optimal level of factors, which indicated the optimisation process was successful.

Microbial community analysis

16S rRNA analysis was carried out based on the DNA extract from the heat-shock pre-treated sludge taken from the bottom of serum bottle at the end of the experiment. All had a DNA insert approximately 1350

bp from 22 screened clones. The phylum *Bacteroidetes* recorded the biggest clone portion at 59.1%, followed by phylum *Firmicutes* (31.8%) and phylum *Thermotogae* (9.1%) (Table S1, Supplementary Data). Partial DNA sequences were obtained from representative amplicons. Five clones were sequenced and were used to search the GenBank nucleotide database with the BLAST search tool. The sequences obtained in this study have been deposited in the GenBank database under accession numbers of MG808388 (ZF01), MG808387 (ZF02), MG825424 (ZF03), MG829860 (ZF04) and MG829859 (ZF05). Fig. 8 shows the phylogenetic tree between clones and other related microorganisms with *Saccharomyces cerevisiae* as the out-group.

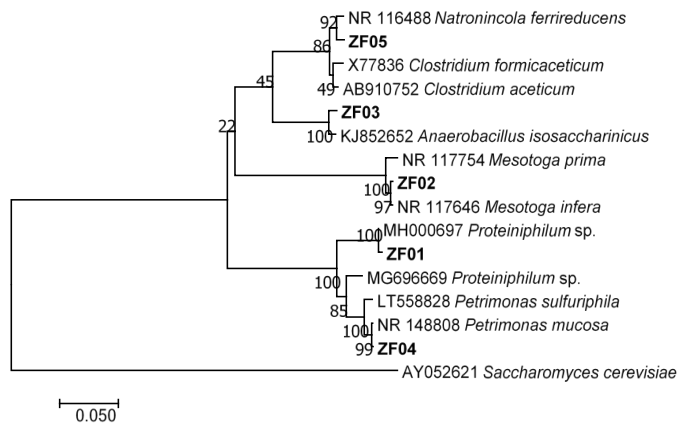


Fig. 8 Phylogenetic tree showing how clones ZF01 – ZF05 are related to other microorganisms

Based on Fig. 8, *Clostridium* sp., which are mainly the H_2 -producers were presented. However, Cabrol *et al.* (2017) reported that *Clostridium* sp. might not be the most adequate H_2 -producers and other obligate anaerobic non-spore forming bacteria, mostly belonging to the *Firmicutes* and *Bacteroidetes* phyla, have been identified as major H_2 -producers, with specific metabolisms which were enable to maintain acceptable (even though suboptimal) H_2 performance when *Clostridium* were inactive. This scenario was supported by reports from Luo *et al.* (2008) and Liu *et al.* (2009) which stated that the non-spore formers were persistent and even dominant in the microbial community of mixed consortia even the operating conditions were favourable such as inoculum source, selection strategy, substrate, and operative parameters. As discovered by Hahnke *et al.* (2016), *Petrimonas* sp. and *Proteiniphilum* sp. were those contributed on H_2 production which belong to phylum *Bacteroidetes*.

CONCLUSION

In conclusion, H_2 production was successfully optimised through BBD based on these three factors; initial pH, incubation temperature, and inoculum with their assigned range. The maximum cumulative H_2 production was obtained at 239.0 mL under an optimised condition of initial pH of 6.4, incubation temperature at 58.0°C and 8.0% v/v of inoculum size. The POME anaerobic sludge used in this study was also studied for microbial community analysis. Findings showed that not only *Clostridium* sp. were contributed on H_2 production, but also other obligate anaerobic non-spore forming bacteria, mostly belonging to the *Firmicutes* and *Bacteroidetes* phyla, have been identified as major H_2 -producers.

ACKNOWLEDGEMENT

This research was funded by the Universiti Teknologi Malaysia (UTM) Research University Grant (RUG Vot. No. 07H47 and 10H72) and Newton Ungku Omar Fund (OTR Vot. No. 4B297). We would also like to express our gratitude to UTM for providing equipment and facilities in order to perform this research smoothly.

REFERENCES

- Ahmad, A. L., Sumathi, S., and Hameed, B. H., 2006. Coagulation of residue oil and suspended solid in palm oil mill effluent by chitosan, alum and PAC. *Chemical Engineering Journal*, 118(1-2), pp.99–105.
- AIM, 2015. National biomass strategy 2020: New wealth creation for Malaysia's biomass industry: Version 2.0, retrieved on 13 December 2015 from http://etp.pemandu.gov.my/upload/Biomass_Strategy_2013.
- Amiruddin, M. N., Abraham, A. K., and Shariff, F., 2005. Market potential and challenges for the Malaysian Palm oil industry in facing competition from other vegetable oils. *Oil Palm Industry Economic Journal*, 5(1), pp.17–27.
- Anderson, M. J., and Whitcomb, P. J., 2000. *DOE Simplified: Practical Tools for Effective Experimentation*. Productivity Press: Boca Raton FL, USA.
- Anderson, M. J., and Whitcomb, P. J., 2005. *RSM simplified: Optimizing processes using response surface methods for design of experiments*. Productivity Press: Boca Raton FL, USA.
- APHA, 2012. *Standard methods for the examination of water and wastewater* (22nd ed.). Washington DC, USA: American Public Health Association, American Water Works Association and Water Environment Federation.
- Arimi, M. M., Knodel, J., Kiprop, A., Namango, S. S., Zhang, Y. and Geißen, S. U., 2015. Strategies for improvement of biohydrogen production from organic-rich wastewater: A review. *Biomass and Bioenergy*, 75, pp.101–118.
- Awalludin, M. F., Sulaiman, O., Hashim, R., and Nadhari, W. N. A. W., 2015. An overview of the oil palm industry in Malaysia and its waste utilization through thermochemical conversion, specifically via liquefaction. *Renewable and Sustainable Energy Reviews*, 50, pp.1469–1484.
- Azman, N. F., Abdeshahian, P., Al-Shorgani, N. K. N., Hamid, A. A., and Kalil, M. S., 2016a. Production of hydrogen energy from dilute acid-hydrolyzed palm oil mill effluent in dark fermentation using an empirical model. *International Journal of Hydrogen Energy*, 41(37), pp.16373–16384.
- Azman, N. F., Abdeshahian, P., Kadir, A., Al-Shorgani, N. K. N., Salih, N. K., Lananan, I., Hamid, A. A., and Kalil, M. S. 2016b. Biohydrogen production from de-oiled rice bran as sustainable feedstock in fermentative process. *International Journal of Hydrogen Energy*, 41(1), pp.145–156.
- Azman, N. F., Abdeshahian, P., Kadir, A., Shukor, H., Al-Shorgani, N. K. N., Hamid, A. A., and Kalil, M. S., 2016c. Utilization of palm kernel cake as a renewable feedstock for fermentative hydrogen production. *Renewable Energy*, 93, pp.700–708.
- Azreen, I., Lija, Y., and Zahrim, A. Y., 2017. Ammonia nitrogen removal from aqueous solution by local agricultural wastes. In *IOP Conference Series: Materials Science and Engineering*, 206(1), pp. 012077.
- Azwar, M. Y., Hussain, M. A., and Abdul-Wahab, A. K., 2014. Development of biohydrogen production by photobiological, fermentation and electrochemical processes: A review. *Renewable & Sustainable Energy Review*, 31, pp.158–173.
- Bay, H. H., 2014. *Decolourisation and degradation of Acid Orange 7 using an acclimatised BAC-ZS mixed bacterial culture*. PhD Thesis, Universiti Teknologi Malaysia.
- Borja, R., Banks, C. J., and Sánchez, E., 1996. Anaerobic treatment of palm oil mill effluent in a two-stage up-flow anaerobic sludge blanket (UASB) system. *Journal of Biotechnology*, 45(2), pp.125–135.
- Cabrol, L., Marone, A., Tapia-Venegas, E., Steyer, J. P., Ruiz-Filippi, G., and Trably, E., 2017. Microbial ecology of fermentative hydrogen producing bioprocesses: Useful insights for driving the ecosystem function. *FEMS Microbiology Reviews*, 41(2), pp.158–181.
- Cheng, J., Zhu, X., Ni, J., and Borthwick, A., 2010. Palm oil mill effluent treatment using a two-stage microbial fuel cells system integrated with immobilized biological aerated filters. *Bioresource Technology*, 101(8), pp.2729–2734.
- Chittibabu, G., Nath, K. and Das, D., 2006. Feasibility studies on the fermentative hydrogen production by recombinant *Escherichia coli* BL-21. *Process Biochemistry*, 41(3), pp.682–688.
- Chong, M. L., Sabaratnam, V., Shirai, Y., and Hassan, M. A., 2009. Biohydrogen production from biomass and industrial wastes by dark fermentation. *International Journal of Hydrogen Energy*, 34(8), pp.3277–3287.
- Choong, Y. Y., Chou, K. W., and Norli, I., 2018. Strategies for improving biogas production of palm oil mill effluent (POME) anaerobic digestion: A critical review. *Renewable and Sustainable Energy Reviews*, 82, pp.2993–3006
- Dareioti, M. A., and Kornaros, M., 2014. Effect of hydraulic retention time (HRT) on the anaerobic co-digestion of agro-industrial wastes in a two-stage CSTR system. *Bioresource Technology*, 167, pp.407–415
- Forsberg, C. W., 2007. Future hydrogen markets for large-scale hydrogen production systems. *International Journal of Hydrogen Energy*, 32(4), pp.431–439.
- Gadhe, A., Sonawane, S. S., and Varma, M. N., 2013. Optimization of conditions for hydrogen production from complex dairy wastewater by anaerobic sludge using desirability function approach. *International Journal of Hydrogen Energy*, 38(16), pp.6607–6617.

- Ghimire, A., Frunzo, L., Pirozzi, F., Trably, E., Escudie, R., Lens, P. N., and Esposito, G., 2015. A review on dark fermentative biohydrogen production from organic biomass: Process parameters and use of by-products. *Applied Energy*, 144, pp.73–95.
- Gobi, K., and Vadivelu, V. M., 2013. By-products of palm oil mill effluent treatment plant – A step towards sustainability. *Renewable and Sustainable Energy Reviews*, 28, pp.788–803.
- Goyal, H. B., Seal, D., and Saxena, R. C., 2008. Bio-fuels from thermochemical conversion of renewable resources: A review. *Renewable and Sustainable Energy Reviews*, 12(2), pp.504–517.
- Hahnke, S., Langer, T., Koeck, D. E., and Klocke, M., 2016. Description of *Proteiniphilum saccharofermentans* sp. nov., *Petrimonas mucosa* sp. nov. and *Fermentimonas caenicola* gen. nov., sp. nov., Isolated from mesophilic laboratory-scale biogas reactors, and emended description of the Genus *Proteiniphilum*. *International Journal of Systematic and Evolutionary Microbiology*, 66(3), pp.1466–1475.
- Hoerl, R., 2012. *Statistics Roundtable: The Reality of Residual Analysis*. Quality Progress.
- Iskandar, M. J., Baharum, A., Anuar, F. H., and Othaman, R., 2018. Palm Oil industry in South East Asia and the effluent treatment technology: A review. *Environmental Technology & Innovation*, 9, pp.169–185.
- Junghare, M., Subudhi, S. and Lal, B., 2012. Improvement of hydrogen production under decreased partial pressure by newly isolated alkaline tolerant anaerobe, *Clostridium butyricum* TM-9A: Optimization of process parameters. *International Journal of Hydrogen Energy*, 37(4), pp.3160–3168.
- Khamaiseh, E. I., Abdul Hamid, A., Abdeshahian, P., Wan Yusoff, W. M., and Kalil, M. S., 2014. Enhanced butanol production by *Clostridium acetobutylicum* NCIMB 13357 grown on date fruit as carbon source in P2 medium. *The Scientific World Journal*, 2014, pp. 1-7.
- Khanal, S. K., Chen, W. H., Li, L., and Sung, S., 2004. Biological hydrogen production: effects of pH and intermediate products. *International Journal of Hydrogen Energy*, 29(11), pp.1123–1131.
- Kumar, S., Stecher, G., and Tamura, K., 2016. MEGA7: Molecular evolutionary genetics analysis version 7.0 for bigger datasets. *Molecular Biology and Evolution*, 33(7), pp.1870–1874.
- Lam, M. K., Tan, K. T., Lee, K. T., and Mohamed, A. R., 2009. Malaysian palm oil: Surviving the food versus fuel dispute for a sustainable future. *Renewable and Sustainable Energy Reviews*, 13(6-7), pp.1456–1464.
- Lazaro, C. Z., Varesche, M. B. A., and Silva, E. L., 2015. Effect of inoculum concentration, pH, light intensity and lighting regime on hydrogen production by phototrophic microbial consortium. *Renewable Energy*, 75, pp.1–7.
- Lee, C., Kim, J., Shin, S. G., and Hwang, S., 2008. Monitoring bacterial and archaeal community shifts in a mesophilic anaerobic batch reactor treating a high-strength organic wastewater. *FEMS Microbiology Ecology*, 65(3), pp.544–554.
- Lin, C. Y., and Cheng, C. H., 2006. Fermentative hydrogen production from xylose using anaerobic mixed microflora. *International Journal of Hydrogen Energy*, 31(7), pp.832–840.
- Liu, H., Wang, G., Zhu, D., and Pan, G., 2009. Enrichment of the hydrogen-producing microbial community from marine intertidal sludge by different pretreatment methods. *International Journal of Hydrogen Energy*, 34(24), pp.9696–9701.
- Liu, I. C., Whang, L. M., Ren, W. J., and Lin, P. Y., 2011. The effect of pH on the production of biohydrogen by *Clostridia*: Thermodynamic and metabolic considerations. *International Journal of Hydrogen Energy*, 36(1), pp.439–449.
- Loh, S. K., Lai, M. E., Ngatiman, M., Lim, W.S., Choo, Y. M., Zhang, Z., and Salimon, J., 2013. Zero discharge treatment technology of palm oil mill effluent. *Journal of Oil Palm Research*, 25(3), pp.273–281.
- Luo, Y., Zhang, H., Salerno, M., Logan, B. E., and Bruns, M. A., 2008. Organic loading rates affect composition of soil-derived bacterial communities during continuous, fermentative biohydrogen production. *International Journal of Hydrogen Energy*, 33(22), pp.6566–6576.
- Mohammadi, P., Ibrahim, S., Annuar, M. S. M., and Law, S., 2011. Effects of different pretreatment methods on anaerobic mixed microflora for hydrogen production and COD reduction from palm oil mill effluent. *Journal of Cleaner Production*, 19(14), pp.1654–1658.
- Mohan, S. V., Babu, V. L., and Sarma, P. N., 2008. Effect of various pretreatment methods on anaerobic mixed microflora to enhance biohydrogen production utilizing dairy wastewater as substrate. *Bioresource Technology*, 99(1), pp.59–67.
- Montgomery, D. C., 2009. *Design and analysis of experiments*. 7th ed. John Wiley & Sons, Inc.: Hoboken NJ, USA.
- Nath, K., and Das, D., 2011. Modeling and Optimization of fermentative hydrogen production. *Bioresource Technology*, 102(18), pp.8569–8581.
- Onyia, C. O., Uyu, A. M., Akunna, J. C., Norulaini, N. A., and Omar, A. K., 2001. Increasing the fertilizer value of palm oil mill sludge: Bioaugmentation in nitrification. *Water Science and Technology*, 44(10), pp.157–162.
- O-Thong, S., Prasertsan, P., Intrasingha, N., Dhamwichukorn, S., and Birkeland, N. K., 2008. Optimization of simultaneous thermophilic fermentative hydrogen production and COD reduction from palm oil mill effluent by *Thermoanaerobacterium*-rich sludge. *International Journal of Hydrogen Energy*, 33(4), pp.1221–1231.
- Pendyala, B., Chaganti, S. R., Lalman, J. A., Shanmugam, S. R., Heath, D. D., and Lau, P. C. K., 2017. Pretreating mixed anaerobic communities from different sources: Correlating the hydrogen yield with hydrogenase activity and microbial diversity. *International Journal of Hydrogen Energy*, 37, pp.12175–12186.
- Poh, P. E., and Chong, M. F., 2010. Biomethanation of palm oil mill effluent (POME) with a thermophilic mixed culture cultivated using POME as a substrate. *Chemical Engineering Journal*, 164, pp.146–154.
- Rasdi, Z., Rahman, N. A. A., Abd-Aziz, S., Lai-Yee, P., Zulkhairi, M., Yusoff, M., Mei-Ling, C., and Ali Hassan, M., 2009. Statistical optimization of biohydrogen production from palm oil mill effluent by natural microflora. *The Open Biotechnology Journal*, 3(1), pp.79–86.
- Rezania, S., Md Din, M. F., Mat Taib, S., Sohail, J., Chelliapan, S., Kamyab, H., and Saha, B. B., 2017. Review on fermentative biohydrogen production from water hyacinth, wheat straw and rice straw with focus on recent perspectives. *International Journal of Hydrogen Energy*, 42, pp.20955–20969.
- Rupani, P. F., Singh, R. P., Ibrahim, M. H., and Esa, N., 2010. Review of current palm oil mill effluent (POME) treatment methods: Vermicomposting as a sustainable practice. *World Applied Sciences Journal*, 11(1), pp.70–81.
- Shanmugam, S. R., Chaganti, S. R., Lalman, J. A., and Heath, D., 2014. Using a statistical approach to model hydrogen production from a steam exploded corn stalk hydrolysate fed to mixed anaerobic cultures in an ASBR. *International Journal of Hydrogen Energy*, 39(19), pp.10003–10015.
- Singh, A., Yadav, A., and Bishnoi, N. R., 2013. Statistical screening and optimization of process variables for xylanase production utilizing alkali-pretreated rice Husk. *Annals of Microbiology*, 63, pp.353–361.
- Sreela-Or, C., Imai, T., Plangklang, P., and Reungsang, A., 2011a. Optimization of key factors affecting hydrogen production from food waste by anaerobic mixed cultures. *International Journal of Hydrogen Energy*, 36(21), pp.14120–14133.
- Sreela-Or, C., Plangklang, P., Imai, T., and Reungsang, A., 2011b. Co-digestion of food waste and sludge for hydrogen production by anaerobic mixed cultures: Statistical key factors optimization. *International Journal of Hydrogen Energy*, 36(21), pp.14227–14237.
- Thompson, J. D., Higgins, D. G., and Gibson, T. J., 1994. CLUSTAL W: Improving the sensitivity of progressive multiple sequence alignment through sequence weighting, position-specific gap penalties and weight matrix choice. *Nucleic Acids Research*, 22(22), pp.4673–4680.
- Wahid, Z., and Nadir, N., 2013. Improvement of one factor at a time through design of experiments. *World Applied Sciences Journal*, 21, pp.56–61.
- Wang, J., and Wan, W., 2008. Optimization of fermentative hydrogen production process by response surface methodology. *International Journal of Hydrogen Energy*, 33(23), pp.6976–6984.
- Wang, J., and Wan, W., 2009. Factors influencing fermentative hydrogen production: A review. *International Journal of Hydrogen Energy*, 34(2), pp.799–811.
- Wang, J., and Wan, W., 2011. Combined effects of temperature and pH on biohydrogen production by anaerobic digested sludge. *Biomass and Bioenergy*, 35(9), pp.3896–3901.
- Wang, J., and Yin, Y., 2017. Principle and application of different pretreatment methods for enriching hydrogen-producing bacteria from mixed cultures. *International Journal of Hydrogen Energy*, 42(8), pp.4804–4823.
- Wong, Y. M., Wu, T. Y., and Juan, J. C., 2014. A review of sustainable hydrogen production using seed sludge via dark fermentation. *Renewable and Sustainable Energy Reviews*, 34, pp.471–482.
- Wright, E. S., Yilmaz, L. S., and Noguera, D. R., 2012. DECIPHER, A search-based approach to chimera identification for 16S rRNA sequences. *Applied and Environmental Microbiology*, 78(3), pp.717–725.
- Wu, T. Y., Mohammad, A. W., Jahim, J. M., and Anuar, N., 2009. A Holistic approach to managing palm oil mill effluent (POME): Biotechnological advances in the sustainable reuse of POME. *Biotechnology Advances*, 27(1), pp.40–52.
- Wu, T. Y., Mohammad, A.W., Jahim, J. M., and Anuar, N., 2010. Pollution control technologies for the treatment of palm oil mill effluent (POME) through end-of-pipe processes. *Journal of Environmental Management*, 91(7), pp.1467–1490.
- Yacob, S., Hassan, M. A., Shirai, Y., Wakisaka, M., and Subash, S., 2006. Baseline study of methane emission from anaerobic ponds of palm oil mill effluent treatment. *Science of the Total Environment*, 366(1), pp.187–196.
- Yokoyama, H., Waki, M., Moriya, N., Yasuda, T., Tanaka, Y., and Haga, K., 2007. Effect of fermentation temperature on hydrogen production from cow

waste slurry by using anaerobic microflora within the slurry. *Applied Microbiology and Biotechnology*, 74(2), pp.474–483.

Yusoff, S., and Hansen, S. B., 2007. Feasibility study of performing an life cycle assessment on crude palm oil production in Malaysia. *The International Journal of Life Cycle Assessment*, 12(1), pp.50–58.

Zhang, J. N., Li, Y. H., Zheng, H. Q., Fan, Y. T., and Hou, H. W., 2015. Direct degradation of cellulosic biomass to bio-hydrogen from a newly isolated strain *Clostridium sartagoforme* FZ11. *Bioresource Technology*, 192, pp.60–67.

Supplementary Data

Table S1 16S rRNA clone analysis of microbial community in sludge.

Clone types	No. of clones	Size (bp)	Phylogenetic linkage			Similarity (%)	Relative abundance (%)
			Phylum	Family	Closest relative		
ZF01	8	1384	Bacteroidetes	Dysgonamonadaceae	<i>Proteiniphilum</i> sp.	99	36.4
ZF02	2	1345	Thermotogae	Kosmotogaceae	<i>Mesotoga infera</i>	99	9.1
ZF03	2	1329	Firmicutes	Bacillaceae	<i>Anaerobacillus arseniciselenatis</i>	96	9.1
ZF04	5	1385	Bacteroidetes	Porphyromonadaceae	<i>Petrimonas mucosa</i>	99	22.7
ZF05	5	1314	Firmicutes	Clostridiaceae	<i>Clostridium aceticum</i>	97	22.7