

TITANIUM DIOXIDE COATED POLYETHERIMIDE PHOTOCATALYTIC
NANOFIBER MEMBRANE FOR WATER TREATMENT

BUTHAYNA NASSER ALI AL GHAFRI

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Master of Philosophy

School of Chemical and Energy Engineering
Faculty of Engineering
Universiti Teknologi Malaysia

JANUARY 2020

ACKNOWLEDGEMENT

As I approach the completion of my MEng, it dawns on me that I could never have done this alone. I thank Allah for giving me the strength, knowledge, ability and opportunity to undertake my MEng research study and to continue and complete it satisfactorily. I also take this opportunity to thank Nanotechnology Research Center, Sultan Qaboos University that funded me and provided the most needed equipment and materials.

I would like to sincerely thank my main supervisor Assoc Prof Dr. Lau Woei Jye for his unlimited support, guidance, innovative and bright mind which have taught me valuable lessons. I'm privileged to have had the opportunity to work under his supervision. I would like to take the opportunity to express my sincere gratitude and thanks to my co-supervisor Assoc Prof Dr. Mohammed Al-Abri throughout my research work who had been great sources of encouragement, unlimited support, valuable criticism and great inspiration throughout my study. Sincere gratitude to Assoc Prof Dr. Goh Pei Sean for her co-supervision.

Special thanks to Mr. Ali Vakilinejad, Mr. Issa Al-Husaini, Dr. Mohammed Aly and Dr. Ibrahim Jumaan for their help in many of my academic issues. Sincere gratitude to Dr. Suliman Al-Obaidani for his help in mechanical tensile strength tests and to Dr. Sergey Dobrestov for his help in antibacterial activities tests. I would like to express my gratitude to Dr. Htet H Kyaw, Dr. Jamal Al-Sabahi, Dr. Maissa Souayeh and Dr. Myo Tay Zar for the valuable scientific discussion and interaction. My deep thanks to Azan Al-Khudori and Naser Al-Shukili from Nanotechnology Research Center and to all my friends, especially, Majda, Sara, Intisar, Zainab, Sumaya, Noor and many others, who put an excellent support to me during my MEng study.

Most importantly, infinite gratitude to my parents and siblings for their uncountable support and encouragement throughout my MEng study. Special thanks to my brother Ahmed and my sister Rehab for always being there when I needed them the most.

ABSTRACT

Access to clean water for human use is a growing concern across the world with the ever-increasing human population. Treatment of wastewater to produce usable water is essential to meet future clean water demand. Separation and decontamination processes using membrane technologies have been implemented worldwide. Photocatalytic membrane is an emerging technology that is capable of simultaneously separating and degrading organic pollutants (e.g., humic acid (HA) and dyes) present in aqueous solution under UV-irradiation besides microorganism disinfection. In view of this, the main objective of this work is to fabricate and characterize a new type of nanocomposite nanofiber membrane by incorporating photocatalytic nanomaterials – titanium dioxide (TiO₂) into a highly porous nanofiber made of UV-resistant polyetherimide (PEI). The nanofiber membrane was fabricated via an electrospinning method using a dope solution containing 15 wt% PEI dissolved in a mixed solvent of dimethylformamide (DMF)/n-methyl-2-pyrrolidone (NMP) with ratio of 2:8. The top surface of nanofiber membrane was further modified by coating it with different TiO₂ concentration (0.2 and 0.6 wt%) using electrospraying method. The properties of the TiO₂-modified PEI nanofiber membranes were then analysed using scanning electron microscope (SEM), water contact angle (WCA) goniometer and tensile strength machine. Results showed that 0.2 wt% TiO₂-modified PEI nanofiber displayed better behaviour by reducing WCA of unmodified nanofiber from 130.25° to 23.35° and improving water flux by 28%. Although the WCA of membrane was further reduced when a higher TiO₂ amount (0.6 wt%) was used, the resultant nanofiber suffered from decreased ultimate strength and significant nanoparticles leaching. Using the best performing 0.2 wt% TiO₂-modified PEI membrane, significant removal rate of *Escherichia coli* (99%) and humic acid (~80%) could be achieved along with 85% methylene blue degradation during photocatalytic process. The findings of this work provide an insight into the design of advanced nanocomposite nanofiber membrane for photocatalytic process.

ABSTRAK

Akses kepada bekalan air bersih menjadi isu global di seluruh dunia dengan jumlah populasi penduduk manusia yang semakin meningkat. Rawatan air kumbahan untuk menghasilkan air bersih adalah sangat penting untuk menjamin bekalan air bersih di masa akan datang. Proses pengasingan dan dekontaminasi menggunakan teknologi membran telah dilaksanakan di serata dunia. Membran fotokatalitik merupakan suatu teknologi yang sedang berkembang dan berupaya mengasingkan dan memecahkan bahan pencemar organik (contohnya, asid humik (HA) dan pewarna) yang wujud di dalam cecair selain dapat membasmi mikroorganisma yang wujud dalam cecair tersebut. Sehubungan dengan itu, objektif utama kajian ini adalah untuk menghasilkan sejenis nanokomposit nanofiber membran yang baru dengan menggabungkan bahan nano fotokatalitik – titanium dioksida (TiO_2), ke dalam nanofiber berongga, yang diperbuat daripada bahan tahan UV - polieterimida (PEI). Membran nanofiber dihasilkan daripada kaedah elektroputar dengan mencampurkan cecair yang mengandungi 15 wt% PEI bersama cecair campuran dimetilformamida (DMF)/n-metil-2-pirolidon (NMP) dengan nisbah 2:8. Permukaan membran nanofiber kemudiannya dilapiskan dengan kepekatan TiO_2 yang berbeza (0.2 dan 0.6 wt%) menggunakan kaedah elektrosemburan. Kandungan TiO_2 yang telah diubah suai ini kemudian dianalisis dengan menggunakan mikroskop pengimbas elektron (SEM), pengukur sudut sentuhan air (WCA) dan mesin pengukur tegangan. Kajian mendapati 0.2 wt% TiO_2 yang telah ditambah dengan PEI nanofiber adalah lebih baik dengan mengurangkan WCA nanofiber yang tidak diubah suai dari 130.25° ke 23.35° dan meningkatkan fluks air sehingga 28%. Walaupun WCA membran dapat dikurangkan apabila TiO_2 yang tinggi (0.6 wt%) digunakan, kekuatan dan tegangan nanofiber tersebut telah berkurang dan partikel nano telah larut. Justeru itu, dengan menggunakan 0.2% TiO_2 , *Escherichia coli* (99%) dan asid humik (~80%) dapat disingkirkan dengan 85% degradasi metilin biru semasa proses fotokatalitik. Penemuan dan hasil daripada kajian ini dapat memberikan lebih pencerahan kepada rekabentuk membran nanokomposit nanofiber untuk proses fotokatalitik yang akan datang.

TABLE OF CONTENTS

	TITLE	PAGE
	DECLARATION	iii
	DEDICATION	iv
	ACKNOWLEDGEMENT	v
	ABSTRACT	vi
	ABSTRAK	vii
	TABLE OF CONTENTS	viii
	LIST OF TABLES	xi
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xiv
	LIST OF SYMBOLS	xv
	LIST OF APPENDICES	xvi
CHAPTER 1	INTRODUCTION	1
1.1	Research Background	1
1.2	Problem Statement	5
1.3	Research Objectives	7
1.4	Scope of Work	7
1.5	Significance of Research	9
CHAPTER 2	LITERATURE REVIEW	11
2.1	Conventional Water Treatment Technologies	11
2.2	Membrane Separation Process	12
2.3	Membrane Structures: Isotropic Membranes and Anisotropic Membranes	14
2.3.1	Nanofiber Membrane	16
2.4	Membrane Materials: Electrospun Polymers	18
2.5	Modification of Polymeric Membrane: Coating	20
2.5.1	Modified Polymeric Membranes: Metal Oxide Nanomaterials	21

2.6	Membrane Fabrication Methods	23
2.6.1	Phase Inversion	23
2.6.2	Interfacial Polymerization	25
2.6.3	Electrospinning	26
2.7	Photocatalysis: Titanium Dioxide	29
2.8	UV- Resistance Polymer Material: Polyetherimide (PEI)	34
CHAPTER 3	METHODOLOGY	39
3.1	Research Framework	39
3.2	Materials	41
3.2.1	Membrane Fabrication	41
3.2.2	Preparation of PEI Nanofibers via Nanospinner	41
3.2.3	Coating of PEI Nanofibers by TiO ₂	43
3.3	Membrane Characterization	43
3.3.1	Scanning Electron Microscope (SEM)	43
3.3.2	Contact Angle Measurement	44
3.3.3	Mechanical Strength	45
3.3.4	Fourier Transform Infrared (FTIR)	46
3.3.5	Inductively Coupled Plasma-Mass Spectroscopy (ICP-MS)	46
3.3.6	Nanofibers Porosity	46
3.4	Membrane Process	47
3.5	Photocatalytic Tests	48
3.5.1	Organic Contaminants	49
3.5.2	Bacterial Test	50
CHAPTER 4	RESULTS AND DISCUSSION	51
4.1	Properties of PEI Nanofiber Membrane	51
4.1.1	Effect of PEI Concentration and Solvent Composition on Nanofiber Morphology	51
4.1.2	Effect of TiO ₂ Nanoparticle Loading on Nanofiber Morphology	53

4.1.3	Effect of TiO ₂ Nanoparticle Loading on Nanofiber Mechanical Strength and Stability Study	55
4.1.4	Effect of TiO ₂ Nanoparticle Loading on Nanofiber Porosity	57
4.2	Performance of PEI Nanofiber Membranes	58
4.2.1	Water Flux and Rejection of PEI Nanofiber Membranes	58
4.2.2	Photocatalytic Performance of PEI-based Nanofiber Membranes	60
4.2.2.1	Photocatalytic Dye Degradation	60
4.2.2.2	Photocatalytic Degradation of Humic Acid	61
4.2.2.3	Photocatalytic Disinfection of E.coli	63
4.2.3	Effect of UV Irradiation on The PEI Membrane Property	65
CHAPTER 5	CONCLUSIONS AND RECOMMENDATIONS	67
5.1	Conclusions	67
5.2	Recommendations	68
	REFERENCES	69
	LIST OF PUBLICATIONS	89

LIST OF TABLES

TABLE NO.	TITLE	PAGE
Table 2.1	Chemical potential gradient in membrane separation processes	13
Table 2.2	Characterization and property of isotropic and anisotropic membranes	15
Table 2.3	Examples of polymeric membranes with applications and configuration	19
Table 2.4	Common ENMs polymers with common dissolving solvents	20
Table 2.5	Influences of parameters in electrospinning process on the fiber morphology	28
Table 2.6	A summary of reported studies of different AOP processes on different types of contaminants	32
Table 2.7	Studies with TiO ₂ based membrane for water treatment	33
Table 2.8	Typical primary dissociation energies (Hergenrother 2003)	36
Table 4.1	Effect of the percentage of DMF in NMP as a solvent mixture in average diameter of PEI electrospun nanofibers	53
Table 4.2	Detection of Ti element by ICP-MS for different TiO ₂ /PEI nanofiber membranes	56
Table 4.3	Porosity and pore size of PEI nanofiber membrane with and without TiO ₂ coating	57

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
Figure 1.1	The particles rejected by membrane as a function of pore size (Yoon 2006)	3
Figure 2.1	Wastewater treatment plant types (Pandey and Singh, 2014)	12
Figure 2.2	Top view of isotropic and anisotropic membranes (Pinnau et al. 2000)	16
Figure 2.3	a) Nanofibers by electrospun process (Al-Ghafri <i>et al.</i> , 2018) and b) Nanoparticles on nanofibers (Al-Husaini <i>et al.</i> , 2019)	17
Figure 2.4	Phase inversion method (Low <i>et al.</i> , 2015)	24
Figure 2.5	Types of Phase Inversion Technique	24
Figure 2.6	Interfacial polymerization method (Cheng <i>et al.</i> , 2014)	26
Figure 2.7	A basic illustration of electrospun concept (Li <i>et al.</i> , 2010)	27
Figure 2.8	The photocatalysis process under UV light illumination (Ibhadon and Fitzpatrick, 2013)	31
Figure 2.9	(a) SEM surface image of PSf/TiO ₂ composite and (b) FTIR spectra of PSf/TiO ₂ composite before and after UV (Jyothi <i>et al.</i> , 2014)	34
Figure 2.10	Photodegradation stability study of a,c) PVDF- and b,d) PEI-based membranes after 60 h (Ong <i>et al.</i> , 2017)	35
Figure 2.11	Chemical structure of PEI polymer (Zhang <i>et al.</i> , 2014b)	36
Figure 3.1	Experimental methods carried to achieve the objectives of this research	40
Figure 3.2	(a) Nanospinner instrument, (b) electrospun process and (c) nanofiber membrane Preparation of TiO ₂ /PEI composite nanofiber	42
Figure 3.3	Experimental Setup of dead-end operation process.	48
Figure 3.4	Schematic diagram of dead-end operation process.	48
Figure 4.1	SEM micrographs of PEI nanofiber membrane prepared of different polymer concentration, (a) 10 wt% PEI, (b) 15 wt% PEI and (c) 20 wt% PEI	52

Figure 4.2	SEM micrographs of PEI nanofibers with different DMF/NMP mixed ratios prepared with 15 wt% PEI, a) 3:7, b) 2:8 and c) 1:9	53
Figure 4.3	SEM micrographs the 15 wt% PEI nanofiber membrane incorporated with different nanofiller concentration, (a) 0.2wt% TiO ₂ and (b) 0.6wt% TiO ₂	54
Figure 4.4	(a) SEM image of 15 wt% PEI nanofiber membrane, (b) EDS of 0.2wt% TiO ₂ /PEI and (c) SEM image of 0.2wt% TiO ₂ /PEI	55
Figure 4.5	Tensile strength and elongation-at-break of PEI and TiO ₂ /PEI nanofiber membranes	56
Figure 4.6	Pure water flux and water contact angle of PEI and TiO ₂ /PEI nanofiber membrane	58
Figure 4.7	Water flux and HA rejection of PEI and 0.2wt% TiO ₂ /PEI nanofiber membranes	59
Figure 4.8	Photocatalytic degradation of [10μM] MB by PEI and 0.2wt%TiO ₂ /PEI nanofibers under UV light irradiation (without filtration).	60
Figure 4.9	Photocatalytic degradation of 50 ppm humic acid by 0.2wt%TiO ₂ /PEI nanofibers with and without UV light irradiation. Inset: Photo of initial and final samples after 180-min UV-irradiation (without filtration).	62
Figure 4.10	Rejection of [50ppm] HA by 0.2wt% TiO ₂ /PEI nanofibers with and without UV light irradiation. Inset: Photo of final samples with and without UV light irradiation (with filtration).	62
Figure 4.11	Water flux of nanofiber membranes as a function of time under UV light illumination.	63
Figure 4.12	CFU of filtrated <i>E.coli</i> bacteria under UV light illumination using 0.2wt% TiO ₂ /PEI nanofiber membrane and the percentages showed disinfection efficiency (with filtration)	64
Figure 4.13	Number of CFU of <i>E.coli</i> bacteria under UV light illumination without filtration process (No filtration)	64
Figure 4.14	FTIR spectra of PEI and TiO ₂ /PEI nanofibers before and after 48-h UV irradiation	65

LIST OF ABBREVIATIONS

AFM	-	Atomic force microscopy
ATR	-	Attenuated total reflectance
BSA	-	Bovine serum albumin
CA	-	Cellulose acetate
CFU	-	Colony forming units
DMAc	-	Dimethylacetamide
DMF	-	Dimethylformamide
DMSO	-	Dimethyl sulfoxide
<i>E.coli</i>	-	Escherichia coli
FTIR	-	Fourier transform infrared spectroscopy
MB	-	Methylene Blue
MF	-	Microfiltration
NF	-	Nanofiltration
NMP	-	N-methyl-2-pyrrolidone
NPs	-	Nanoparticles
PA	-	Polyamide
PEG	-	Polyethylene glycol
PEI	-	Polyetherimide
PES	-	Polyethersulfone
PWF	-	Pure water flux
SEM	-	Scanning electron microscope
TEM	-	Transmission electron microscope
TFC	-	Thin film composite membrane
TiO ₂	-	Titanium dioxide
UF	-	Ultrafiltration
XRD	-	X-ray diffraction

LIST OF SYMBOLS

A_m	-	Effective area of the membrane
ε	-	Porosity
C_f	-	Concentration of feed
C_p	-	Concentration of permeate
C_t	-	Concentration at t time
C_0	-	Concentration at initial tie
J_v	-	Pure water flux
μL	-	Microliter
$\rho_{\text{H}_2\text{O}}$	-	Water density (1.00 g/cm ³)
ρ_{PEI}	-	PEI density (1.27 g/cm ³)
θ	-	Contact angle
ΔV	-	Volume of permeate water flux
γ_{SI}	-	Liquid interfacial free energy
γ_{IV}	-	Liquid surface free energy
γ_{SV}	-	Solid surface free energy

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
Appendix A		87

CHAPTER 1

INTRODUCTION

1.1 Research Background

Fresh water scarcity is a strong issue already in an area of land affecting over one third of the world's population. This problem is expected to double by 2050, and the overuse of natural freshwater resources in many countries is already showing signs of reaching unsustainable levels. This issue has been further complicated by rapid population growth and industrialization that demand large volumes of clean water resources. According to the World Health Organization (WHO) and the United Nations International Children's Emergency Fund (UNICEF), 2.1 billion population lack access to safe, readily available water at home (Program, 2014).

The presence of some organic contaminants in water like humic substances can easily react with some types of disinfectants products like chlorine to form disinfection by-products (DBP) such as trihalomethanes (THMs) and haloacetic acid (HAAs) which are the most prevalent DBP. The concentration and formation of those DBPs is strongly dependant on raw water characterization, residual chlorine available in the water distribution system and an operational parameter (Zhou *et al.*, 2014). Moreover, organic dyes like Methylene blue (MB), Methylene orange (MO) and Rhodamine B (RHB) (Zangeneh *et al.*, 2015) are commonly found in wastewater, and they are considered to have significant environmental impacts owing to their toxicity to living aquatic organisms (Akpan and Hameed, 2009).

In addition to organic contaminants, waterborne pathogenic microorganisms like *Escherichia coli* (*E.coli*) bacteria are widely spread in wastewater which causes many diseases to humans (Alrousan *et al.*, 2009). However, the conventional wastewater treatment plants are not designed to remove emerging and related contaminants as there is no single technology that is suitable for removing all

contaminants. Additionally, Many of these compounds occur at different concentrations in natural water bodies (Arrubla *et al.*, 2016; Gupta *et al.*, 2016).

Membrane technologies are a reliable technology and have been used for more than 50 years for water filtration. Membrane separation process is used for both pre and post water treatments. It also has a wide range of industrial (Cartwright, 2010), medical (Baker and Staff, 2000) and environmental applications (Khin *et al.*, 2012). The separation process-based membrane technology is mainly dependent on the pore size of the fabricated membranes. According to the pore size, membranes can be classified into microfiltration (MF), ultrafiltration (UF), nanofiltration (NF) and reverse osmosis (RO) membranes as shown in Figure 1.1 (Khin *et al.*, 2012; Baker and Staff, 2000). MF and UF membrane processes are based on size exclusion of the molecules. MF is used for the removal of submicron suspended materials which have molecular size in the range 0.01-1 μm including bacteria, algae and sediments in water pre-treatment applications. UF membranes have pore size ranges of 10-100 nm for the removal of dissolved organic matter, pathogens like viruses and proteins (Baker and Staff, 2000).

Generally, the commercial membranes are classified as polymeric membranes and inorganic membranes. However, the polymeric membranes like polysulfone (PSF), polyvinylidene fluoride (PVDF) (Lee *et al.*, 2016), polyvinylpyrrolidone (PVP) (Horikoshi *et al.*, 2001), polyvinyl chloride (PVC) (Gesenhues, 2000), polybenzimidazole (PBI) (Kushwaha *et al.*, 2014c) and polycarbonate (PC) (Geretovszky *et al.*, 2002) are esteemed in water treatment plants. The key advantage of polymeric membranes is their high selectivity for water components at different sizes during the separation process, which depends on the method of fabrication (Lalia *et al.*, 2013; Ray *et al.*, 2016). Polymeric membranes are widely used as pre-treatment in water filtration as they have unique characteristics like thermal stability, heat resistant and high pH resistance compared to other commonly used membranes in filtration application (Frenot and Chronakis, 2003; Ray *et al.*, 2016). They have the advantages of low cost fabrication and salt rejection properties compared to inorganic membranes (Buonomenna and Golemme, 2012). Polyetherimide (PEI) polymer is possesses unique properties such as excellent thermal stability, chemical resistance to

a wide range of pH and excellent mechanical strength (Wang *et al.*, 2016). It is mainly related to the strong chemical bonds and surface chemistry of PEI structure as it has bonds with high dissociation energy.

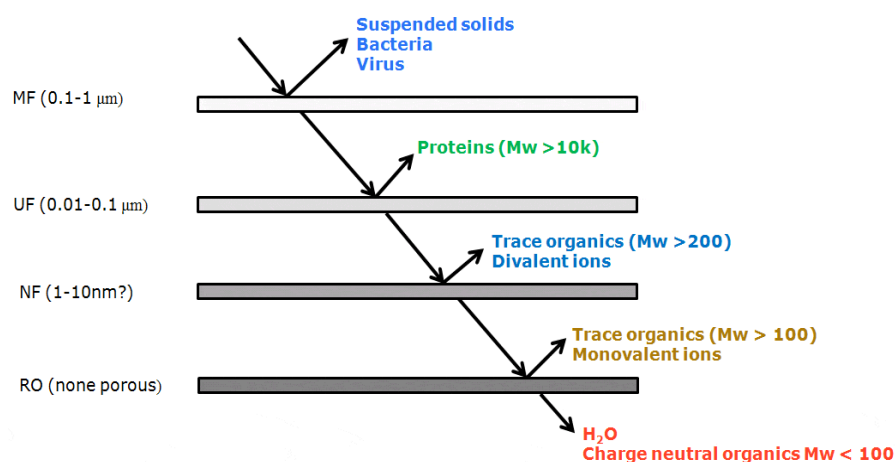


Figure 1.1 The particles rejected by membrane as a function of pore size (Yoon 2006)

Different membrane fabrication methods have been reported in the literature including phase inversion, powder sintering, interfacial polymerization, film etching and stretching and electrospinning. These methods depend mainly on the polymer, structure or configuration of the membrane and application (Barth *et al.*, 2000). However, there is an emerging interest towards using nanofibers membrane largely due to its high surface area, high porosity and tunable surface chemistry.

Electrospinner overperformed other fabrication methods, as it a simple technique that applies electrostatic force to form nanofibers in nanometer size as several studies have mentioned that the average diameter of electrospun nanonofibers ranges from 100 nm to 500 nm (Ray *et al.*, 2016) and so nanofibers are consider to be microfiltration membranes. This technique has been extensively explored as the best and most simple method to prepare nanofibers from polymer solutions or melts with advanced applications in filtration, barrier membranes for energy storage and engineered tissue scaffold (Ma *et al.*, 2009). Nanofiber membranes outclass other membranes because of the ease of production and cost-effectiveness, besides its simple setup.

Biofouling is the attachment and growth of microbial organisms, such as bacteria (Mohammad and Amin, 2013; Nguyen *et al.*, 2012). This process may result in pore blocking, adsorption of hydrophobic particles and nonpolar solutes, gel layer formation and cake layer formation. In addition, scaling occurs when dissolved metal salts in the feed water precipitate on the membrane due to the increase of salt concentration exceeding the solubility limit. These obstacles lead to decline in rejection and net water flux. Therefore, the consequence of these problems is the short lifetime of the membrane and eventual replacement (Nguyen *et al.*, 2012).

Introduction of photocatalysis process can overcome this obstacle as it is based on the use of semiconductor metal oxides with a large band gap. These include zinc oxide (ZnO), titanium dioxide (TiO₂), iron (III) oxide (α -Fe₂O₃) and zinc sulfide (ZnS). They were incorporated to enhance physical and chemical properties of the membranes. The nanomaterials can be defined as materials with at least one dimension in the nano-scale (1-100 nm) with defined structure. Compared to the chlorination and ozonation process, photocatalysis is a promising method for the removal of organic pollutants in water, and it is cost effective because its sustainable source is sunlight (Zhang *et al.*, 2014a; Herrmann, 2005). Generally, there is an emerging interest toward the modification of the surface of membranes to ensure a good rejection of low weight solutes by pore size control and surface charge.

The special characteristic of nanomaterials is that they exhibit a high surface area-to-volume ratio compared to bulk materials, which enhances the catalytic activity at nanoscale levels (Binns, 2010). In general, metal oxides consist of either binary, ternary or quaternary compounds. Binary oxides are often wide band gap semiconductors that generate electron-hole pairs upon exposure to light irradiation (UV or visible light). The photo-generated $e^- - h^+$ pair then produces highly reactive oxidizing species (ROS) such as superoxide anions (O₂⁻) and hydroxyl radicals (OH[·]) in water.

1.2 Problem Statement

Photocatalytic membrane is an emerging technology that is capable of simultaneously separating and degrading organic pollutants present in the aqueous solution under UV irradiation (Ong *et al.*, 2015). The presence of organic contaminants in water sources such as humic substances can easily react with disinfectant products like chlorine to form harmful DBPs, e.g., HAAs and THMs (Aseri *et al.*, 2019). Moreover, waterborne pathogenic microorganisms like *E.coli* bacteria are widely spread and cannot be fully removed by filtration process using MF membranes only (Al-Ghafri *et al.*, 2018).

For the conventional membrane technology (e.g., NF and UF), its performance is negatively affected by fouling due to pore blockage, adsorption, cake layer formation and scaling. Moreover, biofouling caused by microorganisms is another main concern of conventional membrane applications (Mohammad and Amin, 2013). The consequences of these problems are a decline in net water flux and reduced membrane life span, leading to higher operating and maintenance costs (Singh, 2014).

Although polymeric membranes are widely used in water/wastewater treatment plants to separate unwanted solutes/pollutants, these kinds of membranes are not suitable to be used as photocatalytic membrane process. This is mainly because there exist no catalysts within the membrane matrix. Furthermore, the polymeric materials used to manufacture commercial polymeric membranes are not UV-resistant and are very likely to suffer from severe degradation under UV light illumination, owing to the breakage of chemical bonds of polymeric materials such as methine, C-S and C-O groups (Kushwaha *et al.*, 2014b; Rupiasih *et al.*, 2013).

In addition to the surface chemistry changes, alternation on the membrane microstructure and morphology upon UV light illumination could also take place which reduces membrane separation efficiency. Many studies have reported that the membranes made of polysulfone (PSF), polyvinylidene fluoride (PVDF) (Lee *et al.*, 2016), polyvinylpyrrolidone (PVP) (Horikoshi *et al.*, 2001), polyvinyl chloride (PVC) (Gesenhues, 2000), polybenzimidazole (PBI) (Kushwaha *et al.*, 2014c) and

polycarbonate (PC) (Geretovszky *et al.*, 2002) suffered from severe degradation upon UV light exposure. Therefore, there is a need to consider using UV-resistant polymers like PEI for the fabrication of photocatalytic membranes. Besides being UV-resistant, PEI also shows unique properties such as good thermal stability, excellent chemical resistance to a wide range of pH, and excellent mechanical strength (Wang *et al.*, 2016).

Modification processes of the polymeric membrane has emerging interest toward reducing fouling affinity of the membranes and controlling the pore sizes. Nanoparticles-blended membrane is famous way in membrane modifications, however, Rahimpour *et al.* studied the effect this way on photo-sensitisation efficiency and found that blending reduced efficiency due to the entrapment of NPs in random positions in the membrane shielded UV light penetration (Rahimpour *et al.*, 2008). Therefore, coated method used in this work to overcome the drawback of the blended way.

A literature search revealed that titanium dioxide (TiO₂) is perhaps the most commonly reported photocatalyst, owing to its low price and commercial availability (Thiruvengkatachari *et al.*, 2008). It acts as a semiconductor in water purification due to its high stability, nontoxic nature and high oxidizing potential (Nakamura *et al.*, 2004). It requires energy from UV light to excite electrons to produce hydroxyl radicals, which are the key to the photodegradation of organic pollutants (Noothongkaew *et al.*, 2017a).

Based on a thorough survey of literature, the photocatalytic behaviour of TiO₂/PEI nanofibers has not been reported yet. This work addresses this issue and probes the formation of TiO₂/PEI nanocomposite nanofibers. TiO₂/PEI nanofibers are prepared by using Nanospinner, and their performance will be evaluated with respect to photocatalytic activity against HA and MB dye, in addition to *E. coli* disinfection.

1.3 Research Objectives

In order to address the aforementioned problems, the main objectives of this work are:

1. To investigate the establishment of nanocomposite nanofiber membranes by incorporating PEI membranes with mixed solvents at different concentration of TiO₂ nanoparticles (NPs).
2. To study the effect of TiO₂ nanoparticles on PEI membranes surface, morphology, and chemical properties, aiming to enhance the membrane properties as well as performance.
3. To investigate the performances of TiO₂/PEI nanocomposite nanofiber membranes in degrading organic pollutant removal (MB and HA) and bacterial disinfection under UV irradiation.

1.4 Scope of Work

The performances of the resulting PEI ENMs incorporated with TiO₂ are characterized with respect to water flux, contaminants rejection, bacteria removal and water flux recovery, in addition to the instrumental characterizations using an optical contact angle measuring instrument (WCA), Scanning Electron Microscopy (SEM), Energy-dispersive spectroscopy (EDS) and Fourier Transform Infrared (FTIR).

1. Fabricating PEI nanocomposite nanofiber membrane
 - (a) Dissolving 10-20 wt% PEI polymer in a mixture of DMF/NMP solvents with different ratio (3:7, 2:8 and 1:9).
 - (b) Optimizing the electrospinner parameters during fabrication process of nanocomposite ENMs by varying applied voltage (19.7-23.5 kV kV),

flow rate (0.8-1.2 mL/h), spinning distance (130-145 cm) and rotation speed of the drum (220 rpm) at fixed humidity (60 RH%).

2. Fabricating TiO₂/PEI nanocomposite nanofiber membrane
 - a) Dissolving TiO₂ NPs in a mixture of NMP:DMF at 8:2 weight ratio.
 - b) Coating the PEI nanofibers with different percentages of TiO₂ NPs (0.2 and 0.6 wt%) via electrospinner instrument under optimal spraying parameters. Spraying process was lasted for 6 h with a flow rate set at 0.4 mL/h. Other electrospinning conditions remained the same as for PEI nanofiber fabrication, with a fixed voltage at 18.2 kV.
3. Characterizing PEI and TiO₂/PEI nanocomposite nanofiber membrane.
 - (a) Characterizing TiO₂/PEI ENMs by SEM, EDS, FTIR and WCA
 - (b) Measuring the pure water flux (MF), HA flux and bacteria media flux using dead-end cell.
4. Investigating the performance of TiO₂/PEI nanofibers
 - (a) Evaluating the performance of TiO₂/PEI using dead-end cell mode at operated pressure < 0.5 bar in terms of water flux and flux recovery.
 - (b) Studying the decontamination of organic pollution for 3 h using 10 μM MB as model of contaminant and applying UVA (365 nm) as a source of light illumination.
 - (c) Studying the decontamination and rejection of HA (50 ppm).
 - (d) Analysing the permeate samples of the fabricated membrane using UV-vis spectrophotometer.
 - (e) Investigating the inhibition growth of *E.coli* bacteria by calculating the colony forming unit (CFU) and antifouling properties.
 - (f) Studying the surface chemistry and degradation of the used membranes using FTIR

1.5 Significance of Research

In this study, a new approach of photocatalysis-based membrane was established using newly developed TiO₂/PEI nanofiber membrane. No work has been done on photocatalysis-based membrane using PEI electrospun nanofibers and UV as a source for photons. Although membrane fouling tendency remains a major problem in polymeric membranes, photocatalysis process is potentially viable for solving critical environmental problems and it is often used for water treatment.

There is a need to consider using UV-resistant polymers for the fabrication of photocatalytic membranes. One of the UV-resistant polymers that could be considered is PEI. The PEI polymeric electrospun nanofibers have attracted a great deal of attention by their special features and characteristics such as thermal stability, chemical and physical inertia, good mechanical strength and UV-resistance behaviour which has been used in a variety of applications

Besides separating pollutants based on sieving mechanism, the nanofiber membrane developed in this work also act as host for the TiO₂ photocatalysts to distribute. TiO₂ overperform other nanoparticles such as ZnO in photocatalysis performance under UV light illumination because the photocatalytic activity of ZnO is lower due to photocorrosion which frequently occurs with the illumination of UV light (Zaghlool, 2011). A literature search revealed that TiO₂ is perhaps the most commonly reported photocatalyst owing to its low price and commercial availability (Awazu *et al.*, 2008; Thiruvengkatachari *et al.*, 2008).

Another new approach in this research is coating the PEI nanofiber surface with TiO₂ via electrospinner to solve the conventional blending problems that affect the efficiency of photocatalysis process. This approach could offer higher porosity and provide better water flux stability due to better hydrophilicity (Qiu *et al.*, 2005). Moreover, the recent problems of the conventional methods of disinfection of bacteria can also be solved using the photocatalytic-based membrane technology. Hence, the membrane developed in this study not only remove the bacteria but also kill it by attacking cellular DNA of bacteria and make then disable (Sosnin *et al.*, 2004). This

REFERENCES

- Ahmed, F. E., Lalia, B. S., and Hashaikeh, R. (2015). A review on electrospinning for membrane fabrication: challenges and applications. *Desalination*, 356, 15-30.
- Ai, Z., Lu, L., Li, J., Zhang, L., Qiu, J., and Wu, M. (2007). Fe@ Fe₂O₃ Core– Shell Nanowires as the Iron Reagent. 2. An Efficient and Reusable Sono-Fenton System Working at Neutral pH. *The Journal of Physical Chemistry C*, 111(20), 7430-7436.
- Akpan, U. G., and Hameed, B. H. (2009). Parameters affecting the photocatalytic degradation of dyes using TiO₂-based photocatalysts: a review. *Journal of hazardous materials*, 170(2-3), 520-529.
- Al-Ghafri, B., Bora, T., Sathe, P., Dobrestov, S., and Al-Abri, M. (2018). Photocatalytic microbial removal and degradation of organic contaminants of water using PES fibers. *Applied Catalysis B: Environmental*, 233, 136-142.
- Al-Hinai, M. H., Sathe, P., Al-Abri, M. Z., Dobrestov, S., Al-Hinai, A. T., and Dutta, J. (2017). Antimicrobial activity enhancement of poly (ether sulfone) membranes by in situ growth of ZnO nanorods. *ACS omega*, 2(7), 3157-3167.
- Al-Husaini, I., Yusoff, A., Lau, W., Ismail, A., Al-Abri, M., Al-Ghafri, B., et al. (2019). Fabrication of polyethersulfone electrospun nanofibrous membranes incorporated with hydrous manganese dioxide for enhanced ultrafiltration of oily solution. *Separation and Purification Technology*, 212, 205-214.
- Alrousan, D. M., Dunlop, P. S., McMurray, T. A., and Byrne, J. A. (2009). Photocatalytic inactivation of E. coli in surface water using immobilised nanoparticle TiO₂ films. *Water research*, 43(1), 47-54.
- Arrubla, J. P., Cubillos, J. A., Ramírez, C. A., Arredondo, J. A., Arias, C. A., and Paredes, D. (2016). Pharmaceutical and personal care products in domestic wastewater and their removal in anaerobic treatment systems: septic tank-up flow anaerobic filter. *Ingeniería e Investigación*, 36(1), 70-78.
- Arsuaga, J. M., Sotto, A., del Rosario, G., Martínez, A., Molina, S., Teli, S. B., et al. (2013). Influence of the type, size, and distribution of metal oxide particles on the properties of nanocomposite ultrafiltration membranes. *Journal of membrane science*, 428, 131-141.

- Aseri, N., Lau, W., Goh, P., Hasbullah, H., Othman, N., and Ismail, A. (2019). Preparation and characterization of polylactic acid-modified polyvinylidene fluoride hollow fiber membranes with enhanced water flux and antifouling resistance. *Journal of Water Process Engineering*, 32, 100912.
- Awazu, K., Fujimaki, M., Rockstuhl, C., Tominaga, J., Murakami, H., Ohki, Y., et al. (2008). A plasmonic photocatalyst consisting of silver nanoparticles embedded in titanium dioxide. *Journal of the American Chemical Society*, 130(5), 1676-1680.
- Baker, R. W., and Staff, U. b. (2000). Membrane technology. *Kirk-Othmer Encyclopedia of Chemical Technology*.
- Barth, C., Goncalves, M., Pires, A., Roeder, J., and Wolf, B. (2000). Asymmetric polysulfone and polyethersulfone membranes: effects of thermodynamic conditions during formation on their performance. *Journal of Membrane Science*, 169(2), 287-299.
- Behboudi, A., Jafarzadeh, Y., and Yegani, R. (2016). Preparation and characterization of TiO₂ embedded PVC ultrafiltration membranes. *Chemical Engineering Research and Design*, 114, 96-107.
- Béquet, S., Remigy, J.-C., Rouch, J.-C., Espenan, J.-M., Clifton, M., and Aptel, P. (2002). From ultrafiltration to nanofiltration hollow fiber membranes: a continuous UV-photografting process. *Desalination*, 144(1-3), 9-14.
- Bhave, R. (2012). *Inorganic Membranes Synthesis, Characteristics and Applications: Synthesis, characteristics, and applications*: Springer Science & Business Media.
- Binns, C. (2010). *Introduction to nanoscience and nanotechnology* (Vol. 14): John Wiley & Sons.
- Bora, T., and Dutta, J. (2014). Applications of nanotechnology in wastewater treatment—a review. *Journal of nanoscience and nanotechnology*, 14(1), 613-626.
- Bric, J. M., Bostock, R. M., and Silverstone, S. E. (1991). Rapid in situ assay for indoleacetic acid production by bacteria immobilized on a nitrocellulose membrane. *Applied and environmental Microbiology*, 57(2), 535-538.
- Buonomenna, M. G., and Golemme, G. (2012). *Advanced Materials for Membrane Preparation*: Bentham Science Publishers.

- Burke, L., Keshvari, A., Hilal, N., and Wright, C. J. (2015). Electrospinning: A Practical Approach for Membrane Fabrication. In *Membrane Fabrication* (pp. 70-99): CRC Press.
- Carp, O., Huisman, C. L., and Reller, A. (2004). Photoinduced reactivity of titanium dioxide. *Progress in solid state chemistry*, 32(1-2), 33-177.
- Carruthers, B. G., and Lamoreaux, N. R. (2016). Regulatory races: The effects of jurisdictional competition on regulatory standards. *Journal of Economic Literature*, 54(1), 52-97.
- Cartwright, P. S. (2010). New Developments in Membrane-based Processes for Industrial Applications. In *The Science and Technology of Industrial Water Treatment* (pp. 229-247): CRC Press.
- Chã, M. S., Bittencourt, P. P., Sena, M. E., Paredes, M. L., Moreira, G. F., and Reis, R. A. (2014). Synthesis and characterization of sulfonated poly (ether imide) with higher thermal stability and effect on CO₂, N₂, and O₂ permeabilities. *Materials Research*, 17(3), 714-719.
- Cheng, X. Q., Zhang, Y. L., Wang, Z. X., Guo, Z. H., Bai, Y. P., and Shao, L. (2014). Recent advances in polymeric solvent-resistant nanofiltration membranes. *Advances in Polymer Technology*, 33(S1).
- Choi, J.-H., Jegal, J., and Kim, W.-N. (2006). Fabrication and characterization of multi-walled carbon nanotubes/polymer blend membranes. *Journal of Membrane Science*, 284(1-2), 406-415.
- Choi, Y. S., and Kim, B. W. (2000). Photocatalytic disinfection of E coli in a UV/TiO₂-immobilised optical-fibre reactor. *Journal of Chemical Technology & Biotechnology: International Research in Process, Environmental & Clean Technology*, 75(12), 1145-1150.
- Cobry, K. D., Yuan, Z., Gilron, J., Bright, V. M., Krantz, W. B., and Greenberg, A. R. (2011). Comprehensive experimental studies of early-stage membrane scaling during nanofiltration. *Desalination*, 283, 40-51.
- Combe, C., Molis, E., Lucas, P., Riley, R., and Clark, M. (1999). The effect of CA membrane properties on adsorptive fouling by humic acid. *Journal of membrane science*, 154(1), 73-87.
- Damodar, R. A., You, S.-J., and Chou, H.-H. (2009). Study the self cleaning, antibacterial and photocatalytic properties of TiO₂ entrapped PVDF membranes. *Journal of hazardous materials*, 172(2-3), 1321-1328.

- Deitzel, J. M., Kleinmeyer, J., Harris, D., and Tan, N. B. (2001). The effect of processing variables on the morphology of electrospun nanofibers and textiles. *Polymer*, 42(1), 261-272.
- Doshi, J., and Reneker, D. H. (1995). Electrospinning process and applications of electrospun fibers. *Journal of electrostatics*, 35(2-3), 151-160.
- Durthi, C. P., Rajulapati, S. B., Palliparambi, A. A., Kola, A. K., and Sonawane, S. H. (2018). Studies on removal of arsenic using cellulose acetate–zinc oxide nanoparticle mixed matrix membrane. *International Nano Letters*, 8(3), 201-211.
- Elimelech, M., Zhu, X., Childress, A. E., and Hong, S. (1997). Role of membrane surface morphology in colloidal fouling of cellulose acetate and composite aromatic polyamide reverse osmosis membranes. *Journal of membrane science*, 127(1), 101-109.
- Elsalamony, R. A., and Mahmoud, S. A. (2017). Preparation of nanostructured ruthenium doped titania for the photocatalytic degradation of 2-chlorophenol under visible light. *Arabian Journal of Chemistry*, 10(2), 194-205.
- Erdem, R., Usta, I., Akalin, M., Atak, O., Yuksek, M., and Pars, A. (2015). The impact of solvent type and mixing ratios of solvents on the properties of polyurethane based electrospun nanofibers. *Applied Surface Science*, 334, 227-230.
- Erickson, A. E., Edmondson, D., Chang, F.-C., Wood, D., Gong, A., Levensgood, S. L., et al. (2015). High-throughput and high-yield fabrication of uniaxially-aligned chitosan-based nanofibers by centrifugal electrospinning. *Carbohydrate polymers*, 134, 467-474.
- Fallouh, N. A. K., Roblot-Treupel, L., Fessi, H., Devissaguet, J. P., and Puisieux, F. (1986). Development of a new process for the manufacture of polyisobutylcyanoacrylate nanocapsules. *International Journal of Pharmaceutics*, 28(2-3), 125-132.
- Fan, X., Su, Y., Zhao, X., Li, Y., Zhang, R., Zhao, J., et al. (2014). Fabrication of polyvinyl chloride ultrafiltration membranes with stable antifouling property by exploring the pore formation and surface modification capabilities of polyvinyl formal. *Journal of Membrane Science*, 464, 100-109.
- Fashandi, H., and Karimi, M. (2013). Comparative studies on the solvent quality and atmosphere humidity for electrospinning of nanoporous polyetherimide fibers. *Industrial & Engineering Chemistry Research*, 53(1), 235-245.

- Ferreira, J. L., Gomes, S., Henriques, C., Borges, J. P., and Silva, J. C. (2014). Electrospinning polycaprolactone dissolved in glacial acetic acid: Fiber production, nonwoven characterization, and In Vitro evaluation. *Journal of Applied Polymer Science*, 131(22).
- Foley, G. (2006). A review of factors affecting filter cake properties in dead-end microfiltration of microbial suspensions. *Journal of Membrane Science*, 274(1-2), 38-46.
- Fox, M. A., and Dulay, M. T. (1993). Heterogeneous photocatalysis. *Chemical reviews*, 93(1), 341-357.
- Frenot, A., and Chronakis, I. S. (2003). Polymer nanofibers assembled by electrospinning. *Current opinion in colloid & interface science*, 8(1), 64-75.
- Gao, W., Liang, H., Ma, J., Han, M., Chen, Z.-l., Han, Z.-s., et al. (2011). Membrane fouling control in ultrafiltration technology for drinking water production: a review. *Desalination*, 272(1-3), 1-8.
- Geng, X., Kwon, O.-H., and Jang, J. (2005). Electrospinning of chitosan dissolved in concentrated acetic acid solution. *Biomaterials*, 26(27), 5427-5432.
- Geretovszky, Z., Hopp, B., Bertoti, I., and Boyd, I. (2002). Photodegradation of polycarbonate under narrow band irradiation at 172 nm. *Applied Surface Science*, 186(1-4), 85-90.
- Gesenhues, U. (2000). Influence of titanium dioxide pigments on the photodegradation of poly (vinyl chloride). *Polymer Degradation and Stability*, 68(2), 185-196.
- Gohari, R. J. (2014). *Novel Ultrafiltration Flat Sheet Mixed Matrix Membranes for Arsenic and Lead Removal and Fouling Mitigation*. Universiti Teknologi Malaysia.
- Gu, X., Song, X., Shao, C., Zeng, P., Lu, X., Shen, X., et al. (2014). Electrospinning of poly (butylene-carbonate): Effect of Solvents on the Properties of the Nanofibers Film. *International journal of electrochemical science*, 9, 8045-8056.
- Guo, M., Xu, Y., and Chen, Y. D. (2017). Catching environmental noncompliance in shale gas development in China and the United States. *Resources, conservation and recycling*, 121, 73-81.
- Gupta, S., Mukherjee, A., and Bhattacharya, J. (2016). *Occurrence of organic pollutants in groundwater of parts of western Bengal basin*. Paper presented at

the ANNUAL GENERAL MEETING OF THE GEOLOGICAL SOCIETY OF INDIA, 225.

- Hergenrother, P. M. (2003). The use, design, synthesis, and properties of high performance/high temperature polymers: an overview. *High Performance Polymers*, 15(1), 3-45.
- Hernández, A., Calvo, J., Prádanos, P., and Tejerina, F. (1996). Pore size distributions in microporous membranes. A critical analysis of the bubble point extended method. *Journal of Membrane Science*, 112(1), 1-12.
- Herrmann, J.-M. (2005). Heterogeneous photocatalysis: state of the art and present applications In honor of Pr. RL Burwell Jr.(1912–2003), Former Head of Ipatieff Laboratories, Northwestern University, Evanston (Ill). *Topics in Catalysis*, 34(1-4), 49-65.
- Horikoshi, R., Mochida, T., and Moriyama, H. (2001). Coordination Polymers from $M(\text{hfac})_2$ [$M = \text{CuII}, \text{MnII}$] and 4,4'-Dipyridyldisulfide. *Inorganic chemistry*, 40(10), 2430-2433.
- Ibhadon, A., and Fitzpatrick, P. (2013). Heterogeneous photocatalysis: recent advances and applications. *Catalysts*, 3(1), 189-218.
- Igne, B., and Ciurczak, E. W. (2014). *Pharmaceutical and medical applications of near-infrared spectroscopy*: CRC Press.
- Ismail, S. (2013). Disinfection of wastewater using TiO_2 semiconductor photochemistry.
- Janotti, A., and Van de Walle, C. G. (2007). Native point defects in ZnO . *Physical Review B*, 76(16), 165202.
- Jyothi, M., Nayak, V., Padaki, M., Balakrishna, R. G., and Ismail, A. (2014). The effect of UV irradiation on PSf/TiO_2 mixed matrix membrane for chromium rejection. *Desalination*, 354, 189-199.
- Kariduraganavar, M., Nagarale, R., Kittur, A., and Kulkarni, S. (2006). Ion-exchange membranes: preparative methods for electrodialysis and fuel cell applications. *Desalination*, 197(1-3), 225-246.
- Khin, M. M., Nair, A. S., Babu, V. J., Murugan, R., and Ramakrishna, S. (2012). A review on nanomaterials for environmental remediation. *Energy & Environmental Science*, 5(8), 8075-8109.
- Kim, J., and Van der Bruggen, B. (2010). The use of nanoparticles in polymeric and ceramic membrane structures: review of manufacturing procedures and

- performance improvement for water treatment. *Environmental Pollution*, 158(7), 2335-2349.
- Konstantinou, I. K., and Albanis, T. A. (2004). TiO₂-assisted photocatalytic degradation of azo dyes in aqueous solution: kinetic and mechanistic investigations: a review. *Applied Catalysis B: Environmental*, 49(1), 1-14.
- Kumar, S. G., and Rao, K. K. (2017). Comparison of modification strategies towards enhanced charge carrier separation and photocatalytic degradation activity of metal oxide semiconductors (TiO₂, WO₃ and ZnO). *Applied Surface Science*, 391, 124-148.
- Kushwaha, K., Kaushik, N., and Jain, S. C. (2014a). Design and synthesis of novel 2H-chromen-2-one derivatives bearing 1, 2, 3-triazole moiety as lead antimicrobials. *Bioorganic & medicinal chemistry letters*, 24(7), 1795-1801.
- Kushwaha, O. S., Avadhani, C., and Singh, R. (2014b). Effect of UV rays on degradation and stability of high performance polymer membranes. *Advanced Materials Letters*, 5(5), 272-279.
- Kushwaha, O. S., Ver Avadhani, C., Tomer, N. S., and Singh, R. P. (2014c). Accelerated degradation study of highly resistant polymer membranes for energy and environment applications. *Advances in Chemical Science*, 3(2), 19-30.
- Lalia, B. S., Kochkodan, V., Hashaikeh, R., and Hilal, N. (2013). A review on membrane fabrication: Structure, properties and performance relationship. *Desalination*, 326, 77-95.
- Lee, M. J., Ong, C. S., Lau, W. J., Ng, B. C., Ismail, A. F., and Lai, S. O. (2016). Degradation of PVDF-based composite membrane and its impacts on membrane intrinsic and separation properties. *Journal of Polymer Engineering*, 36(3), 261-268.
- Leong, S., Razmjou, A., Wang, K., Hapgood, K., Zhang, X., and Wang, H. (2014). TiO₂ based photocatalytic membranes: a review. *Journal of membrane science*, 472, 167-184.
- Li, F., Zhao, Y., and Song, Y. (2010). Core-shell nanofibers: nano channel and capsule by coaxial electrospinning. In *nanofibers*: InTech.
- Li, Q., Mahendra, S., Lyon, D. Y., Brunet, L., Liga, M. V., Li, D., et al. (2008). Antimicrobial nanomaterials for water disinfection and microbial control: potential applications and implications. *Water research*, 42(18), 4591-4602.

- Li, Z., and Wang, C. (2013). Effects of working parameters on electrospinning. In *One-Dimensional Nanostructures* (pp. 15-28): Springer.
- Low, Z.-X., Liu, Q., Shamsaei, E., Zhang, X., and Wang, H. (2015). Preparation and characterization of thin-film composite membrane with nanowire-modified support for forward osmosis process. *Membranes*, 5(1), 136-149.
- Ma, H., and Hsiao, B. S. (2018). Current Advances on Nanofiber Membranes for Water Purification Applications. In *Filtering Media by Electrospinning* (pp. 25-46): Springer.
- Ma, W., Zhang, J., Chen, S., and Wang, X. (2008). β -Phase of poly (vinylidene fluoride) formation in poly (vinylidene fluoride)/poly (methyl methacrylate) blend from solutions. *Applied Surface Science*, 254(17), 5635-5642.
- Ma, Y., Zhang, B., Ma, H., Yu, M., Li, L., and Li, J. (2016). Electrospun nanofibrous polyethylenimine mat: a potential adsorbent for the removal of chromate and arsenate from drinking water. *RSC Advances*, 6(36), 30739-30746.
- Ma, Z., Lan, Z., Matsuura, T., and Ramakrishna, S. (2009). Electrospun polyethersulfone affinity membrane: Membrane preparation and performance evaluation. *Journal of Chromatography B*, 877(29), 3686-3694.
- Mahlangu, T. O., Msagati, T. A., Hoek, E., Verliefe, A., and Mamba, B. (2014). Rejection of pharmaceuticals by nanofiltration (NF) membranes: Effect of fouling on rejection behaviour. *Physics and Chemistry of the Earth, Parts A/B/C*, 76, 28-34.
- Mahmood, M. A., Baruah, S., Anal, A. K., and Dutta, J. (2012). Heterogeneous photocatalysis for removal of microbes from water. *Environ. Chem. Lett.*, 10(2), 145-151.
- MANEA, L. R., NECHITA, E., and SANDU, I. Electrospinning of Polyetherimide (PEI) Solution.
- MERDAS, F. T. I., and VERDU, J. (2003). Humid ageing of polyetherimide: Chemical and physical. *Polyimides and other high temperature polymers: synthesis, characterization and applications. Volume 2*, 2, 255.
- Mishan, E., Barre, R., Kühner, J., and Russell, C. S. (2017). *Incentives in Water Quality Management: France and the Ruhr Area*: Routledge.
- Moghimifar, V., Livari, A. E., Raisi, A., and Aroujalian, A. (2015). Enhancing the antifouling property of polyethersulfone ultrafiltration membranes using NaX zeolite and titanium oxide nanoparticles. *Rsc Advances*, 5(69), 55964-55976.

- Mohammad, A. W., and Amin, I. N. H. M. (2013). Fouling of ultrafiltration membrane during adsorption of long chain fatty acid in glycerine solutions.
- More, A. S., Pasale, S. K., and Wadgaonkar, P. P. (2010). Synthesis and characterization of polyamides containing pendant pentadecyl chains. *European Polymer Journal*, 46(3), 557-567.
- Munir, A. (2006). Dead end membrane filtration. *Laboratory Feasibility Studies in Environmental Engineering*, 1-33.
- Nakamura, R., Tanaka, T., and Nakato, Y. (2004). Mechanism for visible light responses in anodic photocurrents at N-doped TiO₂ film electrodes. *The Journal of Physical Chemistry B*, 108(30), 10617-10620.
- Nath, K. (2017). *Membrane separation processes*: PHI Learning Pvt. Ltd.
- Ng, L. Y., Mohammad, A. W., Leo, C. P., and Hilal, N. (2013). Polymeric membranes incorporated with metal/metal oxide nanoparticles: a comprehensive review. *Desalination*, 308, 15-33.
- Nguyen, T., Roddick, F. A., and Fan, L. (2012). Biofouling of water treatment membranes: a review of the underlying causes, monitoring techniques and control measures. *Membranes*, 2(4), 804-840.
- Nguyen, V. G., Thai, H., Mai, D. H., Tran, H. T., and Vu, M. T. (2013). Effect of titanium dioxide on the properties of polyethylene/TiO₂ nanocomposites. *Composites Part B: Engineering*, 45(1), 1192-1198.
- Noothongkaew, S., Han, J. K., Lee, Y. B., Thumthan, O., and An, K.-S. (2017a). Au NPs decorated TiO₂ nanotubes array candidate for UV photodetectors. *Progress in Natural Science: Materials International*, 27(6), 641-646.
- Noothongkaew, S., Han, J. K., Lee, Y. B., Thumthan, O., and An, K.-S. (2017b). Au NPs decorated TiO₂ nanotubes array candidate for UV photodetectors. *Progress in Natural Science: Materials International*, 27(6), 641-646.
- Nuraje, N., Khan, W. S., Lei, Y., Ceylan, M., and Asmatulu, R. (2013). Superhydrophobic electrospun nanofibers. *Journal of Materials Chemistry A*, 1(6), 1929-1946.
- Oliveira, J., Brichi, G. S., Marconcini, J. M., Mattoso, L. H. C., Glenn, G. M., and Medeiros, E. S. (2014). Effect of solvent on the physical and morphological properties of poly (lactic acid) nanofibers obtained by solution blow spinning. *Journal of Engineered Fibers and Fabrics*, 9(4), 117-125.

- Ong, C., Lau, W., Al-Anzi, B., and Ismail, A. (2017). Photodegradation stability study of PVDF-and PEI based membranes for oily wastewater treatment process. *Membrane Water Treatment*, 8(3), 211-223.
- Ong, C., Lau, W., Goh, P., Ng, B., Ismail, A., and Choo, C. (2015). The impacts of various operating conditions on submerged membrane photocatalytic reactors (SMPR) for organic pollutant separation and degradation: a review. *RSC Advances*, 5(118), 97335-97348.
- Pan, J. H., Dou, H., Xiong, Z., Xu, C., Ma, J., and Zhao, X. (2010). Porous photocatalysts for advanced water purifications. *Journal of Materials Chemistry*, 20(22), 4512-4528.
- Pandey, A., and Singh, R. K. (2014). Industrial waste water treatment by membrane bioreactor system. *Elixir Chem. Eng.*, 70, 23772-23777.
- Philippopoulos, C., and Nikolaki, M. (2010). Photocatalytic processes on the oxidation of organic compounds in water. In *New trends in technologies*: IntechOpen.
- Pinnau, I., and Freeman, B. (2000). Formation and modification of polymeric membranes: overview. *Membrane Formation and Modification*, 744, 1-22.
- Poudyal, A., Beckermann, G. W., Chand, N. A., Hosie, I. C., Blake, A., and Kannan, B. (2018). Electrospun Nanofibre Filter Media: New Emergent Technologies and Market Perspectives. In *Filtering Media by Electrospinning* (pp. 197-224): Springer.
- Program, U. N. W. W. A. (2014). The united nations world water development report 2014. *Water and Energy*.
- Qiu, C., Xu, F., Nguyen, Q. T., and Ping, Z. (2005). Nanofiltration membrane prepared from cardo polyetherketone ultrafiltration membrane by UV-induced grafting method. *Journal of membrane science*, 255(1-2), 107-115.
- Qu, X., Alvarez, P. J., and Li, Q. (2013). Applications of nanotechnology in water and wastewater treatment. *Water research*, 47(12), 3931-3946.
- Rahimpour, A., Jahanshahi, M., Rajaeian, B., and Rahimnejad, M. (2011). TiO₂ entrapped nano-composite PVDF/SPES membranes: Preparation, characterization, antifouling and antibacterial properties. *Desalination*, 278(1-3), 343-353.
- Rahimpour, A., Madaeni, S., Taheri, A., and Mansourpanah, Y. (2008). Coupling TiO₂ nanoparticles with UV irradiation for modification of polyethersulfone ultrafiltration membranes. *Journal of Membrane Science*, 313(1-2), 158-169.

- Ramaseshan, R., and Ramakrishna, S. (2007). Zinc titanate nanofibers for the detoxification of chemical warfare simulants. *Journal of the American Ceramic Society*, 90(6), 1836-1842.
- Ray, S. S., Chen, S.-S., Li, C.-W., Nguyen, N. C., and Nguyen, H. T. (2016). A comprehensive review: electrospinning technique for fabrication and surface modification of membranes for water treatment application. *RSC advances*, 6(88), 85495-85514.
- Reneker, D. H., and Chun, I. (1996). Nanometre diameter fibres of polymer, produced by electrospinning. *Nanotechnology*, 7(3), 216.
- Roy, K., Anjali, T., and Sujith, A. (2017). Poly (vinyl chloride) asymmetric membrane modified with poly (ethylene glycol): effect of additive concentration on the morphology and performance. *Polymer-Plastics Technology and Engineering*, 56(9), 1017-1025.
- Rupiasih, N. N., Suyanto, H., Sumadiyasa, M., and Wendri, N. (2013). Study of effects of low doses UV radiation on microporous polysulfone membranes in sterilization process. *Open Journal of Organic Polymer Materials*, 3(1), 12-18.
- Safarpour, M., Khataee, A., and Vatanpour, V. (2015). Effect of reduced graphene oxide/TiO₂ nanocomposite with different molar ratios on the performance of PVDF ultrafiltration membranes. *Separation and Purification Technology*, 140, 32-42.
- Saif, M., Aboul-Fotouh, S., El-Molla, S., Ibrahim, M., and Ismail, L. (2012). Improvement of the structural, morphology, and optical properties of TiO₂ for solar treatment of industrial wastewater. In *Nanotechnology for Sustainable Development* (pp. 101-111): Springer.
- Sarkar, D., El-Khoury, J., Lopina, S. T., and Hu, J. (2005). An effective method for preparing polymer nanocapsules with hydrophobic acrylic shell and hydrophilic interior by inverse emulsion radical polymerization. *Macromolecules*, 38(20), 8603-8605.
- Sathe, P., Myint, M. T. Z., Dobretsov, S., and Dutta, J. (2016). Removal and regrowth inhibition of microalgae using visible light photocatalysis with ZnO nanorods: A green technology. *Separation and Purification Technology*, 162, 61-67.
- Sato, D. M., Guerrini, L. M., De Oliveira, M. P., de Oliveira Hein, L. R., and Botelho, E. C. (2018). Production and characterization of polyetherimide mats by an electrospinning process. *Materials Research Express*, 5(11), 115302.

- Seifert, B., Mihanetzis, G., Groth, T., Albrecht, W., Richau, K., Missirlis, Y., et al. (2002). Polyetherimide: A new membrane-forming polymer for biomedical applications. *Artificial organs*, 26(2), 189-199.
- Shan, M., Liu, X., Wang, X., Liu, Z., Iziyi, H., Ganapathy, S., et al. (2019). Novel high performance poly (p-phenylene benzobisimidazole)(PBBI) membranes fabricated by interfacial polymerization for H₂ separation. *Journal of Materials Chemistry A*, 7(15), 8929-8937.
- Shen, B., Zhai, W., Tao, M., Ling, J., and Zheng, W. (2013). Lightweight, multifunctional polyetherimide/graphene@ Fe₃O₄ composite foams for shielding of electromagnetic pollution. *ACS applied materials & interfaces*, 5(21), 11383-11391.
- Shirkavand, S., and Moslehifard, E. (2014). Effect of TiO₂ nanoparticles on tensile strength of dental acrylic resins. *Journal of dental research, dental clinics, dental prospects*, 8(4), 197.
- Shirzad-Siboni, M., Jonidi-Jafari, A., Farzadkia, M., Esrafil, A., and Gholami, M. (2017). Enhancement of photocatalytic activity of Cu-doped ZnO nanorods for the degradation of an insecticide: Kinetics and reaction pathways. *Journal of environmental management*, 186, 1-11.
- Simone, S., Galiano, F., Faccini, M., Boerrigter, M. E., Chaumette, C., Drioli, E., et al. (2017). Preparation and characterization of polymeric-hybrid PES/TiO₂ hollow fiber membranes for potential applications in water treatment. *Fibers*, 5(2), 14.
- Singh, R. (2014). *Membrane technology and engineering for water purification: application, systems design and operation*: Butterworth-Heinemann.
- Song, L., Zhu, B., Gray, S., Duke, M., and Muthukumaran, S. (2017). Performance of hybrid photocatalytic-ceramic membrane system for the treatment of secondary effluent. *Membranes*, 7(2), 20.
- Sosnin, E. A., Stoffels, E., Erofeev, M. V., Kieft, I. E., and Kunts, S. E. (2004). The effects of UV irradiation and gas plasma treatment on living mammalian cells and bacteria: a comparative approach. *IEEE Transactions on Plasma Science*, 32(4), 1544-1550.
- Soylak, M., Divrikli, U., Elci, L., and Dogan, M. (2002). Preconcentration of Cr (III), Co (II), Cu (II), Fe (III) and Pb (II) as calmagite chelates on cellulose nitrate

- membrane filter prior to their flame atomic absorption spectrometric determinations. *Talanta*, 56(3), 565-570.
- Srinivasan, S. S., Wade, J., and Stefanakos, E. K. (2006). Visible light photocatalysis via CdS/TiO₂ nanocomposite materials. *Journal of Nanomaterials*, 2006.
- Strathmann, H., and Kock, K. (1977). The formation mechanism of phase inversion membranes. *Desalination*, 21(3), 241-255.
- Su, J., Yang, Q., Teo, J. F., and Chung, T.-S. (2010). Cellulose acetate nanofiltration hollow fiber membranes for forward osmosis processes. *Journal of membrane science*, 355(1-2), 36-44.
- Sugunan, A., and Dutta, J. (2008). Pollution treatment, remediation and sensing. *Nanotechnology*, 2(4), 125-146.
- Suja, P., Reshmi, C., Sagitha, P., and Sujith, A. (2017). Electrospun nanofibrous membranes for water purification. *Polymer Reviews*, 57(3), 467-504.
- Sun, W.-n., Chen, C.-x., Li, J.-d., and Lin, Y.-z. (2009). Ultrafiltration membrane formation of PES-C, PES and PPESK polymers with different solvents. *Chinese Journal of Polymer Science*, 27(02), 165-172.
- Taketani, Y., Hayashi, Y., Kawaguchi, T., Ono, T., and Mori, K. (1981). Preparation of permselective composite membrane: Google Patents.
- Tarus, B., Fadel, N., Al-Oufy, A., and El-Messiry, M. (2016). Effect of polymer concentration on the morphology and mechanical characteristics of electrospun cellulose acetate and poly (vinyl chloride) nanofiber mats. *Alexandria Engineering Journal*, 55(3), 2975-2984.
- Tassalit, D., Lebouachera, S., Dechir, S., Chekir, N., Benhabiles, O., and Bentahar, F. (2016). Comparison between TiO₂ and ZnO photocatalytic efficiency for the degradation of tartrazine contaminant in water. *International Journal of Education and Learning Systems*, 1.
- Teo, W. E., and Ramakrishna, S. (2006). A review on electrospinning design and nanofibre assemblies. *Nanotechnology*, 17(14), R89.
- Thiruvengkatachari, R., Vigneswaran, S., and Moon, I. S. (2008). A review on UV/TiO₂ photocatalytic oxidation process (Journal Review). *Korean Journal of Chemical Engineering*, 25(1), 64-72.
- Torikai, A., and Hasegawa, H. (1998). Wavelength effect on the accelerated photodegradation of polymethylmethacrylate. *Polymer Degradation and Stability*, 61(2), 361-364.

- Tungprapa, S., Puangparn, T., Weerasombut, M., Jangchud, I., Fakum, P., Semongkhon, S., et al. (2007). Electrospun cellulose acetate fibers: effect of solvent system on morphology and fiber diameter. *Cellulose*, 14(6), 563-575.
- Urper, G. M., Sengur-Tasdemir, R., Turken, T., Ates Genceli, E., Tarabara, V. V., and Koyuncu, I. (2017). Hollow fiber nanofiltration membranes: A comparative review of interfacial polymerization and phase inversion fabrication methods. *Separation Science and Technology*, 52(13), 2120-2136.
- Valdez, H. A., Jiménez, G. G., Granados, S. G., and de León, C. P. (2012). Degradation of paracetamol by advance oxidation processes using modified reticulated vitreous carbon electrodes with TiO₂ and CuO/TiO₂/Al₂O₃. *Chemosphere*, 89(10), 1195-1201.
- Valenzuela, M., Bosch, P., Jiménez-Becerrill, J., Quiroz, O., and Páez, A. (2002). Preparation, characterization and photocatalytic activity of ZnO, Fe₂O₃ and ZnFe₂O₄. *Journal of Photochemistry and photobiology A: Chemistry*, 148(1-3), 177-182.
- Vatanpour, V., Madaeni, S. S., Moradian, R., Zinadini, S., and Astinchap, B. (2012). Novel antibifouling nanofiltration polyethersulfone membrane fabricated from embedding TiO₂ coated multiwalled carbon nanotubes. *Separation and purification technology*, 90, 69-82.
- Vauthier, C., Dubernet, C., Fattal, E., Pinto-Alphandary, H., and Couvreur, P. (2003). Poly (alkylcyanoacrylates) as biodegradable materials for biomedical applications. *Advanced drug delivery reviews*, 55(4), 519-548.
- Veil, J. A., Puder, M. G., Elcock, D., and Redweik Jr, R. J. (2004). *A white paper describing produced water from production of crude oil, natural gas, and coal bed methane*: Argonne National Lab., IL (US) Document Number)
- Wang, C.-j., Chen, C., Ren, H., Yang, Y.-q., and Dai, H.-q. (2016). Polyethyleneimine addition for control of dissolved and colloidal substances: Effects on wet-end chemistry. *BioResources*, 11(4), 9756-9770.
- Wang, H., Zhang, S., Zhu, M., Sui, G., and Yang, X. (2018). Remarkable heat-resistant halloysite nanotube/polyetherimide composite nanofiber membranes for high performance gel polymer electrolyte in lithium ion batteries. *Journal of Electroanalytical Chemistry*, 808, 303-310.

- Wang, L. (2018). *Configurations and Membranes of Photocatalytic Membrane Reactors for Water and Wastewater Treatment*. Paper presented at the IOP Conference Series: Earth and Environmental Science, 012078.
- Wang, X., Drew, C., Lee, S.-H., Senecal, K. J., Kumar, J., and Samuelson, L. A. (2002). Electrospun nanofibrous membranes for highly sensitive optical sensors. *Nano letters*, 2(11), 1273-1275.
- Wang, X., Feng, M., Liu, Y., Deng, H., and Lu, J. (2019). Fabrication of graphene oxide blended polyethersulfone membranes via phase inversion assisted by electric field for improved separation and antifouling performance. *Journal of membrane science*, 577, 41-50.
- Wang, X., and Hsiao, B. S. (2016). Electrospun nanofiber membranes. *Current opinion in chemical engineering*, 12, 62-81.
- Wei, C., Lin, W. Y., Zainal, Z., Williams, N. E., Zhu, K., Kruzic, A. P., et al. (1994). Bactericidal activity of TiO₂ photocatalyst in aqueous media: toward a solar-assisted water disinfection system. *Environmental science & technology*, 28(5), 934-938.
- Wong, S. (2010). An investigation of process parameters to optimize the fiber diameter of electrospun vascular scaffolds through experimental design.
- Yang, J., Wang, X., Zhao, X., Dai, J., and Mo, S. (2015). Synthesis of uniform Bi₂WO₆-reduced graphene oxide nanocomposites with significantly enhanced photocatalytic reduction activity. *The Journal of Physical Chemistry C*, 119(6), 3068-3078.
- Yang, Q., Li, Z., Hong, Y., Zhao, Y., Qiu, S., Wang, C., et al. (2004). Influence of solvents on the formation of ultrathin uniform poly (vinyl pyrrolidone) nanofibers with electrospinning. *Journal of Polymer Science Part B: Polymer Physics*, 42(20), 3721-3726.
- Yener, F., Jirsak, O., and Gemci, R. (2010). *Effect of polymer concentration on electrospinning System*. Paper presented at the International Conference-Fiber Society.
- Yin, J., and Deng, B. (2015). Polymer-matrix nanocomposite membranes for water treatment. *Journal of membrane science*, 479, 256-275.
- Yongjing, L. F. G. (1999). Enhanced Rates of Photocatalytic Behavior Using WO₃/TiO₂ Coupled Semiconductor Nanopowder [J]. *CHINESE JOURNAL OF ENVIRONMENTAL SCIENCE*, 4.

- Yoon, K., Hsiao, B. S., and Chu, B. (2009). Formation of functional polyethersulfone electrospun membrane for water purification by mixed solvent and oxidation processes. *Polymer*, 50(13), 2893-2899.
- You, S.-J., Semblante, G. U., Lu, S.-C., Damodar, R. A., and Wei, T.-C. (2012). Evaluation of the antifouling and photocatalytic properties of poly (vinylidene fluoride) plasma-grafted poly (acrylic acid) membrane with self-assembled TiO₂. *Journal of hazardous materials*, 237, 10-19.
- Yu, L., Kanezashi, M., Nagasawa, H., and Tsuru, T. (2020). Phase inversion/sintering-induced porous ceramic microsheet membranes for high-quality separation of oily wastewater. *Journal of Membrane Science*, 595, 117477.
- Yu, X., Xiang, H., Long, Y., Zhao, N., Zhang, X., and Xu, J. (2010). Preparation of porous polyacrylonitrile fibers by electrospinning a ternary system of PAN/DMF/H₂O. *Materials Letters*, 64(22), 2407-2409.
- Zaghlool, R. (2011). Study the Effect of Mg O on the Photo catalysis of Zn O Thin Layers.
- Zangeneh, H., Zinatizadeh, A., Habibi, M., Akia, M., and Isa, M. H. (2015). Photocatalytic oxidation of organic dyes and pollutants in wastewater using different modified titanium dioxides: A comparative review. *Journal of Industrial and Engineering Chemistry*, 26, 1-36.
- Zhai, Y., Xiao, K., Yu, J., and Ding, B. (2015). Fabrication of hierarchical structured SiO₂/polyetherimide-polyurethane nanofibrous separators with high performance for lithium ion batteries. *Electrochimica Acta*, 154, 219-226.
- Zhang, J., Hai, Y., Zuo, Y., Jiang, Q., Shi, C., and Li, W. (2015). Novel diamine-modified composite nanofiltration membranes with chlorine resistance using monomers of 1, 2, 4, 5-benzene tetracarbonyl chloride and m-phenylenediamine. *Journal of Materials Chemistry A*, 3(16), 8816-8824.
- Zhang, X., Wang, D. K., and da Costa, J. C. D. (2014a). Recent progresses on fabrication of photocatalytic membranes for water treatment. *Catalysis Today*, 230, 47-54.
- Zhang, Y.-H., Chen, Y., Zhang, Y.-M., Yang, Y., Chen, J.-T., and Liu, Y. (2014b). Recycling gene carrier with high efficiency and low toxicity mediated by L-cystine-bridged bis (β -cyclodextrin) s. *Scientific reports*, 4, 7471.

- Zhang, Z., Kang, G., Yu, H., Jin, Y., and Cao, Y. (2019). From reverse osmosis to nanofiltration: Precise control of the pore size and charge of polyamide membranes via interfacial polymerization. *Desalination*, 466, 16-23.
- Zhao, L.-j., Sui, G., and Yang, X.-p. (2012). STUDY ON STRUCTURE AND DIELECTRIC PROPERTIES OF ELECTROSPUN POLYETHERIMIDE FIBROUS MEMBRANES. *Acta Polymerica Sinica*(12), 1409-1416.
- Zhou, S., Shao, Y., Gao, N., Li, L., Deng, J., Zhu, M., et al. (2014). Effect of chlorine dioxide on cyanobacterial cell integrity, toxin degradation and disinfection by-product formation. *Science of the Total Environment*, 482, 208-213.
- Zhou, W., He, J., Cui, S., and Gao, W. (2011). Studies of electrospun cellulose acetate nanofibrous membranes. *The Open Materials Science Journal*, 5(1).
- Zhu, L., Song, H., Zhang, D., Wang, G., Zeng, Z., and Xue, Q. (2017). Negatively charged polysulfone membranes with hydrophilicity and antifouling properties based on in situ cross-linked polymerization. *Journal of colloid and interface science*, 498, 136-143.