

# Numerical Analysis of Mixed Convection Flow Past a Symmetric Cylinder with Viscous Dissipation in Viscoelastic Nanofluid

Rahimah Mahat<sup>1,3</sup>, Sharidan Shafie<sup>2,\*</sup>, Fatihhi Januddi<sup>1,3</sup>

<sup>1</sup> Universiti Kuala Lumpur Malaysian Institute of Industrial Technology, Persiaran Sinaran Ilmu, Bandar Seri Alam, 81750 Johor Bahru, Johor, Malaysia

<sup>2</sup> Department of Mathematical Sciences, Faculty of Science, Universiti Teknologi Malaysia, Skudai, 81310 UTM Johor Bahru, Johor, Malaysia

<sup>3</sup> Advance Facilities Engineering Technology (AFET) Research Cluster, Facilities Maintenance Engineering Section, Malaysian Institute of Industrial Technology, Universiti Kuala Lumpur, Persiaran Sinaran Ilmu, Bandar Seri Alam, 81750 Johor Bahru, Johor, Malaysia

## ARTICLE INFO

### Article history:

Received 24 December 2020

Received in revised form 15 February 2021

Accepted 23 February 2021

Available online 27 February 2021

### Keywords:

Viscous dissipation; Viscoelastic;  
Nanofluid

## ABSTRACT

Research on the nanofluid becomes trending amongst researchers especially in the industrial and engineering field due to its important and extensive applications. Therefore, the present study aims to investigate numerically the impact of viscous dissipation conducted by sodium carboxymethyl cellulose (CMC-water) nanofluid containing copper nanoparticles at room temperature with convective boundary conditions (CBC). The Tiwari and Das model was selected in this study and the transformed boundary layer equations for momentum and energy subject to the appropriate boundary conditions were numerically solved by employing numerical scheme, namely the Keller-box method. The results were analysed in detail and presented graphically for the velocity, temperature, skin friction coefficient as well as the heat transfer coefficient. The obtained results indicated that there was no significant effect for velocity and temperature profiles when values of Eckert number increased. However, it is significant for skin friction and heat transfer coefficient profiles. In the meantime, the thermal conductivity of the fluid may increase by increasing the concentration of nanofluid.

## 1. Introduction

The heat transfer system is a crucial part in most the industrial applications such as automotive, manufacturing, maintenance and heat exchangers. Therefore, it is a challenge for the researchers to find and figure out the optimum heat transfer to get optimum outcomes for the industries. Several properties measure the thermal performance which are thermal conductivity, viscosity, density and specific heat. However, a lower value of thermal conductivity may affect poor in heat transfer systems and become a major issue.

\* Corresponding author.

E-mail address: [sharidan@utm.my](mailto:sharidan@utm.my) (Sharidan Shafie)

<https://doi.org/10.37934/cfdl.13.2.1228>

Hence, new technology is developed to overcome this issue by proposing that nanometer-sized particles that suspended in heat transfer fluids such as water, ethylene glycol, or oil. This new technology is called nanofluid. The earlier attempt who discovered about this nanofluid was Choi and Eastman [1], who was investigated thermal conductivity enhancement. Later, a series of research by experiment raised such as Das *et al.*, [2], Jang and Choi [3], Murshed *et al.*, [4] and Zhu *et al.*, [5] prove the claimed by Choi. For a theoretical part, the first attempt who discovered the nanofluid equation was by Khanafer *et al.*, [6]. The consequence from that, a numerous theoretical study of nanofluid has received considerable attention from other researchers such as Buongiorno [7], Tiwari and Das [8] which leads to Buongiorno and Tiwari and Das model, respectively. Then, the research on nanofluid becomes tremendous among researchers [9-12].


In a meantime, non-Newtonian fluid has become more considerable among researchers since most of the fluids in real life are non-Newtonian behaviour such as blood, honey, oil and ketchup. Non-Newtonian fluids can be divided into rheopectic fluids, thixotropic fluids, dilatant fluids, viscoelastic fluids and pseudoplastic fluids. However, only viscoelastic fluids will be focused on in this research. The viscoelastic fluids are a type of non-Newtonian fluid that exhibit both viscous and elastic characteristics. The pioneering research about viscoelastic was proposed by Rivlin [13] which considered the stress deformation relation for isotropic. Later, Min *et al.*, [14] have extended this work by studying the viscoelastic response to small deformations superposed on a large stretch. The purpose of the extended study was to provide the general theoretical framework for the organization of data from such experiments. Besides that, Bird [15] also studied about viscoelastic fluid, and they described that the fluid does not move far or very rapidly from its initial configuration. Later on, an investigation on the flow of elastic-viscous fluids past a circular cylinder was done by Harnoy [16]. After that, the study on viscoelastic was carried out widely by the researchers since viscoelastic fluids have gained considerable importance because of its applications in various branches of science, engineering, and technology such as in chemical and nuclear industries, geophysics, material processing and bioengineering [17].

In all above-mentioned investigations, the viscous dissipation effect on boundary layer flow was not extensively studied. The viscous dissipation is appreciable when the induced kinetic energy becomes significant as compared to the amount of heat transferred according to Gebhart [18], the first researcher who studied the viscous dissipation in free convection flow. It is known that the viscous dissipation model for a Newtonian fluid is quite different from the non-Newtonian fluid. Previous studies have established the viscous dissipation effect in a viscoelastic fluid with somewhat different mathematical modelling, such as studies conducted by Metri *et al.*, [19], and Abel *et al.*, [20]. In the latest study regarding the non-Newtonian fluids, Dalir [21] considered the numerical study of entropy generation for the forced convection flow and heat transfer of Jeffrey fluid over a stretching sheet. Besides, the viscous dissipation effect generated by the frictional force was comprehensively explored by Zokri *et al.*, [22] and Zokir *et al.*, [23].

It could be observed that limited attention was provided to the flow of viscoelastic nanofluid past a horizontal circular cylinder in previous studies. In this study, the effect of viscous dissipation with a convective boundary condition was evaluated. The convective boundary condition is known as the supply of heat through a bounding surface of finite thickness and finite capacity [22]. A comprehensive study on the horizontal circular cylinder with a convective boundary condition has been carried out by El-Amin [24], Mohamed *et al.*, [25], and Mohamed *et al.*, [26].

## 2. Mathematical Formulation

The steady two-dimensional mixed convection boundary layer flow past a horizontal circular cylinder of radius  $a$  placed in a viscoelastic nanofluid has been considered in this study. The Cartesian coordinate  $(x, y)$  is chosen and the dimensional gravitational acceleration is defined as  $g_x = g \sin(\bar{x}/a)$ , where  $\bar{x}$  is the distance from the lower stagnation point. The dimensional velocity outside the boundary layer is  $\bar{u}_e(\bar{x}) = U_\infty \sin(\bar{x}/a)$  by assuming that the constant free stream velocity is  $(1/2)U_\infty$ , which is flowing vertically upwards past the cylinder [29]. The temperature of the ambient nanofluid is  $T_\infty$ . Figure 1 shows the three-dimensional model on the flow of viscoelastic nanofluid past a horizontal circular cylinder with radius  $a$ . The surface of the cylinder is considered a convective boundary condition (CBC).

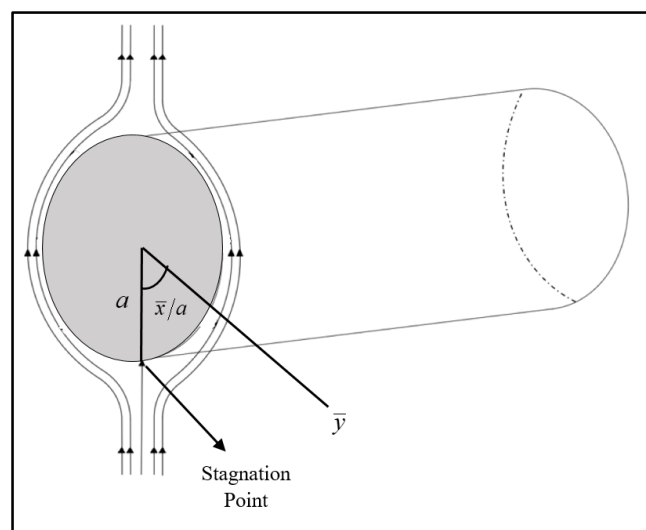

**Fig. 1.** Three-dimensional model on the flow of viscoelastic nanofluid past a horizontal circular cylinder with radius  $a$

The model by Tiwari and Das [8] has been chosen in this study and the model is defined as a single-phase model that use Brickman viscosity model. The nanoparticles are assumed to have a uniform shape and size. The mixture of the based fluid and nanoparticles has an assumption of incompressible and no chemical reaction of heat transfer occurs. The idealized of the mixtures is when the thermal is in an equilibrium state and they flow at the same velocity. The nanoparticles volume fraction is the factor that affecting heat transfer in this model. As the nanoparticles volume fraction increases, the effective thermal conductivity of nanofluid is also increased [27]. However, it is worthy to mention that by increasing the nanoparticles volume fraction, it may no longer be in a state of suspended between each other. For ensuring the effectiveness, only small quantities of volume fraction are necessary [28]. Therefore, the nanofluid is chosen at volume fractions up to 3% to meet the requirement and are well-dispersed in CMC-water as a base fluid.

Under the above assumptions and by considering the nanofluid model, the dimensional governing equations of momentum equation and energy equation can be expressed as

$$\frac{\partial \bar{u}}{\partial \bar{x}} + \frac{\partial \bar{v}}{\partial \bar{y}} = 0, \quad (1)$$

$$\bar{u} \frac{\partial \bar{u}}{\partial \bar{x}} + \bar{v} \frac{\partial \bar{u}}{\partial \bar{y}} = \bar{u}_e \frac{\partial \bar{u}_e}{\partial \bar{x}} + \frac{\mu_{nf}}{\rho_{nf}} \frac{\partial^2 \bar{u}}{\partial \bar{y}^2} - \frac{k_o}{\rho_{nf}} \left[ \frac{\partial}{\partial \bar{x}} \left( \bar{u} \frac{\partial^2 \bar{u}}{\partial \bar{y}^2} \right) + \bar{v} \frac{\partial^3 \bar{u}}{\partial \bar{y}^3} - \frac{\partial \bar{u}}{\partial \bar{y}} \frac{\partial^2 \bar{u}}{\partial \bar{x} \partial \bar{y}} \right] + g \beta_{nf} (T - T_\infty) \sin \left( \frac{\bar{x}}{a} \right), \quad (2)$$

$$\bar{u} \frac{\partial T}{\partial \bar{x}} + \bar{v} \frac{\partial T}{\partial \bar{y}} = \frac{k}{\rho C_p} \frac{\partial^2 T}{\partial \bar{y}^2} + \frac{\mu_o}{\rho C_p} \left( \frac{\partial \bar{u}}{\partial \bar{y}} \right)^2 - \frac{k_o}{\rho C_p} \left[ \bar{u} \left( \frac{\partial \bar{u}}{\partial \bar{y}} \frac{\partial^2 \bar{u}}{\partial \bar{x} \partial \bar{y}} \right) + \bar{v} \left( \frac{\partial \bar{u}}{\partial \bar{y}} \frac{\partial^2 \bar{u}}{\partial \bar{y}^2} \right) \right], \quad (3)$$

with the boundary conditions

$$\begin{aligned} \bar{u} = 0, \quad \bar{v} = 0, \quad -k_{nf} \frac{\partial T}{\partial \bar{y}} = h_f (T_f - T) \quad \text{at} \quad \bar{y} = 0, \quad \bar{x} \geq 0, \\ \bar{u} = \bar{u}_e(\bar{x}), \quad \frac{\partial \bar{u}}{\partial \bar{y}} = 0, \quad T = T_\infty \quad \text{at} \quad \bar{y} \rightarrow \infty, \quad \bar{x} \geq 0, \end{aligned} \quad (4)$$

where  $k_{nf}$  is the thermal conductivity of nanofluid,  $h$  is the convection heat transfer coefficient,  $T$  is the fluid temperature,  $q_w$  is the constant heat flux and  $T_f$  is the temperature when the bottom surface of the cylinder is heated by convection from hot fluid. The nanoparticles volume fraction is the factor that affecting heat transfer in this model. As the nanoparticles volume fraction increases, the effective thermal conductivity of nanofluid is also increased [27]. However, it is worthy to mention that by increasing the nanoparticles volume fraction, it may no longer be in a state of suspended between each other. For ensuring the effectiveness, only small quantities of volume fraction are necessary [28]. Therefore, the nanofluid is chosen at volume fractions up to 3% and are well-dispersed in CMC-water as a base fluid. Cu nanoparticles have a spherical shape and their size diameters have a normal distribution in a range from 63 to 100 nm. The numerical values of the thermophysical properties of base fluid and nanoparticles are given in Table 1.

**Table 1**  
Thermophysical properties of nanoparticles and base fluid

Physical Properties	$\rho$ (kg m <sup>-3</sup> )	$C_p$ (J kg <sup>-1</sup> K <sup>-1</sup> )	$k$ (Wm <sup>-1</sup> K <sup>-1</sup> )	$\beta \times 10^5$ (K <sup>-1</sup> )
Base Fluid (CMC)	997.1	4179	0.613	21
Nanoparticle (Cu)	8933	385	401	1.67

The dimensionless variables are introduced to simplify the complexity of the governing equations. Based on Anwar *et al.*, [30], the dimensionless variables are defined as

$$\begin{aligned} x = \bar{x}/a, \quad y = \text{Re}^{1/2} (\bar{y}/a), \quad u = \bar{u}/U_\infty, \quad v = \text{Re}^{1/2} (\bar{v}/U_\infty), \\ u_e(x) = \bar{u}_e(\bar{x})/U_\infty, \quad \theta = (T - T_\infty)/(T_f - T_\infty), \end{aligned} \quad (5)$$

where  $Re$  is Reynolds number. By substituting Eq. (5) into Eq. (1)-(3), the dimensionless system below is yielded

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \quad (6)$$

$$\left[ (1-\phi) + \phi \frac{\rho_s}{\rho_f} \right] \left[ u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right] = \left[ (1-\phi) + \phi \frac{\rho_s}{\rho_f} \right] \sin x \cos x + \frac{1}{(1+\phi)^{2.5}} \frac{\partial^2 u}{\partial y^2} - K \left[ \frac{\partial}{\partial x} \left( u \frac{\partial^2 u}{\partial y^2} \right) + v \frac{\partial^3 u}{\partial y^3} - \frac{\partial u}{\partial y} \frac{\partial^2 u}{\partial x \partial y} \right] + \left[ (1-\phi) + \phi \frac{(\rho\beta)_s}{(\rho\beta)_f} \right] \lambda \theta \sin(x), \quad (7)$$

$$\left[ (1-\phi) + \phi \frac{(\rho C_p)_s}{(\rho C_p)_f} \right] \left[ u \frac{\partial \theta}{\partial x} + v \frac{\partial \theta}{\partial y} \right] = \frac{(k_s + 2k_f) - 2\phi(k_f - k_s)}{(k_s + 2k_f) + \phi(k_f - k_s)} \frac{1}{\text{Pr}} \frac{\partial^2 \theta}{\partial y^2} + Ec \left[ \left( \frac{\partial u}{\partial y} \right)^2 - K \left( u \frac{\partial u}{\partial y} \frac{\partial^2 u}{\partial x \partial y} + v \frac{\partial u}{\partial y} \frac{\partial^2 u}{\partial y^2} \right) \right], \quad (8)$$

with the new boundary conditions as

$$u = 0, \quad v = 0, \quad \frac{\partial \theta}{\partial y} = -\gamma_1(1-\theta), \quad \text{at} \quad y = 0, \quad x \geq 0, \quad (9)$$

$$u = u_e(x), \quad \frac{\partial u}{\partial y} = 0, \quad \theta = 0, \quad \text{as} \quad y \rightarrow \infty, \quad x \geq 0,$$

where  $\text{Pr} = \mu_f C_p / k_f$  is Prandtl number,  $Ec = U_\infty^2 / \left( (C_p)_f (T_f - T_\infty) \right)$  is Eckert number  $K = k_o U_\infty / \mu_f a$  is viscoelastic parameter,  $\gamma_1$  is Biot number and  $\lambda$  is mixed convection parameter.

### 3. Mathematical Solution

In order to solve Eq. (6) to Eq. (8), subject to the boundary conditions (9), the following variables have been considered

$$\psi = xF(x, y), \quad \theta = \theta(x, y), \quad (10)$$

are introduced where  $\psi$  is the stream function defined as

$$u = \frac{\partial \psi}{\partial y}, \quad v = -\frac{\partial \psi}{\partial x}. \quad (11)$$

By substituting Eq. (10) and Eq. (11) into Eq. (6) to Eq. (8), obtained

$$\begin{aligned} & \left[ (1-\phi) + \phi \frac{\rho_s}{\rho_f} \right] \left[ \left( \frac{\partial F}{\partial y} \right)^2 + x \frac{\partial F}{\partial y} \left( \frac{\partial^2 F}{\partial x \partial y} \right) - x \frac{\partial F}{\partial x} \frac{\partial^2 F}{\partial y^2} - F \frac{\partial^2 F}{\partial y^2} \right] \\ &= \left[ (1-\phi) + \phi \frac{\rho_s}{\rho_f} \right] \frac{\sin x \cos x}{x} + \frac{1}{(1+\phi)^{2.5}} \frac{\partial^3 F}{\partial y^3} + \left[ (1-\phi) + \phi \frac{(\rho\beta)_s}{(\rho\beta)_f} \right] \lambda \theta \frac{\sin x}{x} \\ &+ K \left[ 2 \frac{\partial F}{\partial y} \frac{\partial^3 F}{\partial y^3} - F \frac{\partial^4 F}{\partial y^4} - \left( \frac{\partial^2 F}{\partial y^2} \right)^2 + x \left( \frac{\partial^2 F}{\partial x \partial y} \frac{\partial^3 F}{\partial y^3} - \frac{\partial F}{\partial x} \frac{\partial^4 F}{\partial y^4} + \frac{\partial F}{\partial y} \frac{\partial^4 F}{\partial x \partial y^3} - \frac{\partial^2 F}{\partial y^2} \frac{\partial^3 F}{\partial x \partial y^2} \right) \right], \end{aligned} \tag{12}$$

$$\begin{aligned} & \frac{(k_s + 2k_f) - 2\phi(k_f - k_s)}{(k_s + 2k_f) + \phi(k_f - k_s)} \frac{1}{Pr} \frac{\partial^2 \theta}{\partial y^2} + \left[ (1-\phi) + \phi \frac{(\rho C_p)_s}{(\rho C_p)_f} \right] F \frac{\partial \theta}{\partial y} \\ &= x \left[ \begin{aligned} & (1-\phi) + \phi \frac{(\rho C_p)_s}{(\rho C_p)_f} \left( \frac{\partial F}{\partial y} \frac{\partial \theta}{\partial x} - \frac{\partial F}{\partial x} \frac{\partial \theta}{\partial y} \right) \\ & - Ecx \left[ \left( \frac{\partial^2 F}{\partial y^2} \right)^2 + K \left( \begin{aligned} & x \frac{\partial F}{\partial y} \frac{\partial^2 F}{\partial y^2} \frac{\partial^3 F}{\partial x \partial y^2} + \frac{\partial F}{\partial y} \left( \frac{\partial^2 F}{\partial y^2} \right)^2 \\ & - x \frac{\partial F}{\partial x} \frac{\partial^2 F}{\partial y^2} \frac{\partial^3 F}{\partial y^3} - F \frac{\partial^2 F}{\partial y^2} \frac{\partial^3 F}{\partial y^3} \end{aligned} \right) \right] \end{aligned} \right], \end{aligned} \tag{13}$$

which are subject to the following boundary conditions

$$\begin{aligned} & F = 0, \quad \frac{\partial F}{\partial y} = 0, \quad \frac{\partial \theta}{\partial y} = -\gamma_1(1-\theta), \quad \text{at } y = 0, \quad x \geq 0, \\ & \frac{\partial F}{\partial y} = \frac{\sin x}{x}, \quad \frac{\partial^2 F}{\partial y^2} = 0, \quad \theta = 0, \quad \text{as } y \rightarrow \infty, \quad x \geq 0, \end{aligned} \tag{14}$$

When  $x \approx 0$ , Eq. (12) and Eq. (13) reduce to the following ordinary differential equations:

$$\begin{aligned} & \frac{1}{(1+\phi)^{2.5}} f''' - \left[ (1-\phi) + \phi \frac{\rho_s}{\rho_f} \right] [f'^2 - ff''] + K(2ff''' - ff^{iv} - f'^2) \\ & + \left[ (1-\phi) + \phi \frac{(\rho\beta)_s}{(\rho\beta)_f} \right] \lambda \theta = 0, \end{aligned} \tag{15}$$

$$\frac{(k_s + 2k_f) - 2\phi(k_f - k_s)}{(k_s + 2k_f) + \phi(k_f - k_s)} \frac{1}{Pr} \theta'' + \left[ (1-\phi) + \phi \frac{(\rho C_p)_s}{(\rho C_p)_f} \right] f \theta' = 0, \tag{16}$$

with the boundary conditions

$$\begin{aligned} f(0) = 0, \quad f'(0) = 0, \quad \theta'(0) = -\gamma_1(1 - \theta(0)), \\ f'(\infty) = 1, \quad f''(\infty) = 0, \quad \theta(\infty) = 0. \end{aligned} \quad (17)$$

The physical quantities of principal interest in this problem are the skin friction coefficient  $C_f$  and heat transfer coefficient  $\theta_w(x)$ . We define these coefficients in non-dimensional form as

$$C_f = \text{Re}^{1/2} \frac{\tau_w}{\rho U_\infty^2}, \quad \theta_w(x) = \text{Re}^{-1/2} \frac{aq_w}{k(T_w - T_\infty)}, \quad (18)$$

where  $k$  is the thermal conductivity of the viscoelastic fluid. From Jaluria [31], the skin friction  $\tau_w$  and the heat flux from the surface  $q_w$  in the  $x$ -direction are defined as

$$\tau_w = \mu_{nf} \left( \frac{\partial u}{\partial y} \right)_{y=0} + k_o \left( u \frac{\partial^2 u}{\partial x \partial y} + v \frac{\partial^2 u}{\partial^2 y} + 2 \left( \frac{\partial u}{\partial x} \frac{\partial u}{\partial y} \right) \right)_{y=0}, \quad q_w = -k_{nf} \left( \frac{\partial T}{\partial y} \right)_{y=0} \quad (19)$$

Using Eq. (18) and Eq. (19), we obtain

$$C_f(x) = \frac{1}{(1-\phi)^{2.5}} x \left( \frac{\partial^2 F}{\partial y^2} \right)_{y=0}, \quad \theta_w(x) = -\frac{k_{nf}}{k_f} \left( \frac{\partial \theta}{\partial y} \right)_{y=0}. \quad (20)$$

#### 4. Results


The system Eq. (12)-(13) and Eq. (15)-(16), together with the boundary conditions (14) and (17) respectively, are solved numerically using an implicit finite-difference method known as the Keller-box method. The method has been discussed by Cebeci and Bradshaw [32] and is particularly accurate for nonlinear problems. The model has been solved in two types of equations where Eq. (12)-(13) are in the form of PDE (full equation) and Eq. (15)-(16) are in the form of ODE (stagnation point) corresponding to boundary conditions (14) and (17), respectively. The present results for the heat transfer coefficients of the cylinder for CBC is compared with those in Merkin [29] and Rashad *et al.*, [33], as shown in Table 2 when the viscous dissipation effect and viscoelastic is neglected. The results are found to be in excellent agreement. This supports the validity of the other graphical results for dimensionless velocity and temperature profiles, as well as skin friction and heat transfer coefficients.

**Table 2**

Comparison values of heat transfer coefficient when  $K = 0$ ,  $Pr = 1$ ,  $\phi = 0$ ,  $Ec = 0$ ,  $\gamma_1 = 1000$  and different values of  $\lambda$

$\lambda$	Merkin [29] (Newton-Raphson Method)	Rashad <i>et al.</i> , [33] (Tri-diagonal Method)	Present (Keller-box Method)
-1.75	0.4199	0.4202	0.419804
-1.5	0.4576	0.4579	0.457196
-1.0	0.5067	0.5068	0.506451
-0.5	0.5420	0.5421	0.541784
0.0	0.5705	0.5706	0.570141
0.5	0.5943	0.5947	0.594164
0.88	0.6096	0.6111	0.610363
0.89	0.6110	0.6114	0.610770
1.0	0.6158	0.6160	0.615180
2.0	0.6497	0.6518	0.651019

Figure 2 shows the comparison of the heat transfer coefficient with different values of nanoparticle volume fractions  $\phi$ . From that figure, it can be seen that the heat transfer coefficient of the fluid is higher at the stagnation point,  $x = 0^\circ$ , and slowly reduced as the fluid past the circular cylinder at  $x = 50^\circ$ . This is because of the source of heat at the boundary conditions. The heat transfer coefficient increases slowly from  $\phi = 0$  to  $\phi = 0.02$  and rapidly from  $\phi = 0.02$  to  $\phi = 0.03$ . This is probably because of the high thermal conductivity of the fluid when the concentration of nanoparticles volume fraction increase.

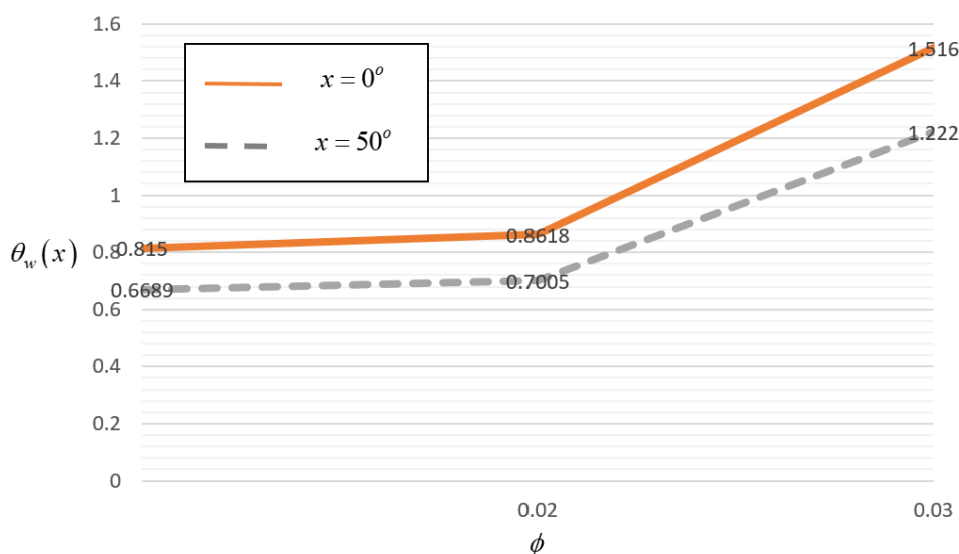


**Fig. 2.** Comparison of heat transfer coefficients with different values of nanoparticles volume fraction when  $x = 0^\circ$  and  $x = 50^\circ$

Velocity profiles for viscoelastic nanofluid as well as temperature profiles for the variation values of  $\lambda$ ,  $Ec$ ,  $\phi$ ,  $\gamma_1$  and  $K$  are presented graphically in Figure 3 to Figure 7. Figure 3 depicts the effect of mixed convection parameter  $\lambda$  on the velocity and temperature profiles, respectively for the fixed values of  $K = 1$ ,  $\phi = 0.03$  and  $Ec = 0.2$ . From this figure, it is predicted that the velocity profile tends to increase and the boundary layer becomes thinner. This results of  $\lambda$  shows that the buoyancy effects help the fluid accelerates and consequently leads to an increase in velocity profiles. The




temperature profile decreases as  $\lambda$  increases, where  $\lambda$  represents the buoyancy effect. This is because since  $\lambda$  increases, the convection cooling effect increases and reducing the temperature of the fluid. Besides that, the buoyancy force is more effective than the viscous force. Therefore, the temperature profile is reduced.

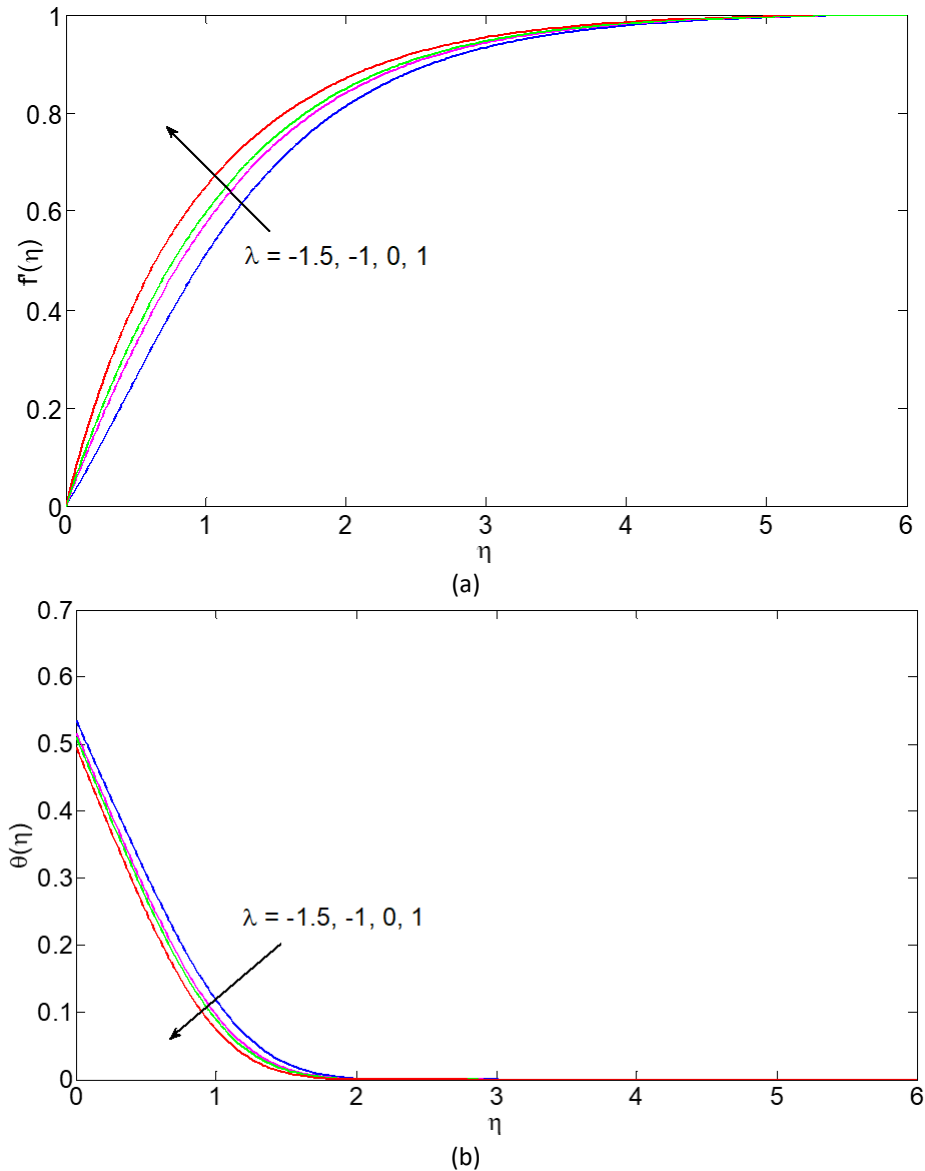


**Fig. 3.** Effect of  $\lambda$  on (a) velocity and (b) temperature profiles when  $K = \gamma_1 = 1$ ,  $Ec = 0.2$ ,  $\phi = 0.03$ ,  $Pr = 6.2$

Figure 4 depicts the variation in velocity and temperature profiles due to increment in  $Ec$ . It is observed that there is no effect in the increment of  $Ec$  for both distributions. Referring to the energy Eq. (16), it is interesting to remark that both velocity and temperature profiles do not pronounce any effect on the  $Ec$  at the lower stagnation point of the cylinder because at this point, the velocity of the fluid is zero. Eckert number represents the kinetic energy of the flow and this effect is significant for a high acceleration of the fluid flow. A similar result is shown in Zokri *et al.*, [34].

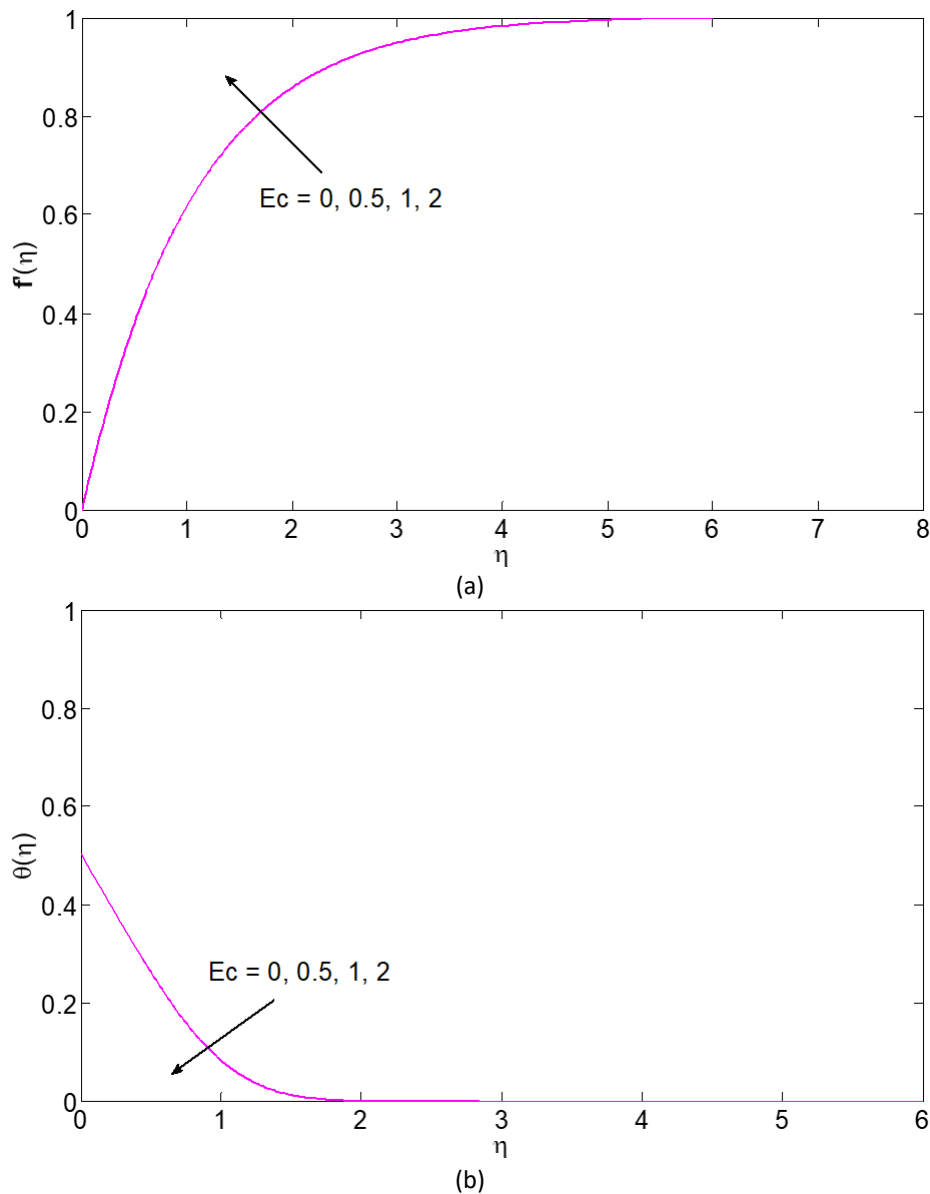


**Fig. 4.** Effect of  $Ec$  on (a) velocity and (b) temperature profiles when  $K = \gamma_1 = \lambda = 1$ ,  $\phi = 0.03$ ,  $Pr = 6.2$

Figure 5 shows the effect of nanoparticles volume fraction,  $\phi$  on velocity and temperature profiles with  $K = \lambda = 1$  and  $Ec = 0.2$ . As presented in Figure 5(a), it is noticed that when the nanoparticles volume fraction increases from 0 to 0.03, the velocity profiles decrease while temperature profiles increase. This is due to the addition of the nanoparticles or concentration in the base fluid that makes the fluid more viscous, thus slowing down the fluid flow. Figure 5(b) also shows that the thermal boundary layer gradually increases with  $\phi$ . This behaviour agrees with the physical expectation, by which the increase of  $\phi$  leads to the enhancement of thermal conductivity of the fluid, thus causing an increase in the fluid temperature.

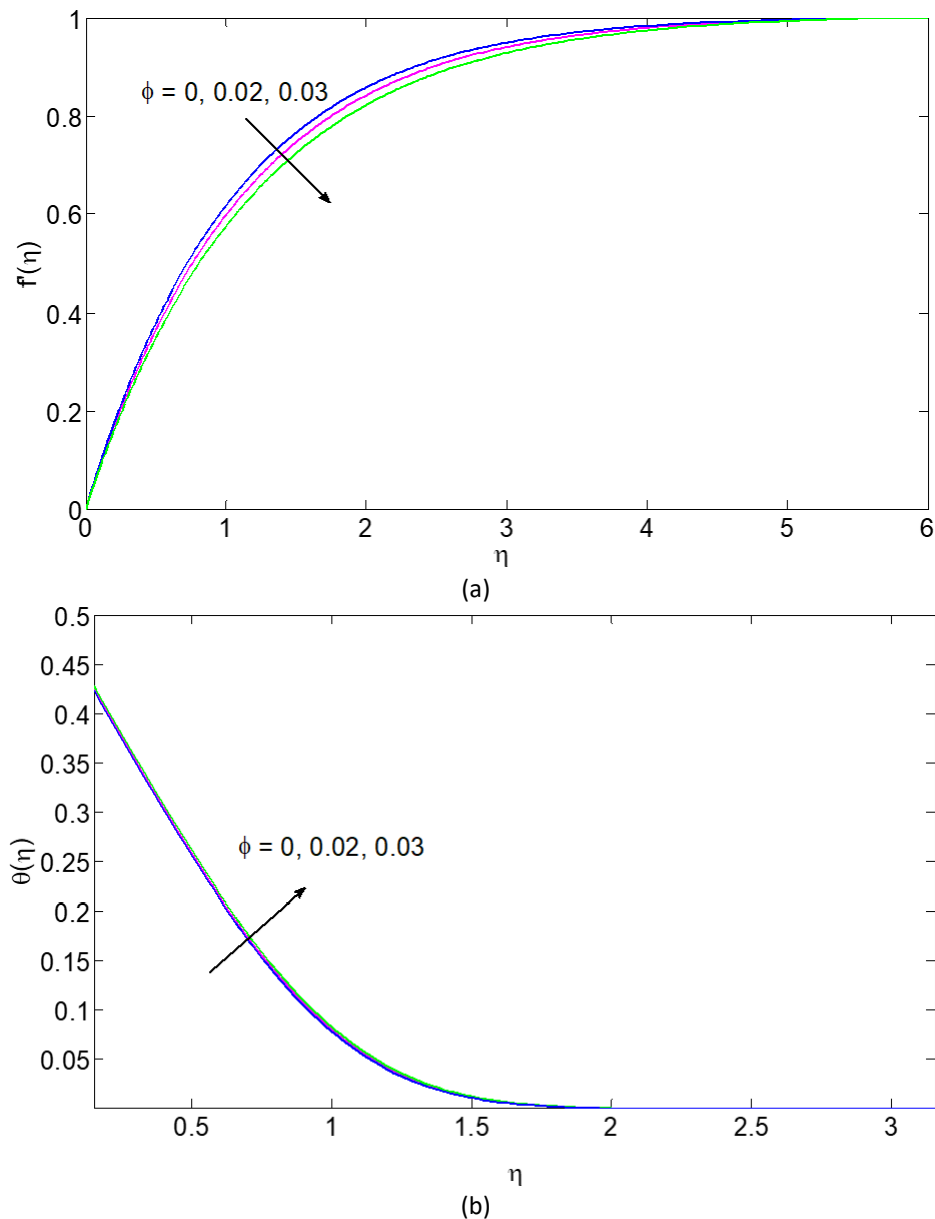


**Fig. 5.** Effect of  $\phi$  on (a) velocity and (b) temperature profiles when  $K = \lambda = \gamma_1 = 1$ ,  $Ec = 0.2$ ,  $Pr = 6.2$

Figure 6 presents the effect of Biot number,  $\gamma_1$  on velocity and temperature profiles, respectively. This figure illustrates that the increase in the value of Biot number  $\gamma_1$  causes an increase in both the velocity and temperature profiles. This is supported by the fact that a high value of Biot number produces strong surface convection which in turn supplies more heat to the cylinder surface, which stimulated the isothermal surface and increases the temperature to the maximum. However, the temperature in a uniform state when  $\gamma_1 = 0$ . Therefore, there will be very less time for heat to transfer as shown in Figure 6(b) since there is no temperature gradient occurred.

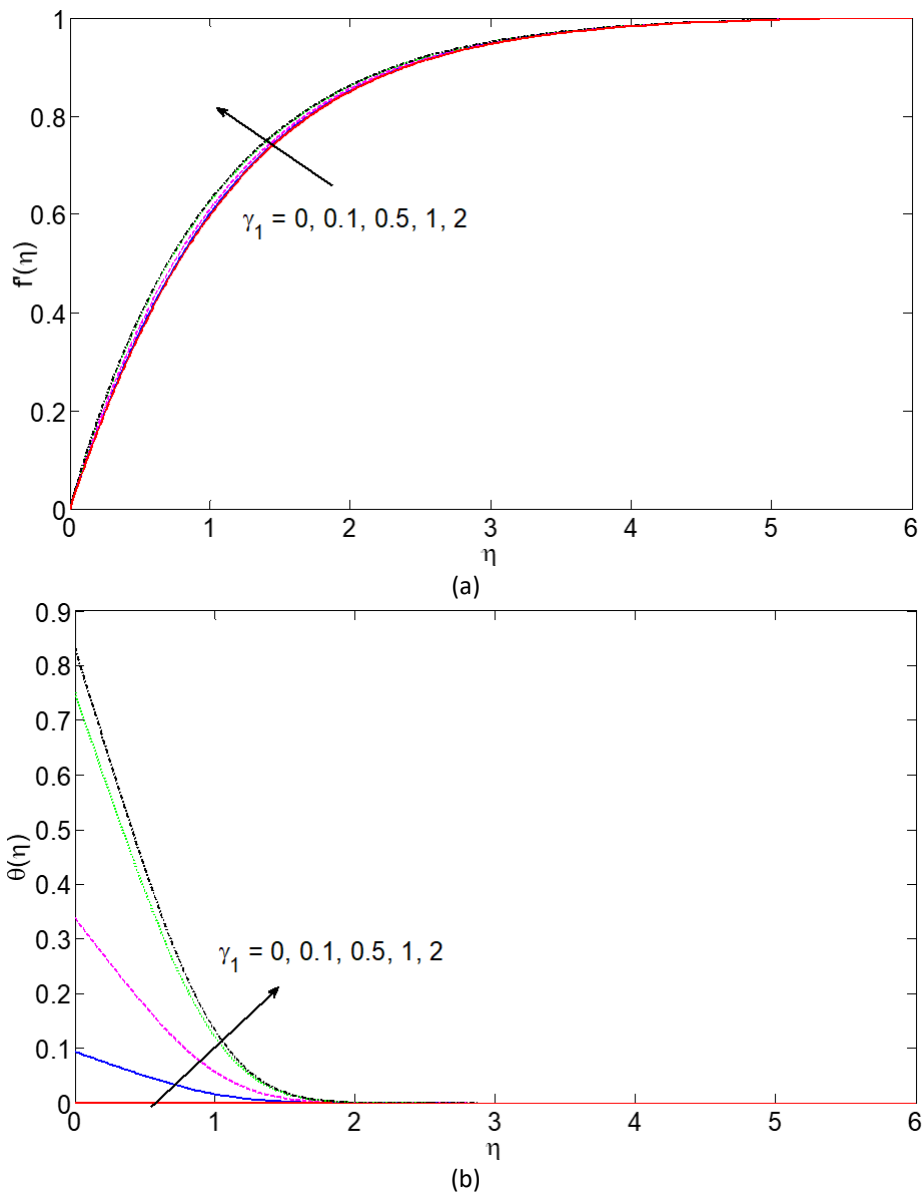


**Fig. 6.** Effect of  $\gamma_1$  on (a) velocity and (b) temperature profiles when  $K = \lambda = 1$ ,  $Ec = 0.2$ ,  $\phi = 0.03$ ,  $Pr = 6.2$

The effects of the viscoelastic parameter,  $K$  that acts on the fluid, where the graphs of velocity and temperature profiles are plotted in Figure 7. The profiles of velocity decreases while the temperature increases with the increase in the viscoelastic parameter. From the temperature profiles, an increase in the value of the viscoelastic parameter leads to the increment in temperature distribution. This happens because of the properties of viscoelasticity that show both viscous and elastic characteristics. The velocity decreases when  $K$  increase because of the viscosity property where fluid with higher viscosity resists motion. Therefore, the temperature profile increases as  $K$  increase as shown in Figure 7(b).

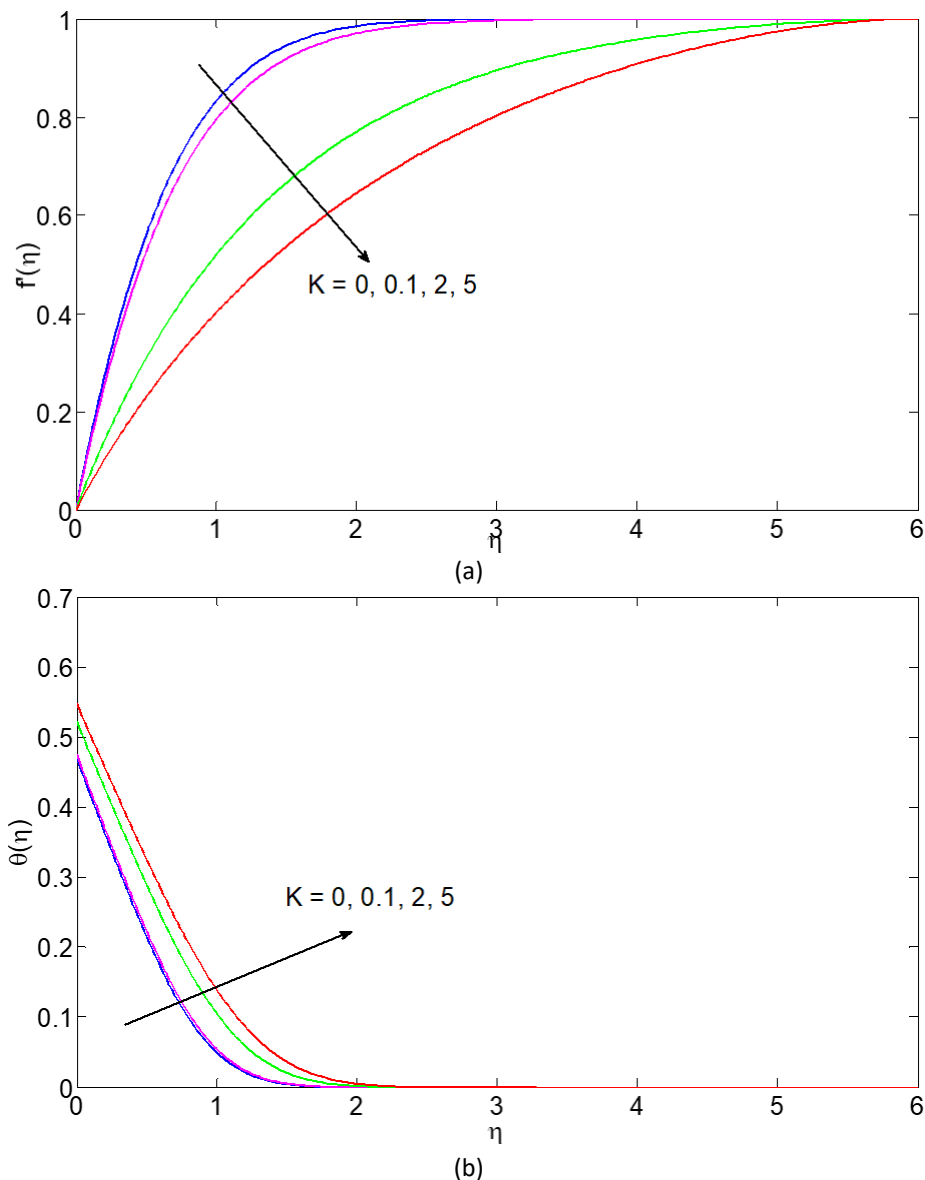

**Fig. 7.** Effect of  $K$  on (a) velocity and (b) temperature profiles when  $\lambda = \gamma_1 = 1, Ec = 0.2, \phi = 0.03, Pr = 6.2$

Typical variations of skin friction and heat transfer coefficients for various values of Eckert number,  $Ec$  is depicted in Figure 8. Skin friction coefficient increases with the increase of Eckert number. From Figure 8(a) and Figure 8(b), the graphs show that there is a unique solution at the lower stagnation point of the cylinder and starting from  $(x \geq 10^0)$ , the graphs increase gradually for skin friction coefficients. This is because when  $(x \approx 0^0)$ , the velocity of the fluid is zero. Eckert number represents the kinetic energy of the flow and this effect is significant for a high acceleration of the fluid flow. Figure 8(b) depicts the heat transfer behaviour with the Eckert number and it is observed with an increase in the Eckert number, it leads to a decrease in the rate of heat transfer. This happens because of the convection process in convective boundary condition case, which implies the temperature slowly decrease to the surrounding temperature. These results show similar behaviour that has been studied by Yusof *et al.*, [35].

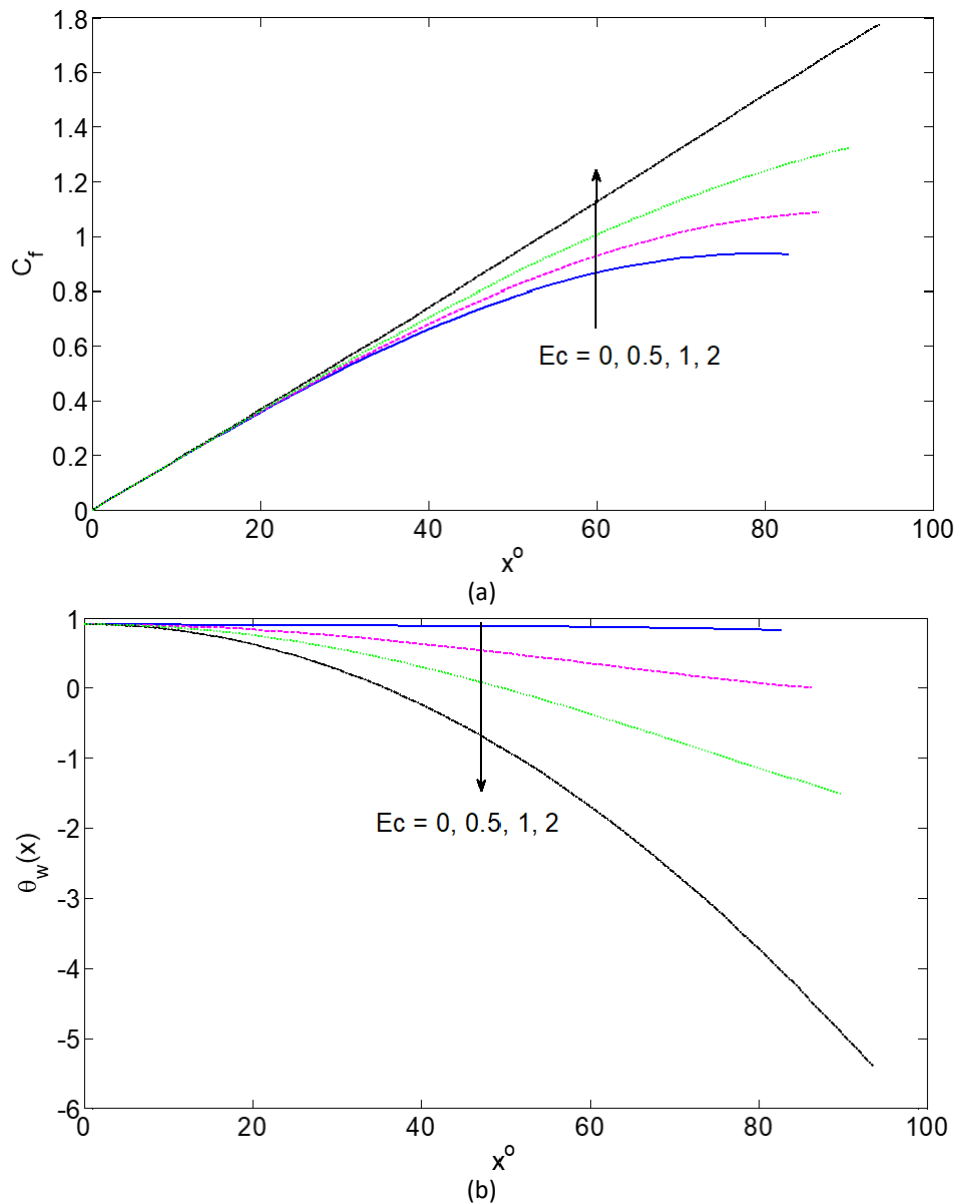

**Fig. 8.** Effect of  $Ec$  on (a) skin friction and (b) heat transfer coefficients when  $K = \lambda = \gamma_1 = 1$ ,  $\phi = 0.03$ ,  $Pr = 6.2$

## 5. Conclusions

The study on the problem of mixed convection flow of viscoelastic nanofluid with the additional effect which is viscous dissipation has been carried out and investigated in the paper. Convective boundary condition has been considered as well with the effects of Tiwari and Das for the nanofluid. The obtained transformed equations were solved numerically by the Keller-box method. Validation with the previously published data has been done and come out with an excellent agreement. Graphical results for velocity, temperature and nanoparticles volume fraction has been obtained. It was found that there are no changes in the increment of  $Ec$  for both velocity and temperature profiles at the lower stagnation point of the cylinder because at this point, the velocity of the fluid is zero and there is no such a kinetic energy. However, as the fluid past the circular cylinder, the effect of Eckert number is more significant since there is an increment for skin friction and decrease for heat transfer coefficient. This happens because of the high acceleration of the fluid flow and convection process

in the convective boundary condition, which implies the temperature slowly decrease to the surrounding temperature and decrease the heat transfer rate. Besides that, the heat transfer coefficient is more efficient and significant at the lower stagnation point because of the main source of heat at the boundary conditions.

### Acknowledgement

The authors would like to acknowledge Ministry of Education (MOE) and Research Management Centre-UTM, Universiti Teknologi Malaysia (UTM) for the financial support through vote numbers FRGS/1/2019/STG06/UNIKL/03/1, 5F004, 5F278, 07G70, 07G72, 07G76, 07G77 and 08G33 for this research.

### References

- [1] Choi, S. US, and Jeffrey A. Eastman. *Enhancing thermal conductivity of fluids with nanoparticles*. No. ANL/MSD/CP-84938; CONF-951135-29. Argonne National Lab., IL (United States), 1995.
- [2] Das, Sarit Kumar, Nandy Putra, Peter Thiesen, and Wilfried Roetzel. "Temperature dependence of thermal conductivity enhancement for nanofluids." *Journal of Heat Transfer* 125, no. 4 (2003): 567-574.  
<https://doi.org/10.1115/1.1571080>
- [3] Jang, Seok Pil, and Stephen US Choi. "Role of Brownian motion in the enhanced thermal conductivity of nanofluids." *Applied Physics Letters* 84, no. 21 (2004): 4316-4318.  
<https://doi.org/10.1063/1.1756684>
- [4] Murshed, S. M. S., K. C. Leong, and C. Yang. "Enhanced thermal conductivity of TiO<sub>2</sub>-water based nanofluids." *International Journal of Thermal Sciences* 44, no. 4 (2005): 367-373.  
<https://doi.org/10.1016/j.ijthermalsci.2004.12.005>
- [5] Zhu, Haitao, Canying Zhang, Shiquan Liu, Yaming Tang, and Yansheng Yin. "Effects of nanoparticle clustering and alignment on thermal conductivities of Fe<sub>3</sub>O<sub>4</sub> aqueous nanofluids." *Applied Physics Letters* 89, no. 2 (2006): 023123.  
<https://doi.org/10.1063/1.2221905>
- [6] Khanafer, Khalil, Kambiz Vafai, and Marilyn Lightstone. "Buoyancy-driven heat transfer enhancement in a two-dimensional enclosure utilizing nanofluids." *International Journal of Heat and Mass Transfer* 46, no. 19 (2003): 3639-3653.  
[https://doi.org/10.1016/S0017-9310\(03\)00156-X](https://doi.org/10.1016/S0017-9310(03)00156-X)
- [7] Buongiorno, Jacopo. "Convective transport in nanofluids." *Journal of Heat Transfer* 128, no. 3 (2006): 240-250.  
<https://doi.org/10.1115/1.2150834>
- [8] Tiwari, Raj Kamal, and Manab Kumar Das. "Heat transfer augmentation in a two-sided lid-driven differentially heated square cavity utilizing nanofluids." *International Journal of Heat and Mass Transfer* 50, no. 9-10 (2007): 2002-2018.  
<https://doi.org/10.1016/j.ijheatmasstransfer.2006.09.034>
- [9] Ravnik, J., and L. Škerget. "A numerical study of nanofluid natural convection in a cubic enclosure with a circular and an ellipsoidal cylinder." *International Journal of Heat and Mass Transfer* 89 (2015): 596-605.  
<https://doi.org/10.1016/j.ijheatmasstransfer.2015.05.089>
- [10] Shehzad, S. A., Tariq Hussain, T. Hayat, M. Ramzan, and A. Alsaedi. "Boundary layer flow of third grade nanofluid with Newtonian heating and viscous dissipation." *Journal of Central South University* 22, no. 1 (2015): 360-367.  
<https://doi.org/10.1007/s11771-015-2530-x>
- [11] Tham, Leony, Roslinda Nazar, and Ioan Pop. "Mixed convection boundary layer flow from a horizontal circular cylinder in a nanofluid." *International Journal of Numerical Methods for Heat & Fluid Flow* 22, no. 5 (2012): 576-606.  
<https://doi.org/10.1108/09615531211231253>
- [12] Prasad, V. Ramachandra, S. Abdul Gaffar, and O. Anwar Bég. "Heat and mass transfer of nanofluid from horizontal cylinder to micropolar fluid." *Journal of Thermophysics and Heat Transfer* 29, no. 1 (2015): 127-139.  
<https://doi.org/10.2514/1.T4396>
- [13] Rivlin, R. S. "Large elastic deformations of isotropic materials IV. Further developments of the general theory." *Philosophical Transactions of the Royal Society of London. Series A, Mathematical and Physical Sciences* 241, no. 835 (1948): 379-397.  
<https://doi.org/10.1098/rsta.1948.0024>

- [14] Min, B. K., H. Kolsky, and A. C. Pipkin. "Viscoelastic response to small deformations superposed on a large stretch." *International Journal of Solids and Structures* 13, no. 8 (1977): 771-781.  
[https://doi.org/10.1016/0020-7683\(77\)90112-3](https://doi.org/10.1016/0020-7683(77)90112-3)
- [15] Bird, R. Byron. "Slow viscoelastic radial flow between parallel disks." *Applied Scientific Research* 33, no. 5-6 (1977): 385-404.  
<https://doi.org/10.1007/BF00411821>
- [16] Harnoy, A. "An investigation into the flow of elastico-viscous fluids past a circular cylinder." *Rheologica Acta* 26, no. 6 (1987): 493-498.  
<https://doi.org/10.1007/BF01333732>
- [17] Kasim, Abdul Rahman Muhd. "Convective boundary layer flow of viscoelastic fluid." *PhD. Thesis, Universiti Teknologi Malaysia, Faculty of Science* (2014).
- [18] Gebhart, B. "Effects of viscous dissipation in natural convection." *Journal of Fluid Mechanics* 14, no. 2 (1962): 225-232.  
<https://doi.org/10.1017/S0022112062001196>
- [19] Metri, Prashant G., Pushpanjali G. Metri, Subhas Abel, and Sergei Silvestrov. "Heat transfer in MHD mixed convection viscoelastic fluid flow over a stretching sheet embedded in a porous medium with viscous dissipation and non-uniform heat source/sink." *Procedia Engineering* 157 (2016): 309-316.  
<https://doi.org/10.1016/j.proeng.2016.08.371>
- [20] Abel, M. Subhas, P. G. Siddheshwar, and Mahantesh M. Nandeppanavar. "Heat transfer in a viscoelastic boundary layer flow over a stretching sheet with viscous dissipation and non-uniform heat source." *International Journal of Heat and Mass Transfer* 50, no. 5-6 (2007): 960-966.  
<https://doi.org/10.1016/j.ijheatmasstransfer.2006.08.010>
- [21] Dalir, Nemat. "Numerical study of entropy generation for forced convection flow and heat transfer of a Jeffrey fluid over a stretching sheet." *Alexandria Engineering Journal* 53, no. 4 (2014): 769-778.  
<https://doi.org/10.1016/j.aej.2014.08.005>
- [22] Zokri, Syazwani Mohd, Nur Syamilah Arifin, Muhammad Khairul Anuar Mohamed, Mohd Zuki Salleh, Abdul Rahman Mohd Kasim, and Nurul Farahain Mohammad. "Influence of radiation and viscous dissipation on magnetohydrodynamic Jeffrey fluid over a stretching sheet with convective boundary conditions." *Malaysian Journal of Fundamental and Applied Sciences* 13, no. 3 (2017): 279-284.  
<https://doi.org/10.11113/mjfas.v13n3.621>
- [23] Zokri, S. M., N. S. Arifin, M. Z. Salleh, A. R. M. Kasim, N. F. Mohammad, and W. N. S. W. Yusoff. "MHD Jeffrey nanofluid past a stretching sheet with viscous dissipation effect." In *Journal of Physics: Conference Series*, vol. 890, no. 1, p. 012002. IOP Publishing, 2017.  
<https://doi.org/10.1088/1742-6596/890/1/012002>
- [24] El-Amin, M. F. "Combined effect of viscous dissipation and Joule heating on MHD forced convection over a non-isothermal horizontal cylinder embedded in a fluid saturated porous medium." *Journal of Magnetism and Magnetic Materials* 263, no. 3 (2003): 337-343.  
[https://doi.org/10.1016/S0304-8853\(03\)00109-4](https://doi.org/10.1016/S0304-8853(03)00109-4)
- [25] Mohamed, Muhammad Khairul Anuar, Mohd Zuki Salleh, Nor Aida Zuraimi Md Noar, and Anuar Ishak. "The viscous dissipation effects on the mixed convection boundary layer flow on a horizontal circular cylinder." *Jurnal Teknologi* 78, no. 4-4 (2016): 73-79.  
<https://doi.org/10.11113/jt.v78.8304>
- [26] Mohamed, Muhammad Khairul Anuar, N. A. Z. M. Noar, Mohd Zuki Salleh, and Anuar Ishak. "Free convection boundary layer flow on a horizontal circular cylinder in a nanofluid with viscous dissipation." *Sains Malaysiana* 45, no. 2 (2016): 289-296.
- [27] Behi, Mohammadreza, and Seyed Aliakbar Mirmohammadi. "Investigation on thermal conductivity, viscosity and stability of nanofluids." *Master of Science Thesis EGI-2012, Royal Institute of Technology (KTH), School of Industrial Engineering and Management, Department of Energy Technology, Division of Applied Thermodynamics and Refrigeration, Stockholm, Sweden* (2012).
- [28] Jang, Seok Pil, and Stephen US Choi. "Effects of Various Parameters on Nanofluid Thermal Conductivity." *Journal of Heat Transfer* 129 (2007): 617-623.  
<https://doi.org/10.1115/1.2712475>
- [29] Merkin, J. H. "Mixed convection from a horizontal circular cylinder." *International Journal of Heat and Mass Transfer* 20, no. 1 (1977): 73-77.  
[https://doi.org/10.1016/0017-9310\(77\)90086-2](https://doi.org/10.1016/0017-9310(77)90086-2)
- [30] Anwar, Ilyana, Norsarahaida Amin, and Ioan Pop. "Mixed convection boundary layer flow of a viscoelastic fluid over a horizontal circular cylinder." *International Journal of Non-Linear Mechanics* 43, no. 9 (2008): 814-821.



- <https://doi.org/10.1016/j.ijnonlinmec.2008.04.008>
- [31] Jaluria, Yogesh. "Volume 5 of Reports, reviews and computer programs." In *Natural Convection Heat and Mass Transfer: HMT. The Science and Applications of Heat and Mass Transfer*. Pergamon Press, 1980.
- [32] Cebeci, Tuncer, and Peter Bradshaw. "Momentum transfer in boundary layers." *Washington: Hemisphere* (1977).
- [33] Rashad, A. M., A. J. Chamkha, and M. Modather. "Mixed convection boundary-layer flow past a horizontal circular cylinder embedded in a porous medium filled with a nanofluid under convective boundary condition." *Computers & Fluids* 86 (2013): 380-388.  
<https://doi.org/10.1016/j.compfluid.2013.07.030>
- [34] Zokri, Syazwani Mohd, Nur Syamilah Arifin, Muhammad Khairul Anuar Mohamed, Abdul Rahman Mohd Kasim, Nurul Farahain Mohammad, and Mohd Zuki Salleh. "Mathematical model of mixed convection boundary layer flow over a horizontal circular cylinder filled in a Jeffrey fluid with viscous dissipation effect." *Sains Malaysiana* 47, no. 7 (2018): 1607-1615.  
<https://doi.org/10.17576/jsm-2018-4707-32>
- [35] Yusof, Nur Syamila, Siti Khuzaimah Soid, Mohd Rijal Illias, Ahmad Sukri Abd Aziz, and Nor Ain Azeany Mohd Nasir. "Radiative Boundary Layer Flow of Casson Fluid Over an Exponentially Permeable Slippery Riga Plate with Viscous Dissipation." *Journal of Advanced Research in Applied Sciences and Engineering Technology* 21, no. 1 (2020): 41-51.  
<https://doi.org/10.37934/araset.21.1.4151>