

SEMI-DYNAMIC GEOCENTRIC DATUM FOR POSITIONAL ACCURACY
AND RELIABILITY IN MALAYSIA

NOOR SURYATI BINTI MOHD SHARIFF

UNIVERSITI TEKNOLOGI MALAYSIA

SEMI-DYNAMIC GEOCENTRIC DATUM FOR POSITIONAL ACURACY AND
RELIABILITY IN MALAYSIA

NOOR SURYATI BINTI MOHD SHARIFF

A thesis submitted in fulfilment of the
requirements for the award of the degree of
Doctor of Philosophy (Geomatic Engineering)

Faculty of Geoinformation and Real Estate
Universiti Teknologi Malaysia

JANUARY 2018

To my beloved family

ACKNOWLEDGEMENT

First and foremost, I would like to express my grateful by saying praise be to Allah for the accomplishment of this thesis. I wish to express my sincere appreciation to my supervisor, Dr. Zulkarnaini bin Mat Amin for his support and guidance throughout this study. I am also very thankful to Associate Professor Kamaludin bin Haji Mohd Omar, who is my co-supervisor for providing me continuous motivation. Additionally, I would like to thank Dr. Tajul Ariffin bin Musa who gave me the opportunity to expose my learning process especially through international conferences and journal writings.

My sincere appreciation also extends to my postgraduate friends, especially Mr. Jespal Singh Gill and Mr. Gabriel Ling Hoh Teck who have provided assistance and discussions at various occasions. The recommendations provided by them were very useful and were always welcomed as they benefitted my study.

I am also deeply thankful to the Department of Survey and Mapping Malaysia (DSMM) for providing MyRTKnet and MASS stations' GPS data used in this study. Besides, I would like to express my gratitude to the Ministry of Higher Education (MoHE) for the financial support through a scholarship, namely MyBrain (MyPhD).

Last but not least, I am deeply indebted to my family members, especially my husband, who's my driving force towards the completion of this study. Their understanding and thoughtfulness throughout my study are appreciated.

ABSTRACT

Land movements caused by the Earth's natural systems such as tectonic motion and earthquakes have a huge impact on the geodetic datum. The geodetic reference stations that are being used as fiducial points for realizing and maintaining the geodetic datum may shift positions. In a long term, the geodetic datum may suffer more severe coordinate shifts, ultimately resulting in non-geocentric position. The national geodetic datum of Malaysia, the Geocentric Datum of Malaysia (GDM2000), is realised as a static datum which is aligned to the International Terrestrial Reference Frame 2000 (ITRF2000) at epoch January 2000. However, ITRF is currently in version 2014 and Malaysia has experienced several land movements as a result of tectonic motion (secular) and earthquakes (non-secular). This study aims to provide the components needed to enhance the accuracy and reliability of the geodetic datum of Malaysia, outlined in three objectives. First, to investigate the spatio-temporal domain of land deformation in Malaysia. Second, to develop a land deformation model based on secular and non-secular land deformation of Malaysia. Third, to design an appropriate mechanism for the implementation of a semi-dynamic datum in Malaysia and to validate its accuracy over time. In order to achieve these objectives, three phases of methodology have been conducted. In phase one, time series analysis of selected Malaysia Real-time Kinematic Network (MyRTKnet) stations positions has been carried out using linear least squares regression technique. The second phase involves the development of a deformation model using the interpolation approach for secular model and second degree polynomial method for the post-seismic decay model. The third phase provides a timeline for implementing a semi-dynamic datum that consists of information about the applicable epoch and the respective sub-models. In addition, transformation between the new datum GDM2000 at epoch 2009.3055 and the existing datum GDM2000 is generated using the geographic offset method. Based on the time series analysis, it was found that the secular motion of Malaysia can be classified into two periods of time which are 2008-2011 and 2012-2014 and the deformation models for Peninsular Malaysia and East Malaysia have to be separated due to different velocity vectors. Results from assessment of the secular deformation model have found that millimetre-level accuracy can be achieved, i.e. below 6 mm in the horizontal position. For the non-secular deformation model, centimetre-level accuracy can be achieved, i.e. below 7 cm in the horizontal position. It is expected that with the positional accuracy results obtained in this study, it demonstrates the feasibility of implementing a semi-dynamic geocentric datum in Malaysia, thus achieving a reliable position over time.

ABSTRAK

Pergerakan tanah yang disebabkan oleh sistem semula jadi bumi seperti pergerakan tektonik dan gempa bumi memberi kesan besar kepada datum geodesi. Stesen rujukan geodesi yang digunakan sebagai titik fidusial untuk menubuh dan mengekalkan datum geodesi boleh beralih kedudukan. Dalam jangka panjang, datum geodesi boleh mengalami perubahan koordinat yang lebih teruk, akhirnya mengakibatkan kedudukan tidak geosentrik. Datum geodesi kebangsaan Malaysia iaitu datum geosentrik Malaysia (GDM2000) direalisasikan sebagai datum statik yang selaras dengan kerangka rujukan terestrial antarabangsa 2000 (ITRF2000) pada epok Januari 2000. Walau bagaimanapun, ITRF kini berada dalam versi 2014 dan Malaysia telah mengalami beberapa gerakan tanah akibat gerakan tektonik (sekular) dan gempa bumi (tidak sekular). Kajian ini bertujuan untuk menyediakan komponen-komponen yang diperlukan untuk meningkatkan ketepatan dan kebolehpercayaan datum geodesi Malaysia, yang digariskan dalam tiga objektif. Pertama, untuk menyasat domain ruang-masa deformasi tanah di Malaysia. Kedua, untuk membangunkan satu model deformasi tanah berdasarkan deformasi tanah sekular dan bukan sekular di Malaysia. Ketiga, untuk mereka bentuk mekanisma yang sesuai untuk pelaksanaan datum separa dinamik di Malaysia dan untuk mengesahkan ketepatannya dari semasa ke semasa. Bagi mencapai objektif-objektif ini, tiga fasa metodologi telah dijalankan. Dalam fasa pertama, analisis siri masa bagi kedudukan stesen-stesen terpilih jaringan masa hakiki kinematik Malaysia (MyRTKnet) telah dijalankan dengan menggunakan teknik regresi linear kuasa dua terkecil. Fasa kedua melibatkan pembangunan model deformasi dengan menggunakan pendekatan interpolasi untuk model sekular dan kaedah polinomial darjah kedua untuk model pasca-seismik. Fasa ketiga menyediakan satu garis masa untuk melaksanakan datum separa dinamik yang mengandungi maklumat mengenai kebolegunaan epok dan sub-model masing-masing. Tambahan pula, transformasi di antara datum baru GDM2000 pada epok 2009.3055 dan datum sedia ada GDM2000 dihasilkan dengan menggunakan kaedah ofset geografi. Berdasarkan analisis siri masa, didapati bahawa gerakan sekular Malaysia boleh diklasifikasikan kepada dua tempoh masa iaitu 2008-2011 dan 2012-2014 dan model deformasi untuk Semenanjung Malaysia dan Malaysia Timur perlu dipisahkan kerana vektor halaju yang berbeza. Keputusan daripada penilaian model deformasi sekular mendapati bahawa ketepatan tahap milimeter boleh dicapai, iaitu di bawah 6 mm bagi kedudukan mengufuk. Bagi model deformasi bukan sekular, ketepatan tahap sentimeter boleh dicapai, iaitu di bawah 7 sm bagi kedudukan mengufuk. Adalah dijangkakan hasil ketepatan kedudukan yang diperolehi dalam kajian ini, menunjukkan kebolehlaksanaan datum geosentrik separa dinamik di Malaysia, seterusnya mencapai kedudukan yang boleh dipercayai dari semasa ke semasa.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xiii
	LIST OF FIGURES	xv
	LIST OF ABBREVIATIONS	xxi
	LIST OF SYMBOLS	xxiv
	LIST OF APPENDICES	xxvi
1	INTRODUCTION	1
	1.1 Research Background	1
	1.2 Problem Statements	5
	1.3 Research Questions	7
	1.4 Research Objectives	7
	1.5 Research Scope	8
	1.6 Significance of Research	9
	1.7 General Research Framework	10
	1.8 Thesis Outline	12

2	LITERATURE REVIEW	14
2.1	Introduction	14
2.2	Dynamic Earth	15
2.2.1	Secular Motion	17
2.2.1.1	Plate Tectonic	17
2.2.1.2	Other Secular Motion	19
2.1.2	Non-Secular Motion	20
2.2.2.1	Earthquake	21
2.2.2.2	Other Non-Secular Motion	22
2.2.3	Geodynamics in Malaysia	23
2.3	Geodetic Reference Systems, Frames and Geodetic Datum	25
2.3.1	Hierarchy of Current Terrestrial Reference Frames	27
2.3.1.1	Global Terrestrial Reference Frame	28
2.3.1.1.1	The International Terrestrial Reference Frame (ITRF)	28
2.3.1.1.2	The World Geodetic System 1984 (WGS84)	30
2.3.1.1.3	The GNSS Associated Reference Frames	32
2.3.1.2	Regional Terrestrial Reference Frames	32
2.3.1.3	National Terrestrial Reference Frame	33
2.3.2	National Geodetic Datum in Malaysia	34
2.3.2.1	History of the Geodetic Datum in Malaysia	34
2.3.2.2	GPS-Based Network	36
2.3.2.3	Geocentric Datum of Malaysia (GDM2000)	39
2.4	The Relation of National Geocentric Datum to Earth Dynamic	40
2.4.1	Implication of the Geocentric Datum Shift	40
2.4.1.1	Inconsistent Satellite Orbit and Coordinate Bias	41
2.4.1.2	Confusion and Mismatch with Base Map	42

2.4.1.3	Decreased Accuracy of Reference Stations Coordinates	42
2.4.1.4	Managing the Geospatial Database	43
2.4.2	Preliminary Test on the Shift of GDM2000	43
2.4.2.1	Test I: Comparison between Epoch 2000 and 2011 in the Same Reference Frame ITRF2000	43
2.4.2.2	Test II: Comparison between Epoch 2000 and 2011 in Different Reference Frames: ITRF2000 and ITRF2008, Respectively	44
2.4.2.3	Test III: Comparison between ITRF2000 and ITRF2008 Reference Frames at Same Epoch 2011	47
2.4.2.4	Test IV: Time Series Analysis for Coordinates Difference between Epoch 2011 in ITRF2000 and the GDM2000 (2006)	47
2.4.3	The choice of Datum: Static, Semi-Dynamic and Dynamic	49
2.4.3.1	Static Datum	50
2.4.3.2	Semi-Dynamic Datum	50
2.4.3.3	Dynamic Datum	50
2.5	Review on Semi-Dynamic Geocentric Datum	51
2.5.1	Deformation Model	53
2.5.2	Issues of a Semi-Dynamic Geocentric Datum	54
2.6	Summary	56
3	RESEARCH METHODOLOGY	58
3.1	Introduction	58
3.2	Research Framework	59
3.3	Research Materials and Tools	61
3.3.1	GPS Data	61
3.3.2	Research Tools	62
3.3.2.1	Bernese 5.0 GNSS Software	62
3.3.2.2	GPS Interactive Time Series Analysis (GITSA) Software	64
3.3.2.3	Global Mapping Tools (GMT) Tools	66

3.4	Research Procedures	67
3.4.1	Data Acquisition	67
3.4.2	Data Processing	71
3.4.2.1	Data Preparation	71
3.4.2.2	Processing Strategy	73
3.4.2.3	Processing Structure and Quality Check	77
3.4.2.4	Fiducial Stations Selection	82
3.4.2.5	MyRTKnet Stations Selection and Velocities Estimation	84
3.4.3	Plotting Time-series of MyRTKnet Stations and Velocities Estimation	85
3.4.4	Datum Realization	87
3.4.4.1	Selection of Specific Epoch for Datum Realisation	88
3.4.4.2	IGS Fiducial Stations Selection for Datum Realisation	88
3.4.4.3	Datum Transformation between GDM2000 and GDM2000 [2009.3055]	89
3.4.5	Development of Deformation Model	91
3.4.5.1	Secular Deformation Modelling	91
3.4.5.1.1	Estimation of Velocity: Linear Least Square Regression Method	92
3.4.5.1.2	Gridding Velocity Data: Minimum Curvature Interpolation Technique	95
3.4.5.2	Non-secular Deformation Modelling	97
3.4.5.2.1	Displacement Offset for the Co-Seismic Events	98
3.4.5.2.2	Second Degree Polynomial for the Post-Seismic Decay	98
3.4.6	Execution and Testing the Deformation Model and Datum transformation	99
3.5	Summary	100

4	RESULTS AND ANALYSIS ON LAND DEFORMATION IN MALAYSIA	103
4.1	Introduction	103
4.2	GPS Data Processing Results	104

4.3	Land Deformation from December 2004 – 2014	107
4.4	Secular Motion before the Northern Sumatra Earthquake	111
4.5	Secular Motion after the Northern Sumatra Earthquake	119
4.6	Co-seismic Displacement	126
4.7	Post-seismic Decay	129
4.8	Summary	143
5	LAND DEFORMATION MODEL FOR MALAYSIA	146
5.1	Introduction	146
5.2	Secular Deformation Model	147
5.2.1	Results for the Secular Deformation Model 1	148
5.2.2	Results for the Secular Deformation Model 2	151
5.3	Non-Secular Deformation Model	155
5.3.1	Results for the Non-Secular Deformation Models: Co-seismic	156
5.3.2	Results for the Non-Secular Deformation Models: Post-seismic Decay	160
5.4	Results for the New Datum Realization of GDM2000 [@2009.3055]	163
5.5	Results for the Geographic Offset between GDM2000 and GDM2000 [@2009.3055]	167
5.6	Summary	169
6	FRAMEWORK FOR THE IMPLEMENTATION OF A SEMI-DYNAMIC GEOCENTRIC DATUM IN MALAYSIA	172
6.1	Introduction	172
6.2	Timeline for Implementing the Semi-dynamic Geocentric Datum	173
6.3	Development of Execution Program for Velocity Estimation and Coordinate Propagation	175
6.4	Assessment on the Deformation Model	179

6.4.1	Assessment on the Secular Deformation Model 1	180
6.4.2	Assessment on the Secular Deformation Model 2	183
6.4.3	Assessment on the Non-secular (Co-seismic) Deformation Model	185
6.4.4	Assessment on the Non-secular (Post-seismic Decay) Deformation Model	187
6.4.5	Assessment on the Geographic Offset Transformation and Deformation Model for the Campaign Points	190
6.5	Discussion on Implementing a Semi-Dynamic Geocentric Datum in Malaysia	197
6.5.1	Resistance to Change	197
6.5.2	Integration between New Geospatial Data and Mapping	198
6.5.3	Implications	199
6.6	Summary	200
7	CONCLUSION AND RECOMMENDATIONS	203
7.1	Conclusion	203
7.2	Recommendations for Future Research	207
	REFERENCES	210
	Appendices A – D	221 - 228

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	The effects of post-glacial rebound and atmospheric pressure loading under secular motion category	20
2.2	The effects of volcanism and slow-slip event under non-secular motion category	22
2.3	Great earthquakes nearby Malaysia (USGS, 2015)	23
2.4	The GNSS associated reference frames	32
2.5	Implementation of semi-dynamic geocentric datum or similar approaches in several countries and regions	52
2.6	Considerations for developing a deformation model	54
2.7	Issues regarding the implementation of a semi-dynamic geocentric datum	55
3.1	Main features of Bernese 5.0 software	62
3.2	Main features of GITSA software	64
3.3	Commands used in the GMT software	67
3.4	The selected IGS stations	69
3.5	General files for GPS processing in Bernese software	70
3.6	Corrections files for GPS processing in Bernese software	70
3.7	Processing strategy and parameters used in Bernese software	76
4.1	Average velocities of MyRTKnet stations and their direction from 2008 to 2011	116
4.2	Average velocities of MyRTKnet stations and their direction from 1 October 2012 - 31 December 2014	124
4.3	Differences horizontal velocity before (secular deformation model 1) and after (secular deformation model 2) the 2012 Northern Sumatra earthquake	125
4.4	Maximum and minimum co-seismic displacements in Peninsular Malaysia due to the four major earthquakes	127

5.1	Periods used for the secular deformation models	147
5.2	Periods used for applying the non-secular deformation models	155
5.3	Percentage of ambiguity resolution for each daily solution for Peninsular and East Malaysia	163
5.4	Helmert transformation parameters between processed IGS fiducial coordinates and IGS weekly published coordinates at epoch 22th April 2009 for both Peninsular and East Malaysia	164
5.5	Coordinate of MyRTKnet stations in geographical coordinate system for the new GDM2000 [@2009.3055] datum	165
5.6	Geographic offset between the published Coordinate GDM2000 and the new realization of GDM2000 [@2009.3055]	167
6.1	Coordinate residuals for MyRTKnet stations in Peninsular Malaysia on 16 th March 2011	181
6.2	Coordinate residuals for MyRTKnet stations in East Malaysia on 16th March 2011	181
6.3	Coordinate residuals for MyRTKnet stations in Peninsular Malaysia on 12 th December 2007	182
6.4	Coordinate residuals for MyRTKnet stations in East Malaysia on 12th December 2007	183
6.5	Coordinate residuals for MyRTKnet stations in Peninsular Malaysia on 26 th December 2013	184
6.6	Coordinate residuals for MyRTKnet stations in East Malaysia on 26 th December 2013	184
6.7	The selected date and points for assessment of non-secular (post-seismic decay) deformation model	188
6.8	Observation details for the campaign points	192
6.9	Summary of positional accuracy of each sub-models	202

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	The general research framework	11
2.1	The classification of secular and non-secular motion (Stanaway <i>et al.</i> , 2012)	16
2.2	The major plate tectonics and several subplates on the Earth (Hamblin and Christiansen, 2009)	17
2.3	Post-seismic and co-seismic motions in Peninsular Malaysia (Omar, <i>et al.</i> , 2010)	24
2.4	The hierarchical relationship between reference frames	27
2.5	ITRF2008 network encompassed with VLBI, SLR, DORIS and GPS sites co-located with GPS (Altamimi <i>et al.</i> , 2011)	29
2.6	WGS 84 (G1150) reference frame stations (Altamimi <i>et al.</i> , 2012)	31
2.7	Geodetic triangulation network for Malayan Revised Triangulation 1968 (MRT68) (DSMM, 2009)	35
2.8	Geodetic triangulation network for Borneo Triangulation 1968 (BT68) (DSMM, 2009)	36
2.9	Peninsular Malaysia Scientific Geodetic Network 1994 (PMSGN94) (DSMM, 2004)	37
2.10	East Malaysia Geodetic Scientific Network 1997 (EMGSN97) (DSMM, 2004)	38
2.11	Coordinate bias in the relative positioning	41
2.12	Comparison between Epoch 2000 and Epoch 2011 in ITRF2000	45
2.13	Comparison between Epoch 2000 in ITRF2000 and Epoch 2011 in ITRF2008	46

2.14	Comparison between ITRF2000 and ITRF2008 at epoch 2011	48
2.15	Time series of displacement at ARAU, KUKP, MUKH, RANA and SARA stations	49
3.1	Research framework for the development of a semi-dynamic geocentric datum	59
3.2	The distribution of 78 MyRTKnet stations (DSMM, 2009)	68
3.3	The distribution of 17 MASS stations (DSMM, 2009)	69
3.4	Summary of the folders and files involved in data preparation of Bernese software	73
3.5	Preparation step of the RNX2SNX processing structure	78
3.6	Pre-processing step of the RNX2SNX processing structure	79
3.7	Processing step of the RNX2SNX processing structure	80
3.8	Summary and deleting step of the RNX2SNX processing structure	81
3.9	The network of selected fiducial and non-fiducial stations for GPS processing	83
3.10	Selected 65 MyRTKnet stations for the GPS data processing	85
3.11	The resultant slope represents velocity and diagonal covariance matrix represents variances	87
3.12	The network of selected fiducial and non-fiducial stations for a new datum realization	89
3.13	Common points that have been selected for Peninsular Malaysia	90
3.14	Common points that have been selected for East Malaysia	91
4.1	Ambiguity results from the summarized GPSQIF output	104
4.2	Helmert residuals results from HELMR1	105
4.3	Positional errors results from the summarized final ADDNEQ2 output	105
4.4	Summarized output from MAUPRP	106
4.5	Summarized output from RESCHK	106
4.6	Zones for spatial analysis of land deformation	107
4.7	UPMS station time series affected by all the nearby earthquakes	108
4.8	Time series of BIN1 (left) and KENI (right) MyRTKnet stations located in Sarawak and Sabah, respectively	109
4.9	Time series of UUMK (left) and GMUS (right)	

	MyRTKnet stations located in North-west and North-east zones, respectively	110
4.10	Time series of MERU (left) and JHJY (right) MyRTKnet stations located in Central and South zones	110
4.11	Time series of UUMK station and velocity from 2008 to 2011	112
4.12	Time series of PUSI station and velocity from 2008 to 2011	113
4.13	Time series of KUAL station and velocity from 2008 to 2011	114
4.14	Time series of UPMS station and velocity from 2008 to 2011	114
4.15	Time series of KUKP station and velocity from 2008 to 2011	115
4.16	Time series of KUDA station and velocity from 2008 to 2011	115
4.17	Time series of BIN1 station and velocity from 2008 to 2011	116
4.18	MyRTKnet velocity vector map for the 2008 to 2011 period	118
4.19	Time series of UUMK station and velocity from 1 October 2012 to 31 December 2014	120
4.20	Time series of KUAL station and velocity from 1 October 2012 to 31 December 2014	121
4.21	Time series of UPMS station and velocity from 1 October 2012 to 31 December 2014	121
4.22	Time series of KUKP station and velocity from 1 October 2012 to 31 December 2014	122
4.23	Time series of KUDA station and velocity from 1 October 2012 to 31 December 2014	122
4.24	Time series of BIN1 station and velocity from 1 October 2012 to 31 December 2014	123
4.25	MyRTKnet velocity vector map for the October 2012 to 2014 period	125
4.26	Co-seismic displacement during (a) 2004 Aceh, (b) 2005 Nias, (c) 2007 Bengkulu and (d) 2012 Northern Sumatra earthquakes with the blue star indicates the location of the respective earthquake's epicenter	128
4.27	Post-seismic decay for the Sumatra-Andaman earthquake at LGKW station	130
4.28	Post-seismic decay for the Sumatra-Andaman	

	earthquake at GMUS station	131
4.29	Post-seismic decay for the Sumatra-Andaman earthquake at JHJY station	132
4.30	Post-seismic decay for the Nias earthquake at LGKW station	134
4.31	Post-seismic decay for the Nias earthquake at GMUS station	135
4.32	Post-seismic decay for the Nias earthquake at JHJY station	136
4.33	Post-seismic decay for the Northern Sumatra earthquake at LGKW station	138
4.34	Post-seismic decay for the Northern Sumatra earthquake at GMUS station	139
4.35	Post-seismic decay for the Northern Sumatra earthquake at JHJY station	140
4.36	Post-seismic decay for the Northern Sumatra earthquake at KUDA station	141
4.37	Post-seismic decay for the Northern Sumatra earthquake at BIN1 station	142
5.1	Secular deformation model 1 for Peninsular Malaysia: East component	149
5.2	Secular deformation model 1 for Peninsular Malaysia: North component	149
5.3	Secular deformation model 1 for East Malaysia: East component	150
5.4	Secular 1 deformation model 1 for East Malaysia: North component	150
5.5	Secular deformation model 2 for Peninsular Malaysia: East component	152
5.6	Secular deformation model 2 for Peninsular Malaysia: North component	153
5.7	Secular deformation model 2 for East Malaysia: East component	154
5.8	Secular deformation model 2 for East Malaysia: North component	154
5.9	Non-secular deformation model 1 (co-seismic Sumatra-Andaman earthquake) for Peninsular Malaysia: East component	156
5.10	Non-secular deformation model 3 (co-seismic Nias earthquake) for Peninsular Malaysia: East component	157

5.11	Non-secular deformation model 5 (co-seismic Bengkulu earthquake) for Peninsular Malaysia: East component	158
5.12	Non-secular deformation model 6 (co-seismic Northern Sumatra earthquake) for Peninsular Malaysia: East component	159
5.13	Post-seismic model for Sumatra-Andaman earthquake in East component at PUPK Station	161
5.14	Post-seismic model for Sumatra-Andaman earthquake in North component at PUPK Station	161
5.15	Post-seismic model for Nias Earthquake in East component at PUPK Station	162
5.16	Post-seismic model for Nias Earthquake in North component at PUPK Station	162
6.1	Timeline for implementing a semi-dynamic geocentric datum for Malaysia	174
6.2	The interface of a Velocity Estimation and Coordinate Propagation (VEaCoP) Program	176
6.3	Process framework of the Velocity Estimation and Coordinate Propagation (VEaCoP) program	177
6.4	Estimation of velocity or/and displacement value for a specific user location by using bilinear interpolation method	179
6.5	Coordinate residuals in North component for the non-secular deformation model which are the co-seismic of Aceh in green line, Nias in red line, Bengkulu in yellow line and Northern Sumatra in blue line	185
6.6	Coordinate residuals in East component for the non-secular deformation model which are the co-seismic of Aceh in green line, Nias in red line, Bengkulu in yellow line and Northern Sumatra in blue line	186
6.7	Coordinate residuals in North component for the non-secular deformation model which are the post-seismic of Aceh in green bar, Nias in red bar and Northern Sumatra in blue bar	188
6.8	Coordinate residuals in East component for the non-secular deformation model which are the post-seismic of Aceh in green bar, Nias in red bar and Northern Sumatrain blue bar	189
6.9	Location of the campaign points around Peninsular Malaysia	191
6.10	Location of the campaign points around Sarawak	191

6.11	Scatter plot of coordinate residuals of East and North component for evaluation of geographic offset transformation in Peninsular Malaysia	193
6.12	Scatter plot of coordinate residuals of East and North component for evaluation of geographic offset transformation in Sarawak	194
6.13	Coordinate residuals of campaign points for evaluation of deformation model in Peninsular Malaysia	195
6.14	Coordinate residuals of campaign points for evaluation of deformation model in Sarawak	196

LIST OF ABBREVIATIONS

APREF	-	Asia-Pacific Reference Frame
BIH	-	Bureau International de l'Heure
BIPM	-	Bureau International des Poids et Mesures
BPE	-	Bernese Processing Engine
BT	-	Borneo Triangulation
CORS	-	Continuously Operating Reference Stations
CTF2000	-	China Terrestrial Reference Frame 2000
DGFI	-	German Geodetic Research Institute
DGRS	-	Differential GPS Reference Stations
DMA	-	Defense Mapping Agency
DoD	-	Department of Defense
DORIS	-	Doppler Orbitography and Radiopositioning Integrated by Satellites
DOS	-	Disk Operating System
DoY	-	Day of Year
DSMM	-	Department of Survey and Mapping Malaysia
ECEF	-	Earth-centered Earth-fixed
EMSGN97	-	East Malaysia Scientific Geodetic Network 1997
EOP	-	Earth Orientation Parameter
EUREF	-	European Reference Frame
FTP	-	File Transfer Protocol
GDM2000	-	Geocentric Datum of Malaysia 2000
GGOS	-	Global Geodetic Observing System
GIA	-	Glacial Isostatic Adjustment
GIS	-	Geographical Information System
GITSA	-	GPS Interactive Time Series Analysis
GMT	-	Global Mapping Tools

GNSS	-	Global Navigation Satellite System
GPS	-	Global Positioning System
GSHHG	-	Global Self-consistent, Hierarchical, High-resolution Geography Database
GUI	-	Graphical User Interface
IAG	-	International Association of Geodesy
ICRF	-	International Celestial Reference Frame
IERS	-	International Earth Rotation and Reference Systems Service
IGN	-	Institute Geographique National
IGS	-	International GNSS Service
IRM	-	IERS Reference Meridian
IRP	-	IERS Reference Pole
ITRF	-	International Terrestrial Reference Frame
ITRF	-	International Terrestrial Reference Frame
ITRS	-	International Terrestrial Reference System
JGD2000	-	Japan Geocentric Datum 2000
KGD2000	-	Korean Geodetic Datum 2000
LLR	-	Lunar Laser Ranging
MASS	-	Malaysian Active GPS System
MRT	-	Malayan Revised Triangulation
MyRTKnet	-	Malaysia Real Time Kinematic GNSS Network
NDCDB	-	National Digital Cadastral Database
NGA	-	National Geospatial-Intelligence Agency
NIMA	-	National Imagery and Mapping Agency
NNR	-	No-Net-Rotation
NRCan	-	Natural Resources Canada
NSWCDD	-	Naval Surface Warfare Center Dahlgren Division
NZGD2000	-	New Zealand Geodetic Datum 2000
PCF	-	Process Control File
PMSGN94	-	Peninsular Malaysia Scientific Geodetic Network 1994
PPP	-	Precise Point Positioning
QIF	-	Quasi Ionosphere Free
RINEX	-	Receiver Independent Exchange Format

SIRGAS	-	Geocentric Reference System for Americas
SLR	-	Satellite Laser Ranging
TAI	-	International Atomic Time
TCG	-	Geocentric Coordinate Time
VLBI	-	Very Long Baseline Interferometry
WGS	-	World Geodetic System
WGS84	-	World Geodetic System 1984

LIST OF SYMBOLS

X_o	-	Position at the epoch of t_o
X_i	-	Velocity at the epoch of t_i
t_o	-	Reference epoch
t	-	Target epoch
dt	-	Difference of time
$\sum_i dX_i(t)$	-	The summation includes various “high-frequency” motions affecting site position
e_i^2	-	Residuals
Y_i	-	Vertical distances between the points of the observed data set
\hat{Y}_1	-	Fitted line
X_i	-	X-axis data set (time)
$\widehat{\beta}_1$	-	Slope coefficient
$\widehat{\beta}_o$	-	Intercept coefficient
σ^2	-	Variance
n	-	Number of observation
u	-	Number of parameters
A	-	Design matrix
L	-	Observation matrix
P	-	Weight matrix
T	-	Tension parameter
∇^2	-	Laplacian operator
∇^4	-	Biharmonic operator
dE	-	Displacement offset for East component

dN	-	Displacement offset for North component
a	-	First coefficient of polynomial
b	-	Second coefficient of polynomial
c	-	Third coefficient of polynomial
λ	-	Geographic longitude
ϕ	-	Geographic latitude
$\Delta\lambda$	-	Difference in the geographic longitude
$\Delta\phi$	-	Difference in the geographic latitude

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	Example of Ambiguity Resolution Summary File from QIF140240.SUM	221
B	Example of HELMR1 File from HLM140240.OUT	223
C	Example of MAUPRP File from MPR140240.SUM	225
D	Coordinate of MyRTKnet Stations in Cartesian System for the new datum GDM2000 [2009.3055] at epoch 22 April 2009	227

CHAPTER 1

INTRODUCTION

1.1 Research Background

A geodetic datum plays an important role as a reference for determining coordinates of points on the earth. From time to time, the geodetic datum has to be improved in accordance with the advances of space-based measurement technology and modernization in the field of Geodesy. One of the elements considered in modern geodesy is Geokinematics, of which the kinematics and variations of the Earth may directly affect the Earth's surface, thus, disturbing the precision of the geodetic datum (or the global datum, i.e. geocentric datum). Therefore, it is essential to understand the movement of the earth that directly affects the geocentric datum and the extent to which these effects may impact positioning accuracy.

Generally, the earth is a complex and dynamic system which is undergoing tectonic plate motion, rotational motion, core-mantle dynamics and changes of mass loads, which include the atmosphere, ocean and crust. One of the most direct economic and social effects is a large destructive phenomenon called earthquake. This phenomenon is usually the result of geological deformation from the slip between tectonic plates (Wang *et al.*, 2012). During an earthquake, also known as the co-seismic period, energy releases instantaneously to the crust and causing a great impact, in the form of displacement, to the land. For instance, the 26 December 2004 Sumatra–Andaman megathrust earthquake significantly affected land displacements up to 10 cm in magnitude with a radius of 400 km away from the earthquake's epicentre (Vigny *et al.*, 2005) during its co-seismic period. In fact, this land

displacement, or land deformation, may cause a motion even after the earthquake, in order to return to its equilibrium state, which can last up for a couple of years or decades. A specific term for this phase is the post-seismic motion, resulting in significant amount of land displacement, i.e. centimetres to decimetres per year (Hu and Wang, 2012), over a long period of time, as well as the post-seismic decay motion which is a short term motion after an earthquake. Co-seismic, post-seismic, and post-seismic decay, motions randomly occur and depend on the specific geological deformation pattern, hence, they are typically classified as non-secular motion. A steady-state motion associated with plate tectonic motion is classified as secular motion (Blick *et al.*, 2005). Tectonic plates have a normal internal forcing of heat transported out of the hot core and mantle to the Earth's surface (Hamblin and Christiansen, 2009). Consequently, these plates move gradually and varyingly, with velocities up to a few centimetres annually.

In Malaysia, since the occurrence of the mega earthquake of 2004, the country has been affected by significant land deformation. In fact, Malaysia has experienced heterogeneous land deformation both in spatial and temporal aspects. For example, the northern parts of Peninsular Malaysia, i.e. Arau and Langkawi, have experienced up to 17 cm in land deformation during the 2004 Sumatra–Andaman earthquake (Omar and Jhonny, 2009). In addition, few series of earthquakes such as 2005 Nias, 2007 Bengkulu and 2012 Northern Sumatra also influenced the land deformation in the country. Furthermore, with a significant impact of post-seismic decay motion that occurred from these earthquake events, it will worsen the land deformation and distort the national geocentric datum.

In many countries, a geocentric datum is typically being implemented by adopting a global datum: the International Terrestrial Reference Frame (ITRF). Among the drives for a geocentric datum are the increasing use of satellite-based positioning systems such as Global Positioning System (GPS) and the need of global or unified coordinate system. However, the geocentric datum is only fully compatible with the ITRF at a certain epoch, whereby most of the national geocentric datums remain as a static datum where all site coordinates are fixed or assumed unchanged with time.

Thus, the accuracy of a geocentric datum decreases over the time, if land deformations are not taken into account. It is because tectonic plate motions will dislocate the GPS reference stations over time, thus affecting the geocentric datum causing it to be no longer geocentric (non-geocentric) and does not represent the “true” position of the geodetic stations. The consequence does not only affect the activities of survey and mapping, but will also have a big impact on resource-grade activities, involving socio-economic and environmental activities in general.

In Malaysia, the Geocentric Datum of Malaysia 2000 (GDM2000) was developed by the Department of Survey and Mapping Malaysia (DSMM) to provide a global and homogeneous coordinate system across the country. The realization of the GDM2000 was based on the ITRF2000 at epoch 1st January 2000 (DSMM, 2009). Since Malaysia has experienced land deformation due to plate tectonic motion and a series of earthquakes, thus, there are a number of questions raised: (1) is the current GDM2000 sufficiently reliable to be utilised for present positioning practice when associated with inexorable motion due to tectonic plates and earthquakes? (2) how does the GDM2000 account for heterogeneous land deformations in terms of spatio-temporal? and (3) how to obtain accurate coordinates as function of time? Therefore, there is a need for a comprehensive strategy to enhance and maintain high geospatial accuracy of the geocentric datum in terms of consistency to the ITRF and reliability of the positioning results with respect to time.

Possible options for datum enhancement are by implementing semi-dynamic or dynamic geocentric datum. Both options enable the coordinates to be updated from one epoch to another. The difference between these datum are the reference epoch, whereby the semi-dynamic geocentric datum only updates coordinates at a defined reference epoch and deals with coordinate propagation to/from that reference epoch. Semi-dynamic geocentric datum requires study on the selection of a reference epoch which is within a stable seismic period and requires to determine the appropriate update rate according to the seismic activities and datum accuracy over time. Meanwhile, the dynamic datum is always updating the coordinates based on current epoch and constantly associated to the ITRF. The reference epoch for dynamic datum keeps on changing periodically such as weekly, monthly, or yearly;

thus introducing an array of epochs (Grant and Blick, 1998). Hence, the semi-dynamic geocentric datum is a more practical and reasonable approach to be implemented rather than a dynamic datum so as to avoid confusion at the end-user level, e.g., surveyors, due to continuously changing reference coordinates.

The semi-dynamic geocentric datum includes a land deformation model that enables coordinates to be 'corrected' by absorbing the deformation event into the solution. Therefore, the coordinates in a semi-dynamic geocentric datum represents the actual position with respect to the deformation event and time. There are only a few countries that have initiated the implementation of a semi-dynamic geocentric datum, for example, New Zealand (*Blick et al.*, 2005) and Papua New Guinea (Stanaway, 2004). It is believed that the number of countries that develop the semi-dynamic geocentric datum is increasing over time, especially when there are significant land deformations in or nearby the country such as Indonesia (*Susilo et al.*, 2015) and Taiwan (Ching and Chen, 2015). Nevertheless, Malaysia is presently still adopting a conventional static datum even though it is affected by severe co-seismic and post-seismic motions. Hence, for Malaysia to achieve accurate and reliable positions with respect to time, a semi-dynamic geocentric datum approach is recommended.

The implementation of a semi-dynamic geocentric datum has several issues that need to be properly considered to ensure its feasibility, such as: (1) duration or frequency for updating the geocentric datum, (2) the desired positional accuracy, (3) the deformation model development related to spatial-temporal variation, (4) the appropriate transformation parameters to relate former and later geodetic datums, and (5) cost-benefit of the implementation. There are also several possible challenges that will be raised such as resistant to changes into the new approach and managing the dynamic database.

1.2 Problem Statements

The phenomena of secular and non-secular motions will distort the geodetic infrastructures, i.e. Continuously Operating Reference Stations (CORS), up to few centimetres or decimetres, depending on the magnitude of the plate tectonics. Thus, it affects the geocentric datum causing it to no longer be reliable to represent the current (epoch) position of points. In the case of Malaysia, GDM2000 is still implemented as a static datum with more than 10 years of duration without updating the reference datum. Consequently, over time, the national geocentric datum does not represent the real meaning of geocentric anymore and the relation of the national geocentric datum with satellite-based geodetic technology such as GPS would not be truly compatible. Furthermore, if the national geocentric datum is not accurate, it will have profound effects associated with misinterpretation and wrong decision making on land, property and security-related matters. For instance, there is a risk in cadastre that involves disputes in land parcels, whereby if the measurements are not legally traceable to its source, it could be challenged in court. The source for GDM2000 is ITRF2000, of which currently is in version ITRF2014. Therefore, regular datum updates must be carried out on the geodetic infrastructure by considering the land deformation due to plate tectonics.

Even though Malaysia is not situated at the subduction zone, it is still subjected to significant land deformation during the co-seismic and post-seismic as it is nearby the Ring of Fire subduction zone. According to Vigny *et al.* (2005) and Omar and Jhonny (2009), the largest displacement recorded in Peninsular Malaysia during Sumatra-Andaman earthquake was the North-West part (MyRTKnet stations: Langkawi with 17 cm, Arau with 13.7 cm, Sungai Petani with 12.8 cm and Universiti Sains Malaysia, Penang with 12.5 cm). Meanwhile the smallest displacement was at the South-East part (MyRTKnet stations: Tanjung Pengelih with 2 cm, Johor Jaya with 1.9 cm, Pekan with 2.6 cm and Mersing with 3.5 cm). These trends indicate that there are absolutely heterogeneous land deformation in Peninsular Malaysia. Although geodynamics studies in Malaysia have shown the results of its tectonic setting, e.g. Omar and Jhonny (2009), but there is no further research to comprehensively model the land deformation especially in resolving the issue of an

outdated geocentric datum. Besides, the study by Jhonny (2010) only used data from December 2004 to December 2008 and did not cover the land deformation in East Malaysia, i.e. Sabah and Sarawak. Hence, the development of deformation model that covers the entire Malaysia is needed by providing specific approach for developing the secular and non-secular sub-models. It is also very important for the effects of post-seismic decay not to be neglected, especially after a strong earthquake, whereby significant effects of land movements, e.g. up to a few centimetres, are able to occur with unique decay patterns which are not linear and can last for several years. Therefore, the inclusion of post-seismic decay motion as part of the non-secular sub-model will significantly contribute to the development of a deformation model, since existing deformation models do not include the post-seismic decay element.

One of the major concerns for implementing a semi-dynamic geocentric datum is the relation between the updated datum and previous datum. In the Malaysian case, it is essential to relate between the new semi-dynamic geocentric datum and the presently used GDM2000 in order to bring all previous database to the new database or vice versa. In terms of time variations, the 14-parameters transformation is typically being used to take into account the rigid plate tectonic motion by the addition of the rates of change of the 7-parameters (Soler and Marshall, 2003). However, further consideration is needed to adopt the 14-parameters in Malaysia since land deformation is heterogeneous across the country which may be inaccurate for high accuracy positioning applications. Hence, this study will find a more specific datum transformation approach that provides high accuracy transformations in Malaysia, such as a 7-parameter datum transformation with a deformation model for coordinate propagation.

Based the above mentioned problem statements and literature reviews in Chapter 2, three main research gaps have been identified. First, Malaysia still implements a static datum which leads to a non-geocentric datum. Preliminary studies in section 2.4.2 have shown that the accuracy of the national datum is out to the extent of decimeter-level from the current position. Second, a land deformation model is not available in Malaysia and there is an opportunity for an improvement to

the non-secular model by adding the post-seismic element. Lastly, a semi-dynamic geocentric datum that is suited for Malaysia is needed to cater for high accuracy positioning applications. This includes taking into account the relationship between the new and existing datum through a proper datum transformation approach.

1.3 Research Questions

Based on the problem statements and research gaps, several research questions are outlined as follows:

- (1) What is the current deformation trend in Malaysia in terms of spatial and temporal aspects, and how has this affected the accuracy of GDM2000?
- (2) How to develop a deformation model that comprises a secular and non-secular motion and what techniques are available?
- (3) Which epoch is suitable to be a reference epoch for the secular and non-secular models?
- (4) What is the appropriate datum transformation model to adopt between GDM2000 and the reference epoch of the deformation model?
- (5) How accurate is the semi-dynamic geocentric datum for Malaysia?

1.4 Research Objectives

This research aims to provide the components needed to enhance the accuracy and reliability of the geodetic datum of Malaysia. The objectives are specified as follows:

- (1) *To investigate the spatio-temporal domain of land deformation in Malaysia.*

This objective was accomplished by carrying out time-series analysis of position variations, using the Malaysia Real Time Kinematic GNSS Network (MyRTKnet) stations all over Malaysia which involves long-term GPS data to represent the spatio-temporal domain of land deformation in Malaysia.

- (2) *To develop a land deformation model based on secular and non-secular land deformation of Malaysia.*

This objective focuses on modelling the deformation model that comprises of several sub-models which are secular (steady-state tectonic motion) and non-secular (co-seismic and post-seismic motion) and generate a gradient map (velocity or land displacement) for each sub-model.

- (3) *To design an appropriate mechanism for the implementation of a semi-dynamic geocentric datum in Malaysia, and to validate its accuracy over time.*

This objective adopts several elements. First, a timeline to signify how semi-dynamic geocentric datum will be applied over time. Second is the transformation between the semi-dynamic geocentric datum and the existing GDM2000. Third, an execution program will be developed to validate the semi-dynamic geocentric datum.

1.5 Research Scope

The scope of this research is as follows:

- (1) This study covers the development of semi-dynamic geocentric datum in Malaysia. Thus, the area of study involving land deformation and generating land deformation model encompasses entire Malaysia.
- (2) GPS data used in this study consist of MyRTKnet and Malaysian Active GPS System (MASS) as well as International GNSS Service (IGS) stations, which is obtained from the Department Survey and Mapping Malaysia and IGS Central Bureau Information System, respectively. The IGS stations were selected among Igb08 reference frame sites which had been selected by the IGS Reference Frame Working Group for the IGS realization of the ITRF2008. The GPS data used in this study include the available GPS data from December 2004 until December 2014. In terms of GPS data processing, double difference with Quasi Ionosphere Free (QIF) strategy will be used in

this study by using scientific GPS high-precision processing software: Bernese version 5.0.

- (3) All the daily coordinate solutions were mapped into ITRF2008. Thus, the development of deformation model and the new geocentric datum were based on the ITRF2008.
- (4) This study focuses on the horizontal datum and 2D deformation model. However, map projection and accurate vertical datum transformations are beyond the scope of this research as both of the elements have no major problems with regards to the land deformation in Malaysia (the changes of vertical deformation are below 1 cm which is a very small value).

1.6 Significance of Research

This study has several significances:

- (1) The semi-dynamic geocentric datum will revolutionize the conventional national geocentric datum in order to dynamically enhance the coordinates by considering the land movement due to plate tectonics and earthquakes over time. Therefore, it provides the ‘true’ coordinates for a specific epoch.
- (2) The semi-dynamic geocentric datum that aligns with the ITRF that leads to compliance with international geodetic standard, seamless integration and homogeneous coordinate reference frame; thus, legally traceable coordinates.
- (3) A new land deformation model for Malaysia that is generated by combining secular and non-secular motions, in particular, with the inclusion of post-seismic decay element in the model, will raise awareness and improve the existing deformation models. In addition, this land deformation model will significantly deepen the understanding of the tectonic motion and seismic activities that vary in the spatio-temporal domain in Malaysia.
- (4) The design of semi-dynamic geocentric datum will increase the possibility to support wide range of applications. It is expected to benefit geodynamics, environmental hazards mitigation and earth science applications, which crucially require having reliable position information at their desired epoch.

1.7 General Research Framework

This section provides the general research methodology that links to several key elements of the research such as problem statements, research questions, and research objectives. Figure 1.1 illustrates the general research framework. The research framework is essential in order to give an overview of how to construct this study. Beginning with literature reviews, several aspects in the study have been reviewed. These include reviews on the dynamic Earth and how it affects the geodetic datum, geodynamics in Malaysia, current status of GDM2000, semi-dynamic geocentric datum and land deformation model. From the literature reviews, it would help to identify the problem statements and research gaps.

Subsequently, 5 research questions and 3 objectives have been derived based on the problem statements and research gaps. These research questions (RQ) have specific relation to the objectives, for example RQ 1 will be answered in the first objective. Then, the research methodology of this study was constructed into three main phases according to three objectives. On the other hand, specific methods and techniques were selected by referring back to the information obtained from the literature reviews. Several assessments on the deformation model have been carried out and the results were presented accordingly. Lastly, conclusion and recommendations were outlined at the end of this thesis. Note that the detailed research framework is illustrated in Figure 3.1, in Chapter 3.

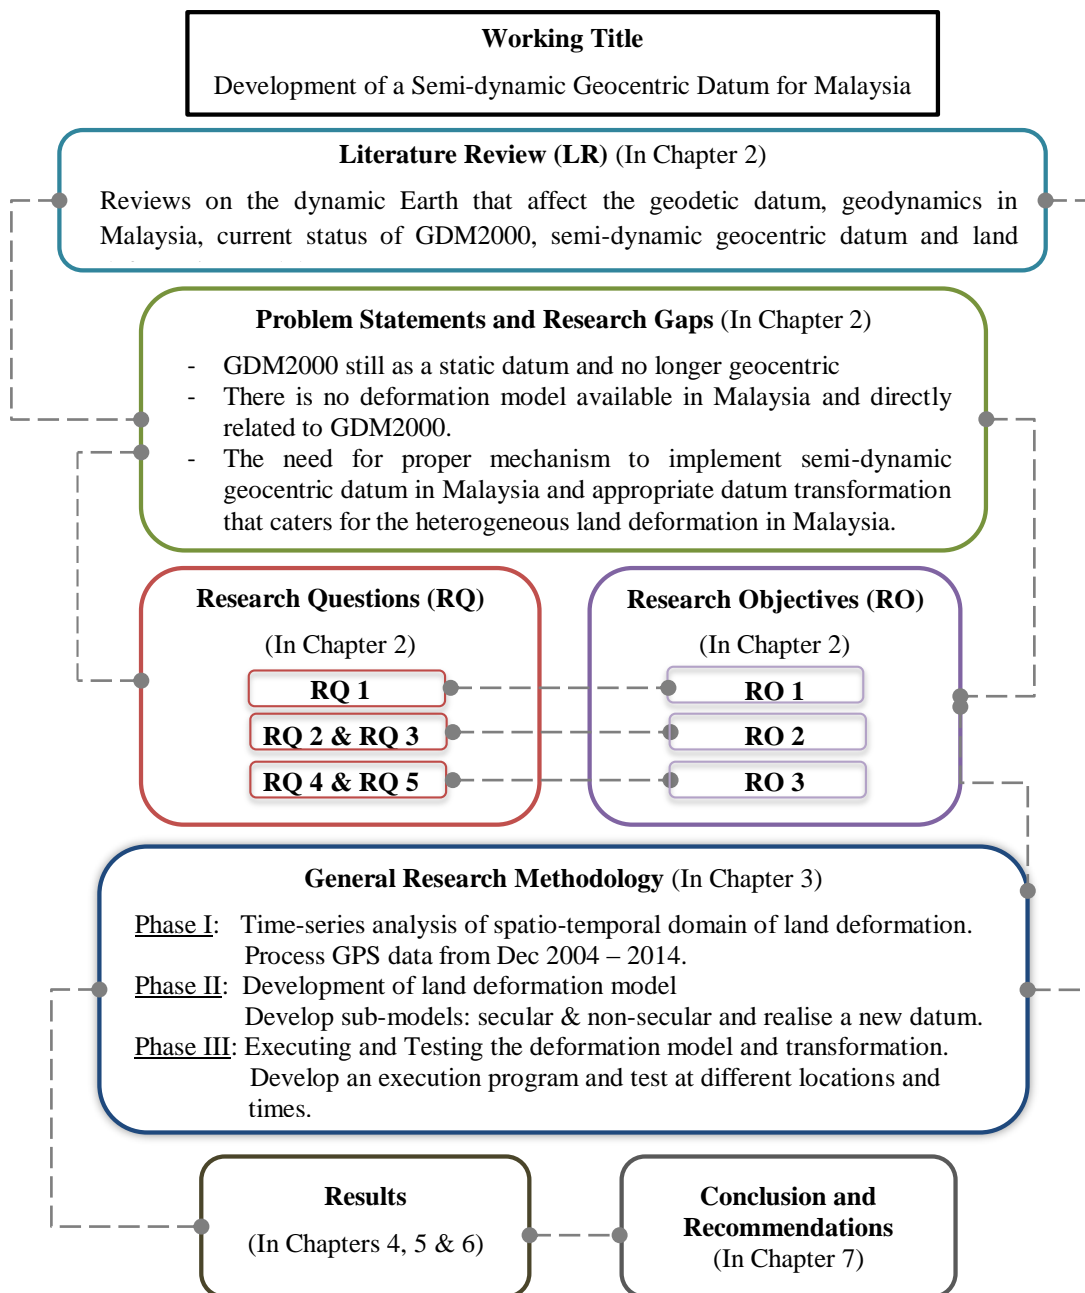


Figure 1.1 : The general research framework

1.8 Thesis Outline

The contents of this thesis is structured into 7 chapters. Chapter 1 describes the background of the research that consists of the overview of the dynamic Earth and geocentric datum, problem statements, research gaps, research questions, research objectives, research scope, significance of research, and research framework.

Chapter 2 reviews several significant aspects that are related to this study. The overview of the dynamic Earth in the perspective of Geodesy focuses on identifying the secular and non-secular motion factors that affect the geodetic datum. Besides, previous geodynamic studies in Malaysia were also reviewed. Then, the fundamental geodetic reference systems, frames and datum theory were described as the working title is mainly related to these topics. Next, the current deformation trend in Malaysia is described based on previous studies and the accuracy of GDM2000 with relation to the tectonic motion is evaluated in a preliminary study. Lastly, a review on the semi-dynamic geocentric datum was conducted to take into account possible techniques to develop a deformation model as well as several considerations and issues regarding the semi-dynamic geocentric datum. This significantly helps to answer research question 2.

Chapter 3 provides the research methodology of this study in order to achieve the research objectives. Three main phases are structured with their respective procedures. Initially, research materials and tools that consist of information about the GPS data and software used are outlined. Then, the details on the procedures begins with data acquisition, followed by data processing, plotting time-series of MyRTKnet stations and velocities estimation, datum realization, development of deformation model and lastly the execution and testing of the deformation model and datum transformation approach.

Chapter 4 presents the results and analysis of land deformation in Malaysia that are significant to achieve the first objective of this study. Initially, the results of GPS data processing was revealed in order to check the quality of the long-term data processing. Then, a number of selected time series plots of MyRTKnet and MASS stations position were presented and the epoch and period of seismic activities are identified. The time series was then plotted again according to the identified period of seismic activity. This is to estimate the horizontal velocity and land displacement that is beneficial for developing the deformation model in the next chapter.

Chapter 5 discusses one of the contributions of this study, i.e., development of the deformation model based on secular and non-secular land deformation in Malaysia. This model was developed using three different deformation modules which are linear least square regression method, displacement offset and second degree of polynomial. This chapter also presents the results and discusses on each sub-models that has been developed with regard to the secular and non-secular motions in Malaysia. In addition, results for the new datum realization of GDM2000 [2009.3055] and the datum transformation, i.e. geographic offset, to the existing GDM2000 were indicated.

Chapter 6 contains the framework for implementing a semi-dynamic geocentric datum in Malaysia. Firstly, a timeline for implementing the semi-dynamic geocentric datum in Malaysia was illustrated in order to give an understanding of applying the deformation model as well as geographic offsets involved in the semi-dynamic geocentric datum. Secondly, the development of execution program for velocity estimation and coordinate propagation was described. Then, the results from the assessment of the deformation model were revealed and validated. Lastly, the implication of implementing a semi-dynamic geocentric datum in Malaysia was discussed.

Chapter 7 summarises several factors that drive this study and concludes the major findings from Chapters 4, 5 and 6. Several recommendations are also outlined for future research.

REFERENCES

- Altamimi, Z., Angermann, D., Argus, D., Blewitt, G., Boucher, C., Chao, B., Drewes, H., Eanes, R., Feissel, M., Ferland, R., Herring, T., Holt, B., Johannson, J., Larson, K., Ma, C., Manning, J., Meertens, C., Nothnagel, A., Pavlis, E., Petit, G., Ray, J., Ries, J., Scherneck, H.-G., Sillard, P., Watkins, M. (2001). The Terrestrial Reference Frame and the Dynamic Earth. *Eos, Transactions American Geophysical Union*. 82 (25), .273–279.
- Altamimi, Z., Sillard, P. and Boucher, C. (2002). ITRF2000: A New Release of the International Terrestrial Reference Frame for Earth Science Applications. *Journal of Geophysical Research*. 107 (B10). p. ETG 2-1–ETG 2-19.
- Altamimi, Z. (2003). ITRF and Co-location Sites. IERS Technical Note No. 33. *Proceedings of the IERS Workshop on Site Co-location*. 23 - 24 October. Matera, Italy.
- Altamimi, Z., Collilieux, X., Métivie, L. (2011). ITRF2008: An Improved Solution of the International Terrestrial Reference Frame. *Journal of Geodesy*. 85 (8), 457-473. Springer.
- Altamimi, Z., Métivie, L. and Collilieux, X. (2012). ITRF2008 Plate Motion Model. *Journal of Geophysical Research*. 117, B07402.
- Angermann, D., Manuela, S. and Drewes, H. (2013). Global Terrestrial Reference Systems and Their Realizations. In: Xu, G. (Ed.). *Sciences of Geodesy – II Innovations and Future Developments*. Springer Berlin Heidelberg.
- Argus, D. F., R. G. Gordon, and C. DeMets (2011), Geologically Current Motion of 56 Plates Relative to the No-Net-Rotation Reference Frame. *Geochem. Geophys. Geosyst.* 12, Q11001.
- Banerjee, P., Pollitz, F., Nagarajan, B., and Bürgmann, R. (2007). Coseismic Slip Distributions of the 26 December 2004 Sumatra-Andaman and 28 March 2005 Nias Earthquakes from GPS Static Offsets. *Bulletin of the Seismological Society of America*. 97 (1A), 86-102.

- Beauducel, F. (1997). *Okada85.m Matlab Code*. Okada: Surface Deformation due to a Finite Rectangular Source. Mathworks Matlab Central File Exchange. Retrieved from: <http://www.mathworks.com/matlabcentral/fileexchange/25982-okada-surface-deformation-due-to-a-finite-rectangular-source/content/okada85.m>.
- Beavan, J. (2008). Consultancy services for PositionZonLine, Phase 2 (PONL-02). *GNS Science Consultancy Report 2008/136*: 79. GNS Science, Lower Hutt, New Zealand.
- Beavan, J. and G. Blick. (2005). Limitations in the NZGD2000 deformation model. Dynamic Planet 2005. *Proceedings of the International Association of Geodesy Conference*. Cairns, Australia.
- Blewitt, G., and Lavallée, D. (2002). Effect of Annual Signals on Geodetic Velocity. *Journal of Geophysical Research: Solid Earth*. 107(B7), ETG-9.
- Blick, G., Donnelly, N., and Jordan, A. (2009). The Practical Implications and Limitations of the Introduction of a Semi-Dynamic Datum – a New Zealand Case Study. In Drewes, H. *Geodetic Reference Frames*. (pp. 115-120). Springer Berlin Heidelberg.
- Blick, G., and Grant, D. (2010). The Implementation of a Semi-dynamic Datum in New Zealand – Ten Years On. *Proceedings of the FIG Congress 2010*. 11-16 April. Sydney, Australia.
- Blick, G., Crook, C., Grant, D., and Beavan, J. (2005). Implementation of a Semi-Dynamic Datum for New Zealand. In Sanso, F. (Ed) *A Window on the Future of Geodesy 128* (pp. 38-43). Sapporo, Japan: Springer Berlin Heidelberg.
- Boehm, J., Heinkelmann, R., Schuh, H. (2007). Short Note: A Global Model of Pressure and Temperature for Geodetic Applications. *Journal of Geodesy*. 81, 679–683. Springer.
- Boucher, C., Altamimi, Z., Sillard, P., Feissel-Vernier, M. (2004). *The ITRF2000. IERS Technical Note No. 31*. Verlag des Bundesamtes für Kartographie und Geodäsie, Frankfurt am Main.
- Bastos, L., Bos, M. and Fernandes, R. M. (2010). Deformation and Tectonics: Contribution of GPS Measurements to Plate Tectonics – Overview and Recent Developments. In Xu, G. (Ed) *Sciences of Geodesy -1* (pp.155-184). Berlin Heidelberg: Springer-Verlag.

- Brunini, L, Sanchez, H. Drewes, S. Costa, V. Mackern, W. Marti´nez, W. Seemuller, and A. da Silva. (2012). Improved Analysis Strategy and Accessibility of the SIRGAS Reference Frame. In Kenyon, S. et al. (Eds.) *Geodesy for Planet Earth, International Association of Geodesy Symposia 136* (pp. 3-10). Berlin Heidelberg: Springer-Verlag.
- Campbell, D. R. (2001). Keystone Herbivores and their Impact on Vegetation and Successional Dynamics within the Debris Avalanche Deposit at Mount St. Helens National Volcanic Monument. Master’s Thesis. University of Wisconsin-Stevens Point. United State.
- Ching, K. and Chen, K. (2015). Tectonic effect for establishing a semidynamic datum in Southwest Taiwan. *Earth, Planets and Space*. 67 (207).
- Chlieh, M., Avouac, J., Hjorleifsdottir, V., Song, T. A., Ji, C., Sieh, K., Sladen, A., Hebert, H., Prawirodirdjo, L., Bock, Y. and Galetzka, J. (2007). Coseismic Slip and Afterslip of the Great Mw9.15 Sumatra-Andaman Earthquake of 2004. *Bulletin of the Seismological Society of America*. 97 (1A), 152-173.
- Cohen, J., Cohen, P., Stephen, G., West, L. and Aiken, S. (2003). *Applied Multiple Regression/Correlation Analysis for the Behavioral Sciences*. Lawrence Erlbaum Association, Inc. Publisher. New Jersey. Third edition.
- Conrad, C. P., Steinberger. B. and Torsvik, T. H. (2013). Stability of Active Mantle Upwelling Revealed by Net Characteristics of Plate Tectonics. *Nature*. 479-482.
- Dach, R., Hugentobler, U., Fridez, P. and Meindl, M. (2007). *Bernese GPS Software Version 5.0*. Switzerland: Astronomical Institute, University of Bern.
- DeMets, C., Gordon, R.G., Argus, D.F. and Stein, S. (1994). Effect of recent revisions to the geomagnetic reversal timescale on estimates of current plate motions. *Geophysical Research Letter*. 21(20), 2191.
- Denys, P., Winefield, R., and Jordan, A. (2007). Incorporating localised deformation events in dynamic datums. *Proceedings of the FIG General Assembly and Working Week 2007*. 13-17 May. Hong Kong.
- Department of Survey and Mapping Malaysia (DSMM). (2009). *Technical Guide to the Coordinate Conversion, Datum Transformation and Map Projection*. (PKPUP3-2009 Circular). Kuala Lumpur: DSMM.
- Dressler, M. (2009). *Art of Surface Interpolation*. PhD’s Thesis. Technical University of Liberec. Czech Republic.

- Drewes, H. (2009). Reference Systems, Reference Frames, and the Geodetic Datum – Basic Considerations. In Sideris, M. G., (Ed.) *Observing our Changing Earth, International Association of Geodesy Symposia 133* (pp.1-9). Berlin Heidelberg: Springer-Verlag.
- Drewes, H., and Heidbach, O. (2005). Deformation of the South American Crust Estimated from Finite Element and Collocation Methods. In Sanso, F. (Ed) *A Window on the Future of Geodesy 128* (pp. 544-549). Sapporo, Japan: Springer Berlin Heidelberg.
- El-Rabbany, A. (2006). *Introduction to GPS the Global Positioning System*, Second Edition. Boston, London: Artech House, Inc.
- Even-Tzur, G. (2011). Updating the Semi-Dynamic Datum of Israel. *Surveying and Land Information Science*, 71 (2). 41-47.
- Fortes, L. P., Lauria, E., Brunini, C., Amaya, W., Sanchez, L., Drewes, H., and Seemüller, W. (2006). Current Status and Future Developments of the SIRGAS Project. *Wissenschaftliche Arbeiten der Fachrichtung Geodäsie und Geoinformatik der Universität Hannover*. 258. 59-70.
- Geographical Survey Institute. (2004). The New Geodetic Reference System of Japan – Its adoption and application to our products. *Bulletin of the Geographical Survey Institute*. 50 (March).
- Goudarzi, M. A., Cocard, M., Santerre, R. and Woldai, T. (2013). GPS Interactive Time Series Analysis Software. *GPS solutions*. 17(4), 595-603.
- Grant, D., and Crook, C. (2012). Spatial maintenance of the New Zealand Cadastre in Response to Earthquakes. *Proceedings of the FIG Working Week 2012*. 6-10 May. Rome, Italy.
- Grand, D. and Blick, G. (1998). A New Geocentric Datum for New Zealand. *New Zealand Surveyor*. 288.
- Grant, D. and Pearse, M. (1995). Proposal for a Dynamic National Geodetic Datum for New Zealand. *Proceedings of the IUGG XXI General Assembly*. 2-14 July. Colorado, USA.
- Gregory, K. J. (2010). *The Earth's Land Surface: Landforms and Processes in Geomorphology*. Sage Publications Ltd, London.
- Haasdyk, J., Donnelly, N., Harrison, C., Rizos, C., Roberts, C., and Stanaway, R. (2014). Options for Modernising the Geocentric Datum of Australia.

- Proceedings of the Research@Locate'14 Conference*. 7-9 April. Canberra, Australia.
- Hamada, Y., Sakaguchi, A., Tanikawa, W., Yamaguchi, A., Kameda, J. and Kimura, G. (2015). Estimation of Slip Rate and Fault Displacement during Shallow Earthquake Rupture in the Nankai Subduction Zone. *Earth, Planets and Space*. 67(39).
- Hambli, W. K. and Christiansen, E. H. (2009). *Earth's Dynamic Systems*. Web edition 1.0. Pearson Education, Inc., publishing as Pearson Prentice Hall. Retrieved from: http://earthds.info/pdfs/EDS_17.PDF.
- Hase, H. (2011). Geodesy, Networks and Reference Systems. *Encyclopedia of Earth Sciences Series 2011*. 323-331. Encyclopedia of Solid Earth Geophysics. Springer Science+Business Media B.V.
- Hashim, N. M., Omar, A. H., Omar, K. M., Abdullah, N. M. and Yatim, M. H. M. (2016). Cadastral Positioning Accuracy Improvement: A Case Study in Malaysia. *Proceedings of the Remote Sensing and Spatial Information Sciences XLII-4/W1. International Conference on Geomatic and Geospatial Technology (GGT)*. 3–5 October, Kuala Lumpur, Malaysia.
- Hiyama Y., Yamagiwa, A., Kawahara, T., Iwata, M., Fukuzaki, Y., Shouji, Y., Sato, Y., Yutsudo, T., Sasaki, T., Shigematsu, H., Yamao, H., Inukai, T., Ohtaki, M., Kokado, K., Kurihara, S., Kimura, I., Tsutsumi, T., Yahagi, T., Furuya, Y., Kageyama, T., Kawamoto, S., Yamaguchi, K., Tsuji, H., and Matsumura, S. (2011). Revision of Survey Results of Control Points after the 2011 off the Pacific Coast of Tohoku Earthquake. *Bulletin of the GSI*. 59.
- Hofmann-Wellenhof, B., Lichtenegger, H. and Wasle, E. (2008). *GNSS Global Navigation Satellite Systems GPS, GLONASS, Galileo and more*. Austria: Springer Wien NewYork.
- Hu, Y. and Wang, K. (2012). Spherical-Earth Finite Element Model of Short-term Postseismic Deformation Following the 2004 Sumatra Earthquake. *Journal of Geophysical Research*. 117, B05404.
- International Association of Geodesy (IAG) (2012). Geodesy for Sustainable Development. *Proceedings of the Nineteenth United Nations Regional Cartographic Conference for Asia and the Pacific*. 29 October – 1 November. Bangkok.

- International Committee on Global Navigation Satellite Systems (ICG). (2013). Retrieved from: http://www.oosa.unvienna.org/pdf/icg/2012/template/WGS_84.pdf.
- Jekeli, C. (2012). *Geometric Reference Systems in Geodesy* (2nd Ed.). Columbus: The Ohio State University.
- Jhonny. (2010). *Post-Seismic Earthquake Deformation Monitoring in Peninsular Malaysia using Global Positioning System*. Master's Thesis, Universiti Teknologi Malaysia, Skudai.
- Jordan, A., Denys, P., and Blick, G. (2007). Implementing Localised Deformation Models into a Semi-Dynamic Datum. In Tregoning, P. and Rizos, C. (Eds) *Dynamic Planet: Monitoring and Understanding a Dynamic Planet with Geodetic and Oceanographic Tools*. 130 (pp. 631-637) Cairns, Australia: Springer Berlin Heidelberg.
- Kadir, M., Ses, S., Omar, K., Desa, G., Omar, A.H., Taib, K and Nordin, S. (2003). Geocentric Datum GDM2000 for Malaysia: Implementation and Implications. *Seminar on GDM2000, Department of Survey & Mapping Malaysia*. 28 August, Kuala Lumpur, Malaysia.
- Kelly, K. M. (2012). Towards implementing dynamic datum data management in GIS. *Proceedings of FIG Working Week 2012*. 6-10 May. Rome, Italy.
- Kious, W. J., and Tilling, R. I. (2008). *This Dynamic Earth: The story of plate tectonics: Online Edition (1.15th Ed.)*. U.S Geological Survey. Retrieved from <http://pubs.usgs.gov/gip/dynamic/dynamic.html>.
- Li, B., and Teunissen, P. J. (2011). High dimensional integer ambiguity resolution: a first comparison between LAMBDA and Bernese. *Journal of Navigation*. 64(S1), S192-S210.
- Malys, S., Slater, J.A., Smith, R.W., Kunz, L.E. and Kenyon, S.C. (1997). Refinements to the World Geodetic System 1984, *Proceedings of the ION GPS-97*. 16-19 September, Kansas City, MO, 841-850.
- McCarthy, D., and G. Petit (2004). IERS Conventions 2003. *IERS Technical Note 32*. Verlag des Bundesamts für Kartographie und Geodäsie, Frankfurt am Main, Germany.
- Mccaffrey, R. (2002). Crustal Block Rotations and Plate Coupling, In Plate Boundary Zones. *American Geophysical Union*. 101-122.

- Merrigan, M. J., Swift, E. R., Wong, R. F. and Saffel, J. T. (2002). A Refinement to the World Geodetic System 1984 Reference Frame. *Proceedings of the Institute of Navigation, ION – GPS*. 24-27 September. Portland, Oregon, 1519-1529.
- Michel, G. W., Yua, Y. Q., Zhua, S. Y., Reigber, C., Becker, M., Reinhart, E., Simons, W., Ambrosius, B., Vigny, C., Chamot-Rooke, N., Pichond, X., Morgane, P. and Matheussene, S. (2001). Crustal Motion and Block Behaviour in SE-Asia from GPS Measurements. *Earth and Planetary Science Letters*. 187 (3-4), 239-244. Elsevier.
- Milne, G. A., Davis, J. L., Mitrovica, J. X., Scherneck, H.-G., Johansson, J. M., Vermeer, M., & Koivula, H., 2001. Space-geodetic Constraints on Glacial Isostatic Adjustment in Fennoscandia. *Science*. 291 (5512), 2381-2385. American Association for the Advancement of Science.
- Nishimura, T. (2014). Short-Term Slow Slip Events along the Ryukyu Trench, Southwestern Japan, observed by Continuous GNSS. *Progress in Earth and Planetary Science*. 1 (12).
- Okada, Y. (1985). Surface deformation due to shear and tensile faults in a half-space, *Bulletin Seism. Soc. Am.* 75. 1135–1154.
- Okada, Y. (1992). Internal Deformation Due To Shear and Tensile Faults in a Half-Space. *Bulletin of the Seismological Society of America*. 82, 1018–1040.
- Omar, K. and Nordin, S. (2000). *Geodetic Practices in Malaysia*. Skudai, Malaysia: UTM Publisher.
- Omar, K. and Jhonny (2009). Crustal Deformation Study in Peninsula Malaysia using Global Positioning System. *Proceedings of Postgraduate Seminar Faculty of Geoinformation Science & Engineering*. 14-15 July. Institut Ibnu Sina UTM, Skudai.
- Pearson, C., McCaffrey, R., Elliott, J. L., and Snay, R. (2010). HTDP 3.0: Software for Coping with the Coordinate Changes Associated with Crustal Motion. *Journal of Surveying Engineering*. 136 (2), 80-90.
- Pearson, C., and Snay, R. (2013). Introducing HTDP 3.1 to transform coordinates across time and spatial reference frames. *GPS Solutions*. 17 (1), 1-15.
- Peltier, W. R. (2004). Global Glacial Isostasy and the Surface of the Ice-Age Earth: The ICE-5G (VM2) Model and GRACE. *Annu. Rev. Earth Planet Sci.* 32, 1 1 1-149. Annual Reviews.

- Petit, G. and Luzum, B. (2010). IERS Conventions (2010). *IERS Technical Note 36*. Verlagdes Bundesamts für Kartographie und Geodäsie, Frankfurt am Main, Germany.
- Pinto, J. T. (2009). Questioning the Need of Regional Reference Frames. In Drewes, H. (Ed) *Proceedings of the Geodetic Reference Frame, International Association of Geodesy Symposia vol 134*. (pp. 225–230). Berlin: Springer.
- Plag, H-P. (2006). *National Geodetic Infrastructure Current Status and Future Requirements: The Example of Norway*. Nevada Bureau of Mines and Geology Bulletin 112, University of Nevada.
- Plag, H.-P., Altamimi, Z., Bettadpur, S., Beutler, G., Beyerle, G., Cazenave, A., Crossley, D., Donnellan, A., Forsberg, R., Gross, R., Hinderer, J., Komjathy, A., Ma, C., Mannucci, A.J., Noll, C., Nothnagel, A., Pavlis, E.C., Pearlman, M., Poli, P., Schreiber, U., Senior, K., Woodworth, P.L., Zerbini, S., Zuffada, C. (2009). The Goals, Achievements, and Tools of Modern Geodesy. In Plag, H.-P. and Pearlman, M. (Eds) *Global Geodetic Observing System* (pp. 15-88). Berlin: Springer-Verlag.
- Ray, J., Dong, D. and Altamimi, Z. (2004). IGS Reference Frames: Status and Future Improvements. *Proceedings of the Workshop and Symposium “Celebrating a Decade of the International GPS Service”*. Astronomical Institute, University of Bern, Switzerland.
- Rebischung, P., Griffiths, J., Ray, J., Schmid, R., Collilieux, X., and Garayt, B. (2012). IGS08: the IGS realization of ITRF2008. *GPS solutions*. 16(4), 483-494.
- Riley, W. J. (2008). Algorithms for Frequency Jump Detection. *Metrologia*. 45, S154–S161. IOP Publishing.
- Rodionov, S., N. (2004). A Sequential Algorithm for Testing Climate Regime Shifts. *Geophys. Res. Lett.* 31, L09204.
- Rummel, R. (2010). The Interdisciplinary Role of Space Geodesy-Revisited. *Journal of Geodynamics*. 49, 112–115. Elsevier.
- Rummel, R., Beutler, G., Dehant, V., Gross, R., Ilk, K. H., Plag, H.-P., Poli, P., Rothacher, M., Stein, S., Thomas, R., Woodworth, P. L., Zerbini, S. and Zlotnicki, V. (2009). Understanding a Dynamic Planet: Earth Science Requirements for Geodesy. In Plag, H.-P. and Pearlman, M. (Eds) *Global Geodetic Observing System* (pp. 15-88). Berlin: Springer-Verlag.

- Sánchez, L. (2011). IGS Regional Network Associate Analysis Center for SIRGAS (IGS RNAAC SIR). *IGS Technical Report*. 107-115.
- Satirapod, C., Wichanchaen, C., Trisirisatayawonga, I., Vigny, C. and Simons, W. (2005). Surface Displacement due to Banda-Aceh Earthquake and its Effect on Geo-Informatic Work in Thailand. *Proceedings of IEEE IGARSS 2005*. Seoul, Korea, 2907-2909.
- Seeber, G. (2003). *Satellite Geodesy*. 2nd Edition. Walter de Gruyter GmbH & Co. Berlin New York.
- Seitz, M., Angermann, D., Gerstl, M., Bloßfeld, M., Sánchez, L. and Seitz, F. (2015). Geometrical Reference Systems. In Freedon, W., Nashed, M. Z. and Sonar, T. (Eds.) *Handbook of Geomathematics* (Second Edition), Springer.
- Schmid R, Steigenberger P, Gendt G, GeM, Rothacher M. (2007). Generation of a Consistent Absolute Phase-Center Correction Model for GPS Receiver and Satellite Antennas. *Journal of Geodesy*. 81, 781–798.
- Simons, W., Socquet, A., Vigny, C., Ambrosius, C., Abu, S., Promthong, C., Subarya, C., Sarsito, D. A, Matheussen, S., Morgan, P. and Spakman, W. (2007). A Decade of GPS in Southeast Asia: Resolving Sundaland Motion and Boundaries. *Journal of Geophysical Research*. 112 (B06420). AGU Publications.
- Smith, P. and Wessel, W. H. (1990). Gridding with Continuous Curvature Splines in Tension. *Geophysics*. 55 (3), 293-305.
- Socquet, A., Vigny, C., Chamot-Rooke, N., Simons, W., Rangin, C. and Ambrosius, B. (2006). India and Sunda Plates Motion and Deformation along their Boundary in Myanmar Determined by GPS. *Journal of Geophysical Research*. 111 (B05406). AGU Publications.
- Soffel, M. and Langhans, R. (2012). *Space-Time Reference Systems*. Springer Heidelberg New York Dordrecht London.
- Stanaway, R. F. (2004). *Implementation of a Dynamic Geodetic Datum in Papua New Guinea: A Case Study*. MPhil Thesis. The Australian National University, Australia.
- Stanaway, R., Roberts, C., Blick, G. and Crook, C. (2012). Four Dimensional Deformation Modelling, the link between International, Regional and Local Reference Frames. *Proceedings of the FIG Working Week 2012*. 6-10 May. Rome, Italy.

- Stanaway, R., Roberts, C., and Blick, G. (2014). Realisation of a Geodetic Datum Using a Gridded Absolute Deformation Model (ADM). In Rizos, C. and Willis, P. *Earth on the Edge: Science for a Sustainable Planet*. Melbourne, 139 (pp. 259-265). Australia: Springer Berlin Heidelberg.
- Steinberg, G., and Even-Tzur, G. 2005. Establishment of National Grid Based on Permanent GPS Stations in Israel. *Surveying and Land Information Science*. 65 (1), 47-52.
- Susilo, S., Abidin, H., Z., Meilano, I. and Sapiie, B. (2015). On the Development and Implementations of the New Semi-Dynamic Datum for Indonesia. *Proceedings of the FIG Working Week 2015*. 17-21 May. Sofia, Bulgaria.
- Takasu, T. (2009). *GPS Precise Analysis Software GpsTools: Program Execution*. <http://gpspp.sakura.ne.jp/gpstools/help/gpstools1.htm>.
- Tanaka, Y., Saita, H., Sugawara, J., Iwata, K., Toyoda, T., Hirai, H., Kawaguchi, T., Matsuzaka, S., Hatanaka, Y., Tobita, M., Kuroishi, Y., and Imakiire, T. (2007). Efficient Maintenance of the Japanese Geodetic Datum 2000 using Crustal Deformation Models-Patch JGD & Semi-Dynamic Datum. *Buletin Geog Surv Inst*. 54.
- Tregoning, P., McQueen, H., Lambeck, K., Jackson, R., Little, R., Saunders, S. and Rosa, R. (2000). Present-day Crustal Motion in Papua New Guinea. *Earth, Planets and Space*. 52 (10), 727-730. Springer.
- Tregoning, P. and van Dam, T. (2005). Effects of Atmospheric Pressure Loading and Seven-Parameter Transformations on Estimates of Geocenter Motion and Station Heights from Space Geodetic Observations. *Journal of Geophysical Research*. 110 (B03408). AGU Publications.
- True, S. A. (2004). Planning the Future of the World Geodetic System 1984. *Proceedings of the IEEE PLANS 2004*. 26-29 April. Monterey, CA, 639-468.
- Tsang, L. L. H., Meltzner, A. J., Philibosian, B., Hill, E. M., Freymueller, J. T., Seih, K.. 2015. A 15 Year Slow-Slip Event on the Sunda Megathrust offshore Sumatra. *Geophysical Research Letters*. 42 (16).
- Van Dam, T., Blewitt, G. and Heflin, M. B. (1994). Atmospheric Pressure Loading Effects on Global Positioning System Coordinate Determinations. *Journal of Geophysical Research: Solid Earth*. 99 (B12), 23939–23950. AGU Publications.

- Van Dam, T., Altamimi, Z., Collilieux, X. and Ray, J. (2010). Topographically Induced Height Errors in Predicted Atmospheric Loading Effects. *Journal of Geophysical Research*. 115 (B07415). AGU Publications.
- Vigny, C., Simons, W. J. F., Abu, S. H., Ronnachai, B., Satirapod, C., Chhoosakul, M., Subarya, C., Omar, K., Abidin, H. Z., Socquet, A. and Ambrosius, B. A. C., (2005). Insight into the 2004 Sumatra–Andaman earthquake from GPS measurements in Southeast Asia. *Nature*. 436, 201–206.
- Weber, J. C., Dixon, T. H., DeMets, C., Ambeh, W. B., Mattioli, P. J. G., Saleh, J., Sella, G., Bilham, R. and Perez, O. (2001). GPS Estimate of Relative Motion between the Caribbean and South American Plates, and Geologic Implications for Trinidad and Venezuela. *Geology*. 29 (1), 75-78. Geological Society of America.
- Weisstein, E. W. (2015). *Least Squares Fitting*. Retrieved from <http://mathworld.wolfram.com/LeastSquaresFitting.html>.
- Wessel, P. and Smith, W. H. (2016). *The Generic Mapping Tools GMT version 4.5.15 Technical Reference and Cookbook*. School of Ocean and Earth Science and Technology University of Hawai'i at Manoa.
- Wang, K., Hu, Y. and He, J. (2012). Deformation Cycles of Subduction Earthquakes in a Viscoelastic Earth. *Nature*. 484, 327-332. Macmillan Publishers Limited.
- Wijaya, D. D., Böhm, J., Karbon, M., Krásná, H. and Schuh, H. Atmospheric Pressure Loading. In Böhm, J. and Schuh, H. (Eds.) *Atmospheric Effects in Space Geodesy* (pp. 137-157). Berlin Heidelberg: Springer Verlag.