

MATHEMATICAL MODELLING OF SIMULTANEOUS WATER AND
ENERGY MINIMISATION CONSIDERING WATER MANAGEMENT
HIERARCHY OPTIONS

LILY SYAFIKAH MANSOR

A dissertation submitted in partial fulfilment of the
requirements for the award of the degree of
Master of Engineering

Faculty of Chemical and Energy Engineering
Universiti Teknologi Malaysia

JULY 2018

I lovingly dedicate this dissertation to my lovely mother who gave me endless love, trust, constant encouragement and supported me in each step of the way wherever I needed. I also dedicate this work to my family and friends for their patience, support, love and prayers.

ACKNOWLEDGEMENT

All praises are to Allah Al-Mighty for his grace and blessing and bestowing me with health and opportunity to gain this treasure of knowledge. Apart from the efforts of the author, the success of any research project depends largely on the guidelines and encouragements of many others. I take this opportunity to officially express my gratitude to the people who have been instrumental in the successful completion of this thesis.

I would first like to express my sincere gratitude to my supervisor, Prof. Ir. Dr. Sharifah Rafidah bt. Wan Alwi for the useful comments, remarks and engagement through the learning process of this master. Her patience and guidance are much appreciated. I would like to thank my co-supervisor Dr. Lim Jeng Shiun for the insightful comments and encouragement in making this study a success.

I thank my lab mates in Process Systems Engineering Centre (PROSPECT), especially Ainur Munirah and Ezah Abd Aziz. Finally, I must express my very profound gratitude to my parents and my family for their understanding, supporting and continuous encouragement upon completing this study. This accomplishment would not have been possible without them.

ABSTRACT

Water and energy are closely interlinked together. The goal to reduce water and energy simultaneously has been a growing research. However, previous studies only consider maximising water reuse and, in some cases, also include water regeneration. This study aims to develop a mathematical model to design water and energy network that further reduces the water consumption, considering the whole water management hierarchy (WMH) schemes. This includes elimination, reduction, reuse, outsourcing and regeneration. Two steps solution is proposed, which involves solving two MINLP models. First, water and energy minimisation network considering WMH schemes and direct heat transfer is designed. The obtained network is then improved by inclusion of indirect heat integration to minimise the objective cost function. Two cases of thermal data extraction are studied for heat integration, Case A extracts individual streams based on supply and targeted temperature, whereas Case B extracts stream after mixer based on mixer temperature and targeted temperature. Streams which temperature load is satisfied in direct heat transfer were excluded for heat integration. The proposed method has been tested with literature case study. The implementation of all possible WMH scheme yields a lower freshwater consumption and wastewater generation. The model selected 35% and 15% of reduction for demand 3 and demand 1 respectively. Case A yields a lower total operating cost but slightly higher investment cost compared to Case B. Case B result in a simpler heat exchanger network, but degradation of the potential energy causes more heating and cooling. Case A is chosen as the optimal network and exhibits 13% reduction of the total cost compared to the literature case study.

ABSTRAK

Air dan tenaga saling berkait rapat. Penyelidikan dengan matlamat untuk mengurangkan penggunaan air dan tenaga pada masa yang sama semakin berkembang. Namun, kajian sebelum ini hanya mempertimbangkan pemaksimuman penggunaan semula air dan dalam beberapa kes, juga penjanaan semula air. Kajian ini bertujuan membina satu model matematik untuk mereka bentuk rangkaian air dan tenaga yang mengurangkan lagi penggunaan air, dengan mempertimbangkan keseluruhan skim hierarki pengurusan air (WMH). Ini termasuk penghapusan, pengurangan, penggunaan semula, penyumberan luar dan pertumbuhan semula. Kaedah dua langkah penyelesaian dicadangkan dalam kajian ini dengan menyelesaikan dua model MINLP. Pertama, rangkaian pengagihan air dan haba melalui skim WMH dan pemindahan haba secara langsung direka. Rangkaian yang diperolehi kemudiannya ditambah baik dengan melakukan integrasi haba secara tidak langsung untuk mengurangkan fungsi objektif kos. Dua kes pengekstrakan data haba telah diuji, Kes A mengekstrak aliran individu berdasarkan suhu asal dan suhu sasaran, manakala Kes B mengekstrak aliran campuran berdasarkan suhu campuran dan suhu sasaran. Aliran yang telah menepati suhu sasaran tidak dimasukkan untuk integrasi haba. Kaedah yang dicadangkan telah diuji dengan menggunakan kes daripada kajian kesusasteraan. Pelaksanaan skim WMH telah mengurangkan penggunaan air dan penjanaan sisa buangan Model ini telah memilih 35% dan 15% ke atas operasi 3 dan operasi 1. Kes A menghasilkan kos operasi yang lebih rendah tetapi kos pelaburan yang lebih tinggi sedikit berbanding Kes B. Kes B menghasilkan rangkaian pertukaran haba yang lebih mudah daripada Kes A, namun degradasi tenaga keupayaan menyebabkan lebih banyak pemanasan dan penyejukan diperlukan. Kes A dipilih sebagai rangkaian optimal dan menunjukkan 13% pengurangan jumlah kos berbanding jumlah kos daripada kajian kesusasteraan.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xiv
	LIST OF SYMBOLS	xvi
	LIST OF APPENDICES	xix
1	INTRODUCTION	1
	1.1 Global Water Issue	1
	1.2 Global Energy Issue	4
	1.3 Problem Background	7
	1.4 Problem Statement	8
	1.5 Objective	8
	1.6 Scopes of Work	9
	1.7 Overview	10
2	LITERATURE REVIEW	12
	2.1 A Review on Water Minimisation Network	12

2.1.1	Conceptual Approach	14
2.1.2	Mathematical Programming Approach	17
2.2	A Review on Energy Minimisation Network	21
2.2.1	Conceptual Approach	22
2.2.2	Mathematical Programming Approach	23
2.3	A Review on Water and Energy Minimisation Network	25
2.3.1	Conceptual Approach	26
2.3.2	Mathematical Approach	29
2.4	Water Management Hierarchy	33
2.5	Research Gap on Simultaneous Water and Energy Minimisation	35
3	RESEARCH METHODOLOGY	36
3.1	The Proposed Methodology	36
3.2	Model 1	38
3.2.1	Water Source and Demand Data Extraction	38
3.2.2	Superstructure and Mathematical Formulation of Model 1	38
3.2.3	Mass and Energy Balance Verification	39
3.3	Model 2	39
3.3.1	Hot and Cold Streams Extraction	39
3.3.2	Superstructure and Mathematical Formulation of Model 2	40
3.3.3	Energy Balance Verification	41
4	MATHEMATICAL MODEL	42
4.1	Case Study Background	42
4.2	Model 1	43
4.2.1	Input Data	43
4.2.2	Superstructure	47
4.2.3	Mathematical Formulation	49

4.2.4	GAMS Coding	58
4.2.5	Mass and Energy Balance Verification	59
4.3	Model 2	62
4.3.1	Input Data	62
4.3.2	Superstructure	64
4.3.3	Mathematical Formulation	65
4.3.4	GAMS Coding	71
4.3.5	Energy Balance Verification	74
5	RESULTS AND DISCUSSION	75
5.1	Model 1	75
5.2	Model 2	76
5.3	Result Analysis	78
6	CONCLUSION AND RECOMMENDATIONS	82
6.1	Conclusion	82
6.2	Recommendations	83
	REFERENCES	85
	Appendices A-F	98-124

LIST OF TABLES

TABLE NO.	TITLE	PAGE
3.1	Different scenario of Case A and Case B stream extraction	40
4.1	Water using operation data from Boix <i>et al.</i> (2012)	43
4.2	Extracted water demand data from Boix <i>et al.</i> (2012)	44
4.3	Extracted water source data from Boix <i>et al.</i> (2012)	44
4.4	Utilities cost from Boix <i>et al.</i> (2012)	44
4.5	Investment cost for WMH schemes	45
4.6	Various water minimization schemes	45
4.7	List of sets	50
4.8	List of parameters	51
4.9	List of variables	52
4.10	List of binary variables	53
4.11	Mass balance verification for Model 1	59
4.12	Mass load balance verification for Model 1	59
4.13	Energy balance verification for Model 1	60
4.14	Hot and cold stream data for Model 2 (Case A)	63
4.15	Hot and cold stream data for Model 2 (Case B)	63
4.16	Parameters from Boix <i>et al.</i> (2012) for Model 2	64
4.17	List of sets for HEN	66
4.18	Lists of parameters for HEN	66
4.19	List of variables for HEN	67
4.20	List of binary variables for HEN	68

4.21	Energy balance verification after heat integration (Model 2) for Case A	74
4.22	Energy balance verification after heat integration (Model 2) for Case B	74
5.1	Result from WMH implementation in simultaneous water and energy minimisation (Model 1)	76
5.2	Energy requirement after heat integration (Case A)	77
5.3	Energy requirement after heat integration (Case B)	77
5.4	Utilities and costs comparison between Case A and Case B	77
5.5	Freshwater consumption and wastewater generation comparison between the proposed method and Boix <i>et al.</i> (2012)	78
5.6	Utilities cost comparison before and after heat integration for Case A and Case B	79
5.7	Total annual cost saving between the proposed method and Boix <i>et al.</i> (2012)	81

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Global fresh water consumption (AQUASTAT, 2014))	2
1.2	Distribution of Earth's water (Gleick, 1996)	2
1.3	Global energy consumption by sector (EIA, 2012)	4
1.4	World energy supplies by fuel (EIA, 2014)	5
1.5	Energy consumption by region (EIA, 2016)	6
2.1	Water minimisation through (a) reuse, (b) regeneration reuse (c) regeneration recycling (Wang and Smith, 1994)	13
2.2	The water management hierarchy (Wan Alwi <i>et al.</i> , 2006)	34
3.1	Process flow of the proposed methodology	37
3.2	Case A and Case B stream extraction	40
4.1(a)	Selection of water minimisation schemes of water demand	48
4.1(b)	Superstructure of water and energy network with outsourcing and regeneration unit	48
4.2	Water network with WMH options and direct heat transfer (Model 1)	61
4.3	Superstructure of heat exchanger network for Model 2 (Yee <i>et al.</i> , 1990)	65
4.4	The overall water and energy network of Model 2 (Case A)	72

4.5	The overall water and energy network of Model 2 (Case B).	73
5.1	Comparison of investment, operating and total cost between the proposed method and Boix <i>et al.</i> (2012)	80

LIST OF ABBREVIATIONS

BARON	-	Branch-and-Reduce Optimisation Navigator
BOD	-	Biological oxygen demand
CC	-	Composite curve
CEMWN	-	Cost effective minimum water network
COD	-	Chemical oxygen demand
D	-	Demand
DCS	-	Distributed control system
FW	-	Fresh water
GAMS	-	General algebraic modeling system
HEAT	-	Heat Allocation and Targeting
HEN	-	Heat exchanger network
HRAT	-	Heat recovery temperature approach
LP	-	Linear programming
LPT	-	Load problem table
MILP	-	Mixed integer linear programming
MINLP	-	Mixed integer non-linear programming
MHA	-	Maximum heat allocation
MODWN	-	Model optimal design water network
MP	-	Mathematical programming
MPTA	-	Modified problem table algorithm
MSA	-	Mass separating agent
MTB	-	Mass transfer based
MWN	-	Minimum water network
MWR	-	Maximum water recovery
NAD	-	Network Allocation Design

NLP	-	Non-linear programming
NMTB	-	Non-mass transfer based
PTA	-	Problem table algorithm
S	-	Source
SBB	-	Simple Brach & Bound
SDCC	-	Source and demand composite curve
SHARP	-	Systematic Hierarchical Approach for Resilient Process Screening
SMEC	-	Superimposed mass and energy curves
STEP	-	Stream temperature versus enthalpy plot
SWE	-	Simultaneous water energy
TDS	-	Total dissolved solid
TSS	-	Total suspended solid
WA N	-	Water allocation network
WAHEN	-	Water allocation heat exchanger network
WCA	-	water cascade analysis
WMH	-	Water management hierarchy
WPA	-	Water pinch analysis
WUTN	-	water usage and treatment network
WW	-	Waste water

LIST OF SYMBOLS

FS_m	-	Maximum water flow for source m (kg/s)
Fd_n	-	Maximum water flow for demand n (kg/s)
Fh_i	-	Heat capacity flow rate of hot stream (kW/K)
Fc_j	-	Heat capacity flow rate of cold stream (kW/K)
$Fosmax_{os}$	-	Maximum flow rate of outsourcing unit (kg/s)
T_{fw}	-	Fresh water temperature ($^{\circ}\text{C}$)
T_{ww}	-	Waste water temperature ($^{\circ}\text{C}$)
$Ts_{m,t}$	-	Temperature for source m ($^{\circ}\text{C}$)
$Td_{n,t}$	-	Targeted temperature for demand n ($^{\circ}\text{C}$)
$Trg_{rg,t}$	-	Temperature of regeneration unit ($^{\circ}\text{C}$)
$Tos_{os,t}$	-	Temperature of outsourcing unit ($^{\circ}\text{C}$)
$thin_i$	-	Temperature inlet of hot stream ($^{\circ}\text{C}$)
$thout_i$	-	Temperature outlet of hot stream ($^{\circ}\text{C}$)
$tcin_j$	-	Temperature inlet of cold stream ($^{\circ}\text{C}$)
$tcout_j$	-	Temperature outlet of cold stream ($^{\circ}\text{C}$)
$thuin$	-	Temperature inlet of hot utility ($^{\circ}\text{C}$)
$thuout$	-	Temperature outlet of hot utility ($^{\circ}\text{C}$)
$tcuin$	-	Temperature inlet of cold utility ($^{\circ}\text{C}$)
$tcuout$	-	Temperature outlet of cold utility ($^{\circ}\text{C}$)
Cfw_c	-	Contaminant concentration of fresh water (ppm)
$Cd_{n,c}$	-	Maximum contaminant concentration of demand n (ppm)
$Cs_{m,c}$	-	Maximum contaminant concentration of source m (ppm)
$Cosmax_{os,c}$	-	Maximum contaminant concentration of outsource (ppm)
$Crgo_{rg,c}$	-	Maximum contaminant concentration of regeneration unit (ppm)

C_p	-	Heat capacity of stream (kJ/kg. K)
$\alpha_{n,re}$	-	Percentage of water reduction for demand n %
hh_i	-	Heat transfer coefficient of hot stream (kW/m ² °C)
hc_j	-	Heat transfer coefficient of cold stream (kW/m ² °C)
hhu	-	Heat transfer coefficient of hot utility (kW/m ² °C)
hcu	-	Heat transfer coefficient of cold utility (kW/m ² °C)
$Cost_{FW}$	-	Cost of fresh water \$/Tonne
$Cost_{HU}$	-	Cost of hot utility (\$/kW)
$Cost_{CU}$	-	Cost of cold utility (\$/kW)
C_{HE}	-	Investment cost of a heat exchanger (\$/yr)
C_A	-	Pre-exponent term for area cost (\$/yr)
B	-	Exponent for area cost
$F_{m,n}$	-	Water flowrate from source n to demand m (kg/s)
F_{fw_n}	-	Freshwater flowrate to demand n (kg/s)
F_{WW_m}	-	Wastewater flowrate discharged from source m (kg/s)
$F_{OS_{os,n}}$	-	Outsource flow rate supplied to demand n (kg/s)
$F_{irg_{m,rg}}$	-	Regeneration unit flow rate from source n (kg/s)
$F_{rgj_{rg,n}}$	-	Regeneration unit flow rate supplied to demand n (kg/s)
$F_{wwtotal}$	-	Total waste water (kg/s)
A_m	-	Adjusted flow rate of water source m (kg/s)
B_n	-	Adjusted flow rate of water demand n (kg/s)
$F_{da1_{n,el}}$	-	Flow rate of demand n for elimination option (kg/s)
$F_{da2_{n,re}}$	-	Flow rate of demand n for reduction option (kg/s)
$F_{da3_{n,og}}$	-	Original flow rate of demand n (kg/s)
$T_{mix_{n,t}}$	-	Temperature after mixer (°C)
$th_{i,k}$	-	Temperature hot stream i at inlet step k
$th_{j,k}$	-	Temperature cold stream j at inlet step k (°C)
$dt_{i,j,k}$	-	Temperature difference between hot stream i and cold stream j at step k (°C)
$dtcu_i$	-	Temperature difference between hot stream i and cold utility at step k (°C)
$dthu_j$	-	Temperature difference between hot utility and cold stream j at step k (°C)
Q_{W_n}	-	Amount of energy withdrawn from demand n (kW)

Q_{Sn}	-	Amount of energy supplied to demand n (kW)
Q_{ww}	-	Amount of energy withdrawn from waste water (kW)
Q_{sw}	-	Amount of energy supplied to waste water (kW)
$Q_{wrg_{rg}}$	-	Amount of energy withdrawn from regeneration unit (kW)
$Q_{srg_{rg}}$	-	Amount of energy supplied to regeneration unit (kW)
q_{ijk}	-	Exchanged energy between hot stream i and cold stream j at step k (kW)
q_{ci}	-	Exchanged energy between hot stream i and cold utility (kW)
q_{hj}	-	Exchanged energy between hot utility and cold stream j (kW)
A_{ijk}	-	Area of heat exchanger between stream i and j (m ²)
A_{hu_j}	-	Area of heat exchanger between hot utility and cold stream j (m ²)
A_{cu_i}	-	Area of heat exchanger between hot stream j and cold utility (m ²)
$IC_{rg_{rg}}$	-	Investment cost of regeneration unit (\$)
$IC_{os_{os}}$	-	Investment cost of outsourcing unit (\$)
$IC_{el_{n,el}}$	-	Investment cost of elimination unit (\$)
$IC_{re_{n,re}}$	-	Investment cost of reduction unit (\$)
H	-	Annual operating hours (hr/yr)
f	-	Annual operating time ratio for utilities
af	-	Annualised factor
σ_n	-	Equipment unit of demand n
B	-	Exponent for regeneration flow rate
λ	-	Exponent for outsourcing flow rate
ϵ_n	-	Number of equipment of demand n
$CostRg$	-	Capital cost for regeneration unit (\$)
$CostOs$	-	Capital cost for outsourcing unit (\$)
$Costreuse$	-	Capital cost for reuse (\$)
$Costre$	-	Capital cost for reduction (\$)
$CostEl$	-	Capital cost for elimination
TIC	-	Total investment cost (\$/yr)
TOC	-	Total operating cost (\$/yr)
TAC	-	Total annual cost (\$/yr)

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	GAMS input for model 1	98
B	GAMS report file for model 1	103
C	GAMS input for model 2 (Case A)	107
D	GAMS report file for model 2 (Case A)	112
E	GAMS input for model 2 (Case B)	115
F	GAMS report file for model 2 (Case B)	120

CHAPTER 1

INTRODUCTION

This chapter provides the current perspective of the global water and energy issues, followed by problem background and problem statement. Next, objective and scope of the study are discussed to develop the methodology and technique for designing the water and energy network.

1.1 Global Water Issue

The inadequate supply of the available freshwater resources to satisfy the needs has been a concern for past decades, even more, upsetting in these recent years. Human consumes water for various activities such as cooking, cleaning, washing, etc. The municipal use only accounts for a small fraction of the global freshwater consumption. Agriculture and industrial consume around 69% and 19% of the world's fresh water as shown in Figure 1.1(AQUASTAT, 2014). Industrial use of water varies with countries' income. High income countries in Europe and Northern America use more than 45%, while middle and low-income countries in Asia, Africa and Southern America consume less than 10% (AQUASTAT, 2014)

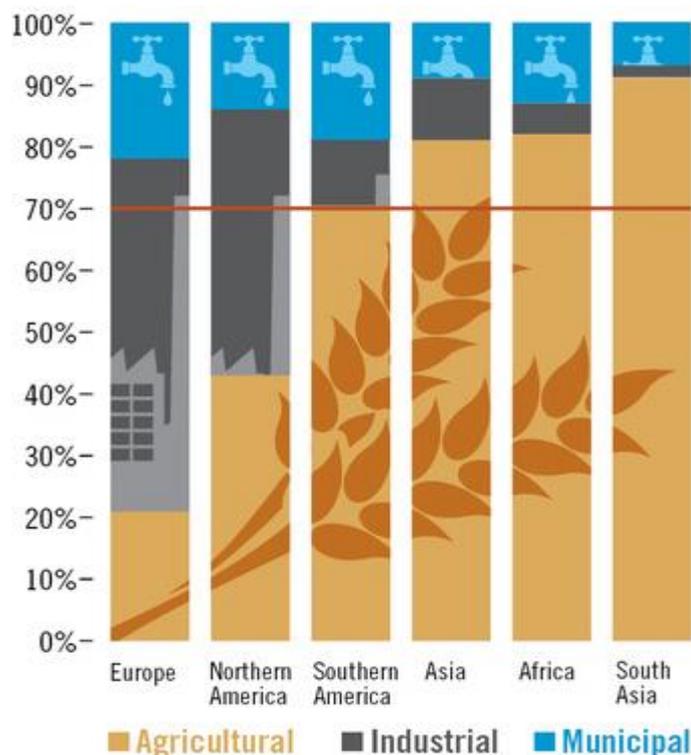


Figure 1.1 Global fresh water consumption (AQUASTAT, 2014)

The visible fresh water on the surfaces of rivers, lakes, and reservoir only represents a small part of the global freshwater resources. Figure 1.2 shows the fresh water's distribution on Earth. Almost two-third of the world's freshwater is stored in glaciers and ice caps, and only one-third of freshwater is available for human consumption (Gleick, 1996). The available fresh water is recycled through the hydrologic cycle, hence the absolute volume of the world's fresh water is relatively the same.

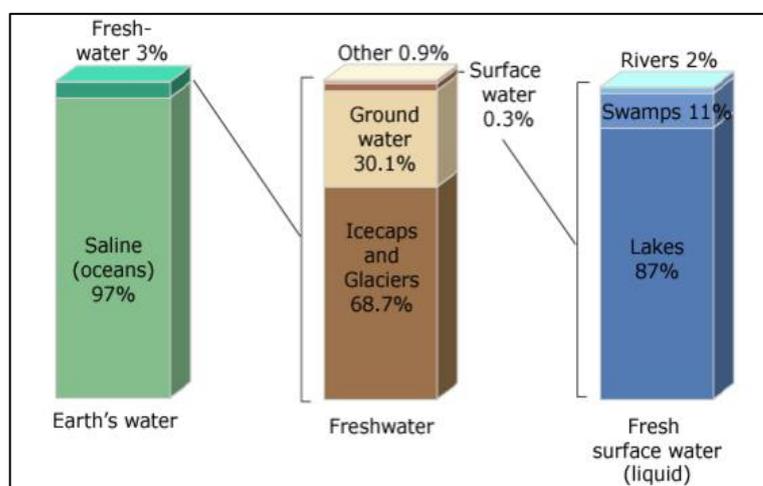


Figure 1.2 Distribution of Earth's water (Gleick, 1996)

While the supply of fresh water is limited, the water demand continues to increase rapidly. The world's population is continuously growing, and it is projected to expand to 9 billion people by 2050 (World Water Development, 2009). According to the United Nations, water use has grown at more than twice the rate of population increase in the last century and water withdrawals are predicted to increase by 50 percent by 2025 in developing countries, and 18 percent in developed countries (Global Environment Outlook, 2015).

The population growth is not the only factor to consider, the freshwater is withdrawn to meet the needs of different users. Industrial, urbanisation, irrigation for agriculture, and other sectors contribute a larger section of the world's fresh water consumption. These sectors are mounting and the competition for water is increasing. Water pollution from industrial wastewater and agriculture excess nutrients degraded the water quality result in less fresh water available for direct use.

Moderate water shortage was first recorded in the 18th century and it has increased with time and affected more people around the world in the years 1960 to 2005 mainly in Africa and Asia (Kummu *et al*,2010). Analysts estimate two-third of the human population will face water shortage by 2025 (United Nation, 2006). The water crisis is often associated with negative effects. People with limited access to clean freshwater usually faced inadequate sanitation which may lead to various health complications such as cholera, diarrhea, and dysentery.

Water is not distributed evenly over the globe, less than 10 countries possess 60% of the world's available fresh water supply (World Business Council for Sustainable Development, 2008). Many countries are sharing the same river basins, changes within a basin can lead to transboundary tensions. Water has been ranked as the top global risk in the World Economic Forum's 2015 Global Risks Report.

Water should be recognised as a great priority, correcting measures still can be taken to avoid the crisis to be worsening. There is an increasing awareness that our freshwater resources are limited and need to be protected both in terms of quantity and quality. Implementing water management for water-related activity is a good practise for decision-makers.

1.2 Global Energy Issue

Energy is important in today modern life. It powers the light and appliances at home, powers many industry processes and transportation. Figure 1.3 shows the world energy consumption for 2012. Approximately 52% of global energy is consumed for industrial activities while another 26% and 14% of global water are used for transportation and residential, respectively (EIA, 2012).

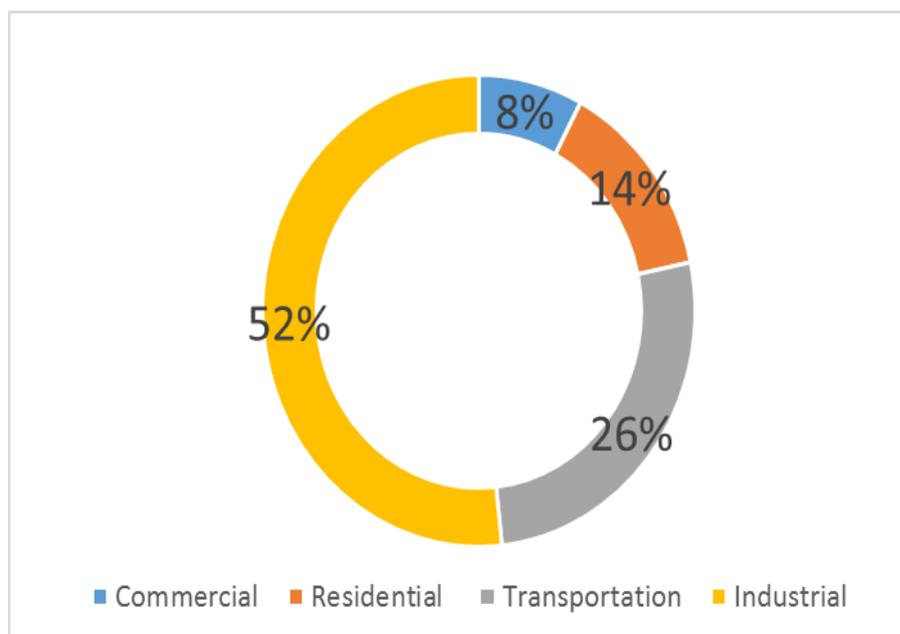


Figure 1.3 Global energy consumption by sector (EIA, 2012)

Fuel is required to generate energy, several fuel types include fossil (coal, oil, natural gas), nuclear, and renewable resource. Fossil fuels provide most of the energy in the world. Liquid fuels, natural gas, and coal account for 81% of total world energy consumption (EIA, 2014). Figure 1.4 shows the world energy supplies by fuels. Oil supplies the most with 31.3% followed by coal and natural gas with 28.6% and 21.2% respectively (EIA, 2014). These resources are finite and limited, and high consumption will lead to the depletion of non-renewable resources.

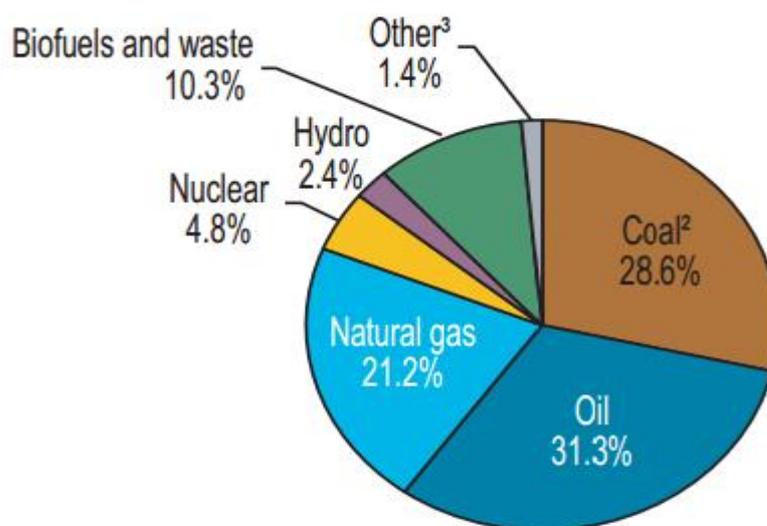


Figure 1.4 World energy supplies by fuel (EIA, 2014)

Economic growth in some regions especially Asia is projected to increase by 87% in 2040 as shown in Figure 1.5 (EIA, 2016). Energy demand increases as nations progress and living standards improve. More infrastructure, facilities, transportation are being built and the capacity to produce goods and services increase in fast-paced economic countries around the world. Population growth also drives for more transportation, houses, and businesses. Both factors are contributing to a higher global energy demand which put pressure on the global fossil fuel consumption.

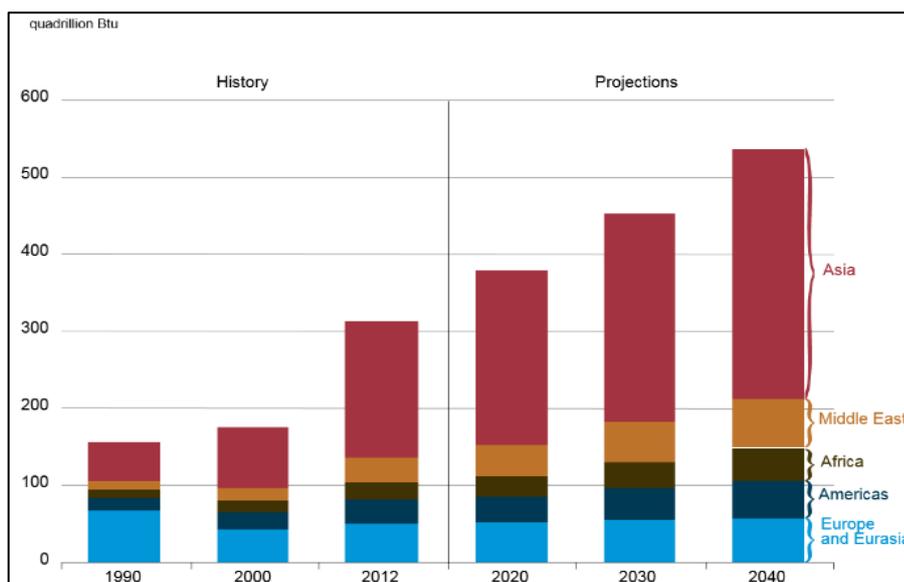


Figure 1.5 Energy consumption by region (EIA, 2016)

The main concern of many countries around the world is how to secure the resources for energy production to meet the user's needs. Energy is not only a matter of economic and financial but also affects the environment and social aspect. High environmental degradation is associated with the fossil fuel extraction activities. Emission of carbon dioxide into the Earth's atmosphere primarily from burning fossil fuels for energy is the main cause of the rising global temperature. The ideal goal is to protect the environment and having adequate energy supplies to meet the needs.

Much of the energy consumed in the world is wasted through transmission, heat loss and inefficient technology. Energy efficiency is an important tool to address the climate change and energy security. The main aim of energy efficiency is to reduce energy usage to provide the same amount of services and products. Energy efficiency also improves the competitiveness of businesses and reduces the dependence on foreign supplies for countries that import energy. Most of the countries share the common interest in improving energy efficiency performance.

1.3 Problem Background

Process industries consume a large amount of water for various activities in the process plant such as washing, cooling, separating, and etc. These activities require water with a certain quality at the specified temperature. Heating or cooling utilities are consumed to heat or cool the water to meet the operating condition. Most industries generate pollutants as by-products which contaminate the used water. Hence, pre-treatment is required to treat the water before discharge at end pipe.

Reduction of fresh water and energy is preferable in process plant mainly due to economic and environmental factors. Various studies have been conducted to minimise water (Liu *et al.*, 2008; Wan Alwi *et al.*, 2008; Deng *et al.*, 2011; Gadalla, 2015; Fan *et al.*, 2016; Li and Guan, 2016) or to minimise energy (Huang *et al.*, 2012; Gadalla, 2015; Chen *et al.*, 2015). These studies consider minimisation energy and water separately for many years. However, water and energy interact closely. For instance, some heat generated in water streams outlet may be used to heat another stream. These potential resources are often neglected and wasted.

The current drive towards environmental sustainability and the rising costs of fuel and water lead process industries to find new ways to reduce water and energy consumption. Freshwater and energy minimisation should be considered simultaneously since reducing fresh water usage leads to a lower energy consumption. Savelski and Bagajewicz (1997) first addressed simultaneous water and energy and later followed by Savulescu and Smith (2005a, 2005b), and many studies have emerged since then using graphical (Polley *et al.*, 2010; Leewongtanawit *et al.*, 2009; Hou *et al.*, 2014 and Xie *et al.*, 2016) or mathematical programming (Bogataj *et al.*, 2008; Dong *et al.*, 2008; Sahu *et al.*, 2010; Boix *et al.*, 2012; Ahmetovic *et al.*, 2013; Yan *et al.*, 2016 and Almaraz *et al.*, 2016).

Most of the simultaneous water and energy studies only focus on water reuse or water regeneration. Minimum freshwater usage is one of the main aims in the

process plant which eventually result in lower utility consumption as well. Manan and Wan Alwi (2006) suggested the use of water management hierarchy (WMH) together with pinch analysis to achieve the minimum water target. WMH is a hierarchy of water conservation priorities which consists of five different levels; namely: elimination, reduction, outsourcing/reuse, regeneration and original. The most preferred option is elimination, followed by reduction of water demand. Next, direct reuse/recycling and water outsourcing through method such as rainwater harvesting are preferred. This is followed by regeneration or treatment of wastewater before being reused. Freshwater is the least preferred and will only be used when all water-saving options have been explored. This framework has successfully led to a significant water reduction. Hence, the aim of this study is to design an optimal water and energy network using WMH options and considering minimising total cost as the objective function.

1.4 Problem Statement

Given a set of temperature, flow rate, and contaminant concentration of global water operations, it is desired to develop a mathematical model to design a network that minimises fresh water usage, energy consumption, and total annual cost. The system will consider all water management hierarchy (WMH) options and direct-indirect heat transfer to achieve the objectives.

1.5 Objective

The main objective of this research is to develop a new mathematical model for designing a minimum water and energy network with minimum total

annual cost. The system considers WMH schemes .The main objective is achieved by incorporating below objectives:-

1. To develop the mathematical model for maximising water recovery with minimum energy requirement based on available model in the literature
2. To extend the mathematical model by including other water management hierarchy options (Model 1); elimination, reduction, outsourcing and regeneration
3. To extend the mathematical model by including indirect heat integration; i.e, the usage of intermediate fluid to transfer heat between process streams, into the network to further reduce the energy consumption (Model 2)
4. To apply the mathematical model to the relative case study

1.6 Scopes of Work

There are six main scopes in this study:-

1. Reviewing the state of the art of simultaneous water and energy reduction using mathematical model and graphical approaches.
2. Developing the mathematical model for maximising water recovery with minimum energy requirement based on an available model in the literature.

3. Developing the mathematical model for minimising water and energy utilisation considering the whole water management hierarchy options – elimination, reduction, reuse, outsourcing, and regeneration (Model 1).
4. Developing the mathematical model to minimise the total annual cost correspond to heat integration (Model 2).
5. Applying the mathematical models on the relative literature case study.
6. Comparing the model results with literatures.

1.7 Overview

This thesis consists of six chapters. Chapter 1 provides an overview of the global water and energy issues, problem background, problem statement, objective and scope of the study.

Chapter 2 provides a review of the relevant literature for this study. The state-of-art review of the development in water and energy minimisation separately, as well as simultaneous water and energy are reviewed. Conceptual and mathematical programming techniques are also reviewed in this chapter.

Chapter 3 presents a general description of the proposed methodology of this study, whereas chapter 4 describes the detailed mathematical model construction. It consists of the water and energy network superstructure to achieve the minimum freshwater and utilities that correspond to the total annual cost, as well as the mathematical formulation derived from the superstructure.

Chapter 5 presents the results from the implementation of the developed methodology on the relative case study. The result is analysed and compared to determine the capability of the model on solving simultaneous water and energy problem. Finally, Chapter 6 summarises the main points and includes recommendations to further improve this thesis.

REFERENCES

- Ahmad, S., Linnhoff, B. and Smith, R. (1990). Cost optimum heat exchanger networks—2. targets and design for detailed capital cost models. *Computers & Chemical Engineering*, 14(7), 751-767. doi: 10.1016/0098-1354(90)87084
- Ahmetović, E., Ibrić, N., Kravanja, Z., & Grossmann, I. E. (2015). Water and energy integration: A comprehensive literature review of non-isothermal water network synthesis. *Computers & Chemical Engineering*, 82 (2015), 144–171. doi.org/10.1016/j.compchemeng.2015.06.011
- Ahmetović, E., Ibrić, N., and Kravanja, Z., (2014). Optimal design for heat-integrated water-using and wastewater treatment networks. *Applied Energy*, 135, 791–808.
- Ahmetović, E. and Kravanja, Z. (2013). Simultaneous synthesis of process water and heat exchanger networks. *Energy*, 57, 236-250
- Ahmetović, E. and Grossmann, I. E. (2011). Global superstructure for the design of integrated process water networks. *AIChE Journal*, 57(2), 434-457
- Al Bredenberg. (2012). *The damage done in transportation – which energy source will lead to the greenest highways?* Retrived 4 Mar, 2016, from <http://news.thomasnet.com/imt/2012/04/30/the-damage-done-in-transportation-which-energy-source-will-lead-to-the-greenest-highways>
- Almaraz, S., Boix, M.,Azzaro- Pantel, C., Montastruc, L., and Domenech, S. (2015). Design of a Multi-Contaminant Water Allocation Network using Multi-Objective Optimization. *Computer Aided Chemical Engineering*, 37(15), 911-916.
- Allen, B., Savard-Goguen, M. and Gosselin, L. (2009). Optimizing heat exchanger networks with genetic algorithms for designing each heat exchanger including condensers. *Applied Thermal Engineering*, 29(16), 3437-3444..

- Alva-Argáez, A., Kokossis, A. C. and Smith, R. (1998). Wastewater minimisation of industrial systems using an integrated approach. *Computers & Chemical Engineering*, 22, Supplement 1(0), S741-S744. doi: 10.1016/s0098-1354(98)00138-0
- Alva-Argáez, A., Kokossis, A. C. and Smith, R. (2007). The design of water-using systems in petroleum refining using a water-pinch decomposition. *Chemical Engineering Journal*, 128(1), 33-46. doi: 10.1016/j.cej.2006.10.001
- Alva-Argáez, A., Vallianatos, A. and Kokossis, A. (1999). A multi-contaminant transshipment model for mass exchange networks and wastewater minimisation problems. *Computers & Chemical Engineering*, 23(10), 1439-1453. doi: 10.1016/s0098-1354(99)00303-8
- Alves, J. J. and Towler, G. P. (2002). Analysis of Refinery Hydrogen Distribution Systems. *Industrial & Engineering Chemistry Research*, 41(23), 5759-5769. doi: 10.1021/ie010558v
- Aly, S., Abeer, S. and Awad, M. (2005). A new systematic approach for water network design. *Clean Technologies and Environmental Policy*, 7(3), 154-161. doi: 10.1007/s10098-005-0004-9
- R. Anantharaman, I. Nastad, B. Nygreen, T. Gundersen
- Anantharaman, R., Nastad, I., Nygreen, B., & Gundersen, T. (2010) The sequential framework for heat exchanger network synthesis – the minimum number of units sub-problem. *Comput Chem Eng*, 34 (11), 1822–1830
- Athier, G., Floquet, P., Pibouleau, L. and Domenech, S. (1997). Synthesis of Heat-Exchanger Network by Simulated Annealing and NLP Procedures. *AIChE Journal*, 43(11), 3007-3020.
- Bagajewicz, M. J. (2000). A review of recent design procedures for water networks in refineries and process plants. *Computers & Chemical Engineering*, 24(9-10), 2093-2113. doi: 10.1016/s0098-1354(00)00579-2
- Bagajewicz, M. J., Rivas, M. and Savelski, M. J. (2000). A robust method to obtain optimal and sub-optimal design and retrofit solutions of water utilization systems with multiple contaminants in process plants. *Computers & Chemical Engineering*, 24(2-7), 1461-1466. doi: 10.1016/s0098-1354(00)00413-0
- Bagajewicz, M. J., Rodera, H. and Savelski, M. (2002). Energy efficient water utilization systems in process plants. *Computers & Chemical Engineering*, 26(1), 59-79. doi: 10.1016/s0098-1354(01)00751-7

- Bagajewicz, M. J. and Savelski, M. (2001). On the use of linear models for the design of water utilization systems in process plants with a single contaminant. *Chemical Engineering Research and Design*, 79(5), 600-610. doi: 10.1205/02638760152424389
- Bandyopadhyay, S. (2006). Source composite curve for waste reduction. *Chemical Engineering Journal*, 125(2), 99-110. doi: 10.1016/j.cej.2006.08.007
- Bandyopadhyay, S., Ghanekar, M. D. and Pillai, H. K. (2006). Process Water Management. *Industrial & Engineering Chemistry Research*, 45(15), 5287-5297. doi: 10.1021/ie060268k
- Bogataj, M. and Bagajewicz, M. J. (2008). Synthesis of non-isothermal heat integrated water networks in chemical processes. *Computers and Chemical Engineering*, 32, 3130-3142.
- Boix, M., Pibouleau, L., Montastruc, L., Azzaro-Pantel, C. and Domenech, S. (2012). Minimizing water and energy consumptions in water and heat exchange networks. *Applied Thermal Engineering*, 36, 442-455
- Boix, M., Pibouleau, L., Montastruc, L., Pibouleau, L., Azzaro-Pantel, C. and Domenech, S. (2011). A multiobjective optimization framework for multicontaminant industrial water network design. *Journal of Environmental Management*, 92 (7), 1802-1808
- Castro, P. M., Matos, H. A. and Novais, A. Q. (2007). An efficient heuristic procedure for the optimal design of wastewater treatment systems. *Resources, Conservation and Recycling*, 50(2), 158-185. doi: 10.1016/j.resconrec.2006.06.013
- Chen, Y., Eslick, J. C., Grossman, I. E. and Miller, D. C. (2015). Simultaneous process optimization and heat integration based on rigorous process simulations. *Computers and Chemical Engineering*, 85(2015), 180-199
- Deng, C., Feng, X., Wen, Z.K., (2013). Optimization of water network integrated with process models. *Clean. Technol. Environ. Policy*, 15, 473-487
- Dhole, V. R., Ramchandani, N., Tainsh, R. A. and Wasilewski, M. (1996). Make your process water pay for itself. *Chemical Engineering*, 103(1), 100-103.
- Dong, H.-G., Lin, C.-Y. and Chang, C.-T. (2008). Simultaneous optimization approach for integrated water-allocation and heat-exchange networks. *Chemical Engineering Science*, 63(14), 3664-3678. doi: 10.1016/j.ces.2008.04.044

- Doyle, S. J. and Smith, R. (1997). Targeting Water Reuse with Multiple Contaminants. *Process Safety and Environmental Protection*, 75(3), 181-189. doi: 10.1205/095758297529020
- Dunn, R. and Wenzel, H. (2001). Process integration design methods for water conservation and wastewater reduction in industry. Part 1-Design for single contaminants. *Clean Technologies and Environmental Policy*, 3(3), 307-318. doi: 10.1007/s100980100121
- Dunn, R., Wenzel, H. and Overcash, M. (2001). Process integration design methods for water conservation and wastewater reduction in industry. Part 2-Design For Multiple Contaminants. *Clean Technologies and Environmental Policy*, 3(3), 319-329. doi: 10.1007/s10098-001-0122-y
- El-Halwagi, M. M. (1997). *Pollution prevention through process integration: systematic design tools*. San Diego: Academic Press.
- El-Halwagi, M. M. (2006). *Process Integration* (Vol. 7). San Diego: Academic Press.
- El-Halwagi, M. M., Gabriel, F. and Harell, D. (2003). Rigorous Graphical Targeting for Resource Conservation via Material Recycle/Reuse Networks. *Industrial & Engineering Chemistry Research*, 42(19), 4319-4328. doi: 10.1021/ie030318a
- Fan, X., Xu, D., Zhu, F., and Yong, (2016). Targeting of water-using networks involving regeneration with a graphical approach. *Clean Technologies and Environmental Policy*, 18(7), 2087-2094. doi:10.1007/s10098-016-1178-z
- Faria, D. C. and Bagajewicz, M. J. (2010). Comparative analysis of different assumptions for the design of single-contaminant water networks. *Chem. Eng. Comm.*, 197, 859-880
- Feng, X., Li, Y. and Shen, R. (2009). A new approach to design energy efficient water allocation networks. *Applied Thermal Engineering*, 29(11-12), 2302-2307. doi: 10.1016/j.applthermaleng.2008.11.007
- Foo, D. C. Y. (2009). State-of-the-Art Review of Pinch Analysis Techniques for Water Network Synthesis. *Industrial & Engineering Chemistry Research*, 48(11), 5125-5159. doi: 10.1021/ie801264c
- Gadalla, M. A. (2015). A new graphical method for Pinch Analysis applications: Heat exchanger network retrofit and energy integration. *Energy*, 81, 159-174. <http://doi.org/10.1016/j.energy.2014.12.011>

- Gadalla, M. A. (2015). A new graphical-based approach for mass integration and exchange network design. *Chemical Engineering Science*, 127, 239–252. <http://doi.org/10.1016/j.ces.2015.01.036>
- George, J., Sahu, G. C. and Bandyopadhyay, S. (2011). Heat integration in process water networks. *Industrial and Engineering Chemistry Research*, 50(7), 3695-3704. doi: 10.1021/ie101098a
- Ghazouani, S., Zoughaib, A., & Pelloux-prayer, S. (2015). Simultaneous heat integrated resource allocation network targeting for total annual cost considering non-isothermal mixing. *Chemical Engineering Science*, 134, 385–398. doi.org/10.1016/j.ces.2015.05.027
- Ghazouani, S., Zoughaib, A., & Le Bourdieu, S. (2016). An MILP model for simultaneous mass allocation and heat exchange networks design *Chemical Engineering Science*, 158, 411–428. doi.org/10.1016/j.ces.2016.10.041
- Global agriculture. (2014) *Competition for a scarce resource*. Retrieved 15 Feb 2016 from <http://www.globalagriculture.org/report-topics/water.html>
- Groundwater – the processes and global significance of aquifer degradation, Foster and Chilton, Royal Society of London, 2003.
- Gunaratnam, M., Alva-Argáez, A., Kokossis, A., Kim, J. K. and Smith, R. (2004). Automated Design of Total Water Systems. *Industrial & Engineering Chemistry Research*, 44(3), 588-599. doi: 10.1021/ie040092r
- Gundepesen, T. and Naess, L. (1988). The synthesis of cost optimal heat exchanger networks: An industrial review of the state of the art. *Computers & Chemical Engineering*, 12(6), 503-530. doi: 10.1016/0098-1354(88)87002-9
- Hallale. (2002). A new graphical targeting method for water minimisation. *Advances in Environmental Research*, 6(3), 377-390. doi: 10.1016/s1093-0191(01)00116-2
- Hallale, N. and Fraser, D. M. (1998). Capital cost targets for mass exchange networks A special case: Water minimisation. *Chemical Engineering Science*, 53(2), 293-313. doi: 10.1016/s0009-2509(97)00191-7
- Handani, Z. B. (2010). *Optimal Design Of Water Networks Involving Multiple Contaminants* M.Eng. Thesis, Universiti Teknologi Malaysia, Skudai, Johor.
- Handani, Z. B., Wan Alwi, S. R., Hashim, H. and Manan, Z. A. (2010). Holistic Approach for Design of Minimum Water Networks Using the Mixed Integer

- Linear Programming (MILP) Technique. *Industrial & Engineering Chemistry Research*, 49(12), 5742-5751. doi: 10.1021/ie1000357
- Hong, X., Liao, Z., Jiang, B., Wang, J., & Yang, Y. (2016). Simultaneous optimization of heat-integrated water allocation networks. *Applied Energy*, 169, 395–407. doi.org/10.1016/j.apenergy.2016.01.059
- Hou, Y., Wang, J., Chen, Z., Li, X., & Zhang, J. (2014). Simultaneous integration of water and energy on conceptual methodology for both single- and multi-contaminant problems. *Chemical Engineering Science*, 117, 436–444. doi.org/10.1016/j.ces.2014.07.004
- Huang, C.-H., Chang, C.-T., Ling, H.-C. and Chang. (1999). A Mathematical Programming Model for Water Usage and Treatment Network Design. *Industrial & Engineering Chemistry Research*, 38(7), 2666-2679. doi: 10.1021/ie990043s
- Ibrić, N., Ahmetović, E., & Kravanja, Z. (2013). A Two-Step Solution Strategy for the Synthesis of Pinched and Threshold Heat-Integrated Process Water Networks, *Chemical Engineering Transactions*, 35(2013), 43–48.
- Ibrić, N., Ahmetović, E., & Kravanja, Z. (2014). Simultaneous optimization of water and energy within integrated water networks. *Applied Thermal Engineering*, 70(2), 1097-1122
- Ibrić, N., Ahmetović, E., & Kravanja, Z. (2014). Synthesis of water, wastewater treatment, and heat-exchanger networks. *Computer-Aided Process Engineering*, 33, 1843-1848
- Isafiade, A. J. and Fraser, D. M. (2008). Interval-based MINLP superstructure synthesis of heat exchange networks. *Chemical Engineering Research and Design*, 86(3), 245-257. doi: 10.1016/j.cherd.2007.11.001
- Ismail, A., Alwi, S. R. W. and Manan, Z. A. (2011). Simultaneous targeting and design for non-mass transfer based water and energy reduction. *Modeling, Simulation and Applied Optimization (ICMSAO), 2011 4th International Conference*. 19-21 April 2011. 1-8.
- Jeżowski, J. and Friedler, F. (1992). A simple approach for maximum heat recovery calculations. *Chemical Engineering Science*, 47(6), 1481-1494.
- Jian, D. U., Hongmei, Y. U., Xishan, F. A. N. and Pingjing, Y. A. O. (2003). Integration of mass and energy in water network design. *Computer Aided Chemical Engineering*, 15(2003), 796-801

- Jiménez-Gutiérrez, A., Lona-Ramírez, J., Ponce-Ortega, J. M., & El-Halwagi, M. (2014). An MINLP model for the simultaneous integration of energy, mass and properties in water networks. *Computers & Chemical Engineering*, 71, 52–66. <http://doi.org/10.1016/j.compchemeng.2014.07.008>
- Kazantzi, V. and El-Halwagi, M. M. (2005). *Targeting material reuse via property integration* (Vol. 101). New York, NY, ETATS-UNIS: American Institute of Chemical Engineers.
- Kermani, M., Périn-levasseur, Z., Benali, M., Savulescu, L. & Marechal, F. (2014). An Improved Linear Programming Approach for Simultaneous Optimization of Water and Energy. *24th European Symposium on Computer Aided Process Engineering – ESCAPE 24*, (2014), 1561-1566.
- Khor, C.S., Chachuat, B., Shah, N., (2012). A superstructure optimization approach for water network synthesis with membrane separation-based regenerators. *Comput. Chem. Eng.* 42, 48-63
- Kim, J.-K.(2012). System analysis of total water systems for water minimization. *Chemical Engineering Journal* ,193–194(2012): 304-317.
- Klemeš, J. J., Varbanov, P. S., & Kravanja, Z. (2013). Recent developments in Process Integration. *Chemical Engineering Research and Design*, 91(10), 2037–2053. doi.org/10.1016/j.cherd.2013.08.019
- Klemeš, J. J. and Kravanja, Z. (2013). Forty years of Heat Integration: Pinch Analysis (PA) and Mathematical Programming (MP). *Current Opinion in Chemical Engineering*, 2(4), 461-474. doi.org/10.1016/j.coche.2013.10.003
- Leewongtanawit, B. and Kim, J.-K. (2008). Synthesis and optimisation of heat-integrated multiple-contaminant water systems. *Chemical Engineering and Processing: Process Intensification*, 47(4), 670-694.
- Leewongwanawit, B., Kim, J.-K. and Smith, R. (2004). Design and optimisation of combined water and energy systems. *Computer Aided Chemical Engineering*, 18(2004), 439-444.
- Li, B-H., Ruan, Z-Z., & Chang, C-T. (2013). Automatic Synthesis of Alternative Heat-Integrated Water-Using Networks. *Chemical Engineering Transactions*, 35(2013), 151–156. doi.org/10.3303/CET1335025
- Li, Y. and Guan, J. (2016) A stepwise optimal design of water network. *Chinese Journal of Chemical Engineering*, 24, 787-794.

- Linnhoff, B. and Ahmad, S.(1990). Cost optimum heat exchanger networks.1. Minimum energy and capital using simple models for capital cost.*Computers & Chemical Engineering*, 14(7),729-750
- López-Maldonado, L. A., Ponce-Ortega, J. M. & Segovia-Hernández, J. G. (2011). Multiobjective synthesis of heat exchanger networks minimizing the total annual cost and the environmental impact. *Applied Thermal Engineering*, 31(6-7), 1099-1113.
- Manan, Z. A., Tan, Y. L. and Foo, D. C. Y. (2004). Targeting the minimum water flow rate using water cascade analysis technique. *AIChE Journal*, 50(12), 3169-3183. doi: 10.1002/aic.10235
- Manan, Z. A., Tan, Y. L., Foo, D. C. Y. & Tea, S. Y. (2007). Application of the water cascade analysis technique for water minimisation in a paper mill plant. *International journal of environment and pollution*, 29(1-3), 90-103.
- Manan, Z. A., Tea, S. Y. and Alwi, S. R. W. (2009). A new technique for simultaneous water and energy minimisation in process plant. *Chemical Engineering Research and Design*, 87(11), 1509-1519. doi: 10.1016/j.cherd.2009.04.013
- Mann, J. and Liu, Y. A. (1999). *Industrial Water Reuse and Wastewater Minimization*. New York: McGraw-Hill.
- Martínez-Patiño, J., Picón-Núñez, M., Serra, L. M. & Verda, V.(2012). Systematic approach for the synthesis of water and energy networks. *Applied Thermal Engineering*, 48(15), 458-464
- Martínez-Patiño, J., Picón-Núñez, M., Serra, L. M. & Verda, V.(2011). Design of water and energy networks using temperature-concentration diagrams. *Energy*, 36(6), 3888-3896
- Mohammad nejad, S., Ataei, A., Nabi Bidhendi, GR., Mehrdadi, N. & Lotfi, F. (2012). Water pinch analysis for water and wastewater minimization in Tehran oil refinery considering three contaminants. *Environmental Monitoring and Assessment*.184(5), 2709-2728.
- Morar, M. and Agachi, P. S. (2010). Review: Important contributions in development and improvement of the heat integration techniques. *Computers & Chemical Engineering*, 34(8), 1171-1179. doi: 10.1016/j.compchemeng.2010.02.038

- Muhammad Reza Abbasi (2013). *A mathematical model for water and energy networks*. M. Eng. Thesis, Universiti Teknologi Malaysia, Skudai, Johor, Malaysia
- Papalexandri, K. P. and Pistikopoulos, E. N. (1993). A multiperiod MINLP model for improving the flexibility of heat exchanger networks. *Computers & Chemical Engineering*, 17, Supplement 1(0), S111-S116. doi: 10.1016/0098-1354(93)80215-9
- Polley, G. T., Picón-Núñez, M. and López-Maciél, J. d. J. (2010). Design of water and heat recovery networks for the simultaneous minimisation of water and energy consumption. *Applied Thermal Engineering*, 30(16), 2290-2299. doi: 10.1016/j.applthermaleng.2010.03.031
- Ponce-Ortega, J. M., El-Halwagi, M. M. and Jiménez-Gutiérrez, A. (2010). Global optimization for the synthesis of property-based recycle and reuse networks including environmental constraints. *Computers & Chemical Engineering*, 34(3), 318-330. doi: 10.1016/j.compchemeng.2009.10.005
- Ponce-Ortega, J. M., Jiménez-Gutiérrez, A. and Grossmann, I. E. (2008). Optimal synthesis of heat exchanger networks involving isothermal process streams. *Computers & Chemical Engineering*, 32(8), 1918-1942
- Prakash, R. and Shenoy, U. V. (2005a). Design and evolution of water networks by source shifts. *Chemical Engineering Science*, 60(7), 2089-2093. doi: 10.1016/j.ces.2004.11.042
- Prakash, R. and Shenoy, U. V. (2005b). Targeting and design of water networks for fixed flowrate and fixed contaminant load operations. *Chemical Engineering Science*, 60(1), 255-268. doi: 10.1016/j.ces.2004.08.005
- Putra, Z. A. and Amminudin, K. A. (2008). Two-Step Optimization Approach for Design of A Total Water System. *Industrial & Engineering Chemistry Research*, 47(16), 6045-6057. doi: 10.1021/ie071620c
- Quesada, I. and Grossmann, I. E. (1995). Global optimization of bilinear process networks with multicomponent flows. *Computers & Chemical Engineering*, 19(12), 1219-1242. doi: 10.1016/0098-1354(94)00123-5
- Renard, L., Périn-levasseur, Z., Salgueiro, L., & Savulescu, L. (2012). Combined heat and mass integration: A benchmarking case study, *22nd European Symposium on Computer Aided Process Engineering – ESCAPE 22*, (2012), 17–20.

- Rosegrant, M. W., Cai, X. and A.Cline, S. (2002). *Global Water Outlook to 2025 International Water Management Institute book*. Washington D.C.: International Food Policy Research Institute (IFPRI).
- Sahu, G. C., & Ā, S. B. (2010). Energy conservation in water allocation networks with negligible contaminant effects. *Chemical Engineering Science*, 65(14), 4182–4193. <http://doi.org/10.1016/j.ces.2010.04.027>
- Sahu, G. C. and Bandyopadhyay, S. (2012). Energy optimization in heat integrated water allocation networks. *Chemical Engineering Science*, 69(1), 352-364.
- Savelski, M. and Bagajewicz, M. (2003). On the necessary conditions of optimality of water utilization systems in process plants with multiple contaminants. *Chemical Engineering Science*, 58(23-24), 5349-5362. doi: 10.1016/j.ces.2003.09.004
- Savulescu, L., Kim, J.-K. and Smith, R. (2005a). Studies on simultaneous energy and water minimisation--Part I: Systems with no water re-use. *Chemical Engineering Science*, 60(12), 3279-3290. doi: 10.1016/j.ces.2004.12.037
- Savulescu, L., Kim, J.-K. and Smith, R. (2005b). Studies on simultaneous energy and water minimisation--Part II: Systems with maximum re-use of water. *Chemical Engineering Science*, 60(12), 3291-3308. doi: 10.1016/j.ces.2004.12.036
- Shenoy, U. V., Sinha, A. and Bandyopadhyay, S. (1998). Multiple utilities targeting for heat exchanger networks. *Chemical Engineering Research and Design*, 76(3), 259-272.
- Shethna, H. K., Jezowski, J. M. and Castillo, F. J. L. (2000). New methodology for simultaneous optimization of capital and operating cost targets in heat exchanger network design. *Applied Thermal Engineering*, 20(15), 1577-1587. doi: 10.1016/s1359-4311(00)00024-7
- Sorin, M. and Bédard, S. (1999). The Global Pinch Point in Water Reuse Networks. *Process Safety and Environmental Protection*, 77(5), 305-308. doi: 10.1205/095758299530189
- Takama, N., Kuriyama, T., Shiroko, K. and Umeda, T. (1980). Optimal water allocation in a petroleum refinery. *Computers & Chemical Engineering*, 4(4), 251-258. doi: 10.1016/0098-1354(80)85005-8
- Teles, J., Castro, P. M. and Novais, A. Q. (2008). LP-based solution strategies for the optimal design of industrial water networks with multiple contaminants.

Chemical Engineering Science, 63(2), 376-394. doi: 10.1016/j.ces.2007.09.033

U.S Energy Information Administration (2016). *International energy outlook 2016*. Retrieved 27 Nov 2016 from <http://www.eia.gov/outlooks/ieo/>

Xie, W., Hou, Y., Wang, Y., & Wang, J. (2016). A heuristic approach based on a single-temperature-peak design principle for simultaneous optimization of water and energy in fixed flowrate systems. *Chemical Engineering Science – 152* (2016), 323-342 doi: 10.1016/j.ces.2016.06.018

Walczyk, K., Jezowski, J., Wa, K., & Je, J. (2008). A single stage approach for designing water networks with multiple contaminants. *18th European Symposium on Computer Aided Process Engineering – ESCAPE 18*, (2008), 719–724.

Wan Alwi, S., Manan, Z., Samingin, M. and Misran, N. (2008). A holistic framework for design of cost-effective minimum water utilization network. *Journal of Environmental Management*, 88(2), 219-252. doi:10.1016/j.jenvman.2007.02.011

Wan Alwi, S. R. (2007). *A new holistic framework for design of cost effective minimum water network*. Doctor Of Philosophy, Universiti Teknologi Malaysia, Skudai, Johor.

Wan Alwi, S. R. and Manan, Z. A. (2006). SHARPS: A new cost-screening technique to attain cost-effective minimum water network. *AIChE Journal*, 52(11), 3981-3988. doi: 10.1002/aic.10986

Wan Alwi, S. R. and Manan, Z. A. (2008). Generic Graphical Technique for Simultaneous Targeting and Design of Water Networks. *Industrial & Engineering Chemistry Research*, 47(8), 2762-2777. doi: 10.1021/ie071487o

Wan Alwi, S. R. and Manan, Z. A. (2010). STEP—A new graphical tool for simultaneous targeting and design of a heat exchanger network. *Chemical Engineering Journal*, 162(1), 106-121. doi: 10.1016/j.cej.2010.05.009

Wan Alwi, S. R., Manan, Z. A., Samingin, M. H. and Misran, N. (2008). A holistic framework for design of cost-effective minimum water utilization network. *Journal of Environmental Management*, 88(2), 219-252. doi: 10.1016/j.jenvman.2007.02.011

- Wang, B., Feng, X. and Zhang, Z. (2003). A design methodology for multiple-contaminant water networks with single internal water main. *Computers & Chemical Engineering*, 27(7), 903-911. doi: 10.1016/s0098-1354(02)00177-1
- Wang, Y. P. and Smith, R. (1994). Wastewater minimisation. *Chemical Engineering Science*, 49(7), 981-1006. doi: 10.1016/0009-2509(94)80006-5
- Water for People, Water for Life. United Nations World Water Development Report, UNESCO, 2003
- Westerberg, A. W. (1987). *Process Synthesis: A morphological view*. In *Recent Developments in Chemical Process and Plant Design*. New York: Wiley.
- World Economic Forum. (2015). *Risks in focus*. Global Risk Report 2015
- World Water Council. (2010). *Water Crisis*. Retrieved 28 Sep 2016, from <http://www.worldwatercouncil.org/index.php?id=25>
- Xiao, F., Yucai, L. I., & Xinjiang, Y. U. (2008). Improving Energy Performance of Water Allocation Networks Through Appropriate Stream Merging. *Chinese Journal of Chemical Engineering*. 16(3), 480–484.
- Yan, F., Wu, H., Li, W., & Zhang, J. (2016). Simultaneous optimization of heat-integrated water networks by a nonlinear program. *Chemical Engineering Science*, 140, 76–89.
- Yang L., Grossmann I. E. (2012). Water Targeting Models for Simultaneous Flowsheet Optimization. *Industrial and Engineering Chemistry Research*, 52, 3209-3224.
- Yee, T. F. and Grossmann, I. E. (1990). Simultaneous optimization models for heat integration—II. Heat exchanger network synthesis. *Computers & Chemical Engineering*, 14(10), 1165-1184. doi: 10.1016/0098-1354(90)85010-8
- Yee, T. F., Grossmann, I. E. and Kravanja, Z. (1990a). Simultaneous optimization models for heat integration—I. Area and energy targeting and modeling of multi-stream exchangers. *Computers & Chemical Engineering*, 14(10), 1151-1164. doi: 10.1016/0098-1354(90)85009-y
- Yee, T. F., Grossmann, I. E. and Kravanja, Z. (1990b). Simultaneous optimization models for heat integration—III. Process and heat exchanger network optimization. *Computers & Chemical Engineering*, 14(11), 1185-1200. doi: 10.1016/0098-1354(90)80001-r

Zheng, X., Feng, X., Shen, R. and Seider, W. D. (2006). Design of Optimal Water-Using Networks with Internal Water Mains. *Industrial & Engineering Chemistry Research*, 45(25), 8413-84