

HYBRID GENETIC ALGORITHM FOR INVENTORY ROUTING PROBLEM
WITH CARBON EMISSION CONSIDERATION

CHOONG JING YEE

A dissertation submitted in partial fulfilment of the
requirements for the award of the degree of
Master of Science

Faculty of Science
Universiti Teknologi Malaysia

AUGUST 2018

I dedicate this to my loved ones whom are always with me through thick and thin.

ACKNOWLEDGMENT

First and foremost, I would like to offer my sincerest gratitude to my supervisor, Dr Nur Arina Bazilah Aziz for her guidance throughout the completion of my dissertation. Dr Nur Arina Bazilah Aziz has been very patient and supportive in various ways and often gave productive suggestions when I encountered difficulties during the preparation of my dissertation. This dissertation will not be completed without her help and support. I am also thankful to my co-supervisor, Encik Ismail Kamis for helping me with the finishing touches of my dissertation.

I would like to take this chance to thank my family and partner for their support and encouragement throughout my master studies. Besides that, I would also like to thank my friends and course mate for their willingness to help me when I seek for their suggestion and advice.

Last but not least, I would like to thank the people who helped me directly or indirectly in completing this thesis. I sincerely apologize, for I could not mention them one by one.

ABSTRACT

Inventory Routing Problem (IRP) has been continuously developed and improved due to pressure from global warming issue particularly related to greenhouse gases (GHGs) emission. The burning of fossil fuel for transportations such as cars, trucks, ships, trains, and planes primarily emits GHGs. Carbon dioxide (CO₂) from burning of fossil fuel to power transportation and industrial process is the largest contributor to global GHGs emission. Therefore, the focus of this study is on solving a multi-period inventory routing problem (MIRP) involving carbon emission consideration based on carbon cap and offset policy. Hybrid genetic algorithm (HGA) based on allocation first and routing second is used to compute a solution for the MIRP in this study. The objective of this study is to solve the proposed MIRP model with HGA then validate the effectiveness of the proposed HGA on data of different sizes. Upon validation, the proposed MIRP model and HGA is applied on real data and parameter sensitivity analysis is performed on the MIRP model. The HGA is found to be able to solve small size and large size instances effectively by providing near optimal solution in relatively short CPU execution time. In addition, the increase in unit carbon price results in the increase of the supply chain's total cost while the increase in carbon cap results in the decrease of supply chain's total cost. The results from the analysis gave an indication that the unit carbon price and carbon cap need to be thoroughly designed so that it will not burden the participating companies of carbon emission regulation and environment.

ABSTRAK

Masalah Penghalaan Inventori (IRP) telah berkembang dan bertambah baik disebabkan oleh tekanan daripada isu pemanasan global terutamanya berkaitan dengan pelepasan gas rumah hijau (GHG). Pengangkutan terutamanya melepaskan GHG dari pembakaran bahan api fosil untuk kereta, trak, kapal, kereta api dan pesawat. Karbon dioksida (CO₂) daripada pembakaran bahan api fosil kepada pengangkutan tenaga dan proses perindustrian adalah penyumbang terbesar kepada pelepasan GHG global. Oleh itu, fokus kajian ini adalah untuk menyelesaikan masalah penghalaan inventori berbilang tempoh (MIRP) dengan pertimbangan pelepasan karbon berdasarkan polisi kapasiti karbon dan mengimbangi. Algoritma genetik hibrid (HGA) berdasarkan peruntukan pertama dan penghalaan kedua digunakan untuk mengira penyelesaian untuk MIRP dalam kajian ini. Objektif kajian ini adalah untuk menyelesaikan model MIRP yang dicadangkan dengan HGA kemudian mengesahkan keberkesanan HGA yang dicadangkan pada data yang berbeza saiz. Setelah pengesahan, model MIRP yang dicadangkan dan HGA diterapkan pada data sebenar dan analisis kepekaan parameter akan dilaksanakan pada model MIRP. HGA didapati mampu menyelesaikan data saiz kecil dan saiz besar dengan berkesan dengan menyediakan penyelesaian yang optimum dalam masa pelaksanaan CPU yang singkat. Di samping itu, peningkatan dalam harga karbon seunit mengakibatkan peningkatan jumlah kos rantaian bekalan sementara peningkatan dalam kapasiti karbon mengakibatkan penurunan jumlah kos rantaian bekalan. Keputusan dari analisis memberikan indikasi bahawa harga karbon seunit dan kapasiti karbon unit perlu direka dengan teliti agar tidak membebani syarikat yang berkait dengan regulasi perlepasan karbon dan alam sekitar.

TABLE OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xiii
	LIST OF SYMBOLS	xv
1	INTRODUCTION	1
	1.1 Preface	1
	1.2 Background of the Problem	2
	1.3 Statement of the Problem	6
	1.4 Objective of the Study	7
	1.5 Scope of the Study	7
	1.6 Significance of the Study	7
	1.7 Overview of the Study	8

2	LITERATURE REVIEW	9
2.1	Introduction	9
2.2	Classical IRP	9
2.3	IRP Involving Carbon Emission Consideration	12
2.4	Genetic Algorithm (GA) in Routing Problems	14
2.5	Double Sweep Algorithm (DSW) in Routing Problems	17
2.6	Summary	20
3	METHODOLOGY	21
3.1	Introduction	21
3.2	Description of the Problem	21
3.3	Lists of Notations	22
3.3.1	Sets	22
3.3.2	Parameters	22
3.3.3	Decision variables	23
3.4	Formulation of Mathematical Model	23
3.4.1	Computation of fuel consumption	24
3.4.2	Formulation of MIRP Model	24
3.5	Operational Framework	27
3.6	Development of the Hybrid Genetic Algorithm	28
3.6	Validation of the Model	36
3.7	Parameter Sensitivity Analysis	37
3.8	Summary	37
4	RESULTS AND DISCUSSIONS	38
4.1	Introduction	38
4.2	Solution of the proposed MIRP model with HGA	39
4.3	Validation of the proposed MIRP model	48
4.4	Solving Real Data Set	52
4.5	Parameter Sensitivity Analysis	54
4.5.1	Unit Carbon Price	54
4.5.2	Carbon Cap	57

4.6	Summary	60
5	CONCLUSION AND RECOMMENDATIONS	61
5.1	Conclusion	61
5.2	Recommendations	63
	REFERENCES	64
	Appendices A-B	71-89

LIST OF TABLES

TABLE NO.	TITLE	PAGE
3.1	Example of binary matrix representation and product collection matrix	29
3.2	Example on prevention of violation of vehicle's capacity	31
3.3	Example of nodes rotation	32
3.4	Example of crossover with bitwise AND operation	34
3.5	Example of crossover with bitwise OR operation	35
3.6	Example of mutation operator	36
4.1	Demand matrix	39
4.2	Best chromosome from initial solution	39
4.3	Best binary chromosome matrix	40
4.4	Best product collection matrix	40
4.5	Coordinates before and after rotation	41
4.6	Distance between each node	41
4.7	After sorting y-coordinate	41
4.8	Clusters of product collection	42
4.9	Clusters of product collection for period 1	43
4.10	Product collection routes	43
4.11	Breakdown of best total costs for <i>S5H5</i> data set	44
4.12	Calculations for total inventory holding cost	44
4.13	Calculations for total fuel consumption cost	45
4.14	Calculations for total emission purchased	47
4.15	Calculations for total fixed vehicle cost	48
4.16	Comparison of results between HGA and CPLEX	49
4.17	Mean and Standard Deviation of the solutions from HGA	52

4.18	Breakdown of best total costs for <i>S98H14</i> data set	53
4.19	Breakdown of costs under different carbon price	55
4.20	Breakdown of costs under different carbon cap	57

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	Global GHGs emission (IPCC, 2014)	2
1.2	US CO ₂ emission by source (EPA, 2018)	3
3.1	Operational framework	27
3.2	AND crossover operation	33
3.3	OR crossover operation	34
4.1	Execution time of HGA and CPLEX	49
4.2	Gap percentage trend	50
4.3	System's cost	51
4.4	Product Collection Route	53
4.5	Convergence of <i>S98H14</i> solutions	54
4.6	Total system cost under different unit carbon price	55
4.7	Emission cost, Inventory cost, Fuel consumption cost and Emission level under different unit carbon price	56
4.8	Total system cost under different carbon cap	58
4.9	Emission cost, Inventory cost, Fuel consumption cost Emission level under different carbon cap	58

LIST OF ABBREVIATIONS

ACO	-	Ant colony optimization
AGA	-	Adaptive genetic algorithm
CH ₄	-	Methane
CO ₂	-	Carbon dioxide
DP	-	Dynamic programming
DSW	-	Double sweep algorithm
EU	-	European Union
F-gases	-	Fluorinated gases
GA	-	Genetic algorithm
GDP	-	Gross domestic product
GHGs	-	Greenhouse gases
HGA	-	Hybrid genetic algorithm
HTS	-	Hybrid tabu search
IC-SA	-	Imperialist competitive-simulated annealing
IRP	-	Inventory routing problem
LCSM	-	Low carbon supply chain management
m-CTP	-	multi-vehicle covering tour problem
MILP	-	Mixed-integer linear programming
MIP	-	Mixed integer programming
MIRP	-	Multi-period inventory routing problem
mm-CTP	-	multi-vehicle multi-covering tour problem
N ₂ O	-	Nitrous oxide
PSO	-	Particle swarm optimization
RTIs	-	Returnable transport items
SA	-	Simulated annealing
SCP	-	Sustainable consumption and production

SI	-	Swarm intelligence
SIRP	-	Stochastic inventory routing problem
SW	-	Sweep algorithm
UN	-	United Nation
US	-	United States
VMI	-	Vendor managed inventory
VND	-	Variable neighbourhood descent
VNS	-	Variable neighbourhood search
VRP	-	Vehicle routing problem

LIST OF SYMBOLS

A	-	A set of all nodes
S	-	A set of suppliers
DP	-	Depot
AP	-	Assembly plant
H	-	Time horizon
d_{it}	-	Demand for product type i in period $t(t \in H)$
F	-	Fixed vehicle cost per trip
C	-	The weight capacity of each vehicle
h_i	-	Unit inventory holding cost at assembly plant for product i
c_{ij}	-	Distance between node i and node j
f	-	Unit fuel price ($\frac{\$}{l}$)
ρ_0	-	The fuel consumption rate ($\frac{l}{km}$) for empty-loaded vehicle
ρ^*	-	The fuel consumption rate ($\frac{l}{km}$) for fully-loaded vehicle
ε	-	Emissions generated per unit of fuel consumption ($kg \frac{CO_2}{l}$)
cc_t	-	Carbon cap in period t
p	-	The price per unit carbon emission bought
x_{ijt}	-	arc (i, j)
ω_{ijt}	-	The total product weight carried by a vehicle through arc (i, j) in period t
q_{it}	-	The product quantity picked up at supplier i in period t
I_{it}	-	The inventory level of product i at the assembly plant at the end of period t
fc_{ijt}	-	Fuel consumption from node i to node j in period t
e_t^+	-	Amount of carbon emission credits purchased in period t

CHAPTER 1

INTRODUCTION

1.1 Preface

Inventory Routing Problem (IRP) incorporates both vehicle routing problems and inventory management problems in a supply chain network. The main objective of the traditional IRP is to minimize simultaneously the inventory cost and transportation cost of a supply chain. From the optimal solution of the IRP, decisions can be made on the delivery schedule, quantity of goods to be delivered to the customers and the delivery routing (Campbell *et al.*, 1997).

Along with the increasing environmental concern related to global warming, various initiatives had been taken to achieve a green and sustainable economy. One of the many initiatives is to develop a low carbon supply chain system by focusing on the transportation network. Researchers had made an extension on the existing IRP model by considering the minimization of carbon emission in the model to optimize simultaneously the inventory cost, transportation cost and cost related to carbon emission of a supply chain.

This research studies the extended IRP with multiple period which considers the minimization of inventory cost, transportation cost and carbon emission cost in a supply chain network. The supply chain network in this study consists of multiple suppliers, one depot and one assembly plant. This chapter discusses about the background of the problem, statement of the problem, objectives of the research, scope of the research and significance of the research.

1.2 Background of the Problem

IRP is a fundamental decision-making approach in supply chain management and has been researched and improved upon extensively, most notably since the seminar paper published by Bell *et al.* (1983) where customers inventory level must be met under stochastic demand. In the past, classical IRP often revolves around maximizing profits and minimizing costs with some additional requirements such as travelling time or distance (Li *et al.*, 2014; Madadi *et al.*, 2010).

Over the years, IRP had been continuously developed and improved to meet various demands from current issues for instance, the global warming issue particularly related to greenhouse gases (GHGs) emission. GHGs contributes to global warming by trapping heat from leaving the atmosphere and make the planet warmer. The burning of fossil fuel for transportations such as cars, trucks, ships, trains, and planes primarily emits GHGs. Over 90 percent of the fuel used for transportation is petroleum based, which includes gasoline and diesel (IPCC, 2007).

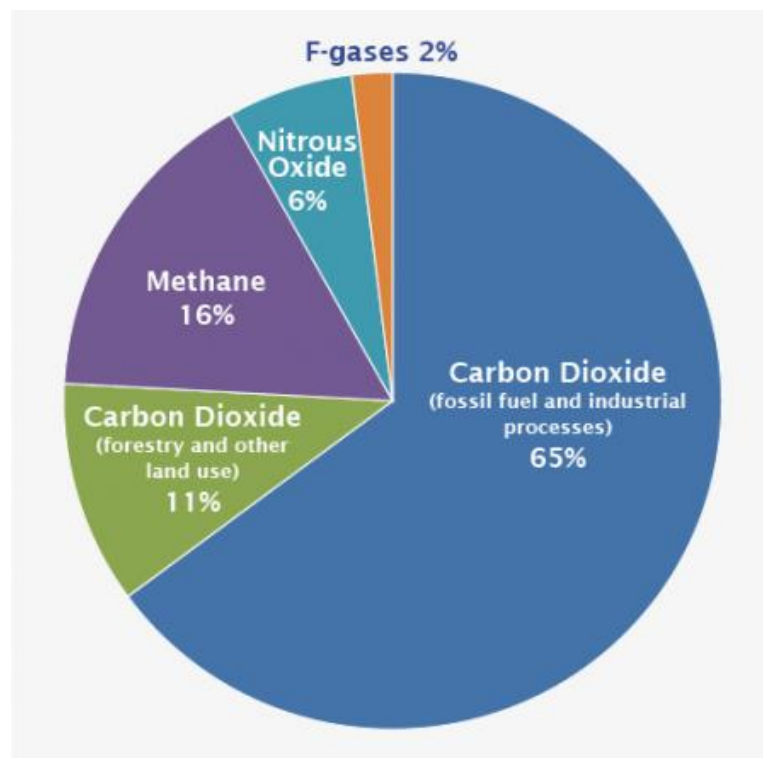


Figure 1.1 Global GHGs emission (IPCC, 2014)

Globally, the key GHGs emitted by human activities are carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O) and fluorinated gases (F-gases). Figure 1.1 shows the contribution of each gas to the global GHGs emission. It is obvious that CO₂ from fossil fuel and industrial process is the largest contributor to global GHGs emission at a total of 65 percent. Therefore, it is crucial to tackle on reducing the amount of CO₂ gases in the atmosphere to prevent global warming from getting worse.

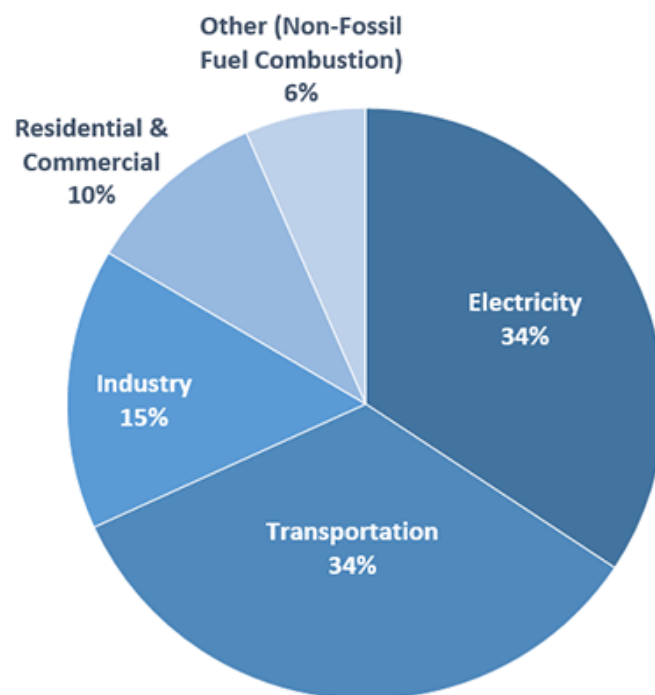


Figure 1.2 US CO₂ emission by source (EPA, 2018)

Other than that, from Figure 1.2, in United States (US), transportation and electricity are the largest share of CO₂ at 34 percent. Which means that, focusing on reducing CO₂ emission in the transportation sector might result in great benefits to the environment. The issue of reducing CO₂ emission in transportation sector gave motivation to researchers to study on the management of transportation in supply chain activities which leads to the improvement on the classical IRP model by considering carbon emission in the model.

Nationally, to play a role in halting global warming, in 2009, an announcement made by Malaysia's former Prime Minister Datuk Seri Najib Razak at the 15th Conference of the Parties to the United Nations Framework Convention on Climate Change that by 2020, Malaysia will reduce the level of GHGs emission of its Gross Domestic Product (GDP) by up to 40 percent compared to the levels in 2005. The Tenth Malaysia Plan from 2011 to 2015 focuses on the Renewable Energy Act, Feed-in Tariff mechanism, household recycling, forest reserve while in the transportation sector, the government gazetted EURO 4M standards in 2013 to control emissions from motor vehicles along with higher use of energy efficient vehicles and bio-fuels. On the Eleventh Malaysia Plan, Sustainable Consumption and Production (SCP) approach is established. Under SCP, the government creates market for green products and services, purchases environmentally friendly products and services to spur demand for green industries and encourages low carbon mobility through utilisation of energy efficient vehicles and public transportation (Economic Planning Unit, 2015).

However, these are not the only methods that can be implemented to play a role in preserving the environment, the government may encourage companies in Malaysia to practice a sustainable supply chain to curb carbon emissions. For instance, foreign companies such as IKEA, HP, IBM and GE, made effort to implement environmental friendly initiatives not only by designing greener products but also considers carbon emission in their supply chain networks (Wang *et al.*, 2011).

Moreover, the United Nations (UN), the European Union (EU), and several countries have imposed regulations to control CO₂ emissions in supply chain network. The four-existing carbon emission regulation policies are the carbon cap, carbon cap and offset, carbon cap and trade, and carbon taxing (Konur and Schaefer, 2014). Under the carbon cap policy, companies manage their operations so that the level of carbon emissions permitted, known as a carbon cap, is not violated. Meanwhile, for the carbon cap and offset policy, a company is allocated a limited amount of carbon cap, but the company can get extra emission credits by paying for them. The carbon cap and trade policy mean that a company can buy (or sell)

emission credits if its emission level is higher (or lower) than the cap. Lastly, under the carbon taxing policy, a company must pay for its carbon emissions as taxes (Cheng *et al.*, 2016). In addition to the existing methods to halt global warming in the Tenth and Eleventh Malaysia Plan, controlling carbon emission in supply chain is considerably an important initiative to achieving the voluntary target set by the 6th Prime Minister of Malaysia.

There have been several transportation studies focusing on minimizing fuel consumption and carbon emissions by using fuel cost to measure varying transportation cost in IRP. Treitl *et al.* (2014) proposed and applied Inventory Routing Model to a case study of the petrochemical industry. The focus was on analysing how will the routing decisions in transport processes will affect the economy and environment in a supply chain. Niakan and Rahimi (2015) presented a new IRP model specialized in healthcare sector for medicinal drug distribution to healthcare facilities. Cheng *et al.* (2016) studied four different carbon emission regulations, namely the carbon cap, carbon cap and offset, carbon cap and trade, and carbon taxing on the IRP for inbound distribution. Lin and Sarker (2017) developed a new inventory model considering carbon tax policy and investigated the effect of different carbon tax systems on the model. Kang *et al.* (2018) studied the effect of carbon credit price and a carbon cap on the cost of an inventory-allocation network.

IRP is known to be NP-hard as it is an integration between inventory control and vehicle routing problem (VRP) (Federgruen and Simchi-Levi, 1995). A metaheuristic algorithm is essential to produce a near optimal solution in a reasonable amount of time. Recent researches show that genetic algorithm (GA) is an effective and time-saving method to solve NP-hard problems. For instance, Park *et al.* (2016) proposed a GA to solve a vendor managed inventory (VMI) problem, the study concluded that GA produces solutions that are similar to the solutions obtained from the optimization model while requiring shorter computational time. In addition, Santosa *et al.* (2016) compared hybrid tabu search (HTS) method with hybrid genetic algorithm (HGA) on a multi-product IRP in shipping industry. The results showed that HGA provides better results for several different conditions which involved changes in parameter. Yang and Sun (2015) applied a modified GA

to a problem involving the electric vehicles battery swap station location and inventory problem which determines the location and battery inventory of battery swap stations. The GA algorithm is effective in solving large-scale network.

Therefore, the focus of this study is on solving a multi-period inventory routing problem (MIRP) involving carbon emission consideration based on carbon cap and offset policy. HGA based on allocation first and routing second is used to compute a solution for the MIRP in this study. The HGA is a combined algorithm of GA and double sweep algorithm (DSW) with the former is used for allocation decisions, while the latter is used for routing decisions. The supply chain involved in this study is an inbound product collection network with one depot, a set of geographically dispersed suppliers and one assembly plant with deterministic and time-varying demands. The transportation cost, fuel consumption cost and inventory holding cost are fixed. Fuel consumption is used to generate the value of carbon emissions. The expected solution will display the best supplier allocation choice and product collection route which results in minimal system's total cost.

1.3 Statement of the Problem

Global warming is among the greatest issue throughout the years and CO₂ emission is one of the known contributors to global warming. To tackle this issue, several carbon emissions regulation policies such as the carbon cap and offset policy, had been imposed on various sectors contributing to carbon emission. Having to abide to these policies, as it would result in certain form of penalty if violated, companies need to make critical decision in their supply chain network to maximize their profit and minimize costs while curbing carbon emission. However, a policy that is not well designed will be a burden to some companies. Therefore, by studying the impact of carbon cap and offset policy on MIRP in a supply chain network, companies will be able to make the best choice in the inventory and routing decisions while policy makers will be able to come up with a reasonable policy that will help participating companies to provide better service to customers while sustaining the environment.

1.4 Objectives of the Study

The objectives of this study are:

- a) To solve the proposed MIRP model involving carbon emission consideration with HGA.
- b) To validate the effectiveness of the proposed HGA on data of different sizes.
- c) To apply the proposed MIRP model and HGA on real data.
- d) To perform parameter sensitivity analysis on the MIRP model.

1.5 Scope of the Study

This study focuses on an inbound product collection network consisting of one depot, several suppliers which provide different products and one assembly plant with deterministic and time-varying demand. Data sets of different sizes ranging from small, medium to large and a real data is used in this study.

1.6 Significance of the Study

This study aids decision making process by providing a near optimal option on the product collection schedule, quantity of products to be collected from the suppliers and the product collection route while abiding to the carbon emission regulation. From the sensitivity analysis, policy makers can device the best carbon emission policy which can be implemented on every sector while companies are able to make better decisions based on the effect of these regulations on their transport services.

1.7 Overview of the Study

This chapter gives a detailed description on why researching carbon emission regulation on IRP model is essential. The literature reviews of related studies are discussed in Chapter 2, and Chapter 3 consists of thorough description on the mathematical model and algorithm used in this study. Chapter 4 is a complete illustration on the problem solving and sensitivity analysis. Chapter 5 concludes the study with some recommendations.

REFERENCES

- Abdelmaguid, T. F. & Dessouky, M. M. (2006). A genetic algorithm approach to the integrated inventory-distribution problem. *International Journal of Production Research*, 44, 4445-4464.
- Akhand, M. A. H., Peya, Z. J., Sultana, T. & Rahman, M. M. H. (2017). Solving Capacitated Vehicle Routing Problem Using Variant Sweep and Swarm Intelligence. *Journal of Applied Science and Engineering*, 20, 511-524.
- Andersson, H., Hoff, A., Christiansen, M., Hasle, G. & Løkketangen, A. (2010). Industrial aspects and literature survey: Combined inventory management and routing. *Computers & Operations Research*, 37, 1515-1536.
- Azadeh, A., Elahi, S., Farahani, M. H. & Nasirian, B. (2017). A genetic algorithm-Taguchi based approach to inventory routing problem of a single perishable product with transshipment. *Computers & Industrial Engineering*, 104, 124-133.
- Bard, J. F., Huang, L., Jaillet, P. & Dror, M. (1998). A Decomposition Approach to the Inventory Routing Problem with Satellite Facilities. *Transportation Science*, 32, 189-203.
- Bell, W. J., Dalberto, L. M., Fisher, M. L., Greenfield, A. J., Jaikumar, R., Kedia, P., Mack, R. G. & Prutzman, P. J. (1983). Improving the Distribution of Industrial Gases with an On-Line Computerized Routing and Scheduling Optimizer. *Interfaces*, 13, 4-23.
- Bertazzi, L., Bosco, A. & Laganà, D. (2015). Managing stochastic demand in an Inventory Routing Problem with transportation procurement. *Omega*, 56, 112-121.

- Cachon, G. P. (2014). Retail Store Density and the Cost of Greenhouse Gas Emissions. *Management Science*, 60, 1907-1925.
- Campbell, A., Clarke, L., Kleywegt, A. & Savelsbergh, M. (1997). *The Inventory Routing Problem*.
- Carbon Market Watch. (2017). Pricing carbon to achieve the Paris goals - Carbon Market Watch. [online] Available at: <https://carbonmarketwatch.org/publications/policy-briefing-pricing-carbon-achieve-paris-goals/> [Accessed 21 May 2018].
- Cheng, C., Qi, M. Y., WANG, X. Y. & ZHANG, Y. (2016). Multi-period inventory routing problem under carbon emission regulations. *International Journal of Production Economics*, 182, 263-275.
- Cheng, C., Yang, P., Qi, M. & Rousseau, L. -M. (2017). Modeling a green inventory routing problem with a heterogeneous fleet. *Transportation Research Part E: Logistics and Transportation Review*, 97, 97-112.
- Cho, D. W., Lee, Y. H., Lee, T. Y. & Gen, M. (2014). An adaptive genetic algorithm for the time dependent inventory routing problem. *Journal of Intelligent Manufacturing*, 25, 1025-1042.
- Coelho, L. C. & Laporte, G. (2013). A branch-and-cut algorithm for the multi-product multi-vehicle inventory-routing problem. *International Journal of Production Research*, 51, 7156-7169.
- Corso, L. L. & Wallace, M. (2015). A hybrid method for transportation with stochastic demand. *International Journal of Logistics-Research and Applications*, 18, 342-354.
- Dondo, R. & Cerda, J. (2013). A sweep-heuristic based formulation for the vehicle routing problem with cross-docking. *Computers & Chemical Engineering*, 48, 293-311.
- Dondo, R. & Cerda, J. (2015). The heterogeneous vehicle routing and truck scheduling problem in a multi-door cross-dock system. *Computers & Chemical Engineering*, 76, 42-62.
- Economic Planning Unit. (2015), *Eleventh Malaysia Plan 2016-2020*, FGAC, Malaysia.
- Elhedhli, S. & Merrick, R. (2012). Green supply chain network design to reduce carbon emissions. *Transportation Research Part D-Transport and Environment*, 17, 370-379.

- Ellis, K. P., Sherali, H. D., Saunders, L., Shao, S. Z. & Crawford, C. (2014). Bulk tank allocation to improve distribution planning for the industrial gas industry. *IIE Transactions*, 46, 557-566.
- EPA. (2018). *Inventory of U.S. Greenhouse Gas Emissions and Sinks*. [online] Available at: https://www.epa.gov/sites/production/files/2018-01/documents/2018_complete_report.pdf [Accessed 21 May 2018].
- Esparcia-Alcazar, A. I., Lluch-Revert, L., Cardos, M., Sharman, K. & Andres-Romano, C. (2006). Design of a retail chain stocking up policy with a hybrid evolutionary algorithm. *Evolutionary Computation in Combinatorial Optimization, Proceedings*, 3906, 49-60.
- European Commission. (2016), *A European Strategy for Low-Emission Mobility*, EC, Brussels.
- Federgruen, A. & Simchi-Levi, D. (1995). Chapter 4 Analysis of vehicle routing and inventory-routing problems. *Handbooks in Operations Research and Management Science*. Elsevier.
- Gaskell, T. J. (1967). Bases for Vehicle Fleet Scheduling. *Journal of the Operational Research Society*, 18, 281-295.
- Ghorbani, A. & Akbari Jokar, M. R. (2016). A hybrid imperialist competitive-simulated annealing algorithm for a multisource multi-product location-routing-inventory problem. *Computers & Industrial Engineering*, 101, 116-127.
- Gillet, B. E., Miller, L. E. & Johnson, J. G. (1979). Vehicle dispatching — Sweep algorithm and extensions. In: Ritzman, L. P., Krajewski, L. J., Berry, W. L., Goodman, S. H., Hardy, S. T. & Vitt, L. D. (eds.) *Disaggregation: Problems in manufacturing and service organizations*. Dordrecht: Springer Netherlands.
- Hiassat, A., Diabat, A. & Rahwan, I. (2017). A genetic algorithm approach for location-inventory-routing problem with perishable products. *Journal of Manufacturing Systems*, 42, 93-103.
- Holland, J. H. (1984). Genetic Algorithms and Adaptation. In: Selfridge, O. G., Rissland, E. L. & Arbib, M. A. (eds.) *Adaptive Control of Ill-Defined Systems*. Boston, MA: Springer US.

- Huang, S. -H. & Lin, P. -C. (2010). A modified ant colony optimization algorithm for multi-item inventory routing problems with demand uncertainty. *Transportation Research Part E: Logistics and Transportation Review*, 46, 598-611.
- Iassinovskaia, G., Limbourg, S. & Riane, F. (2017). The inventory-routing problem of returnable transport items with time windows and simultaneous pickup and delivery in closed-loop supply chains. *International Journal of Production Economics*, 183, 570-582.
- IPCC. (2007). *Chapter 5: Transport and its infrastructure - AR4 WGIII*. [online] Available at: http://www.ipcc.ch/publications_and_data/ar4/wg3/en/ch5.html [Accessed 21 May 2018].
- IPCC. (2014). *Fifth Assessment Report - Mitigation of Climate Change*. [online] Available at: <https://www.ipcc.ch/report/ar5/wg3/> [Accessed 21 May 2018].
- Kang, K., Pu, W., Ma, Y. & Wei, X. A Novel Inventory and Distribution Planning Model with Non-conforming Items Disposal Under Fuzzy Random Environment. 2017 Singapore. Springer Singapore, 1191-1201.
- Kang, K., Pu, W. & Ma, Y. F. (2018). A Dynamic Programming-Based Sustainable Inventory-Allocation Planning Problem with Carbon Emissions and Defective Item Disposal under a Fuzzy Random Environment. *Mathematical Problems in Engineering*.
- Konur, D. & Schaefer, B. (2014). Integrated inventory control and transportation decisions under carbon emissions regulations: LTL vs. TL carriers. *Transportation Research Part E-Logistics and Transportation Review*, 68, 14-38.
- Lee, C. -G., Bozer, Y. A. & White III, C. (2003). A heuristic approach and properties of optimal solutions to the dynamic inventory routing problem.
- Li, K. P., Chen, B., Sivakumar, A. I. & Wu, Y. (2014). An inventory-routing problem with the objective of travel time minimization. *European Journal of Operational Research*, 236, 936-945.
- Lin, T. Y. & Sarker, B. R. (2017). A pull system inventory model with carbon tax policies and imperfect quality items. *Applied Mathematical Modelling*, 50, 450-462.

- Madadi, A., Kurz, M. E. & Ashayeri, J. (2010). Multi-level inventory management decisions with transportation cost consideration. *Transportation Research Part E-Logistics and Transportation Review*, 46, 719-734.
- Mirzapour Al-E-Hashem, S. M. J. & Rekik, Y. (2014). Multi-product multi-period Inventory Routing Problem with a transshipment option: A green approach. *International Journal of Production Economics*, 157, 80-88.
- Mjirda, A., Jarboui, B., Macedo, R., Hanafi, S. & Mladenović, N. (2014). A two phase variable neighborhood search for the multi-product inventory routing problem. *Computers & Operations Research*, 52, 291-299.
- Moin, N. H., Salhi, S. & Aziz, N. A. B. (2011). An efficient hybrid genetic algorithm for the multi-product multi-period inventory routing problem. *International Journal of Production Economics*, 133, 334-343.
- Niakan, F. & Rahimi, M. (2015). A multi-objective healthcare inventory routing problem; a fuzzy possibilistic approach. *Transportation Research Part E-Logistics and Transportation Review*, 80, 74-94.
- Park, Y.-B., Yoo, J.-S. & Park, H.-S. (2016). A genetic algorithm for the vendor-managed inventory routing problem with lost sales. *Expert Systems with Applications*, 53, 149-159.
- Pham, S., Gascon, V. & Dinh, T. (2014). Heuristics to Solve a Real-world Asymmetric Vehicle Routing Problem with Side Constraints. *Fundamenta Informaticae*, 130, 231-246.
- Pham, T. A., Ha, M. H. & Nguyen, X. H. (2017). Solving the multi-vehicle multi-covering tour problem. *Computers & Operations Research*, 88, 258-278.
- Rahimi, M., Baboli, A. & Rekik, Y. (2017). Multi-objective inventory routing problem: A stochastic model to consider profit, service level and green criteria. *Transportation Research Part E: Logistics and Transportation Review*, 101, 59-83.
- Santosa, B., Damayanti, R. & Sarkar, B. (2016). Solving multi-product inventory ship routing with a heterogeneous fleet model using a hybrid cross entropy-genetic algorithm: a case study in Indonesia. *Production & Manufacturing Research*, 4, 90-113.

- Sazvar, Z., Mirzapour AL-E-Hashem, S. M. J., Baboli, A. & Akbari Jokar, M. R. (2014). A bi-objective stochastic programming model for a centralized green supply chain with deteriorating products. *International Journal of Production Economics*, 150, 140-154.
- Sourirajan, K., Centonze, P., Helander, M. E., Katircioglu, K., Ben-Hamida, M. & Boucher, C. (2009). Carbon management in assembly manufacturing logistics. *Ibm Journal of Research and Development*, 53.
- Soysal, M., Bloemhof-Ruwaard, J. M., Haijema, R. & Van Der Vorst, J. G. A. J. (2015). Modeling an Inventory Routing Problem for perishable products with environmental considerations and demand uncertainty. *International Journal of Production Economics*, 164, 118-133.
- Tam, M. (2018). Fuel prices stay the same. The Star Online. [online] Available at: <https://www.thestar.com.my/news/nation/2018/05/16/fuel-prices-stay-the-same/> [Accessed 21 May 2018].
- Treitl, S., Nolz, P. C. & Jammerneegg, W. (2014). Incorporating environmental aspects in an inventory routing problem. A case study from the petrochemical industry. *Flexible Services and Manufacturing Journal*, 26, 143-169.
- Ubeda, S., Arcelus, F. J. & Faulin, J. (2011). Green logistics at Eroski: A case study. *International Journal of Production Economics*, 131, 44-51.
- Vidović, M., Popović, D. & Ratković, B. (2014). Mixed integer and heuristics model for the inventory routing problem in fuel delivery. *International Journal of Production Economics*, 147, 593-604.
- Wang, F., Lai, X. F. & Shi, N. (2011). A multi-objective optimization for green supply chain network design. *Decision Support Systems*, 51, 262-269.
- Wang, Z. Z., Zhao, L. Y., Cao, N. B., Yang, L. & Chen, M. T. (2016). Vehicle routing optimum model of hazardous materials transportation under fuzzy environment. *Journal of Intelligent & Fuzzy Systems*, 31, 3067-3074.
- Xiao, Y. Y., Zhao, Q. H., Kaku, I. & Xu, Y. C. (2012). Development of a fuel consumption optimization model for the capacitated vehicle routing problem. *Computers & Operations Research*, 39, 1419-1431.
- Yang, J. & Sun, H. (2015). *A hybrid genetic algorithm for battery swap stations location and inventory problem.*

- Yu, Y., Chu, C., Chen, H. & Chu, F. (2012). Large scale stochastic inventory routing problems with split delivery and service level constraints. *Annals of Operations Research*, 197, 135-158.
- Zhalechian, M., Tavakkoli-Moghaddam, R., Zahiri, B. & Mohammadi, M. (2016). Sustainable design of a closed-loop location-routing-inventory supply chain network under mixed uncertainty. *Transportation Research Part E: Logistics and Transportation Review*, 89, 182-214.
- Zhang, S. Z., Lee, C. K. M., Choy, K. L., Ho, W. & Ip, W. H. (2014). Design and development of a hybrid artificial bee colony algorithm for the environmental vehicle routing problem. *Transportation Research Part D-Transport and Environment*, 31, 85-99.
- Zhao, Q. -H., Wang, S. -Y. & Lai, K. K. (2007). A partition approach to the inventory/routing problem. *European Journal of Operational Research*, 177, 786-802.